ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

**Artisan Technology Group**
(217) 352-9330 | sales@artisantg.com | artisantg.com

**Full-service, independent repair center**
with experienced engineers and technicians on staff.

**We buy your excess, underutilized, and idle equipment**
along with credit for buybacks and trade-ins.

**Custom engineering**
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

**Expert team | Trust guarantee | 100% satisfaction**

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Cosel SNA-06-223* at our website: ***Click HERE***


COSEL Ripple noise attenuation type for switch mode power supplies(DC)

# SNA series (6A)

## Ordering information

SNA -06 -223 -□

① ② ③ ④

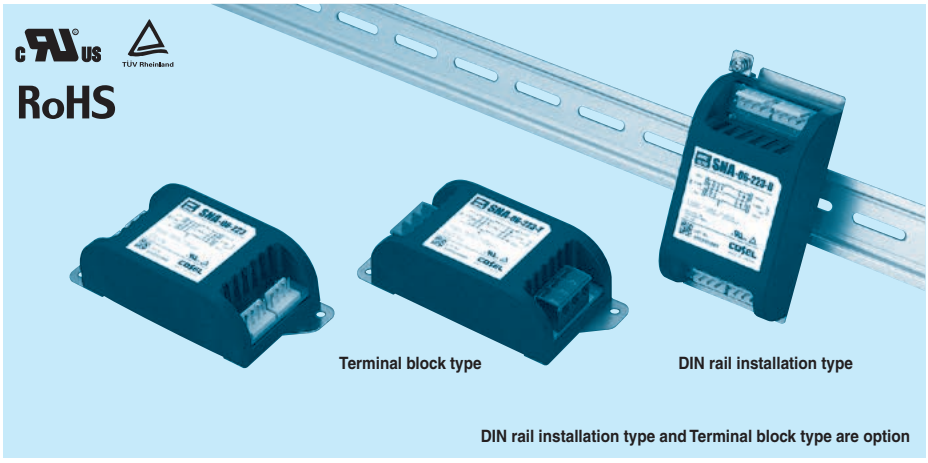


①Model Name
②Rated Current
③Line to ground capacitor code:See table 1.1.

table1.1 Line to ground capacitor code

| Code | Line to ground capacitor (nominal value) |
|---|---|
| 000 | Not Provided |
| 223 | 22000pF |

④Options
D :DIN rail installation type
T :Terminal block type
DT :Terminal block and DIN rail type

＊The dimensions change when the option is set. Refer to External view.

## Features of SNA series (6A)


### Ripple noise attenuation type for switch mode power supplies(DC)

- ±50 VDC
- Best filter for switch mode power supplies of analog circuits (ex. power supply filter for an operational amplifier)

## Specifications

| No. | Items | SNA-06-223 |
|---|---|---|
| | | Interface:Connector |
| 1 | Rated Voltage DC[V] | ±50 (+Vin - COM-in, -Vin - COM-in) |
| 2 | Rated Current DC[A] | 6 |
| 3 | Test Voltage (Terminal-Mounting Plate) | 500 VAC (Cutoff Current = 100mA), 1minute at room temperature and humidity |
| 4 | Isolation Resistance (Terminal-Mounting Plate) | 500 VDC 50MΩ min at room temperature and humidity |
| 5 | DC resistance | 50mΩ max |
| 6 | Operating temperature | -40 to +71℃ (Refer to Derating Curve) |
| 7 | Operating humidity | 20 to 95%RH (Non condensing) |
| 8 | Storage temperature/humidity | -40 to +75℃/20 to 95%RH (Non condensing) |
| 9 | Vibration | 10 to 55Hz, 19.6m/s² (2G), 3min. Period, 1hour each X, Y and Z axis |
| 10 | Impact | 196.1m/s² (20G), 11ms Once each X, Y and Z axis |
| 11 | Safety agency approvals | UL60950-1, C-UL (CSA60950-1), EN60950-1 |
| 12 | Case size (without projection) /Weight | 52×35×117 mm [2.05×1.38×4.61 inches] (W×H×D) /150g max (Option : -D, -T, -DT refer to external view) |


## Circuit Diagram

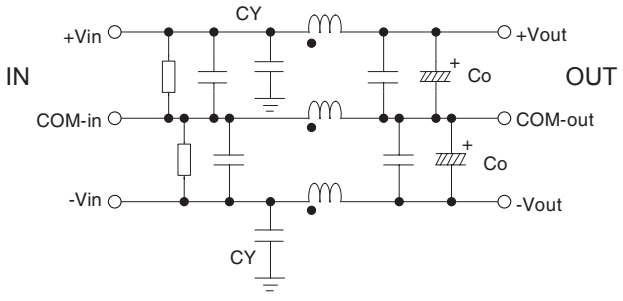


CY : Line to ground capacitor Co : Electrolytic capacitor ⏚ : Mounting Plate

■Expected life : 10 years

## Derating Curve

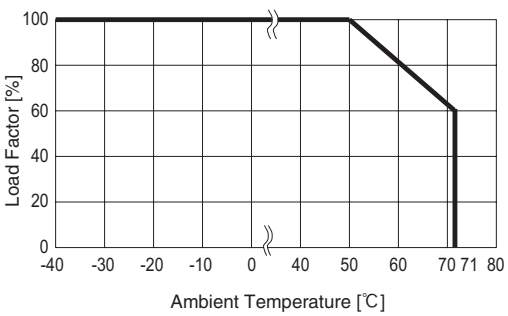





Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

## External view

### Standard Type

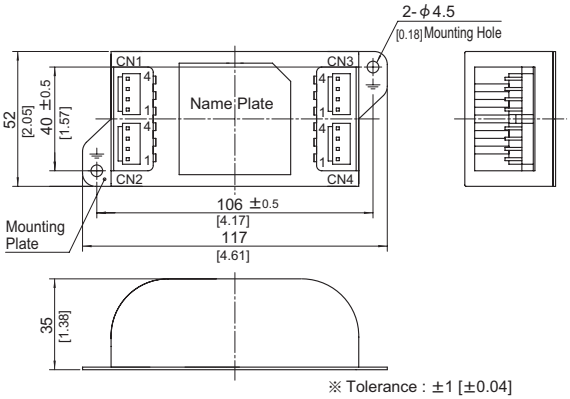


| CN1 | |
|---|---|
| Pin No. | Function |
| 1,2 | COM-in |
| 3,4 | +Vin |

| CN3 | |
|---|---|
| Pin No. | Function |
| 1,2 | COM-out |
| 3,4 | +Vout |

| CN2 | |
|---|---|
| Pin No. | Function |
| 1,2 | -Vin |
| 3,4 | COM-in |


| CN4 | |
|---|---|
| Pin No. | Function |
| 1,2 | -Vout |
| 3,4 | COM-out |

| I/O Connector | Mating connector | Terminal |
|---|---|---|
| CN1~CN4 | B4P-VH | VHR-4N | Reel:SVH-21T-P1.1 |
| | | | Bulk:BVH-21T-P1.1 |

(Mfr:J.S.T)

※ Tolerance : ±1 [±0.04]
※ Weight : 150g max
※ PCB Material /thickness : CEM3 /1.6mm [0.06 inches]
※ Mounting plate : Iron (surface finishing : nickel plating) t=1.0 [0.04]
※ Case : PBT
※ Dimensions in mm, [ ]=inches
※ Keeping drawing current per pin below 5A for CN1 to CN4


### Terminal block Type

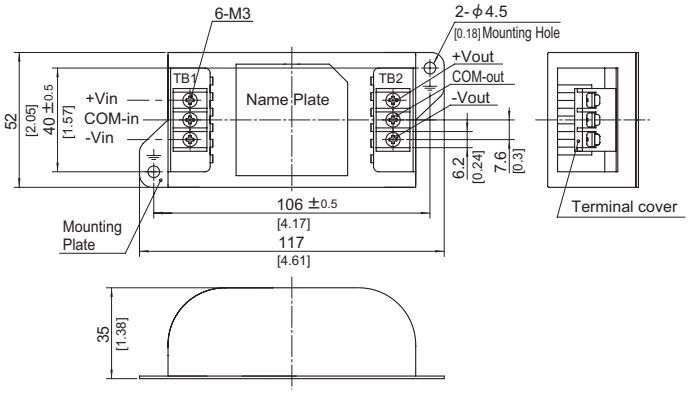


※ Tolerance : ±1 [±0.04]
※ Weight : 160g max
※ PCB Material /thickness : CEM3 /1.6mm [0.06 inches]
※ Mounting plate : Iron (surface finishing : nickel plating) t=1.0 [0.04]
※ Case : PBT
※ Dimensions in mm, [ ]=inches
※ Terminal block screw tighting torque M3:0.8N・m (8.5kgf・cm) max

Option harness : Refer to Instruction Manual 4

### DIN rail installation Type

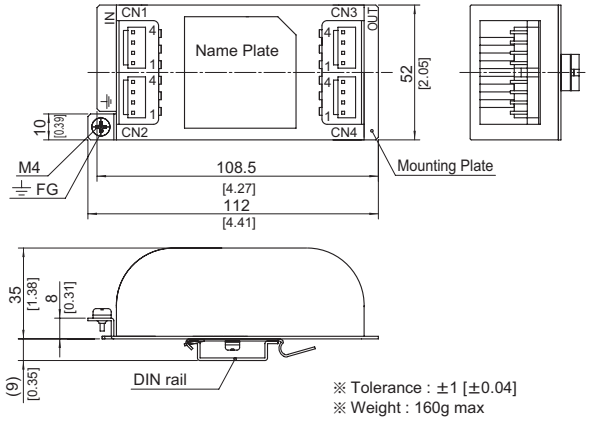


※ Tolerance : ±1 [±0.04]
※ Weight : 160g max
※ PCB Material /thickness : CEM3 / 1.6mm [0.06 inches]
※ Mounting plate : Iron (surface finishing : nickel plating) t=1.0 [0.04]
※ Case : PBT
※ Dimensions in mm, [ ]=inches
※ Keeping drawing current per pin below 5A for CN1 to CN4

| CN1 | |
|---|---|
| Pin No. | Function |
| 1,2 | COM-in |
| 3,4 | +Vin |

| CN3 | |
|---|---|
| Pin No. | Function |
| 1,2 | COM-out |
| 3,4 | +Vout |


| CN2 | |
|---|---|
| Pin No. | Function |
| 1,2 | -Vin |
| 3,4 | COM-in |

| CN4 | |
|---|---|
| Pin No. | Function |
| 1,2 | -Vout |
| 3,4 | COM-out |

| I/O Connector | Mating connector | Terminal |
|---|---|---|
| CN1~CN4 | B4P-VH | VHR-4N | Reel:SVH-21T-P1.1 |
| | | | Bulk:BVH-21T-P1.1 |

(Mfr:J.S.T)

### Terminal block type+DIN rail installation Type

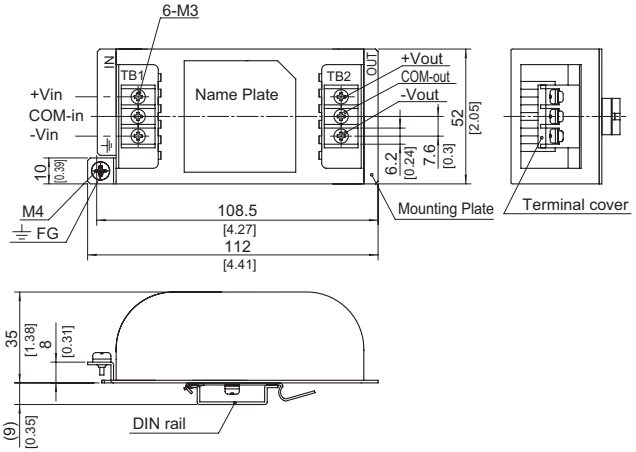



※ Tolerance : ±1 [±0.04]
※ Weight : 170g max
※ PCB Material /thickness : CEM3 /1.6mm [0.06 inches]
※ Mounting plate : Iron (surface finishing : nickel plating) t=1.0 [0.04]
※ Case : PBT
※ Dimensions in mm, [ ]=inches
※ Terminal block screw tighting torque M3:0.8N・m (8.5kgf・cm) max

Option harness : Refer to Instruction Manual 4

## ■Note when installing the EMI/EMC Filter on a DIN rail.

**When the EMI/EMC Filter is grounded through the DIN rail, the proper noise attenuation may not be achieved.**
**Be sure to connect the FG terminal of the EMI/EMC Filter body to the earth.**

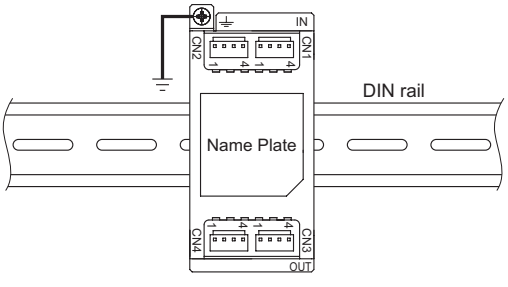




Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

**Artisan Technology Group** is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP