

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

PRINCIPAL SPECIFICATIONS

Model Number	Freq. Range, MHz	Frequency Performance, MHz	Isolation, dB, Min.	Isolation, dB, Typ.	Insertion Loss, dB, Max.	Insertion Loss, dB, Typ.	Phase Balance, Max.	Phase Balance, Typ.	Amplitude Bal., dB, Max.	Amplitude Bal., dB, Typ.	VSWR (In/Output) Max.	VSWR (In/Output) Typ.
PDM-30-50	1 - 100	1 - 100	30	33	0.6	0.3	2°	1°	0.2	0.1	1.3:1	1.25:1
PDM-30-150	1 - 300	2 - 200	27	33	1.0	0.6	3°	1°	0.3	0.1	1.3:1	1.2:1
		1 - 300	20	25	1.2	0.8	4°	2°	0.4	0.4	1.5:1	1.3:1
PDM-30-525	50 - 1000	100 - 500	25	30	1.0	0.6	6°	3°	0.5	0.3	1.3:1	1.2:1
		50 - 1000	20	25	2.0	1.5	8°	4°	0.8	0.5	1.6:1	1.4:1
PDM-30-1050	700 - 1400	700 - 1400	20	25	1.2	0.8	5°	3°	0.5	0.3	1.4:1	1.25:1
PDM-30-1100	100 - 2000	100 - 2000	18	20	2.2	1.5	10°	5°	0.7	0.5	1.5:1	1.3:1

Typical PDM-30-150 Performance

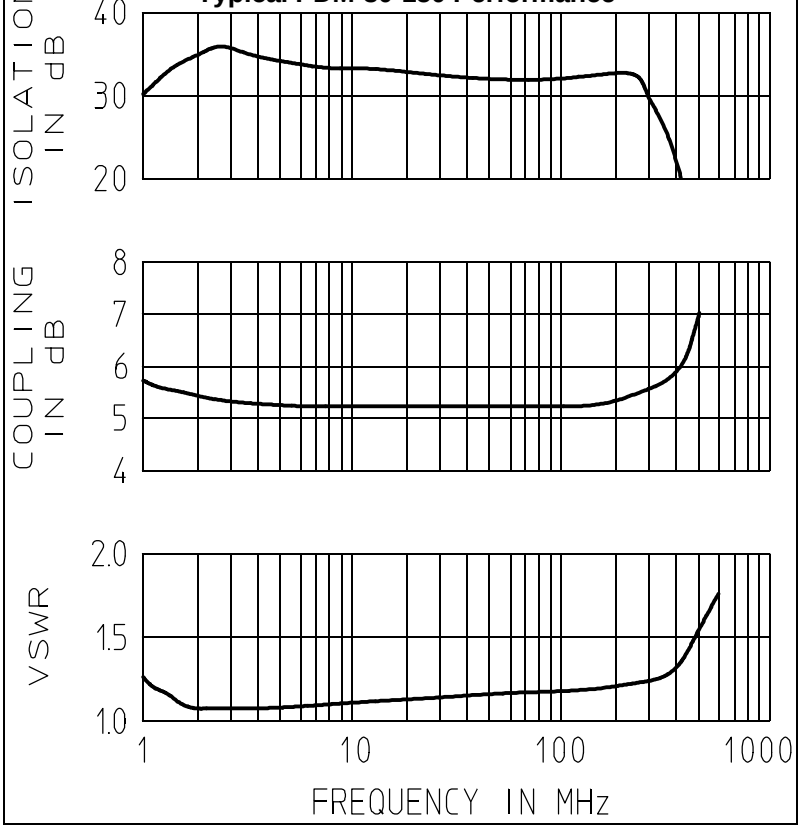

GENERAL SPECIFICATIONS


Coupling:	– 4.8 dB nom.
Impedance:	50 Ω nom.
Internal Load Dissipation:	250 mW max.
CW Power Input:	1 W max. (When used as divider with 1.2:1 $VSWR_{out}$)
Connectors, SMA Female:	to meet interface requirements of MIL-C-39012
Weight, nominal:	2 oz. (57 g)
Operating Temperature:	– 55° to +85°C

General Notes:


1. The PDM-30 series of 3-way In-Phase, Power Dividers/Combiners covers 1 to 2,000 MHz, using a special lumped element design to reduce size.
2. Similar units are available with up to sixteen output ports and with power capacity up to several kilowatts.

19Feb96

PDM-30-50

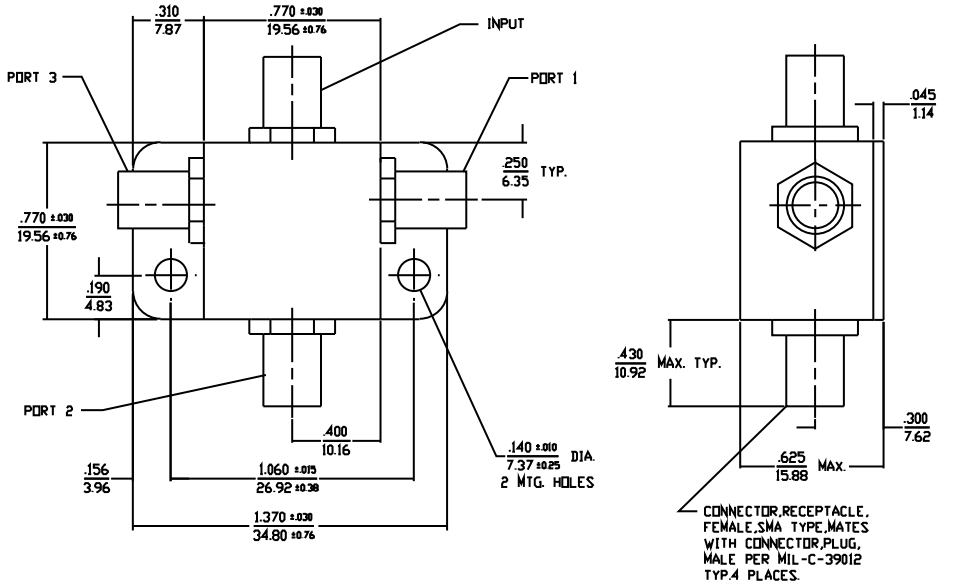

PDM-30-150/525/1050/1100

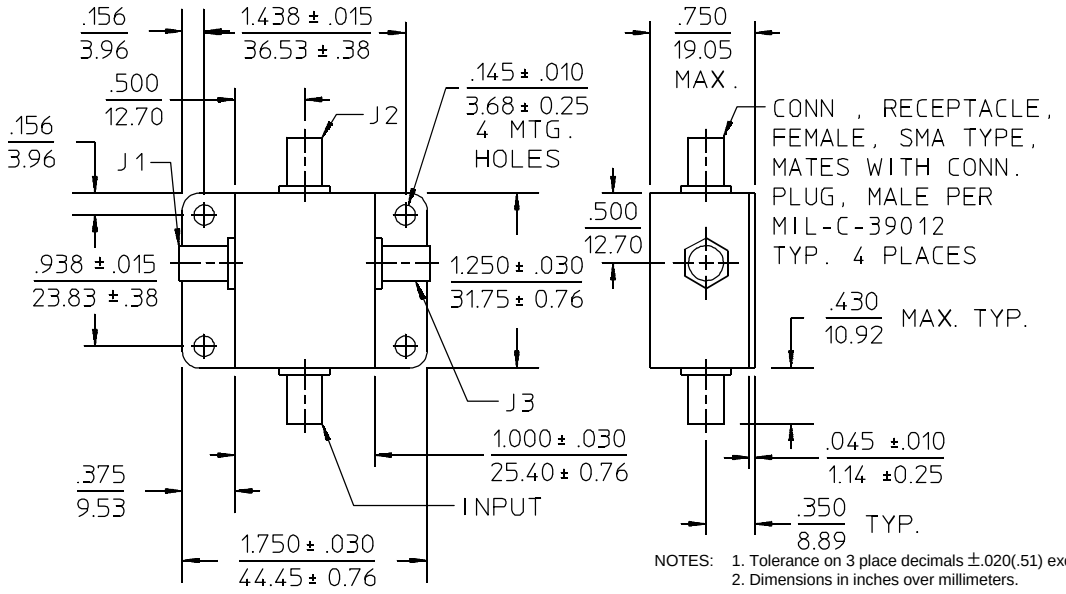

NOTES: 1. Tolerance on 3 place decimals ±.020(.51) except as noted.
2. Dimensions in inches over millimeters.

19Feb96

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP