

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Visit our website - *Click HERE*

XMC To PCIe Adapter Board

ADPT-XMC2PCIE-A Data Sheet: Passive XMC to PCIe Adapter Board

ADPT-XMC2PCIE-A

The Critical I/O ADPT-XMC2PCIE-A is a passive adapter card that allows industry standard XMC form factor boards to be used in the PCIe slots of standard personal computers, servers and motherboards. Critical I/O has tested and validated all of Critical I/O Fibre Channel and Ethernet XMC boards for use in PCIe x8 and x16 motherboard style PCIe slots.

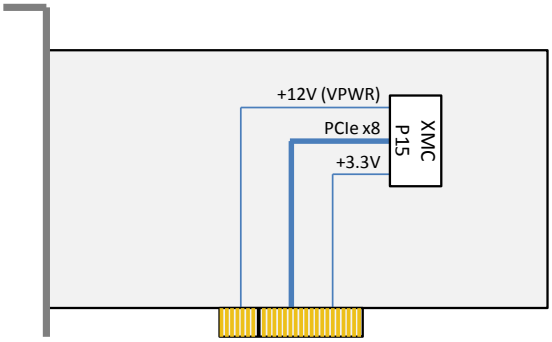

Block Diagram: ADPT-XMC2PCIE-A is a passive 8 lane XMC to PCIe slot adapter



ADPT-XMC2PCIE-A Features:

- **Accepts VITS 42.3 XMC board**
- **Accepts XMCs with up to x8 PCIe interface**
- **Physically compatible with x8 or x16 PCIe slots**
- **+12V XMC VPWR power from PCIe slot**
- **+3.3V XMC power from PCIe slot**
- **Jumper control of XMC global address**
- **Jumper control of EEPROM write protection**
- **Compatible & validated with Critical I/O XMCs**
- **Optional cooling fan**

Technical Specifications

Architecture	8 Lane passive PCIe to XMC adapter
Physical PCIe interface	Compatible with x8 and x16 PCIe motherboard connectors
Electrical PCIe interface	x1, x2, x4, x8
XMC Compatibility	VITA 42, VITA 42.3
Jumpers	GA, MVMRO, ROOT, I2C SCLK, I2C SDATA
LEDs	+12V present, +5V present, +3.3V present
Weight	4 oz
Power	PCIe slot +12V applied to XMC VPWR connections PCIe slot +3.3V applied to XMC +3.3V connections
Operating Temperature	0C to +55C
Storage Temperature	-20C to +70C
Operating Humidity	ADPT-XMC2PCIE-A: 10-90%, non-condensing ADPT-XMC2PCIE-A-HC: 0-95%, non-condensing
Storage Humidity	ADPT-XMC2PCIE-A: 5-95%, non-condensing ADPT-XMC2PCIE-A-HC: 0-100%,condensing
Altitude	15,000 ft
Model Numbers	ADPT-XMC2PCIE-A: no conformal coating ADPT-XMC2PCIE-A-HC: Humiseal conformal coating

© 2013-2018 Critical I/O, LLC. All rights reserved. Critical I/O, LLC believes the information in this document is correct, however, the information is subject to change wihout notice. Critical I/O, LLC assumes no responsibility for any errors or omisions in this document.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP