

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

V·INFINITY

PTK25 Screw Terminal Series DC-DC Converter

REV. 06-2007

Features

- U-Frame w/Screw Terminals
- Wide 2:1 input range
- Fully isolated
- Output voltage trimmable
- Output on/off control
- Over-current protection
- Over-voltage protection
- Six-sided EMI shielding
- Constant switching frequency
- High efficiency
- Compact size 2.25”x3.0”x0.67”
- -40°C~85°C Models available
- Din-rail mount available
- 3 year warranty




RoHS

Model [1] Number	Output Power (max)	Input Voltage	Output Voltage	Output Current (max)	Ripple & Noise [2] mV P-P	Efficiency (Typ.)
PTK25-D24-S3-T	19.8W	18-36VDC	3.3VDC	6.0A	100	80%
PTK25-D24-S5-T	25.0W	18-36VDC	5VDC	5.0A	100	85%
PTK25-D24-S12-T	24.0W	18-36VDC	12VDC	2.0A	120	89%
PTK25-D24-S15-T	24.0W	18-36VDC	15VDC	1.6A	150	89%
PTK25-D24-D5-T	25.0W	18-36VDC	±5VDC	2.5A	75/75	84%
PTK25-D24-D12-T	24.0W	18-36VDC	±12VDC	1.0A	120/120	88%
PTK25-D24-D15-T	24.0W	18-36VDC	±15VDC	0.8A	150/150	87%
PTK25-D48-S3-T	19.8W	36-72VDC	3.3VDC	6.0A	100	81%
PTK25-D48-S5-T	25.0W	36-72VDC	5VDC	5.0A	100	85%
PTK25-D48-S12-T	24.0W	36-72VDC	12VDC	2.0A	120	89%
PTK25-D48-S15-T	24.0W	36-72VDC	15VDC	1.6A	150	89%
PTK25-D48-D5-T	25.0W	36-72VDC	±5VDC	2.5A	75/75	84%
PTK25-D48-D12-T	24.0W	36-72VDC	±12VDC	1.0A	120/120	88%
PTK25-D48-D15-T	24.0W	36-72VDC	±15VDC	0.8A	150/150	87%

Note: 1 All models are also available in an extended temperature range of -40°C~85°C. For these models, append “M” to the model number, e.g. PTK15-Q48-S5M-T.

2 Ripple & noise measured with a 20MHz bandwidth, off a 10uF electrolytic and a 0.1uF ceramic cap in parallel at the ouptut.

Derating Curve

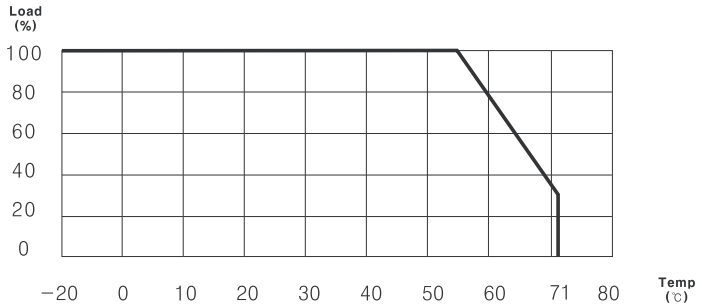

V·INFINITY

PTK25 Screw Terminal Series DC-DC Converter

REV. 06-2007

Input

Parameter	Conditions/Description	Min	Nom	Max	Units
Input voltage range		18	24	36	VDC
		36	48	72	VDC
Remote on/off control	Output turn-on [3]	2.5V	(open)	5.5V	
	Output turn-off	0V	(short)	0.8V	
Switching frequency	Constant		300		KHz

Note: 3 Output defaults to “on” when there is no connection to the “CNT” pin.

Output

Parameter	Conditions/Description	Min	Nom	Max	Units
Output trim range	With external trim resistors	-5%		+5%	
Set point accuracy	Single output	-2%		+2%	
	Dual output	-3%		+3%	
Line regulation	Single output models	-0.25%		+0.25%	
(Low line to high line)	Dual output models	-2.5%		+2.5%	
	Triple: main output (Vout)	-0.25%		+0.25%	
	auxillary outputs (+Vaux / -Vaux)	-5%		+5%	
Load regulation	Single output models - no load to full load	-0.25%		+0.25%	
	Dual output models - balanced loads	-2.5%		+2.5%	
	Triple: main output (Vout)	-0.25%		+0.25%	
	auxillary outputs(+Vaux / -Vaux) - with 10% load on Vout and balanced loads on +Vaux and -Vaux	-5%		+5%	
Minimum load	Converters will not be damaged if loading conditions are less than minimum specified loads, but regulation specs may not be met				
Ripple and noise					See chart

Protection

Parameter	Conditions/Description	Min	Nom	Max	Units
Over-current	Continuous auto recovery [4]	105%		135%	
Over-voltage	Internally zener clamped [4]	110%		140%	

Note: 4 Continuous operation in a protected state may compromise long-term reliability.

General


Parameter	Continuous/Description	Min	Nom	Max	Units
Efficiency	Typical at full load	77%		83%	
Dielectric withstand	Input/case, input/output, output/case	500			VAC
Insulation resistance	at 500 VDC	100M			Ohms
Agency standards	Approved to UL60950, CSA C22.2 No. 60950, TUV EN60950				
Case material			Zn		
Material flammability		94 V-0			
Weight			80 (2.82)		grams (ounces)
MTBF	MIL-HDBK-217F		450k		hours
Operating temperature	Regular models - see derating curve.	-20		+71	ºC
	Extended temperature models	-40		+85	ºC
Storage temperature		-40		+105	ºC
Humidity	Operating(non-condensing)	5%		95%	RH

V·INFINITY

PTK25 Screw Terminal Series DC-DC Converter

REV. 06-2007


Trim Method




External Trim Resistors

Model	Output Voltage	VR	R1	R2
Single Output Models	5V	1K	1.0K	680Ω
	12V	1K	3.9K	680Ω
	15V	1K	5.6K	750Ω
Dual Output Models	±5V(10V)	1K	3.3K	680Ω
	±12V(24V)	5K	9.0K	820Ω
	+15V(30V)	5K	20.0K	910Ω

Single Output

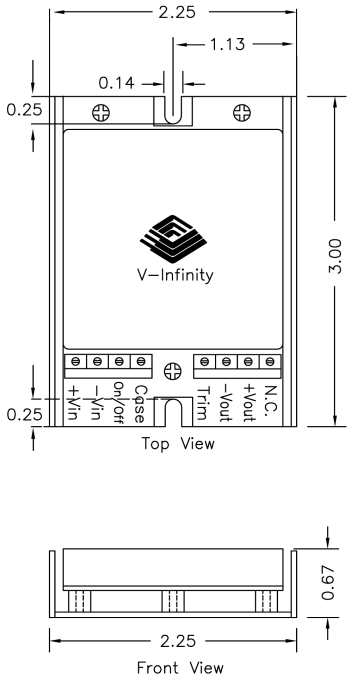

Dual Output

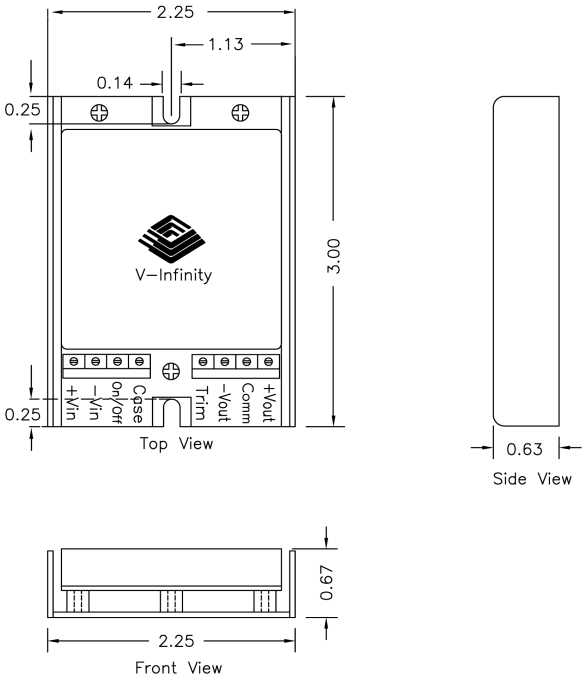


PIN Definitions


+Vin:	Input positive terminal
-Vin:	Input negative terminal
CNT:	Remote On/Off control of output voltage. Referenced to -Vin
+Vout:	Main output positive terminal
-Vout:	Output negative terminal
Com:	Common node for dual- or triple-output models
Trim:	For trimming output voltage on single- or dual-output models
Case:	Connected to chassis


V-Infinity reserves the right to make changes to its products or to discontinue any product or service without notice, and to advise customers to verify the most up-to-date product information before placing orders. V-Infinity assumes no liability or responsibility for customer's applications using V-Infinity products other than repair or replacing (at V-I's option) V-Infinity products not meeting V-I's published specifications. Nothing will be covered outside of standard product warranty.

REV.	DESCRIPTION	DATE
A	NEW DRAWING	10/13/2006

Optional DIN Rail Mounting Bracket

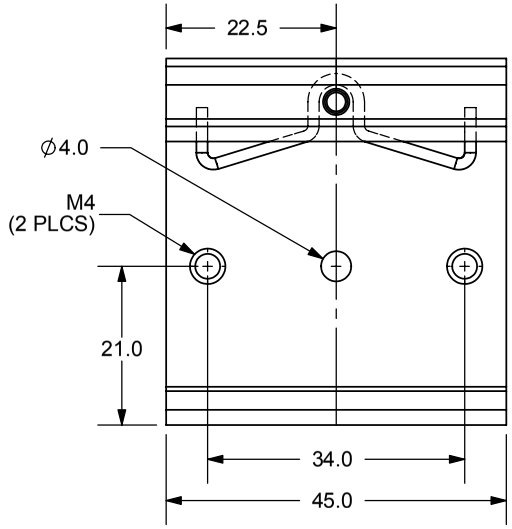

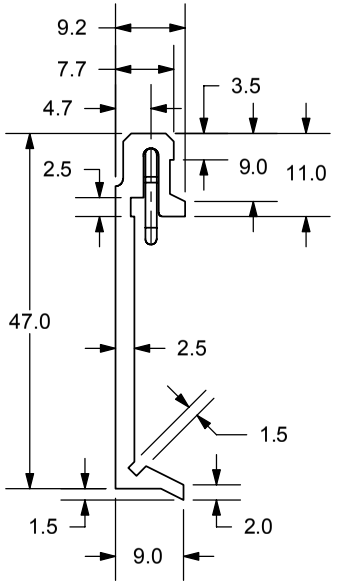

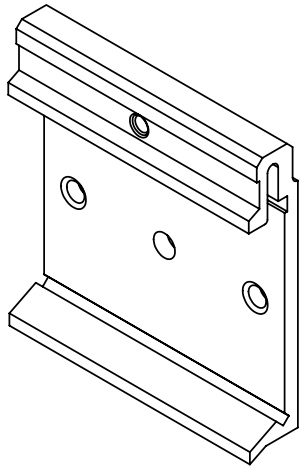

RoHS

V-INFINITY
a division of CUI INC
20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-643-4899
800-275-4899
Fax: 503-372-1266
Website: www.v-infinity.com

TITLE: DIN RAIL MOUNTING BRACKET		REV: A
PART NO. VDRP-03	UNITS: MM [INCHES]	
DRAWN BY: ZRJ	APPROVED BY:	SCALE: 1:1

PC FILE NAME: VDRP-03

COPYRIGHT 2006 BY CUI INC.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP