



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗


WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com



bc620/627AT

PC Time & Frequency Processor

KEY FEATURES

- PC, XT or AT Bus Operation (ISA/EISA Compatible)
- GPS or Time Code Inputs
- Time Code Output
- Pulse Rate Outputs
- Frequency Outputs (1, 5, or 10 MHz)
- External Event Capture/Interrupt
- Programmable Periodic Output/Interrupt
- Programmable Time Strobe Output/Interrupt
- Supplied with FREE Windows Driver
- Battery Backed Clock


Symmetricom's bc620/627AT time and frequency processor modules provide precision time and frequency reference to the host computer and peripheral data acquisition systems. Time is acquired from either the GPS satellites using a supplied antenna/receiver (bc627AT only) or from time code signals, typically IRIG B. Integration of the module is facilitated with a driver for MS DOS that is included at no cost. Optional software development kits are available for Windows® 95/98, Windows NT and Windows 2000.

Central to the operation of the module is a disciplined 10 MHz oscillator and 100 nanosecond clock. Current time (days to 100 nanoseconds) can be accessed across the bus with zero latency, which allows for very high speed time requests. The oscillator is rate-matched (disciplined) to the input

time source and drives the precision 10 MHz frequency output and time code generator circuitry. If the time source is lost, the module will continue to maintain time (flywheel). If power is lost, a 10 PPM battery backed clock is available to maintain time.

Both time code generation and translation are supported. The generator supplies IRIG B time code output synchronized to the input time source. The translator decodes either IRIG B, 2137, XR3 or NASA 36 time code inputs.

An event time capture feature provides a means of latching time for an event input. The module can also be programmed to generate a periodic pulse rate interrupt as well as to generate a single time strobe at a predetermined time.

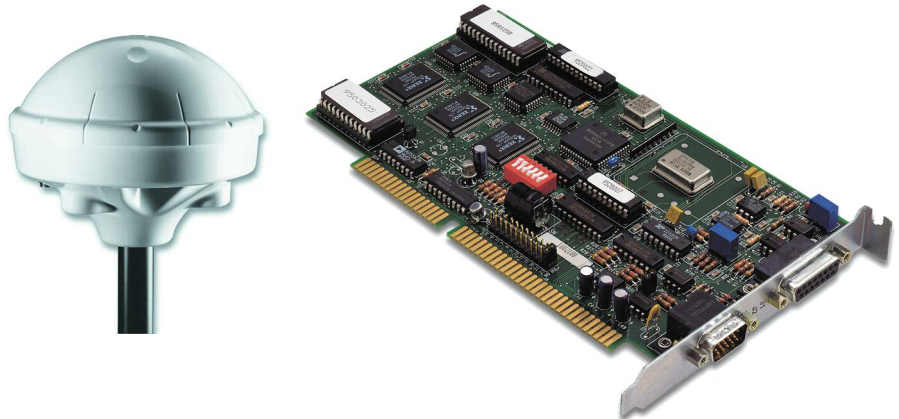

PC Time & Frequency Processor (shown with optional antenna/receiver, bc627AT)

bc620/627AT Specifications

ELECTRICAL SPECIFICATIONS

- Real time clock
 - Bus request resolution: 100 nanoseconds
 - Latency: Zero
 - Major time format: Binary or BCD
 - Minor time format: Binary
- Time code translator
 - Time code formats: IRIG B, NASA 36 (modulated or DCLS)
XR3, 2137 (modulated only)
 - Modulation ratio: 3:1 to 6:1
 - Input amplitude: 500 mV to 5 V P-P
 - Input impedance: >10K Ω (AC coupled)
 - Carrier frequency: \pm 50 PPM (max)
- Time code generator
 - Time code format: IRIG B
 - Modulation ratio: 3:1
 - Output amplitude: 1 V to 10 V P-P (adjustable) into 50 Ω
 - DC level shift: TTL/CMOS
- Timing functions
 - Heartbeat (TTL, 50 Ω): Programmable periodic
2.3 MHz to 2.5 MHz
(adjustable pulse width)
 - Time strobe (TTL, 50 Ω): Programmable, 1 mS through
hours (1 mS pulse width)
 - 1 PPS output (TTL, 50 Ω): 200 mS pulse width
 - Event capture input: 100 nS resolution, zero latency
(20 nS min pulse width; 250 nS min period)
- Disciplined oscillator
 - Frequency: 10 MHz
 - Outputs: 1, 5, or 10 MHz (selectable)
 - Rate accuracy:
 - Standard VCXO: 5.0E-8 short term (tracking)
5.0E-7/day long term (flywheeling)
 - Optional oven oscillator: 2.0E-9 short term (tracking)
5.0E-8/day long term (flywheeling)
 - Sync sources: GPS, Time Code, 1 PPS
- External time base frequency input
 - 10 MHz square wave: TTL (45-55% duty cycle)
 - 10 MHz sine wave: 0.5 to 4.0 V P-P
- AT bus
 - Address space: 1 Block of 16 Bytes in the PC I/O Map Range
100H-3FFH
 - Data transfer: 8-bit
 - Interrupt levels: IRQ 3-7, 9-12, 14-15
(jumper selected)
 - Power: +5 VDC @ 450 mA
+12 VDC @ 55 mA (bc620AT)
+12 VDC @ 250 mA (bc627AT)
-12 VDC @ 20 mA

- GPS subsystem (bc627AT only)
 - Time accuracy: \leq 2 microseconds
 - Position accuracy: 10 to 20 meters SEP (SA off)
 - Maximum velocity: 300 meters/sec (1,080 KPH)
 - Number of channels: 8
 - Receiver frequency: 1.575 GHz (L1, C/A code)
 - Time to first fix: Brief power off: 1.5 min (1-4 SV)
Worst case: 5 to 15 min

Solution modes: 1,3, and 4 satellites

- Environment

	Module	Antenna/Receiver
Operating temperature:	0°C to 70°C	-30°C to + 70°C
Storage temperature:	-50°C to 100°C	-55°C to +100°C
Humidity		
Operating:	5% to 95%*	95%

*non-condensing

- Connector types
 - J1 - module I/O signals: 15-pin 'DS'
 - J2 - GPS Interface: 15-pin high-density 'DP' (bc627AT)
- Software support
 - "C" demo program: Free, supplied on CD
 - Windows driver: Free, supplied on CD

OPTIONS

- Antenna cable extender module
- Isolation transformer time code input
- Ovenized crystal oscillator
- 'D' connector (J1) to BNC adapter
- WINS SDK for Windows 95/98/NT/2000

ORDERING INFORMATION

- | | |
|----------------|---|
| • bc620AT | ATbus Time & Frequency Processor |
| • bc627AT | ATbus GPS Time & Frequency Processor* |
| • 620-WINS SDK | Windows Software Developer's Kit |
| • OVEN | Ovenized oscillator option (factory installed) |
| • BNC | 'D' to BNC adapter (provides IRIG in, IRIG out,
1 pps out, event in, periodic out) |
| • GPS-ACU2K | Spare antenna |
| • 812597-050 | Spare RS422 50' (15 m) antenna cable** |
| • 812597-100 | Spare RS422 100' (30 m) antenna cable** |
| • 812597-200 | Spare RS422 200' (60 m) antenna cable** |

* includes GPS antenna/receiver & 50' (15m) cable

** contact factory regarding longer cabling requirements



SYMMETRICOM, INC.
2300 Orchard Parkway
San Jose, California
95131-1017
tel: 408.433.0910
fax: 408.428.7896
info@symmetricom.com
www.symmetricom.com

©2007 Symmetricom. Symmetricom and the Symmetricom logo are registered trademarks of Symmetricom, Inc. Windows is a registered trademark of Microsoft Corporation. All specifications subject to change without notice. DS/PCT&FP/D/0907/PDF



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com