ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *DDC BU-67124W* at our website: *Click HERE*

Avionics Interface Computer Rugged

Product Brief

Models: BU-67124W



ETHERNET
MIL-STD-1553
MIL-STD-1760
ARINC 429
ARINC 717
DISCRETE
CANbus

intel inside

ACEXTREME®

DDC's Rugged Avionics Interface Computer (AIC-R) provides a flexible and scalable platform that supports a wide range of data network communications. The system combines best-in-class performance from Intel's embedded computing architecture and the I/O flexibility of DDC's High Density Multi-Protocol XMC module, to deliver unmatched avionics connectivity in a small form factor, deployable, rugged enclosure.

Key Features

Performance

- Scalable Processing from an Intel® Core i5 Dual or Quad Core Processor
- Dual Gigabit Ethernet Interfaces for Network Connectivity and Bridging to MIL-STD-1553 or ARINC 429
- Many Configuration Options Supported with (1) XMC Site and (2) Mini-PCIe Sites

Functionality

- Enabled by DDC's Integrated Multi-I/O XMC
  - Up to 4 Dual Redundant MIL-STD-1553 Channels
    - Supports MIL-STD-1553A/B and MIL-STD-1760
    - BC Disable for RT Only Applications
    - Tx Inhibit for MT Only Applications
  - Up to 20 Programmable Tx/Rx ARINC 429 Channels
    - Supports ARINC 575 and Other ARINC Protocols
    - Full Line Rate on All Channels Simultaneously
    - Tx Inhibit for ARINC 429 Rx Only Applications
    - Programmable ARINC 429 Speed
  - Up to 2 Programmable Tx/Rx ARINC 717 Channels
  - Up to 2 CANbus 2.0/ARINC 825 Channels
  - Up to 8 Programmable RS-232/422/485 Channels
  - Up to 10 Avionics/Digital Discrete I/O
- Enabled by DDC's Integrated Mini-PCIe
  - Up to 4 Dual Redundant MIL-STD-1553 Channels
  - Up to 12 Programmable Tx/Rx ARINC 429 Channels

Benefits

- Embedded Intel® Processor Provides Best-in-Class Computing, Programming, and Flexibility, Enabling the AIC to Serve High Density Protocol Bridging and Application Needs.
- Qualified for Rugged Air and Ground Environments.
- Scalable Architecture and DDC's Portfolio of High Density XMC and Mini-PCIe Modules Enables System Customization to Support a Wide Range of Applications
- Field-Proven High TRL Hardware and Software Solution Saves Development Time and Costs.
- Three Modes of Operation Provide Complete Bridging Capability for Lab Environments.
  1. **Remote Access Mode** Uses Ethernet as a Virtual Backplane Between Applications Running on a Host Computer and 1553/429 Interfaces Located Within the AIC, Eliminating the Need and Cost of Long Cabling to Onboard 1553/429 Connections from the Test Lab
  2. **Protocol Conversion Mode** Uses Bridging SDK, Which Allows Users to Easily Create Embedded Software on the AIC that will Autonomously Forward Data Between MIL-STD-1553, ARINC 429, and Ethernet Interfaces
  3. **Standalone Mode** Allows the AIC to Operate as a User Programmable Computer System.

Applications

- Military Aerospace
  - Fixed Wing
  - Rotary
- UAVs
- Commercial Aerospace
  - Fixed Wing
  - Rotary
- Ground Vehicles

Need a Custom Solution?
DDC can customize designs for all products, ranging from simple modifications of standard products to fully customized solutions for commercial, military, aerospace, and industrial applications.

For more information: www.ddc-web.com/BU-67124W

© 2015 Data Device Corporation. All trademarks are the property of their respective owners.
Intel, the Intel logo, the Intel Inside logo and Intel Atom are trademarks of Intel Corporation in the U.S. and/or other countries.

Printed on recycled paper.

Quick Specs

REQUIREMENT	DESCRIPTION
Processor	Scalable to support Core i5 processor modules
Memory	DDR3 DRAM scalable 4GB, 8 GB, 16GB
Networking	2x Gigabit Ethernet
Storage	Solid-State Drive (SSD) 64GB to 512GB
Serial Interface	1x RS-232 4x RS-422 2x USB 2.0 Ports
GPIOs	16x ports
Video	VGS
Power	28VDC, MIL-STD-704
Secure Erase	Trigger by Software
Operating System	Linux, Windows
Enclosure	8.5in x 7.0 in x 3.4in (215.6mm x 177.8mm x 86.2mm)
Weight	< 7lbs (3.175 kg)

ENVIRONMENTALS		TYPICAL
Temperature Range		
	Operating	-40°C to +85°C
	Storage	-55°Cto +100°C
Shock		MIL-STD-8106G — 516.6
Vibration		MIL-STD-8106G — 514.6
EMI		MIL-STD-461F
Humidity		95% Non-condensing
Immersion		MIL-STD-810G — 512.5, Procedure I

Ordering Information

BU-67124W1XXL-CC0 (Contact Factory for Customization)

Config	System Specifications
01	Core i5-4422E, 16GB DRAM, 128GB SSD
02	Core i5-4422E, 16GB DRAM, 128GB SSD x2 Removable SSD
21	Core i5-4422E, 16GB DRAM, 256GB SSD
22	Core i5-4422E, 16GB DRAM, 256GB SSD x2 Removable SSD
31	Core i5-4422E, 16GB DRAM, 512GB SSD
32	Core i5-4422E, 16GB DRAM, 512GB SSD x2 Removable SSD

Note: All configurations include the following:
1. System can be preinstalled with Ubuntu Linux or Windows 7
2. Data Bus I/Os include 1553, ARINC 429, CANBus, Serial I/O, etc.


Included Software:

- BU-69094S1 Bridging SDK for 1553/429 (runs AIC)
  - Includes Web Server and Remote Access Server
- BU-69092S0 Windows 1553 SDK (runs on host)
- BU-69092S1 Linux 1553 SDK (runs on host and AIC)
- DD-42992S0 Windows 429 SDK (runs on host)
- DD-42992S1 Linux 429 SDK (runs on host and AIC)


Optional Cable Assemblies:

- DDC-80965-1 P1 Power Cable (6 ft)
- DDC-80965-2 P2 Maintentance Cable (6 ft)
- DDC-80965-3 P3 USB 3.0 Cable (6 ft)
- DDC-80965-4 P4 I/O Cable (6 ft)
- DDC-80965-5 P5 I/O Cable (6 ft)


Mechanical Outline

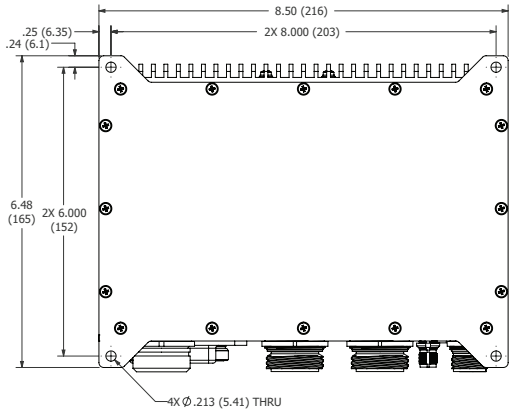

BOTTOM VIEW

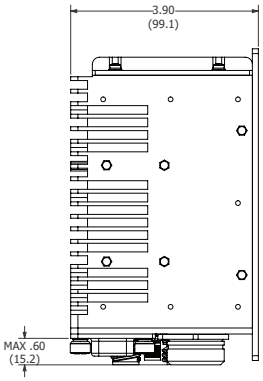

SIDE VIEW

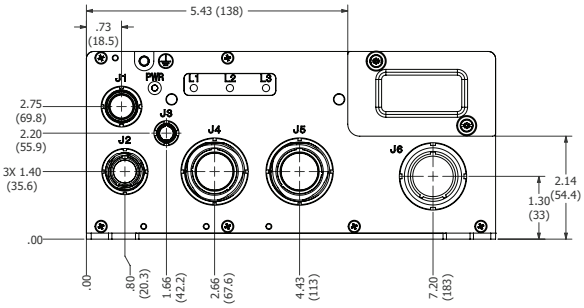

FRONT VIEW

DATA DEVICE CORPORATION
REGISTERED TO:
ISO 9001:2008, AS9100C:2009-01
EN9100:2009, JIS Q9100:2009
FILE NO. 10001296 ASH09



The information in this Flyer is believed to be accurate; however, no responsibility is assumed by Data Device Corporation for its use, and no license or rights are granted by implication or otherwise in connection therewith. Specifications are subject to change without notice.

For ordering assistance and technical support,
E-Mail: service@ddc-web.com
Visit: ddc-web.com Data Device Corporation
Call: HQ, N.Y., U.S.A 1-800-DDC-5757 | (631) 567-5600

UK	+44-(0)1635-811140
France	+33-(0)1-41-16-3424
Germany	+49-(0)89-1500-12-11
Japan	+81-(0)3-3814-7688
Asia	+65-6489-4801
India	+91 080 301 10 200

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP