



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?


Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com



DT9110

Interface Daughter Card

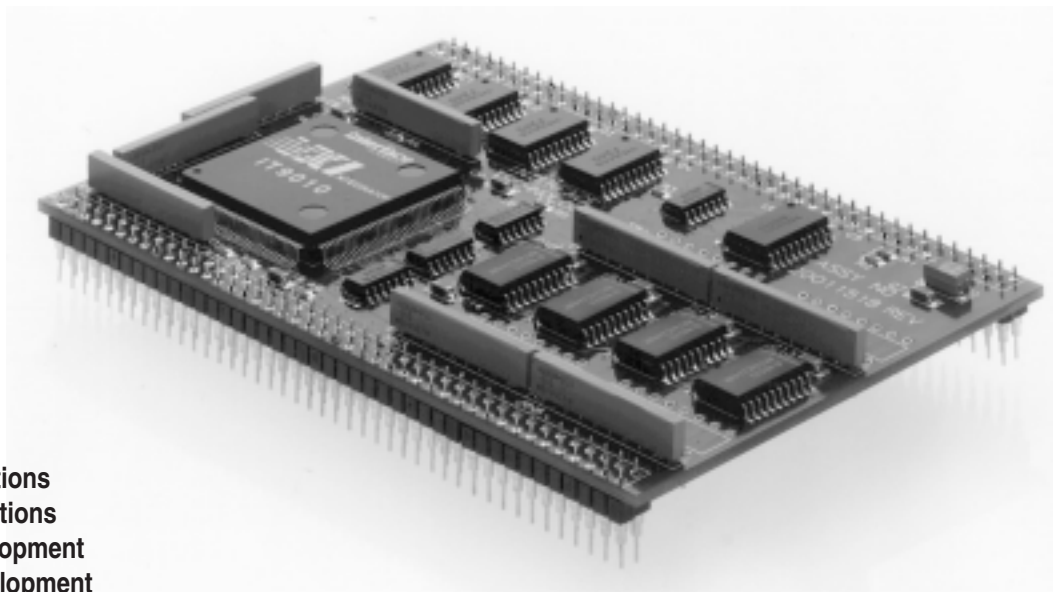

- O.E.M. Applications
- Unique Applications
- Software Development
- Hardware Development
- Proven Cost Efficient & Space Efficient Design
- May be used on B-Size, C-size, and D-size Modules

Description


The DT9110 represents the state-of-the-art approach to VXIbus instrument product development and manufacturing. Taking advantage of the feature set of the IT9010 VXIIntegrator chip, the DT9110 combines all of the elements necessary to implement a register-based VXI interface, on 13.5 inches of board space, leaving 100 square inches of design space on a standard C-size module.

The DT9110 provides all of the configuration registers required by the VXI specification, high current buffers for directly driving the VME/VXI backplane signals, and interrupt circuitry for generating VXIbus interrupts. Also included are decoding and control circuitry for implementing external Device Dependent registers and A24/A32 VMEbus registers as defined by the VXIbus specification.

DT9110 SPECIFICATIONS*



Your Product + DT9110 = VXI Register-Based Instrument

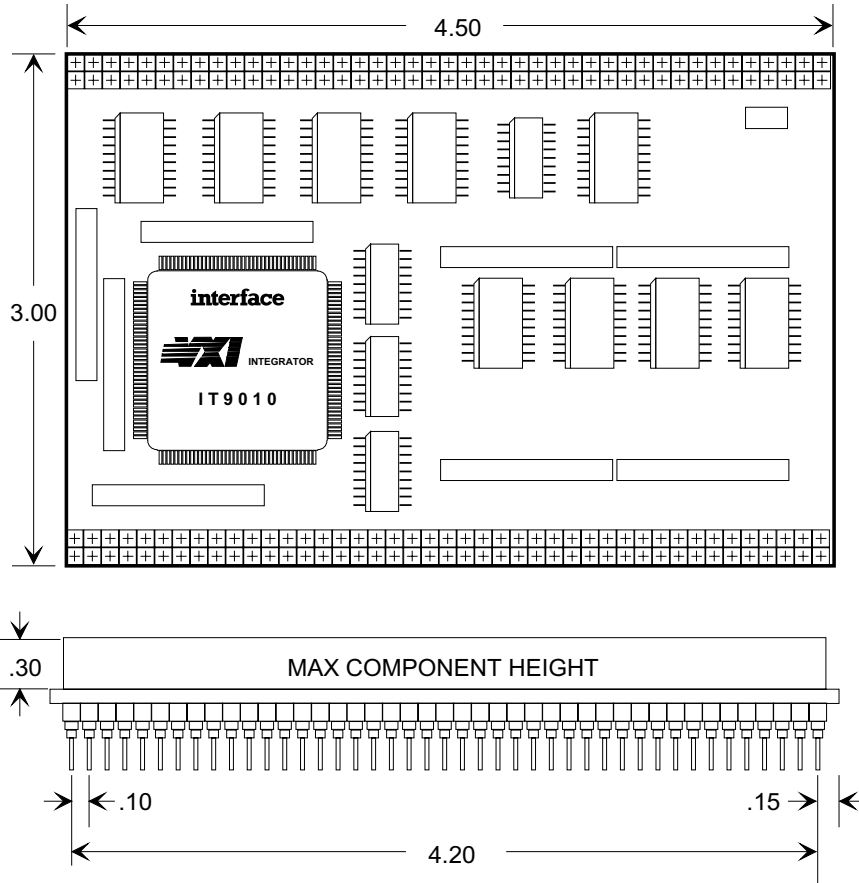

NOTE: ALL DIMENSIONS ARE IN INCHES.

Absolute Maximum Ratings:

Supply Voltage (Vcc)	
Minimum	GND - 0.5 V
Maximum	6.0 V
Input Voltage (Vi)	
Minimum	GND - 0.5 V
Maximum	Vcc + 0.5 V
Output Voltage (Vo)	
Minimum	GND - 0.5 V
Maximum	Vcc + 0.5 V
Temperature	
Storage (Tstg)	-40° C to +70° C
Operating (Topr)	0° C to +50° C

Output Current, Pin Shorted To Ground (Ios):

Standard Output	-40 mA to +40 mA
Medium Drive	-40 mA to +80 mA
High Drive	-90 mA to +180 mA
Open-Collector	-128 mA
Bidirectional (I/O ₁)	-48 mA
Bidirectional (I/O ₂)	-128 mA

Recommended Operating Conditions:

Supply Voltage (Vcc)	
Minimum	4.75 V
Typical	5.0 V
Maximum	5.25 V
Input High Voltage (Vih)	2.2 V, min.
Input Low Voltage (Vil)	0.8 V, max.

Operating Temperature (Topr):

Minimum	0° C
Maximum	+50° C

Supply Current @ 5 V:

300 mA

* Specifications subject to change without notice.



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com