

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Visit our website - *Click HERE*

Series DH

Digihelic® Differential Pressure Controller

3-in-1 Instrument: Gage, Switch and Transmitter, Square Root Extractor for Air Flow



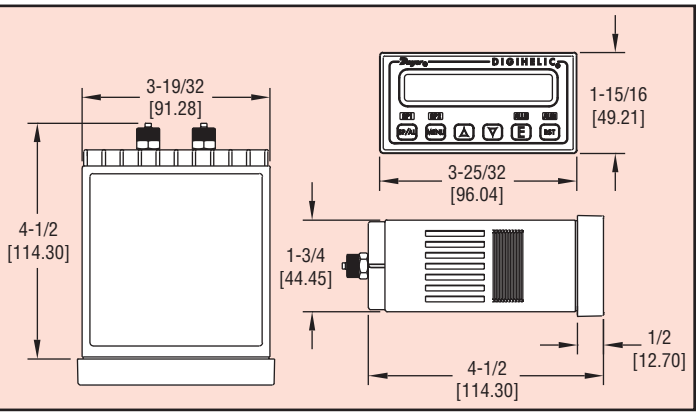

The Series DH Digihelic® Differential Pressure Controller is a 3-in-1 instrument possessing a digital display gage, control relay switches, and a transmitter with current output. Combining these three features allows the reduction of several instruments with one product, saving inventory, installation time and money. The Digihelic® Controller is the ideal instrument for pressure, velocity and flow applications, achieving a 0.5% full scale accuracy on ranges from 5 to 100 in w.c.

The Digihelic® Controller allows the selection of pressure, velocity or volumetric flow operation in several commonly used engineering units. Two SPDT control relays with adjustable deadbands are provided along with a scalable 4-20 mA process output. The Series DH provides extreme flexibility in power usage by allowing 120/220 VAC and also 24 VDC power which is often used in control panels.

Programming is easy using the menu key to access five simplified menus which provide access to: security level; selection of pressure, velocity or flow operation; selection of engineering units; K-factor for use with flow sensors; rectangular or circular duct for inputting area in flow applications; set point control or set point and alarm operation; alarm operation as a high, low or high/low alarm; automatic or manual alarm reset; alarm delay; view peak and valley process readings; digital damping for smoothing erratic process applications; scaling the 4-20 mA process output to fit your application's range; Modbus® communications; and field calibration.

With all this packed into one product it is easy to see why the Digihelic® Controller is the only instrument you will need for all your pressure applications.

OPTIONS

Barbed fitting for 3/16″ ID tubing -B
For NIST traceable calibration certificate, add suffix -NIST to model numbers.
Example DH-004-NIST.
For factory calibration certificate, add suffix -FC to model numbers.
Example DH-004-FC.

ACCESSORIES

The Mini-Node™ converters are an easy solution for utilizing the Digihelic® Controller's RS-485 serial communication and connecting to virtually any PC.
MN-1, Mini-Node™ USB/RS-485 converter
A-266, Digihelic® surface mounting bracket
A-203, 1/8″ ID x 1/4″ OD PVC tubing
Digihelic Links™, Communication Software

SPECIFICATIONS

Service: Air and non-combustible, compatible gases.
Wetted Materials: Consult factory.
Housing Material: ABS plastic, UL approved 94-V-0.
Accuracy: ±0.5% at 77°F (25°C) including hysteresis and repeatability.
Stability: < ±1% per year.
Pressure Limits: Ranges ≤ 2.5 in w.c. = 2 psi; 5″: 5 psi; 10″: 5 psi; 25″: 5 psi; 50″: 5 psi, 100″: 9 psi.
Temperature Limits: 32 to 140°F (0 to 60°C).
Compensated Temperature Limits: 32 to 140°F (0 to 60°C).
Thermal Effects: 0.020%/°F (0.036/°C) from 77°F (25°C).
Power Requirements: High voltage power = 100 to 240 VAC, 50 to 400 Hz or 132 to 240 VDC. Low voltage power = 24 VDC ±20%.
Power Consumption:
Low voltage power = 24 VDC - 130 mA max;
High voltage power = 100 to 240 VAC, 132 to 240 VDC - 7VA max.
Output Signal: 4-20 mA DC into 900 Ω max.
Zero & Span Adjustments: Accessible via menus.
Response Time: 250 ms.
Display: 4 digit LCD 0.4″ height. LED indicators for set point and alarm status.
Electrical Connections: Screw terminals.
Process Connections: Compression fitting for use with 1/8″ ID X 1/4″ OD tubing (3.175 mm ID x 6.35 mm OD). Optional barbed fitting for 3/16″ ID tubing.
Enclosure Rating: Face designed to meet NEMA 4X (IP66).
Mounting Orientation: Mount unit in horizontal plane.
Size: 1/8 DIN.
Panel Cutout: 1.772 x 3.620 in (45 x 92 mm).
Weight: 14.4 oz (408 g).
Serial Communications: Modbus® RTU, RS485, 9600 baud.
Agency Approvals: CE, UL.

SWITCH SPECIFICATIONS

Switch Type: 2 SPDT relays.
Electrical Rating: 8 amps at 240 VAC resistive.
Set Point Adjustment: Adjustable via keypad on face.

Available Pressure Engineering Units

Model	in w.c.	ft w.c.	mm w.c.	cm w.c.	psi	in Hg	mm Hg	mbar	Pa	kPa	hPa	oz/in²
DH-002	.2500		6.350	0.635			0.467	0.623	62.28		0.623	0.144
DH-004	1.000		25.40	2.540			1.868	2.491	249.1	0.249	2.491	0.578
DH-006	5.000	.4167	127.0	12.70	.1806	.3678	9.342	12.45	1245	1.245	12.45	2.890
DH-007	10.00	.8333	254.0	25.40	.3613	.7356	18.68	24.91	2491	2.491	24.91	5.780
DH-008	25.00	2.083	635.0	63.50	.9032	1.839	46.71	62.27	6227	6.227	62.27	14.45
DH-009*	50.00	4.167	1270	127.0	1.806	3.678	93.42	124.5		12.45	124.5	28.90
DH-010*	100.0	8.333	2540	254.0	3.613	7.356	186.8	249.1		24.91	249.1	57.80

Bi-Directional* Ranges also available:
DH-012, Range: 0.25 - 0 - 0.25 in w.c.
DH-014, Range: 1.0 - 0 - 1.0 in w.c.
DH-015, Range: 2.5 - 0 - 2.5 in w.c.
DH-016, Range: 5 - 0 - 5 in w.c.
DH-017, Range: 10 - 0 - 10 in w.c.

*Velocity and volumetric flow not available on bi-directional range units and models DH-009 & DH-010.

Modbus® is a registered trademark of Schneider Automation, Inc.

Process Tubing Options: See page 547 (Gage Tubing Accessories)

Find Quality Products Online at: www.GlobalTestSupply.com sales@GlobalTestSupply.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP