



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

Accessories For All Your Curing Needs

Bulbs • Eye Protection • Liquid Lightguides • Radiometers



Light Guide Simulator



Faceshield



Goggles

Lightguide Type	Used With	Part Number
Single Wand 1 m long x 5 mm diameter (standard)	PC-3, PC-3D, PC-3 Ultra BlueWave 200™	35102 5720
Single Wand .5 m long x 5 mm diameter	PC-3, PC-3D, PC-3 Ultra	35101
Single Wand 1 m long x 8 mm diameter	BlueWave 200™	5722
Single Pole Wand 1.5 m long x 5 mm diameter	PC-3, PC-3D, PC-3 Ultra BlueWave 200™	36238 5721
Single Pole Wand 1 m long x 3 mm diameter	PC-3, PC-3D, PC-3 Ultra	36619
2 Pole Split Wand 1 m long x 3 mm diameter (each pole)	PC-3, PC-3D, PC-3 Ultra BlueWave 200™	37043 38476
3 Pole Split Wand 1 m long x 3 mm diameter (each pole)	PC-3, PC-3D, PC-3 Ultra BlueWave™	37044 38477
4 Pole Split Wand 1 m long x 3 mm diameter (each pole)	BlueWave 200™	38478
Anti Static Wand 1 m long x 5 mm diameter	PC-3, PC-3D, PC-3 Ultra	37040

Quartz and custom lightguides are available upon request



ACCU-CAL 30™ Radiometer for Measuring Lightguide Intensity



ACCU-CAL 20™ Radiometer for Measuring Lightguide Intensity

If you are looking for a solution to your application problem, call the Dymax Tech Center toll free at:
1-877-DYMAX-UV (1-877-396-2988)

© 2001 DYMAX Corporation

Many dispensing and curing system applications are unique. DYMAX does not warrant the fitness of the product for the intended application. Any warranty applicable to the product, its application and use is strictly limited to that contained in DYMAX's standard Conditions of Sale. DYMAX recommends that any intended application be evaluated and tested by the user to insure that desired performance criteria are satisfied. DYMAX is willing to assist users in their performance testing and evaluation by offering equipment trial rental and leasing programs to assist in such testing and evaluation. Data sheets are available for valve controllers or pressure pots upon request. LIT230 Rev. 12/2001

DYMAX Corporation - 51 Greenwood Road - Torrington, CT 06790 - Phone: 860-482-1010 - Fax: 860-496-0608
E-mail: info@dymax.com - www.dymax.com

DYMAX Europe GmbH - Trakehner Strasse 3 - D-60487 Frankfurt am Main - Germany - Phone: (49) 69-7165-3568
Fax: (49) 69-7165-3830 - E-mail: dymaxinfo@dymax.de


DYMAX®, Light-Weld®, Light-Welder®, Multi-Cure®, Ultra Light-Weld®, MEDI-CURE® and MD® are trademarks of DYMAX Corporation



ADHESIVES AND LIGHT CURING SYSTEMS

SELECTOR GUIDE

High Intensity UV/Visible Spot Lamps A Choice of Features, Intensities and Cure Speeds for a Cost Effective UV Process

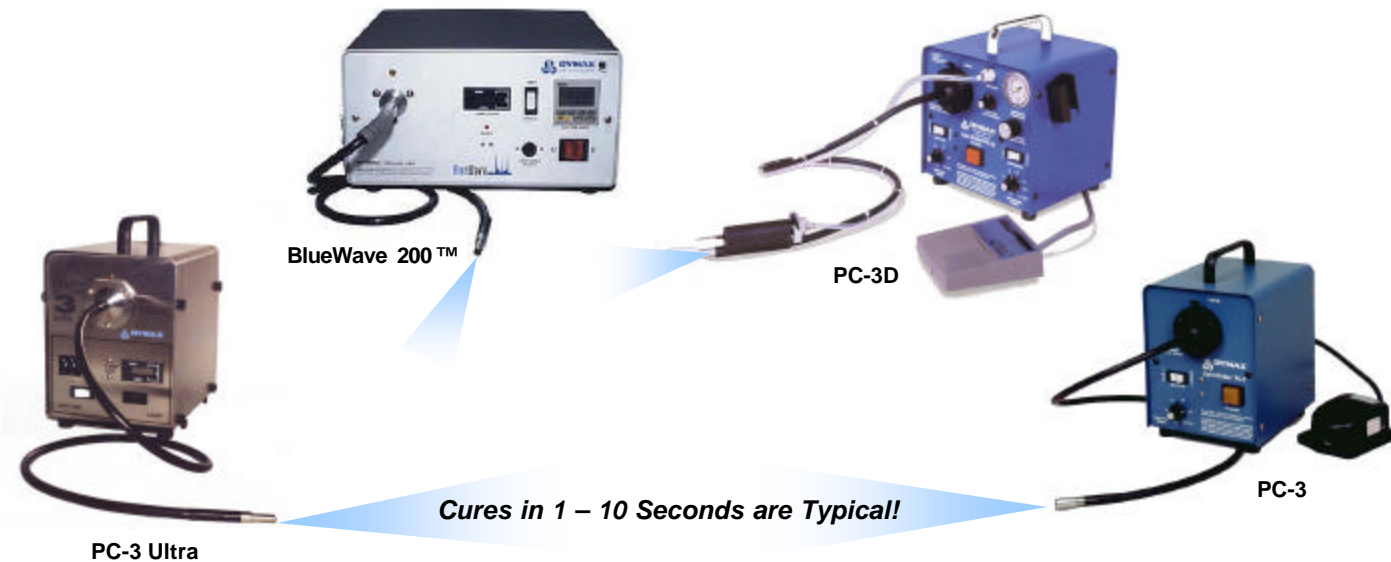

- Up to 20,000 mW/cm² intensity
- Wand lamp/dispenser combinations
- 2, 3 or 4 split wand configurations
- Cool Blue Light Filters™ extend wand life
- Each lamp comes complete with light-guide, foot pedal and bulb reflector assembly
- PC-3 series lamps include free 1 m light guide

- 50 or 200 Watt bulbs
- Stainless steel and anodized aluminum available
- Non ozone producing
- Hour meters
- Light monitors
- Flexible, quick connect light guides
- Foot and automatic controlled shutters

Durable, Reliable and Proven Performers
Cool Blue Light Filter™ Virtually Eliminates Liquid Light Guide Degradation!

DYMAX UV/Visible Light Curing Spot Lamps

Lamp Specifications and Features




Light Source	BlueWave 200™ High Intensity UV Spot Lamp	PC-3 Ultra High Intensity UV Spot Lamp	PC-3 & PC-3D Medium Intensity UV Spot Lamp
Output Power	200 Watt EMARC™**	50 Watt	50 Watt
Intensity in the UVA Range (320-390 nm*)	17-20,000 mW/cm ²	4,000 mW/cm ²	2,000 mW/cm ²
Dimensions of Illuminated Area (standard 5 mm guide)	Up to 2-1/2" in diameter	Up to .50" in diameter	Up to .50" in diameter
Input Power Requirements	90-130 VAC @ 50/60 Hz or 180-206 VAC @	100/115/230V @ 50/60 Hz (customer specified)	100/115/230 VAC @ 50/60 Hz (customer specified)
Weight	11.7 lbs. (17.5 kg)	10 lb. (4.54 kg)	PC-3: 10 lbs. (4.54.kg)
Liquid Light Guides	1 m long x 5 mm diameter (1.5 m long-optional)	1 m long x 5 mm diameter (0.5 m & 1.5 m long-optional)	1 m long x 5 mm diameter (0.5 m and 1.5 m long-optional)
Internal Filter	Cool Blue Light Filter™	Cool Blue Light Filter™	Yes
Overall Dimensions (H X W X D)	11.5" x 11.5" x 6.5" (29.2 cm x 29.2 cm x 16.5 cm)	9.75" x 6.5" x 7.5" (25 cm x 16 cm x 19 cm)	9.75" x 6.5" x 7.5" (25 cm x 16 cm x 19 cm)
Timer Operated Shutter	0.1 to 99.99 seconds	Foot operated shutter included; "Lamp On" indicator light	0-50 seconds with analog timer (Model 35350)
Hour Meter	Yes	Yes	Yes
Construction	Anodized Aluminum	Stainless Steel	Painted
Part Numbers	90-130V, 50/60 Hz: 38600 180-260V, 50/60 Hz: 38605	115V 50/60 Hz: 37100 230V 50/60 Hz: 37130	PC-3: 115V 50/60 Hz: 35350 230V 50/60 Hz: 35936 PC-3D: 115V 50/60 Hz: 35390 230V 50/60 Hz: 35955
Part Number for Replacement Bulb: (pre-focused lamp reflector assembly included)	38465	37123	35003

*Intensity readings vary widely depending on make and model of radiometer. These intensities were measured with the DYMAX ACCU-CAL 20 Radiometer.


**EMARC is a registered trademark of USHIO America, Inc.




Trifurcated Liquid Lightguide Curing Plastic to Metal Application

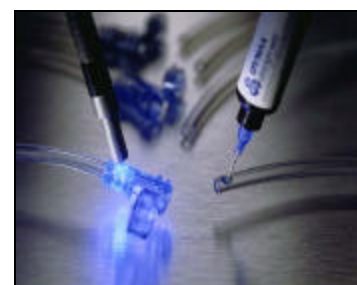

Curing Tube Sets



PC-3 Curing Coating

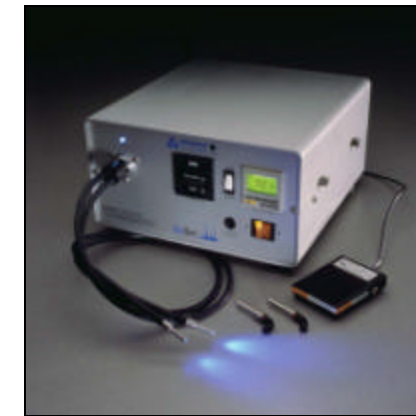

BlueWave™ 200 Spot Lamp with Bifurcated Wand

BlueWave Offers Higher Intensity with a Choice of Single or Split Wands to Become 2, 3 or 4 Work Stations!

- 200 Watts of UV/visible light curing power!
- 2,000 hours of bulb life!
- Up to 20,000+ mW/cm² of intensity!
- Uniform curing with multiple light guides!
- Cure an area up to two inches in diameter!

The BlueWave™ is the highest intensity UV curing spot light available for fast, deep curing of UV adhesives, coatings and potting materials. Because of the high intensity, it can deliver **4 times the useful bulb life** of other popular spot/wand lights. The BlueWave™ has enough power to make multiple wand cures practical!

Single and Multi-Wand Liquid Light Guide Performance of BlueWave™ 200 Compared with Leading 100 Watt Spot Lamp

Number of Wands	BlueWave™ 200		100 Watt Spot	
	Initial Intensity (W/cm ²)	2,000 Hours (W/cm ²)	Initial Intensity (W/cm ²)	2,000 Hours (W/cm ²)
Lightguide Simulator (120 mm rigid wand)	18	12	12.9	3.8
Single*	16	10.8	11.6	3.5
Double*	9.5	6.0	6.0	1.9
Triple*	8	4.5	5.0	1.4
Quad*	5	3.0	3.5	.95

*measured with standard 5 mm x 1000 mm lightguide in W/cm²

PC-3D Spot-Light Dispenser Combination Allows a Single Operator to Dispense and Cure Adhesive

PC-3D Specifications

- Same Features as PC-3
- Dimensions: 9.5" L x 8.25" W x 10.5" H (Height dimensions include 1.5" high handle)
- Weight: 23 lbs.
- 1 m L x 5 mm Diameter Lightguide
- Accepts Standard 10 and 30 cc Syringes
- Shutter Timer Range: .5 to 60 seconds
- Dispenser Timer Range: .5 to 3 seconds
- Manual or Timed Modes Provided for Shutter and Adhesive Dispensing
- Adjustable Vacuum Draw Back
- 0 to 120 psi Pressure Regulator with Dial Gauge
- Power Cord: 6 foot grounded

Power requirements: 120/230 VAC, 3/1.5 AMP max current draw, 60-80 psi clean shop air required.



PC-3D Coil Terminating



PC-3D Curing Printed Circuit Board

DYMAX UV/Visible Light Curing Spot Lamps

Lamp Specifications and Features



Light Source	BlueWave 200™ High Intensity UV Spot Lamp	PC-3 Ultra High Intensity UV Spot Lamp	PC-3 & PC-3D Medium Intensity UV Spot Lamp
Output Power	200 Watt EMARC™**	50 Watt	50 Watt
Intensity in the UVA Range (320-390 nm*)	17-20,000 mW/cm ²	4,000 mW/cm ²	2,000 mW/cm ²
Dimensions of Illuminated Area (standard 5 mm guide)	Up to 2-1/2" in diameter	Up to .50" in diameter	Up to .50" in diameter
Input Power Requirements	90-130 VAC @ 50/60 Hz or 180-206 VAC @	100/115/230V @ 50/60 Hz (customer specified)	100/115/230 VAC @ 50/60 Hz (customer specified)
Weight	11.7 lbs. (17.5 kg)	10 lb. (4.54 kg)	PC-3: 10 lbs. (4.54.kg)
Liquid Light Guides	1 m long x 5 mm diameter (1.5 m long-optional)	1 m long x 5 mm diameter (0.5 m & 1.5 m long-optional)	1 m long x 5 mm diameter (0.5 m and 1.5 m long-optional)
Internal Filter	Cool Blue Light Filter™	Cool Blue Light Filter™	Yes
Overall Dimensions (H X W X D)	11.5" x 11.5" x 6.5" (29.2 cm x 29.2 cm x 16.5 cm)	9.75" x 6.5" x 7.5" (25 cm x 16 cm x 19 cm)	9.75" x 6.5" x 7.5" (25 cm x 16 cm x 19 cm)
Timer Operated Shutter	0.1 to 99.99 seconds	Foot operated shutter included; "Lamp On" indicator light	0-50 seconds with analog timer (Model 35350)
Hour Meter	Yes	Yes	Yes
Construction	Anodized Aluminum	Stainless Steel	Painted
Part Numbers	90-130V, 50/60 Hz: 38600 180-260V, 50/60 Hz: 38605	115V 50/60 Hz: 37100 230V 50/60 Hz: 37130	PC-3: 115V 50/60 Hz: 35350 230V 50/60 Hz: 35936 PC-3D: 115V 50/60 Hz: 35390 230V 50/60 Hz: 35955
Part Number for Replacement Bulb: (pre-focused lamp reflector assembly included)	38465	37123	35003

*Intensity readings vary widely depending on make and model of radiometer. These intensities were measured with the DYMAX ACCU-CAL 20 Radiometer.


**EMARC is a registered trademark of USHIO America, Inc.




Trifurcated Liquid Lightguide Curing Plastic to Metal Application



Curing Tube Sets



PC-3 Curing Coating

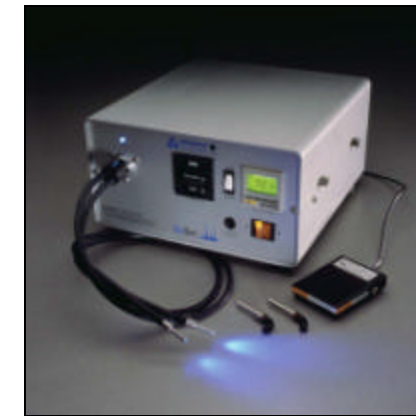

BlueWave™ 200 Spot Lamp with Bifurcated Wand

BlueWave Offers Higher Intensity with a Choice of Single or Split Wands to Become 2, 3 or 4 Work Stations!

- 200 Watts of UV/visible light curing power!
- 2,000 hours of bulb life!
- Up to 20,000+ mW/cm² of intensity!
- Uniform curing with multiple light guides!
- Cure an area up to two inches in diameter!

The BlueWave™ is the highest intensity UV curing spot light available for fast, deep curing of UV adhesives, coatings and potting materials. Because of the high intensity, it can deliver **4 times the useful bulb life** of other popular spot/wand lights. The BlueWave™ has enough power to make multiple wand cures practical!

Single and Multi-Wand Liquid Light Guide Performance of BlueWave™ 200 Compared with Leading 100 Watt Spot Lamp

Number of Wands	BlueWave™ 200		100 Watt Spot	
	Initial Intensity (W/cm ²)	2,000 Hours (W/cm ²)	Initial Intensity (W/cm ²)	2,000 Hours (W/cm ²)
Lightguide Simulator (120 mm rigid wand)	18	12	12.9	3.8
Single*	16	10.8	11.6	3.5
Double*	9.5	6.0	6.0	1.9
Triple*	8	4.5	5.0	1.4
Quad*	5	3.0	3.5	.95

*measured with standard 5 mm x 1000 mm lightguide in W/cm²

PC-3D Spot-Light Dispenser Combination Allows a Single Operator to Dispense and Cure Adhesive

PC-3D Specifications

- Same Features as PC-3
- Dimensions: 9.5" L x 8.25" W x 10.5" H (Height dimensions include 1.5" high handle)
- Weight: 23 lbs.
- 1 m L x 5 mm Diameter Lightguide
- Accepts Standard 10 and 30 cc Syringes
- Shutter Timer Range: .5 to 60 seconds
- Dispenser Timer Range: .5 to 3 seconds
- Manual or Timed Modes Provided for Shutter and Adhesive Dispensing
- Adjustable Vacuum Draw Back
- 0 to 120 psi Pressure Regulator with Dial Gauge
- Power Cord: 6 foot grounded

Power requirements: 120/230 VAC, 3/1.5 AMP max current draw, 60-80 psi clean shop air required.



PC-3D Coil Terminating



PC-3D Curing Printed Circuit Board

Accessories For All Your Curing Needs

Bulbs • Eye Protection • Liquid Lightguides • Radiometers



Light Guide Simulator



Faceshield



Goggles

Lightguide Type	Used With	Part Number
Single Wand 1 m long x 5 mm diameter (standard)	PC-3, PC-3D, PC-3 Ultra BlueWave 200™	35102 5720
Single Wand .5 m long x 5 mm diameter	PC-3, PC-3D, PC-3 Ultra	35101
Single Wand 1 m long x 8 mm diameter	BlueWave 200™	5722
Single Pole Wand 1.5 m long x 5 mm diameter	PC-3, PC-3D, PC-3 Ultra BlueWave 200™	36238 5721
Single Pole Wand 1 m long x 3 mm diameter	PC-3, PC-3D, PC-3 Ultra	36619
2 Pole Split Wand 1 m long x 3 mm diameter (each pole)	PC-3, PC-3D, PC-3 Ultra BlueWave 200™	37043 38476
3 Pole Split Wand 1 m long x 3 mm diameter (each pole)	PC-3, PC-3D, PC-3 Ultra BlueWave™	37044 38477
4 Pole Split Wand 1 m long x 3 mm diameter (each pole)	BlueWave 200™	38478
Anti Static Wand 1 m long x 5 mm diameter	PC-3, PC-3D, PC-3 Ultra	37040

Quartz and custom lightguides are available upon request



ACCU-CAL 30™ Radiometer for Measuring Lightguide Intensity



ACCU-CAL 20™ Radiometer for Measuring Lightguide Intensity

If you are looking for a solution to your application problem, call the Dymax Tech Center toll free at:
1-877-DYMAX-UV (1-877-396-2988)

© 2001 DYMAX Corporation

Many dispensing and curing system applications are unique. DYMAX does not warrant the fitness of the product for the intended application. Any warranty applicable to the product, its application and use is strictly limited to that contained in DYMAX's standard Conditions of Sale. DYMAX recommends that any intended application be evaluated and tested by the user to insure that desired performance criteria are satisfied. DYMAX is willing to assist users in their performance testing and evaluation by offering equipment trial rental and leasing programs to assist in such testing and evaluation. Data sheets are available for valve controllers or pressure pots upon request. LIT230 Rev. 12/2001

DYMAX Corporation - 51 Greenwood Road - Torrington, CT 06790 - Phone: 860-482-1010 - Fax: 860-496-0608
E-mail: info@dymax.com - www.dymax.com

DYMAX Europe GmbH - Trakehner Strasse 3 - D-60487 Frankfurt am Main - Germany - Phone: (49) 69-7165-3568
Fax: (49) 69-7165-3830 - E-mail: dymaxinfo@dymax.de


DYMAX®, Light-Weld®, Light-Welder®, Multi-Cure®, Ultra Light-Weld®, MEDI-CURE® and MD® are trademarks of DYMAX Corporation



ADHESIVES AND LIGHT CURING SYSTEMS

SELECTOR GUIDE

High Intensity UV/Visible Spot Lamps A Choice of Features, Intensities and Cure Speeds for a Cost Effective UV Process

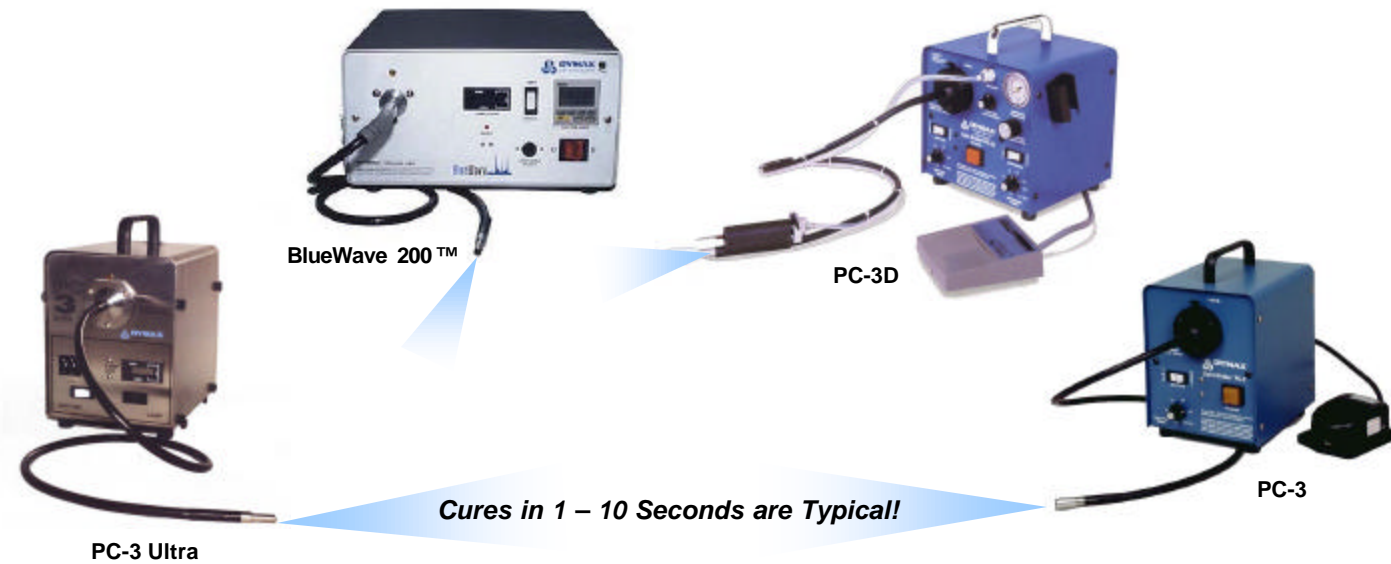

- Up to 20,000 mW/cm² intensity
- Wand lamp/dispenser combinations
- 2, 3 or 4 split wand configurations
- Cool Blue Light Filters™ extend wand life
- Each lamp comes complete with light-guide, foot pedal and bulb reflector assembly
- PC-3 series lamps include free 1 m light guide

- 50 or 200 Watt bulbs
- Stainless steel and anodized aluminum available
- Non ozone producing
- Hour meters
- Light monitors
- Flexible, quick connect light guides
- Foot and automatic controlled shutters

Durable, Reliable and Proven Performers
Cool Blue Light Filter™ Virtually Eliminates Liquid Light Guide Degradation!



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com