

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

We offer the widest range of high-speed digitizers available on the market today. Our powerful PC-based instrumentation products allow you to create reliable, flexible and high-performance solutions quickly and easily.

Reduce development time and costs for testing complex applications such as radar, wireless communications, spectroscopy, etc. by using our GageScope software or SDKs.

APPLICATIONS

Spectroscopy
Radar System Design and Test
Signal Intelligence
Lidar Systems
Wireless Comm
Non-Destructive Testing
High-Performance Imaging
Manufacturing Test

CompuScope 14200

General-purpose digitizer for the PCI bus




A general-purpose, high-resolution digitizer with the power to satisfy the most demanding precision measurement requirements.

FEATURES

- 200 MS/s sampling on 2 synchronous channels
- 14 bits nominal resolution
- 100 MHz bandwidth
- Full-size, single-slot PCI card
- Up to 512 MegaSamples of on-board acquisition memory per channel
- Full-featured, software-controlled front-end
- 32 bits, 66 MHz PCI standard for 200 MB/s transfer to PC memory
- Compatible with GageScope software; software development kits available for LabVIEW, MATLAB, C/C++

CompuScope 14200 Simplified Block Diagram

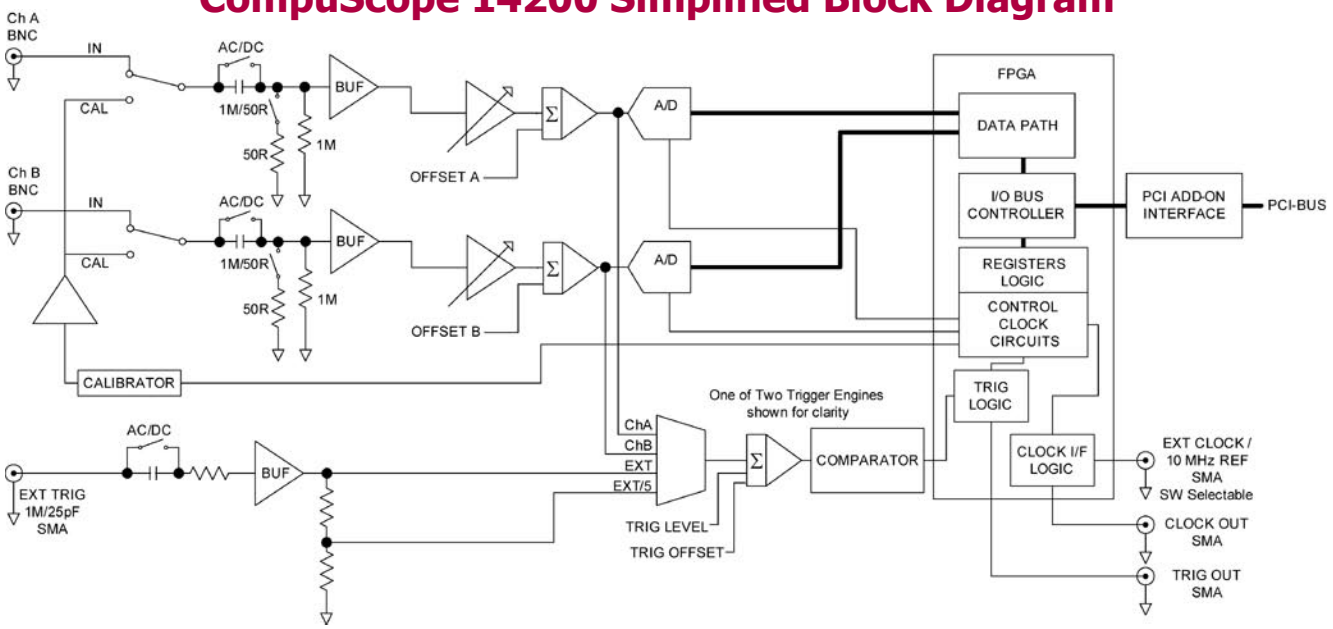

A/D SAMPLING

Number of Inputs:	2
Resolution:	14 bits
ENOB (see Note 1):	10.7 bits
SNR (see Note 1):	66 dB
SFDR (see Note 1):	71 dB
SINAD (see Note 1):	64 dB
Sampling Rates, Channels A and B simultaneously, or A only:	200 MS/s, 160 MS/s, 100 MS/s, 80 MS/s, 50 MS/s, 40 MS/s, 25 MS/s, 20 MS/s, 10 MS/s, 5 MS/s, 2 MS/s, 1 MS/s, 500 kS/s, 200 kS/s, 100 kS/s, 50 kS/s
Connector:	BNC
Impedance:	1 MΩ 40 pF or 50 Ω; (software-selectable)
Coupling:	AC or DC; (software-selectable)
AC Coupled Bandwidth:	10 Hz to 100 MHz (see Note 2)
DC Coupled Bandwidth:	DC to 100 MHz (50 Ω only, slightly less for 1 MΩ)
Flatness:	Within 1 dB of ideal response over 75% of bandwidth (see Note 2)
DC Accuracy:	±0.5 %
Input Voltage Ranges:	±100 mV, ±200 mV, ±500 mV, ±1 V, ±2 V, ±5 V (±5 V is only available in 50 Ω)
DC Offset:	± 1xFull Range, except in ±5 V input range
Protection	
with 1 MΩ impedance:	Diode-clamped
with 50 Ω impedance:	No protection
Absolute Maximum Amplitude	
with 1 MΩ impedance:	±15 V (continuous)
with 50 Ω impedance:	±5 V (continuous); ±15 V (for 1 ms duration)

DIRECT-TO-ADC SAMPLING MODE

Mode Control:	Software-selectable
AC Coupled Bandwidth:	30 kHz to 75 MHz (50 Ω, AC only; see Note 2)
Range:	± 500 mV
Protection:	No protection
Absolute Maximum Amplitude:	± 2 V (continuous) ± 4 V (for 1 ms duration)
Sample Rate:	<=100 MS/s

ACQUISITION MEMORY

Data Storage:	In on-board memory
Memory Depth per Channel:	16M, 64M, 512M (14-bit samples)
One-Channel Mode (Channel A only):	Up to full on-board memory

TRIGGERING

Trigger Engines:	2 per system
Source:	CH A, CH B, EXT or Software
Input Combination:	1, 2, 1 or 2
Type:	Analog triggering
Trigger Level Accuracy:	±5% of Full Scale
Slope:	Positive or Negative
Sensitivity:	±10% of Full Scale This implies that signal amplitude must be at least 20% of full scale to cause a trigger to occur. Smaller signals are rejected as noise.
Post-Trigger Data:	128 points minimum. Can be defined with a 64 point resolution.
Maximum Record Length:	Maximum memory depth

EXTERNAL TRIGGER

Impedance:	1 MΩ, 35 pF
Amplitude:	Absolute maximum ±15 V
Voltage Range:	±1 V, ±5 V (software-selectable)
Bandwidth:	80 MHz
Coupling:	AC or DC
Connector:	SMA

TRIGGER OUT

Impedance:	50 Ω
Amplitude:	0-2.5 V (TTL)
Connector:	SMA

INTERNAL CLOCK

Source:	Clock oscillator
Accuracy (0 to 70° C):	±25 ppm

EXTERNAL CLOCK

Maximum Frequency:	200 MHz
Minimum Frequency:	1 MHz
Signal Level:	Minimum 1 V RMS Maximum 2 V RMS
Impedance:	50 Ω
Sampling Edge:	Rising
Duty Cycle:	50% ± 5%
Connector:	SMA

EXTERNAL REFERENCE

The External Reference timebase is used to synchronize the Internal Sampling Clock

Frequency:	10 MHz; (software-selectable)
Signal Level:	Minimum 1 V RMS Maximum 2 V RMS
Impedance:	50 Ω
Sampling Edge:	Rising
Duty Cycle:	50% ± 5%
Connector:	SMA

CLOCK OUT

Maximum Frequency:	100 MHz
Minimum Frequency:	1 MHz (from External Clock) 50 kHz (from Internal Clock)
Output Frequency:	Equal to the sample rate when it is ≤ 100 MS/s Equal to half the sample rate when it is > 100 MS/s
Signal Level:	0-2.5 V (TTL)
Impedance:	50 Ω
Duty Cycle:	50% ± 10%
Connector:	SMA

MULTIPLE RECORD

Pre-trigger Data:	Up to virtually full record length
Record Length:	128 points minimum. Can be defined with a 64 points resolution.
Maximum # Trigger:	8,388,608

TIMESTAMPING

Resolution:	7.5 ns
Counter turnover:	24 hours continuous

MULTI-CARD SYSTEMS

Operating Mode:	Master/Slave or Multiple/Independent configurations
Master/Slave:	2 to 8 cards
Multiple/Independent:	Limited by PC backplane

CARD SIZE

Single-slot, full-length PCI

SYSTEM REQUIREMENTS

PCI-based computer, minimum Pentium II 500 MHz, with at least one free full-length PCI slot, 128 MB RAM, 100 MB hard disk.

COOLING SYSTEM

Minimum CFM Requirement: Characterization in progress

POWER (IN WATTS, PER CARD)

+5 V		
	Worst	Typical
All Memory Depths	18.25	18.25
+3.3 V		
	Worst	Typical
All Memory Depths	6.67	6.67
+12 V		
	Worst	Typical
All Memory Depths	0	0
-12 V		
	Worst	Typical
All Memory Depths	0	0

PCI BUS INTERFACE

Plug-&-Play:	Fully supported
Bus Mastering:	Fully supported
Scatter-Gather:	Fully supported
Bus Width:	32 bit
Bus Speed:	66 MHz or 33 MHz
Bus Throughput:	200 MB/s to PC memory (66 MHz PCI; dependent on motherboard and number of PCI-PCI bridges)
Compatibility:	PCI-compliant, v.2.2 Also v.2.1 systems that supply 3.3 V to PCI slot

OPERATING SYSTEMS

Windows XP:	All Versions
Windows 2000:	SP1 or higher

SOFTWARE SUPPORT

Software Development Kits for:

C/C++
MATLAB
LabVIEW

Software for programming-free operation:

GageScope®

MATERIALS SUPPLIED

One CompuScope 14200 card
One Gage Software Disk, includes GageScope® Lite Edition
One Hardware Manual

WARRANTY

One year parts and labor
All specifications subject to change without notice.

Notes to specifications:

1) Unless otherwise specified, all dynamic performance specs (ENOB, SNR, SFDR, SINAD) are measured at Input Amplitude of 95% of Full Scale in Direct-to-ADC mode at 80 MS/s.

2) Detailed characterization curves will be available upon request.

ORDERING INFORMATION

Hardware & Upgrades

CompuScope 14200-32M	142-001-002
CompuScope 14200-128M	142-001-004
CompuScope 14200-1G	142-001-006
CS14200: Memory Upgrade Charge	142-181-200
CS14200: Master Multi-Card Upgrade	142-181-002
CS14200: Slave Multi-Card Upgrade	142-181-003

GageScope® Software

GageScope: Lite Edition included	
GageScope: Standard Edition (with Purchase of CompuScope Hardware)	300-100-351
GageScope: Professional Edition (with Purchase of CompuScope Hardware)	300-100-354

Software Development Kits (SDKs)

Gage SDK Pack on CD	200-113-000
CompuScope SDK for C/C++	200-200-101
CompuScope SDK for MATLAB	200-200-102
CompuScope SDK for LabVIEW	200-200-103

All Upgrades performed at the factory.

Updated September 10th, 2004

Copyright © 2004 Gage Applied Technologies. All rights reserved.

Gage Applied Technologies

1 Provost, Suite 200
Lachine, Quebec
Canada H8S 4H2

Toll-Free (US and Canada):
phone 1-800-567-4243
fax 1-800-780-8411

Direct:
phone +1-514-633-7447
fax +1-514-633-0770

Email:
prodinfo@gage-applied.com

To find your local sales representative or distributor or to learn more about Gage Applied Technologies' products visit:

www.gage-applied.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP