

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.


- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Astronics / EADS / Racal 1260-112* at our website: *Click HERE*

RACAL INSTRUMENTS™ 1260-112

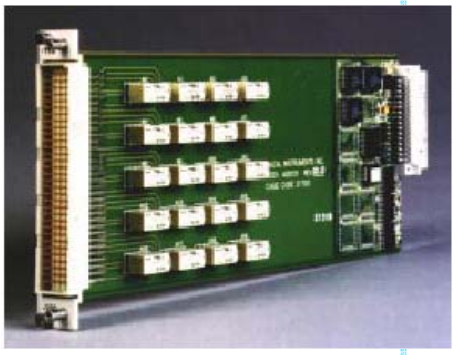

High Density DPDT Switch Plug-in

- **Ideal for Switching Digital Communication Signals**
- **Ideal for Switching Differential Analog Communication Signals**
- **120 MHz Bandwidth**
- **Ideal for General-Purpose High-Performance Signal Routing**
- **High Density**
- **Standard Adapt-a-Switch® Plug-in Design for Ease of Replacement**

Racal Instruments 1260-112 is a high-density, double-pole, double-throw (DPDT) switch plug-in designed for use in the VXI Adapt-a-Switch® carrier (Racal Instruments 1260-100 or 1260-101) and Racal Instruments 1256 GPIB/Ethernet Switching System. It quickly and easily plugs into the front of an Adapt-a-Switch® Carrier or the 1256 Switching System.

This DPDT switch plug-in is designed to switch high-speed differential signals. Its architecture is ideal for switching bi-directional buses and for configuring flexible, interchangeable solutions to varying test requirements.

The 1260-112 provides 20 DPDT relays that can be actuated individually or in groups using the “Include” feature. This feature permits multi-line buses such as RS-232 to be routed with a single command. This simplifies use of the switching system, reducing overall test development time and cost.

The Option-01T interface (for VXI) controls the 1260-112 using either register-based or message-based commands. The 1256 (for GPIB/Ethernet) supports message-based operations. Refer to the Option-01T/1256 literature for more information about product specifications and features such as include, exclude, scan lists, user-defined path names and reset states.

The Adapt-a-Switch® series includes VXI*plug&play* support of Win/98/NT/2000/XP frameworks, including drivers for LabWindows/CVI and LabVIEW.

EADS NORTH AMERICA

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

1260-112 PRODUCT SPECIFICATIONS

INPUT

Maximum Switching Voltage
300 VDC or 300 VAC

Maximum Switching Current
2 ADC or 2 AAC

Maximum Switching Power
60 W, 1225 VA

DC PERFORMANCE

Path Resistance
<500 mΩ

Insulation Resistance
10^9 Ω

Thermal EMF
<10 μV

AC PERFORMANCE (into 50 Ω)

Bandwidth (-3 dB)
120 MHz

Insertion Loss
10 MHz: <0.05 dB
10 MHz: <2.0 dB

Isolation
300 kHz: <70 dB
1 MHz: <65 dB
10 MHz: <50 dB

Crosstalk
300 kHz: <-75 dB
1 MHz: <-70 dB
1 MHz: <-45 dB

Capacitance
Channel-to-Chassis: <100 pF
Channel-to-Channel: <50 pF

INTERFACE DATA

Cooling
See 1260-100 cooling data

Power Requirements
+5 VDC at 150 mA plus 28 mA per energized relay (560 mA max.)

ENVIRONMENTAL DATA

(MIL-T-28800E, Type III, Class 5)

Temperature
Operating: 0° C to 55° C
Storage: -40° C to 75° C


Relative Humidity
85% ±5% non-condensing, ≤35° C

Altitude
Operating: 10,000 ft.
Non-Operating: 15,000 ft.

Shock
30 g, 11 ms, ½ sine wave

Vibration
0.013 in.: (p-p), 5-55 Hz

Bench Handling
4-inch drop at 45°

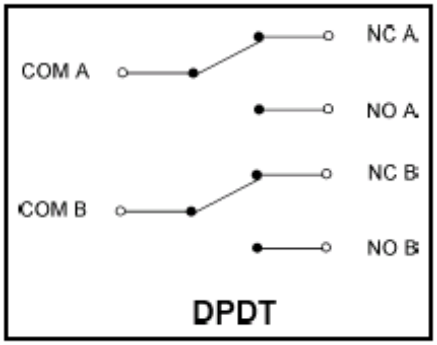

EMC

Emissions
EN55-11A with limits in accordance with EN50081-1

Safety
EN61010-1

RELIABILITY

Rated Switch Operations
Mechanical: 1 x 10^8
Electrical: 1 x 10^6 @ 50 V, 0.1 A
1 x 10^6 @ 10 V, 10 mA

MTBF
>100,000 hrs.

MTTR
<5 minutes

Switching Time
<3 ms (includes settling time)

MECHANICAL

Weight
9 oz. (0.26 kg)

Dimensions
4.5" H x 0.75" W x 9.5" D

CE **The CE Mark indicates that the product has completed and passed rigorous testing in the area of RF Emissions, Immunity to Electromagnetic Disturbances and complies with European electrical safety standards.**

ORDERING INFORMATION

MODEL/DESCRIPTION	PART NUMBER
Racal Instruments 1260-112, Adapt-a-Switch® plug-in, 20 channels of DPDT	407696
160-pin Connector Kit w/Strain Relief	407664
160-pin Cable Assembly, 6 ft., 24 AWG	407408-001

The EADS North America Test and Services policy is one of continuous development, consequently the equipment may vary in detail from the description and specification in this publication.

EADS North America Test and Services
1.800.722.2528/1.949.859.8999 sales@eads-nadefense.com

2.1 –10/06

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP