

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Edmund Optics 58-432* at our website: ***Click HERE***

TECHSPEC® SILVER SERIES TELECENTRIC LENS

#58-432 • 44mm WD • 4.0X



Our TECHSPEC® Silver Series Telecentric Measuring Lenses offer a compact, cost-effective solution for replacing standard fixed focal length lenses. Telecentric lenses are ideal for both on-line and off-line machine vision production environments that require accurate measurements. Edmund Optics has designed this series of machine vision lenses to specifically replace lenses that give inaccurate or inconsistent readings. Telecentric lenses correct perspective errors that yield variations in magnification through the depth of field.

Primary Magnification:	4.0X
Working Distance[1]:	44mm ±3mm
Depth of Field[2]:	±0.03mm at f10 (20% @ 20 lp/mm)
Length:	249.0mm
Filter Thread:	M58 x 0.75
Max. Sensor Format:	⅔"
Camera Mount:	C-Mount

Telecentricity:	<0.1°
Distortion:	<0.3%
Resolution[2]:	>40% @ 40 lp/mm
Aperture (f/#):	f/6 - closed, lockable
Object Space NA:	0.32
Number of Elements (Groups):	8 (7)
AR Coating:	425 - 675nm BBAR
Weight:	850g

Sensor Size	¼"	⅓"	½.5"	½"	⅓.8"	⅔"	1"	4/3"
Field of View[3]	0.9mm	1.2mm	1.4mm	1.6mm	1.8mm	2.2mm	N/A	N/A

1. From front of housing 2. Image space MTF contrast 3. Horizontal FOV on standard 4:3 sensor format

Specifications subject to change

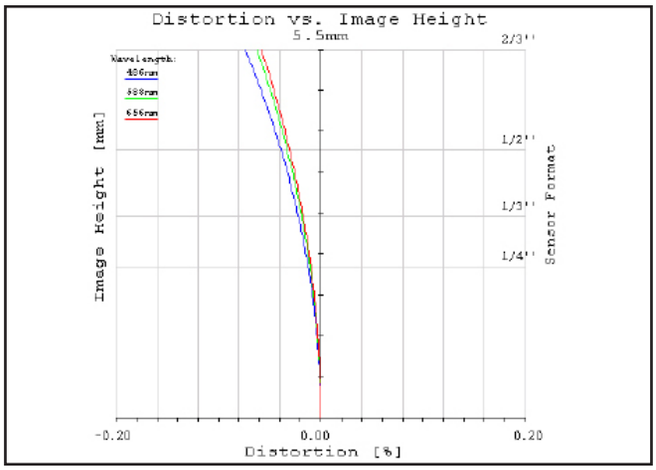


Figure 1: Distortion at the maximum sensor format. Positive values correspond to pincushion distortion, negative values correspond to barrel distortion.

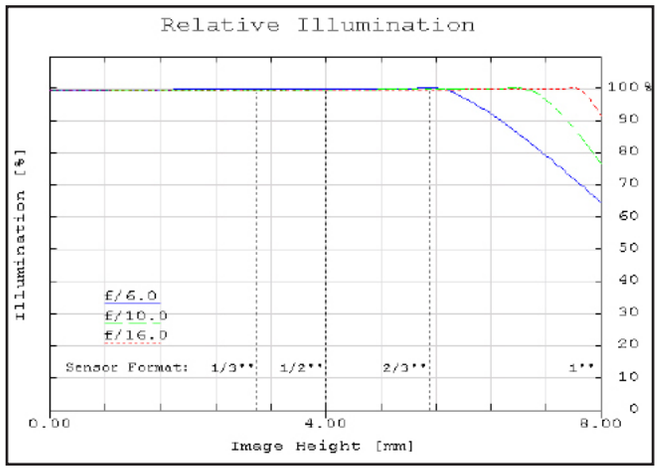


Figure 2: Relative illumination (center to corner)

In both plots, field points corresponding to the image circle of common sensor formats are included. Plots represent theoretical values from lens design software. Actual lens performance varies due to manufacturing tolerances.

© COPYRIGHT 2011 EDMUND OPTICS, INC. ALL RIGHTS RESERVED

Edmund optics | worldwide

www.edmundoptics.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

TECHSPEC® SILVER SERIES TELECENTRIC LENS

#58-432 • 44mm WD • 4.0X

MTF & DOF: f/6.0

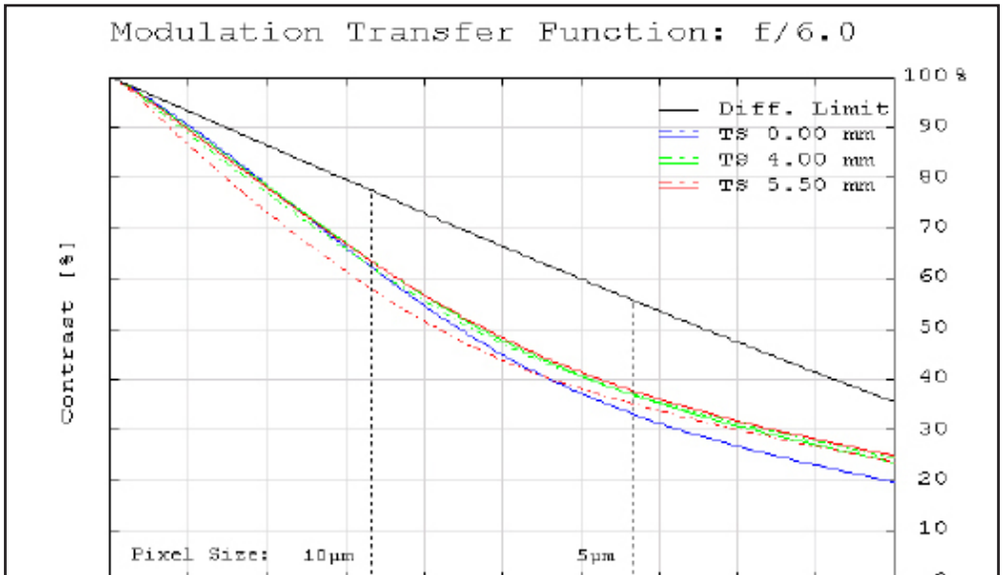


Figure 3: Image space polychromatic diffraction FFT Modulation Transfer Function (MTF) for λ = 486nm to 656nm. Included are Tangential and Sagittal values for field points on center, at 70% of full field and at the maximum sensor format. Solid black line indicates diffraction limit determined by f/#-defined aperture. Frequencies corresponding to the Nyquist resolution limit of pixel sizes are indicated.

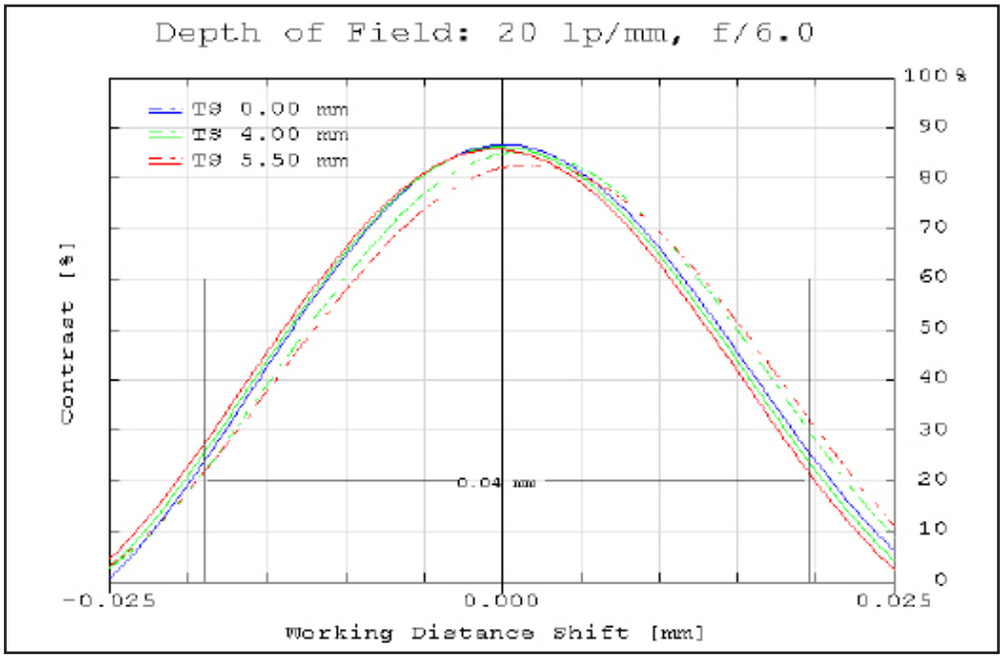


Figure 4: Polychromatic diffraction through-focus MTF at 20 linepairs/mm (image space). The depth of field at the maximum sensor format for the plotted frequency and f/# at 20% contrast is indicated by the measurement bars.

Plots represent theoretical values from lens design software. Actual lens performance varies due to manufacturing tolerances.

® COPYRIGHT 2011 EDMUND OPTICS, INC. ALL RIGHTS RESERVED

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

TECHSPEC® SILVER SERIES TELECENTRIC LENS

#58-432 • 44mm WD • 4.0X

MTF & DOF: f/10.0

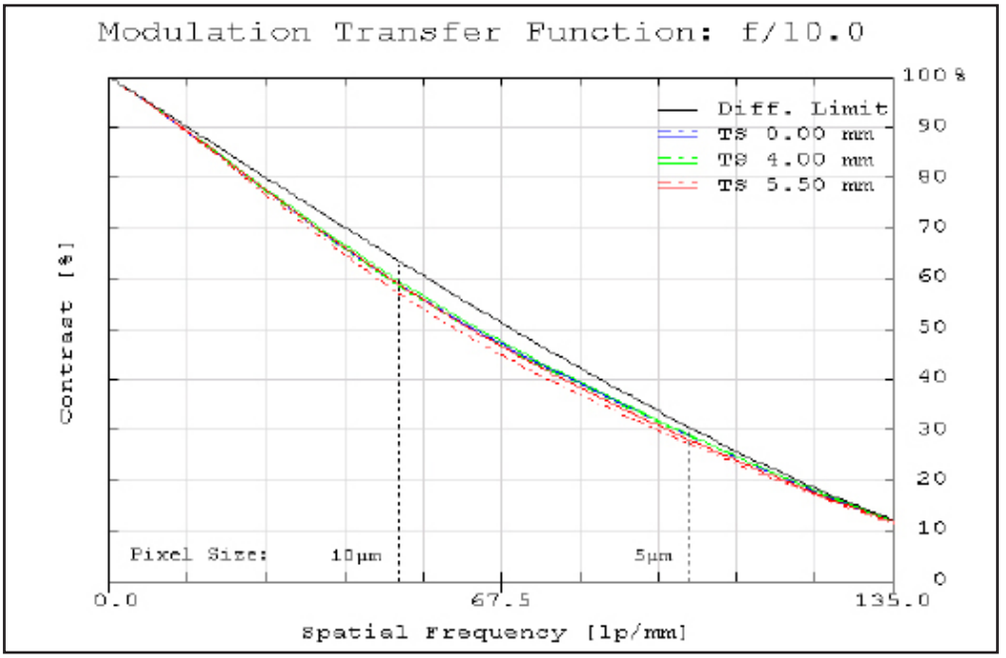


Figure 5: Image space polychromatic diffraction FFT Modulation Transfer Function (MTF) for λ = 486nm to 656nm. Included are Tangential and Sagittal values for field points on center, at 70% of full field and at the maximum sensor format. Solid black line indicates diffraction limit determined by f/#-defined aperture. Frequencies corresponding to the Nyquist resolution limit of pixel sizes are indicated.

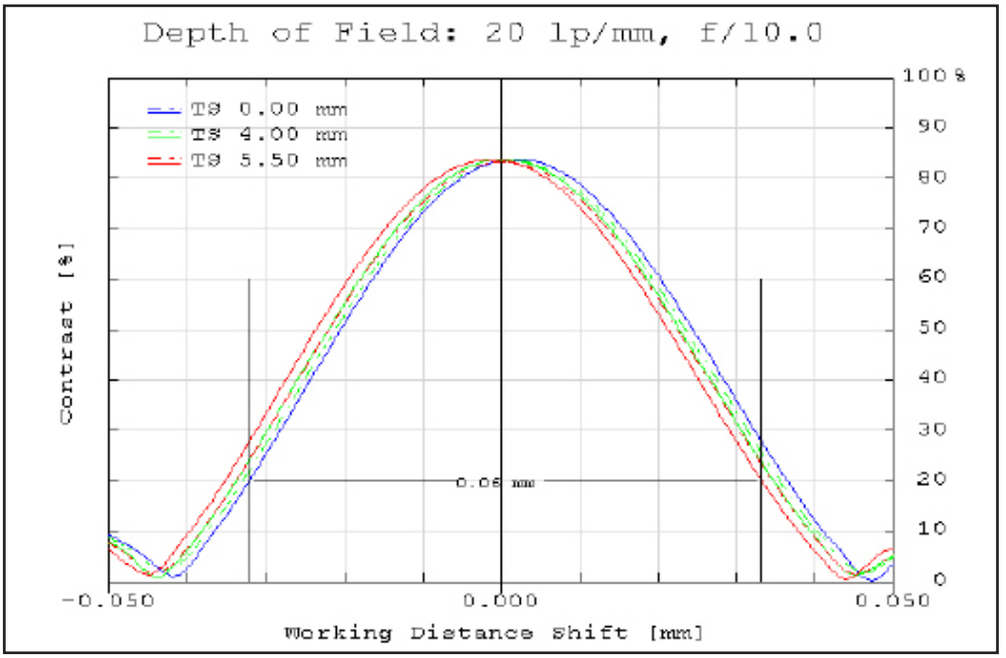


Figure 6: Polychromatic diffraction through-focus MTF at 20 linepairs/mm (image space). The depth of field at the maximum sensor format for the plotted frequency and f/# at 20% contrast is indicated by the measurement bars.

Plots represent theoretical values from lens design software. Actual lens performance varies due to manufacturing tolerances.

® COPYRIGHT 2011 EDMUND OPTICS, INC. ALL RIGHTS RESERVED

® COPYRIGHT 2011 EDMUND OPTICS, INC. ALL RIGHTS RESERVED

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP