



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗


### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)

# PCI 53B

## PCI interface for MIL-STD 1553B

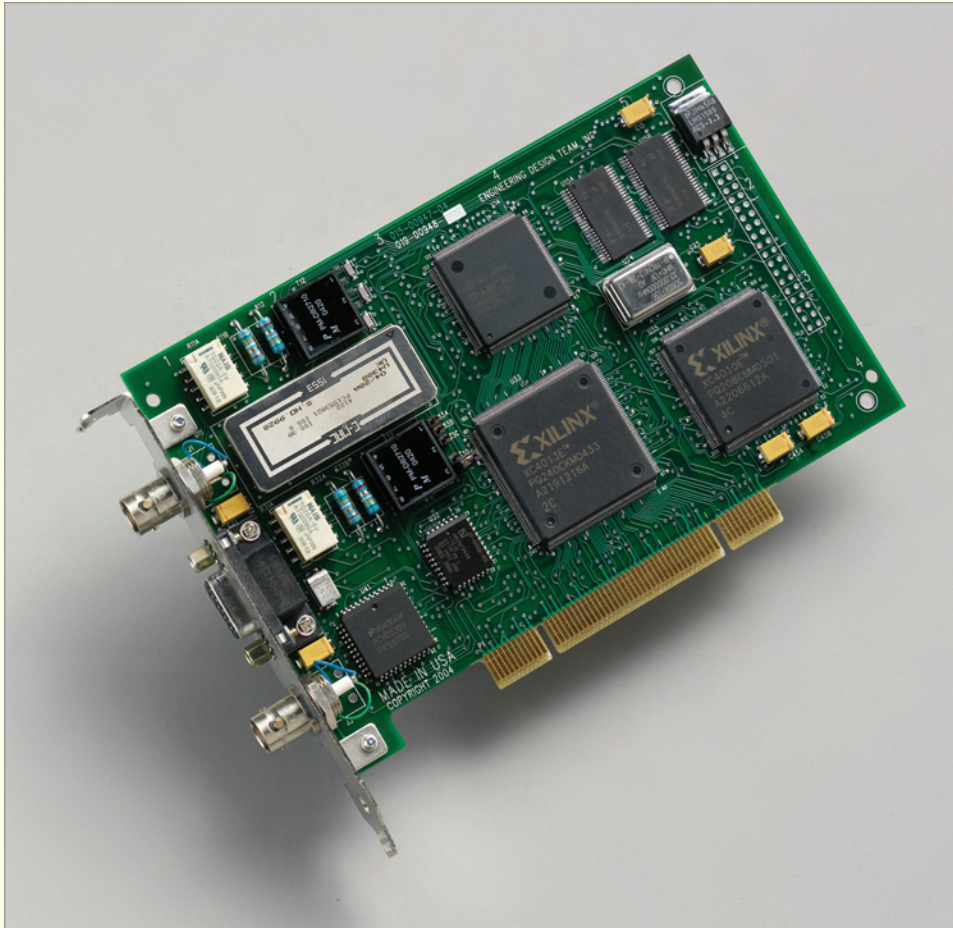

## Description

PCI 53B is a full-height, single-slot PCI interface (80 MB/s) for MIL-STD 1553B. The board supplies one bus controller, one bus monitor, and thirty-one remote terminals (RTs); all run concurrently and independently. Also provided onboard are two EDT-programmable Xilinx FPGAs and one embedded processor (SPARC) with local memory.

The board features a dual-redundant 1553B bus interface and serial debug interface. It has powerful capabilities for real-time scheduling and error insertion / detection; direct or transformer coupling to 1553B bus; and all mode codes for dual redundant operation. It also has an extensive built-in test facility.

The PCI 53B is programmable for multiple 1553 protocols (A or B by user, others by EDT). The board supports the full 1553B standard, but can be configured to detect any standard command or subcommand as illegal.

After initialization, the application program can configure the board as required. EDT provides FPGA configuration files, drivers for supported operating systems, and a software development kit that includes C language libraries, examples, and utilities.

## Features

- PCI interface (80 MB/s, full height, single slot) for 1553B
- Supplies a bus controller, a bus monitor, and thirty-one remote terminals (RTs), all running concurrently and independently
- Provides two EDT-programmable FPGAs (Xilinx) and one embedded processor (SPARC) with local memory
- Has dual-redundant 1553B bus interface and serial debug interface
- Allows real-time scheduling and error insertion / deletion
- Supports direct or transformer coupling to 1553B bus
- Provides extensive built-in test facility
- Is user-programmable for any 1553A or 1553B protocol; can be configured to detect any standard command or subcommand as illegal

## Applications

- Satellite communications
- Robotics control
- Telemetry
- Avionics

## Specifications

Product Type	PCI 53B is a PCI interface for MIL-STD 1553B; it provides DMA, memory, embedded processor, and FPGA resources.	
FPGA & Processing Resources	Two EDT-programmable FPGAs One embedded processor (onboard)	Xilinx XC4013E and XC4010E SPARClite MB86832
Other Resources	One bus monitor One bus controller Thirty-one remote terminals (RTs) User-programmable register to select direct or transformer coupling to 1553B bus	
Memory (on Processor)	SRAM DRAM Flash ROM	0 4 MB 512 KB
Interfaces	PCI bus MIL-STD 1553B bus Serial debug	One; data rate = 80 MB/s One (dual redundant, all mode codes supported); data rate = full bus bandwidth One
PCI Compliance	PCI version Direct memory access (DMA) Number of slots	2.1 Yes One
1553B Compliance	Fully compliant	
Connectors	MIL-STD 1553B Serial debug	Two King 1994-1-9 Triax Lemo 7-pin
Cabling	Cabling is purchased separately; consult EDT for options.	
Physical	Weight Dimensions	6 oz. typical 7.0 x 4.2 x 0.5"
Environmental	Temperature  Humidity	Operating 10° to 40° C Non-operating -20° to 60° C  Operating 20% to 80%, non-condensing at 40° C Non-operating 95%, non-condensing at 40° C
System and Software	System must have a PCI or PCI-X bus, 33 MHz or faster. Software is included for Windows, Solaris, and Linux (and can be requested for Mac OS and VxWorks); for versions, see our website.	

## Ordering Options

- Host computer type: x86 / Sun

**Ask about custom options.**

>> **CONTACT US** to discuss engineer-to-engineer support – from phone consultation to custom design of hardware, firmware, and software.



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)