ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Electroid 58 ECA-26CC-12MM-6-90V-L* at our website: ***Click HERE***

ECA SERIES

ECA-08C



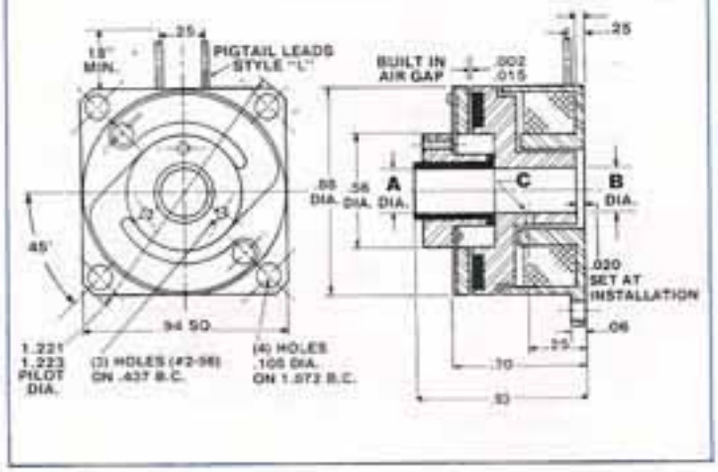

MODEL NO.	A	B	C
ECA-08C-3	.1875 .1885	.1875 .1885	.078

ECA-08C NOTE:

1. Rotor hub is secured to shaft by roll pin (see C).

CUSTOMER SHALL MAINTAIN:


Concentricity of field mounting pilot with shaft within .002 T.I.R.

Squareness of stationary field mounting face with shaft within .002 T.I.R. measured at 1.072 B.C.

Axial dimensions $\frac{.015}{.020}$ to control proper clearances.

ECA-10C



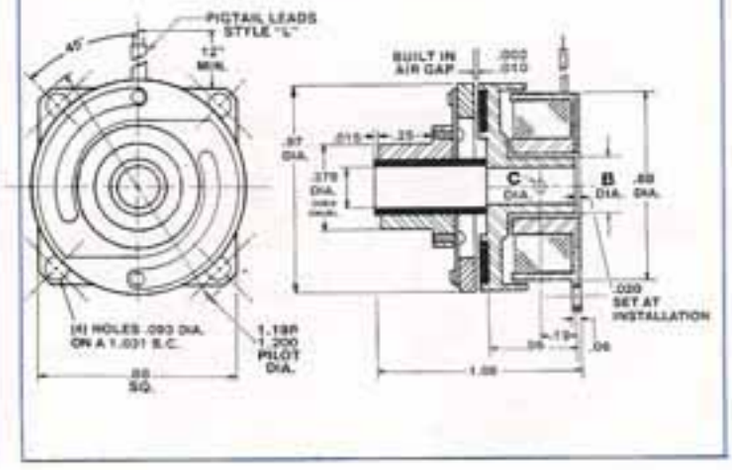

MODEL NO.	A	B	C
ECA-10C-3	.1875 .1885	.1875 .1885	.062
ECA-10C-4	.2505 .2515	.2505 .2515	.062

ECA-10C NOTE:

1. Rotor hub is secured to shaft by roll pin (see C).

CUSTOMER SHALL MAINTAIN:

Concentricity of field mounting pilot with shaft within .002 T.I.R.

Squareness of stationary field mounting face with shaft within .002 T.I.R. measured at 1.031 B.C.


TECHNICAL DATA

MECHANICAL										ELECTRICAL		
MODEL NO.	RATED STATIC TORQUE (IN-LB)	WEIGHT (OZ.)			INERTIA (LB-IN²)		RESPONSE TIME (MSEC)	LIFE AT RATED TORQUE (MILLION CYCLES)	MAXIMUM RATED SPEED (RPM)	COIL NO.	RATED VOLTAGE (VDC)	CURRENT (AMPS)
		ARMATURE ASSEMBLY	ROTOR ASSEMBLY	FIELD ASSEMBLY	ARMATURE ASSEMBLY	ROTOR ASSEMBLY						
ECA-08C	1½	.28	.38	.77	.0014	.0021	10	5	10,000	1	90	.043
										2	24/28	.175
										3	12	.320
										4	6	.640
ECA-10C	1	.34	.46	.75	.00112	.00198	18	5	10,000	1	90	.042
										2	24/28	.136
										3	12	.315
										4	6	.630

ECA SERIES


ECA-11C



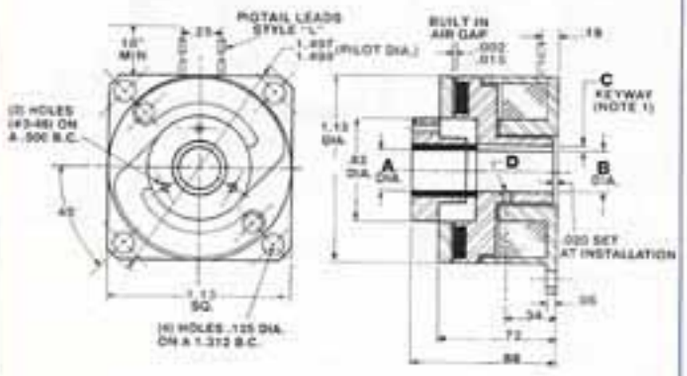

ECA-12C



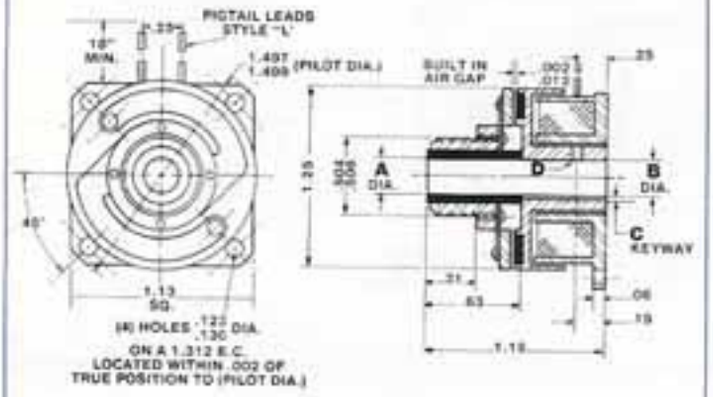

MODEL NO.	A	B	C	D
ECA-11C-3	.1875 .1880	.187 .188	NONE	#4-40 SET SCREW
ECA-11C-4	.250 .251	.250 .251	1/16 X 1/32	#4-40 SET SCREW

MODEL NO.	A	B	C	D
ECA-12C-4	.250 .251	.250 .251	1/16 X 1/32	.062 DIA.
ECA-12C-5	.3125 .3135	.3125 .3135	NONE	.062 DIA.

ECA-11C-12C NOTES:

1. Rotor hub is secured to shaft by set screw and woodruff key #201 (see C and D).
2. Square drive or splined armature hubs also available.

CUSTOMER SHALL MAINTAIN:

Concentricity of field mounting pilot with shaft within .002 T.I.R.

Squareness of stationary field mounting face with shaft within .003 T.I.R. measured at 1.312 B.C.

Axial dimensions $^{.010}_{.020}$ to control proper clearances.


TECHNICAL DATA

MECHANICAL										ELECTRICAL		
		WEIGHT (OZ.)			INERTIA (LB-IN²)					(APPLIES TO BOTH MODELS)		
MODEL NO.	RATED STATIC TORQUE (IN-LB)	ARMATURE ASSEMBLY	ROTOR ASSEMBLY	FIELD ASSEMBLY	ARMATURE ASSEMBLY	ROTOR ASSEMBLY	RESPONSE TIME (MSEC)	LIFE AT RATED TORQUE (MILLION CYCLES)	MAXIMUM RATED SPEED (RPM)	COIL NO.	RATED VOLTAGE (VDC)	CURRENT (AMPS)
ECA-11C	2½	.46	.55	1.2	.0035	.0069	20	5	10,000	1	90	.050
										2	24/28	.160
ECA-12C	5	.61	.75	1.5	.004	.0076	22	5	10,000	3	12	.375
										4	6	.750

ECA SERIES


ECA-17C



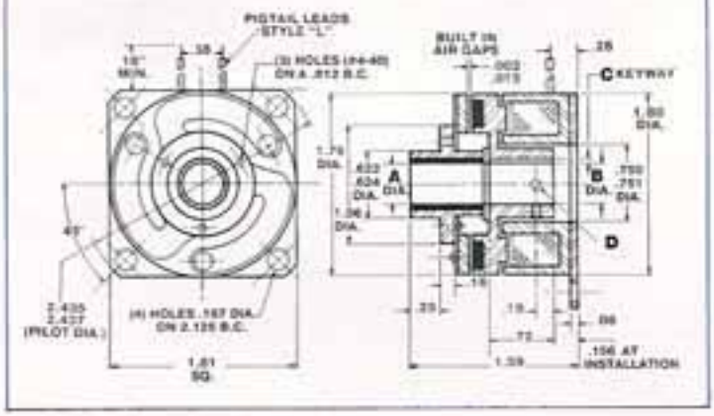

ECA-22C



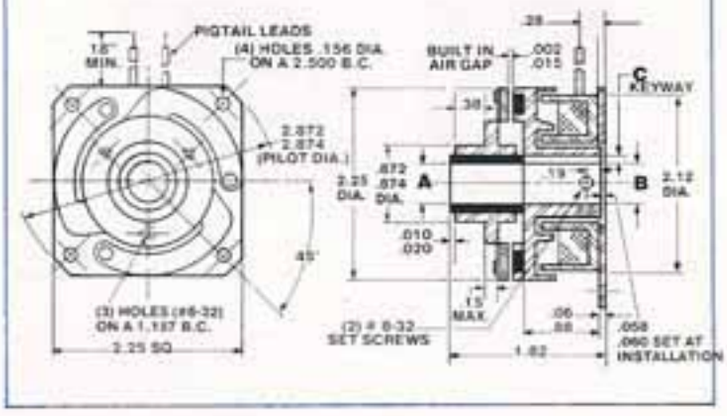

MODEL NO.	A	B	C	D
ECA-17C-4	.250 .251	.250 .251	1/32 X 1/16	#6-32 SET SCREW
ECA-17C-5	.3125 .3135	.312 .313	1/32 X 1/16	#6-32 SET SCREW
ECA-17C-6	.375 .376	.375 .376	3/64 X 3/32	#6-32 SET SCREW

ECA-17C NOTE:

1.Rotor hub is secured by (2) set screws and key (see C and D).

CUSTOMER SHALL MAINTAIN:

Field assembly pilot diameter to be concentric with shaft within .005 T.I.R.

Surface of pilot mounting to be square with shaft within .003 T.I.R. measured at 2.125 B.C.

MODEL NO.	A	B	C
ECA-22C-6	.375 .376	.375 .376	3/64 X 3/32
ECA-22C-8	.500 .501	.500 .501	1/16 X 1/8

ECA-22C NOTE:

1. Rotor is secured to shaft by (2) set screws and key (see C).

CUSTOMER SHALL MAINTAIN:

Concentricity of field mounting pilot diameter with rotor mounting shaft within .005 T.I.R.

Squareness of field mounting face with shaft .003 T.I.R.


TECHNICAL DATA

MECHANICAL										ELECTRICAL		
MODEL NO.	RATED STATIC TORQUE (IN-LB)	WEIGHT (LBS.)			INERTIA (LB-IN²)		RESPONSE TIME (MSEC)	LIFE AT RATED TORQUE (MILLION CYCLES)	MAXIMUM RATED SPEED (RPM)	COIL NO.	RATED VOLTAGE (VDC)	CURRENT (AMPS)
		ARMATURE ASSEMBLY	ROTOR ASSEMBLY	FIELD ASSEMBLY	ARMATURE ASSEMBLY	ROTOR ASSEMBLY						
ECA-17C	15	.117	.163	.248	.068	.0526	32	3	10,000	1	90	.077
										2	24/28	.250
										3	12	.582
										4	6	1.200
ECA-22C	35	.258	.250	.450	.199	.220	38	3	7,500	1	90	.090
										2	24/28	.253
										3	12	.568
										4	6	1.335

ECA SERIES


ECA-26C



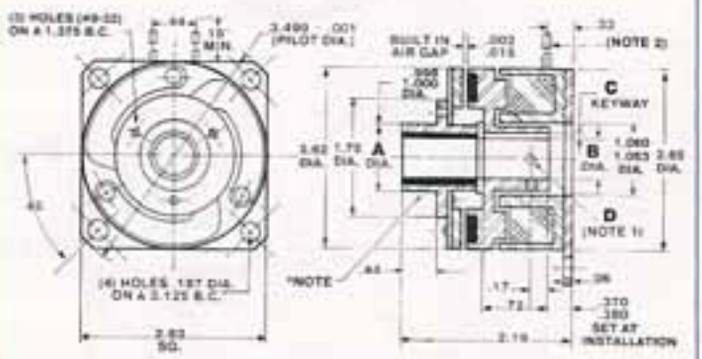

ECA-42C



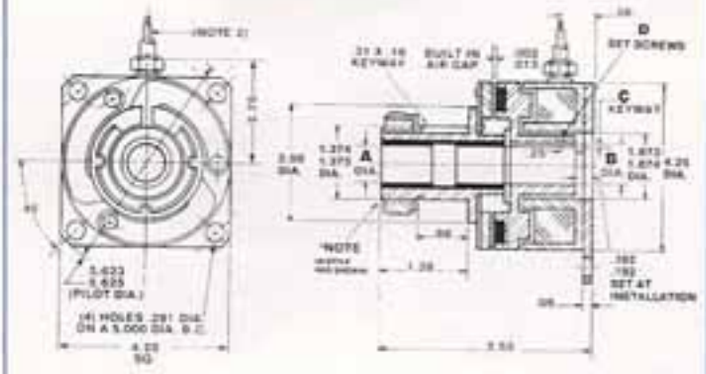

MODEL NO.	A	B	C	D
ECA-26C-6	.375 .376	.375 .376	3/64 X 3/32	#10-32 SET SCREW
ECA-26C-8	.500 .501	.500 .501	1/16 X 1/8	#10-32 SET SCREW
ECA-26C-10	.625 .626	.625 .626	1/16 X 3/16	#10-32 SET SCREW

ECA-26C NOTES:

1. Rotor hub is secured to shaft by (2) set screws and key (see C and D).
2. "L" Style shown. Terminal Style available. Provides female threads for #4-40 screw (screws and rubber insulator supplied). Specify "T" Style when ordering.

*"N" style hub optional. See power transmission options.

MODEL NO.	A	B	C	D
ECA-42C-8	.500 .501	.500 .501	1/16 X 1/8	#¼-20 SET SCREW
ECA-42C-10	.625 .626	.625 .626	3/32 X 3/16	#¼-20 SET SCREW
ECA-42C-12	.750 .751	.750 .751	3/32 X 3/16	#¼-20 SET SCREW

ECA-42C NOTES:

1. Rotor hub is secured by (2) set screws and key (see C and D).
2. "H" Style shown. Unit is available with Terminals (Style "T") or 18" Long Pigtail leads (Style "L") specify "H", "T" or "L" when ordering.

CUSTOMER SHALL MAINTAIN:

Concentricity of field mounting pilot diameter with rotor mounting shaft within .005 T.I.R.

Squareness of field mounting face with shaft .003 T.I.R.

TECHNICAL DATA

MECHANICAL										ELECTRICAL		
		WEIGHT (LBS.)			INERTIA (LB-IN²)							
MODEL NO.	RATED STATIC TORQUE (IN-LB)	ARMATURE ASSEMBLY	ROTOR ASSEMBLY	FIELD ASSEMBLY	ARMATURE ASSEMBLY	ROTOR ASSEMBLY	RESPONSE TIME (MSEC)	LIFE AT RATED TORQUE (MILLION CYCLES)	MAXIMUM RATED SPEED (RPM)	COIL NO.	RATED VOLTAGE (VDC)	CURRENT (AMPS)
ECA-26C	75	.40 1.00*	.24	1.00	.33 .63*	.40	42	3	7,500	1	90	.090
										2	24/28	.290
										3	12	.680
										4	6	1.360
ECA-42C	240	1.70	1.38	2.00	4.05	2.55	90	1½	5,000	1	90	.130
										2	24/28	.410
										3	12	.960
										4	6	1.920

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP