

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

POT

75, 100 and 120 Ampere Three Phase Bridges

Provides 0.23 °C/W Junction-to-Case, Thermal Resistance

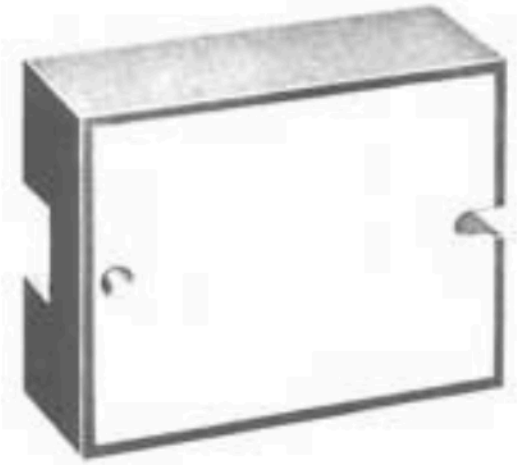



This mark indicates recognition under the component program of Underwriters Laboratories, inc.

PRV/LEG	100	200	400	600	800	1000	1200	1400
TYPE NUMBER	POT120-01	POT120-02	POT120-04	POT120-06	POT120-08	POT120-10	POT120-12	POT120-14
TYPE NUMBER	POT100-01	POT100-02	POT100-04	POT100-06	POT100-08	POT100-10	POT100-12	POT100-14
TYPE NUMBER	POT75-01	POT75-02	POT75-04	POT75-06	POT75-08	POT75-10	POT75-12	POT75-14

ELECTRICAL CHARACTERISTICS

Series Type Number	POT 75	POT 100	POT 120	UNIT
Max. Repetitive Peak Reverse Voltage	100 to 1400			Volts
Max. DC Output Current. T_C =100 °C	75	100	120	Adc
Max. DC Reverse Current @ PRV and 125 °C, I_R	5	5	5	mA.
Max. Peak Non-Rep.Surge Current,(8.3ms)	1000	1000	1000	Apk
Max.I^2t for Fusing (t < 8.3ms)	4000	4000	4000	$A^2SEC.$
Max. Instantaneous Forward Voltage @ I_F=100Apk Pulse Width=300μs. Duty cycle<2.0%	1.3	1.3	1.3	Vpk
Max. Isolation Voltage	2000	2000	2000	V_{RMS}
Thermal Resistance $R_{\theta jc}$ Junction To Case	0.23typ.	0.23 typ.	0.23 typ.	°C/W
Operating Temperature Range	-55 to+150 °C			

EDI reserves the right to change these specifications at any time without notice

Figure 1
CURRENT DERATING



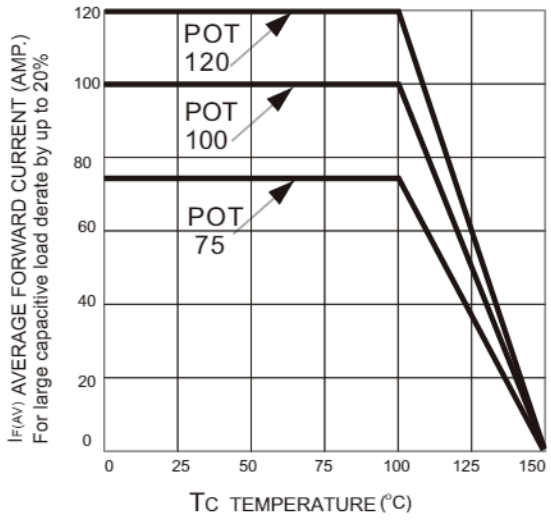


Figure 2
NON- REPETITIVE SURGE CURRENT

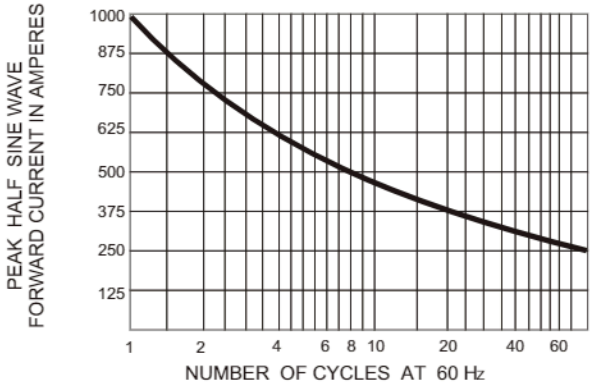

POT SERIES MECHANICAL OUTLINE

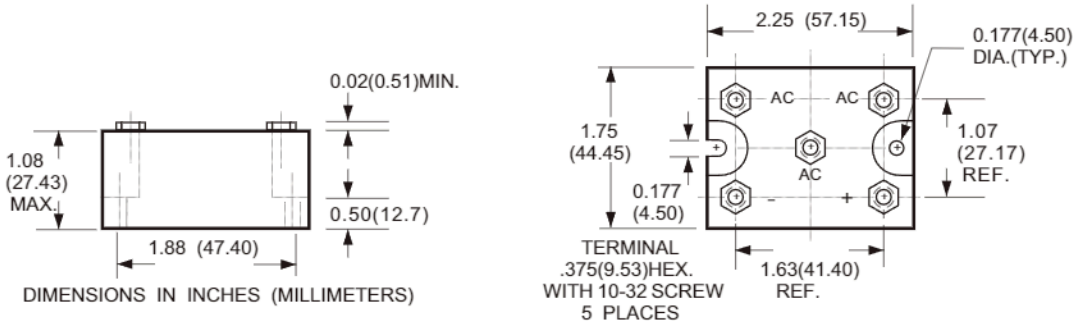

DIMENSIONS IN INCHES (MILLIMETERS)

NOTE: A thin film of silicone thermal compound is recommended between the Bridge case and mounting surface for improved thermal conduction.

ELECTRONIC DEVICES, INC. DESIGNERS AND MANUFACTURERS OF SOLID STATE DEVICES SINCE 1951.
21 GRAY OAKS AVENUE * YONKERS. NEW YORK 10710 914-965-4400 * FAX 914-965-5531 * 1-800-678-0828
e-mail:sales@edidiodes.com * website: http://www.edidiodes.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP