



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

Type 39C 4U –19" Rack Mount/Desktop, Horizontal




Features

- 19" Rack mount fully compliant to IEEE 1101.10/.11
- 4U x 443mm x 300mm (H x W x D)
- 4, 6 or 8 slot, PICMG: 2.0, 2.16, 2.17, 2.20 backplanes (H.110 optional)
- Cooling side to side (200 CFM), plug removable
- Removable air filter tray
- Advanced EMC shielding to meet CE, FCC Class A and NEBS
- Wide range of PSU inputs (90 – 264 VAC, 48 VDC)
- Wide range of PSU options: fix mount, plug in, N+1
- Shelf Management: PICMG 2.9, IPMI (optional)
- Ready to run – turnkey solution


Scope of Supply

High quality platform consisting of black painted sheet steel enclosure, high performance PICMG 2.0, 2.16, 2.17 or 2.20 backplane, power supply, cooling system and AC/DC power components. Assembled, wired and tested prior to shipment.

Order Information




Description	Order Number
<ul style="list-style-type: none"> ■ 4U H x 443mm W x 300mm D ■ 6 slot, 6U x 160mm, front ■ 6 slot, 6U x 80mm, rear I/O ■ 6 slot BP, (PICMG 2.0, wo/H.110) ■ 4 x 3.5" devices ■ 7 fans(200 CFM total), side to side, plug removable ■ 2 x 200W, PSU – 3U, plug removable, N+1 	<p>39C06AD548Y3HP2X</p>

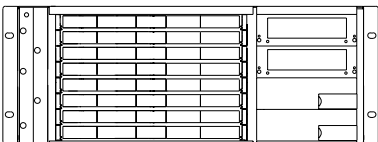

Description	Order Number
<ul style="list-style-type: none"> ■ 4U H x 443mm W x 300mm D ■ 8 slot, 6U x 160mm, front ■ 8 slot, 6U x 80mm, rear I/O ■ 8 slot BP, (PICMG 2.16, 2 x FS wo/H.110) ■ 2 x 3.5" devices ■ 7 fans(200 CFM total), side to side, plug removable ■ 2 x 200W, PSU – 3U, plug removable, N+1 	<p>39C08FD248Y3HP2X</p>

Line Drawings

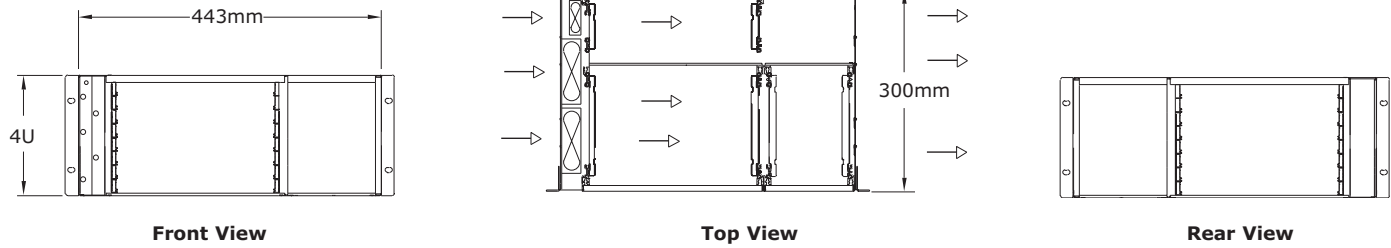

Environmental

	Operating	Storage/Transit
Temperature:	0°C to +50°C	-20°C to +70°C
Altitude:	6000 ft. (1,829m)	50,000 ft. (15,240m)
Humidity:	5% to 95% Non condensing	5% to 95% Non condensing
Shock:	10 G's @ 11ms	15 G's @ 11ms (per ASTM 0775)
Vibration:	1.0 G's @ 10 to 330 Hz	1.2 G's @ 5 to 330 Hz
Agencies:	Designed to meet UL60950, FCC Class A, A, CE	

Custom Configurations

3 9 C 4 8 Y 3 H

Backplane Configuration

00-21: Single BP, AA-YY: Split
 02 = 2 slot
 04 = 4 slot
 06 = 6 slot
 08 = 8 slot

Bare Board

A = 6U Eco, ATX, (RSS)
 B = 3U Rev. 2.0
 C = 6U H110
 D = 6U (LSS)
 E = 2.16, 1 x FS (no H.110)
 F = 2.16, 2 x FS (no H.110)
 H = 2.16, 2 x FS (w/ H.110)
 I = 2.16, 1 x FS (w/ H.110)
 X = No BP installed
 Z = Custom

BP Connector

A = P1 & P2 S; No P3,P4, P5
 B = P1 S, P2 L; No P3,P4, P5
 C = P1, P2 & P4 S; P3 & P5 L
 D = P1 & P2 S; P3, P4, P5 L
 E = P1 S; P2, P3, P4, P5 L
 F = P1 & P4 S; P2, P3, P5 L
 G = P1 & P2 S; P3 L, no P4, P5
 H = 2 x PC: P1, P2 & P4 S; P3 & P5 L
 I = 2 x 47 PIN Power
 X = No connectors
 Z = Custom

Drives

1 = 1 X 3.5"
 2 = 2 X 3.5"
 3 = 1 X 5.25"HH
 4 = 2 X 5.25"HH
 5 = 4 X 3.5"HH
 6 = 2 X 3.5", 1 X 5.25"HH
 9 = 1 X 3.5", 1 X 5.25"HH
 A = 1 x 2.5", 1 X CDROM (SL)
 B = 2 x 2.5"
 X = Not installed

Height

4 = 4U

Width

8 = 84HP (443mm)

Rear IO

Y = Yes

Depth

3 = 300mm

Card Orientation

H = Horizontal

PSU Input

C = 90-230VAC (Fixed)
 E = 110/220VAC (2 x HS, N+1)
 G = 90-230VAC (Plug In)
 H = 48VDC (Plug In)
 K = 48VDC (Fixed)
 L = 48VDC (2 x QC, N+1)
 M = 48VDC (2 x HS, N+1)
 P = 90-230VAC (2 x HS, N+1)
 Q = 90-230VAC (3 x HS, N+1)
 R = 28VDC (Fixed)
 S = 48VDC (3 x HS, N+1)
 X = No PSU

PSU Output

(Note: Not all PSU combinations available)
 1 = 150 W
 2 = 200/250 W (4U, 6U or fixed)
 3 = 300 W (4U/6U, ATX)
 4 = 350 W (6U plug in only)
 5 = 350 W (Brick)
 6 = 500 W (Brick)
 7 = 300 (4U or 6U, PS2 Hot Swap)
 8 = 200 W (6U x 4T)
 X = Not installed

Voltage IO

3 = 3.3V
 5 = 5V
 X = Not installed



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com