

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

SDI500/SDI505

MEMS Quartz Tactical Inertial Measurement Unit

Suitable for Wide Variety of High-Precision Commercial, Industrial, Marine and Defense Applications:

- Precision Aircraft Attitude Heading Reference Systems
- GPS-Aided Navigation Systems
- Autonomous Vehicles
- Remotely Operated Vehicles
- Tactical Weapons & Torpedoes
- Aerial and Marine Geomapping / Surveying
- Targeting & Pointing Systems
- Robotics



Key Performance Features:

- **1°/hr Gyro Bias Over Wide Temperature Range**
- **0.02°/√hr Angle Random Walk - 5X Better Than Competition**
- **< 1.0 seconds Valid Data Start Up**
- **19 in.^{3} Compact Size**
- **Stable Performance, Superior Quality & Reliability**
  - **20 Year Lifetime without Calibration**
  - **Greater Than 100,000 hr MTBF**
- **Data Time of Validity (TOV) Input & Output Synchronization, SDI505 only**



The SDI500 is the highest performance MEMS-based Inertial Measurement Unit (IMU) and is the only MEMS-based IMU to demonstrate 1°/hr gyro bias and 1 mg accelerometer bias stability and very low 0.02°/√hr angle random walk over wide temperature ranges. The breakthrough performance of the SDI500 IMU is based on a SDI's proven quartz MEMS inertial sensor technology. SDI's quartz technology enables repeatable high-volume production of precisely machined sensor structures combined with the inherent large signal output and thermal stability of quartz materials.

The SDI500 is a compact IMU constructed with SDI's latest generation quartz gyros, quartz accelerometers, and high-speed signal processing to achieve outstanding precision performance. The SDI500 IMU is designed for demanding, mission-critical, rugged environments. The solid-state quartz sensors and hermetically sealed IMU construction provide reliable MTBF and a 20-year operating and storage life. Continuous Built-in Test (BIT), configurable communications protocols, electromagnetic interference (EMI) protection and flexible input power compatibility make the SDI500 IMU easy to use in a wide range of higher order integrated system applications.

The SDI505 supports four data message synchronization methods with either input synchronization pulse capability or an output time of validity capability. The user can choose whether the synchronization pulse is internally generated and output as a Time of Validity (TOV) of the output data or whether the SDI505 software will identify the synchronization pulse input and synchronize the output data to the input pulse.

www.emcore.com/nav

Information contained herein is deemed to be reliable and accurate as of the issue date. EMCORE reserves the right to change the design or specifications at any time without notice. EMCORE and Systron Donner are registered trademarks of EMCORE Corporation in the U.S. and other countries.


SDI500/SDI505

MEMS Quartz Tactical Inertial Measurement Unit

Specifications are based on 100 Hz Inertial Data (ΔV/Δθ)

	Units	Measure	SDI50x-AE00	SDI50x-BE00	SDI50x-CE00
System Performance					
Start Up Time for Valid Data	secs	max		1.0	
Bandwidth, Phase (-90° Phase Shift) *	Hz	min		100	
Gyro Channels					
Bias (over temperature)	deg/hr	1σ	1.0	3.0	10.0
Bias In-Run Stability	deg/hr	1σ	1.0	1.5	2.0
Scale Factor Error	ppm	1σ	200	200	200
Angle Random Walk	deg/√hr	max	0.02	0.02	0.02
Angular Rate – Dynamic Range	deg/sec	min	±1000	±1000	±1000
Accelerometer Channels					
Bias (over temperature)	milli-g	1σ	1.0	1.5	2.0
Bias In-Run Stability	µg	1σ	100	200	200
Scale Factor Error	ppm	1σ	200	200	200
Velocity Random Walk	µg/√Hz	1σ	100	100	120
Acceleration - Calibrated Range	g	min	±50	±50	±50
System Physical & Environmental					
Input Voltage	Vdc			10 to 42	
Power	watts			<5.0	
I/O				RS232/422, SDLC	
Data Synchronization Pulse**	Hz			(Input: 600, 1200, 2400) (Output: 100, 200, 400, 600, 1200, 2400)	
Dimensions (height x diameter)	in			2.9 x 2.9	
Volume	cu in			19	
Weight	lbs			1.3	
Temperature	°C			-55 to +85	
Vibration (Operating)	g, rms			19	
Shock	g, ms			150, 11	
Operating Life	yrs			20	
Reliability @ 35°C (MTBF)	hrs			100,000 ground benign: 15,000 air inhabited cargo	
Dormancy	yrs			20	

Note: * @ 600 Hz Flight Control Data Rate, ** SDI505-xE00 only

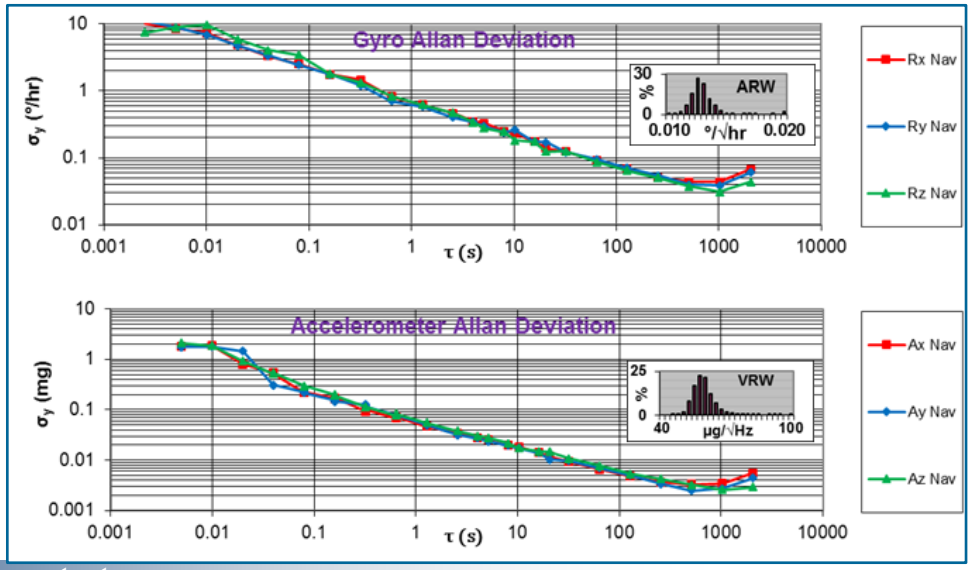

For more information, contact:

EMCORE Corporation
2015 Chestnut Street
Alhambra, CA 91803 USA
Tel: +1 626.293.3700

www.emcore.com/nav

+1 866.234.4976 | navigation-sales@emcore.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP