ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Emerson / Asco SCXG238A047 P* at our website: *Click HERE*

SOLENOID VALVES

anti-waterhammer
pilot operated, hung diaphragm
3/8 to 1

NC



2/2
Series
238



C

FEATURES

- *Two way shut-off valves for the control of cold and hot water*
- *Zero bar minimum operating pressure*
- *Valves are designed to reduce waterhammer*
- *Self-cleaning device located in the bleed orifice to guarantee an optimal performance*
- *The solenoid valves satisfy all relevant EU directives*

GENERAL

Differential pressure 0 to 10 bar [1 bar =100 kPa]
Maximum viscosity 40 cSt (mm²/s)

fluids (∗)	temperature range (TS)	seal materials (∗)
water	-20°C to +85°C	NBR (nitrile)


CONSTRUCTION

Anti-waterhammer test EN 60730-2-8 (CENELEC)
FCI-82-1 (Fluid Controls Institute)

MATERIALS IN CONTACT WITH FLUID

(∗) Ensure that the compatibility of the fluids in contact with the materials is verified

Body Brass
Internal parts Stainless steel
Springs Stainless steel
Seals, diaphragm and disc NBR
Shading coil Copper

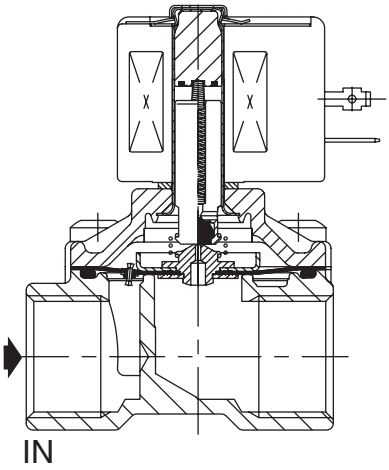

ELECTRICAL CHARACTERISTICS

Coil insulation class F
Connector Spade plug (cable Ø 6-10 mm)
Connector specification ISO 4400 / EN 175301-803, form A
Electrical safety IEC 335
Electrical enclosure protection Moulded IP65 (EN 60529)
Standard voltages DC (=) : 24V - 48V
(Other voltages and 60 Hz on request) AC (~) : 24V - 48V - 115V - 230V / 50 Hz

prefix option	power ratings inrush ~ (VA)	power ratings holding ~ (VA)	power ratings holding ~ (W)	power ratings hot/cold = (W)	operator ambient temperature range (TS) (C°)	replacement coil ~ 230 V/50 Hz	replacement coil = 24 V DC	type (1)
SC	34 30	15,6 22,5	6 9	- 9,5/15,3	-20 to +75 -20 to +50	400325-117 400325-217	- 400325-242	01

(1) Refer to the dimensional drawings on the following page.

SPECIFICATIONS

pipe size G	orifice size (mm)	flow coefficient Kv (m³/h)	flow coefficient Kv (l/min)	operating pressure differential (bar) min.	operating pressure differential (bar) max. (PS) water (∗) ~	operating pressure differential (bar) max. (PS) water (∗) =	power coil (W) ~	power coil (W) =	catalogue number	options EPDM	options	options
NC - Normally closed												
3/8	12,5	2,1	35	0	10	10	6	15,3	**SCG238A044**	**E**	-	-
1/2	12,5	2,1	35	0	10	10	6	15,3	**SCG238A046**	**E**	-	-
1/2	19	4,2	70	0	10	10	6	15,3	**SCG238A047**	**E**	-	-
3/4	19	4,5	75	0	10	10	6	15,3	**SCG238A048**	**E**	-	-
3/4	25	10	166	0	10	10	9	15,3	**SCG238A049**	-	-	-
1	25	10	166	0	10	10	9	15,3	**SCG238A050**	-	-	-

00039GB-2016/R01
Availability, design and specifications are subject to change without notice. All rights reserved.

OPTIONS

- Valves can also be supplied with EPDM (ethylene-propylene) seals and discs. Use the appropriate optional suffix letter for identification
- Explosionproof enclosures for use in zones 1/21-2/22, categories 2-3 to ATEX Directive 2014/34/EU (see “Explosionproof solenoids” section)
- WRAS approval
- Other pipe connections are available on request
- Plug with visual indication and peak voltage suppression or with cable length of 2 m (see Solenoids, Coils & Accessories section)

INSTALLATION

- The solenoid valves can be mounted in any position without affecting operation
- Threaded pipe connection is standard: G = G (ISO 228/1)
- Installation/maintenance instructions are included with each valve

SPARE PARTS KIT

catalogue number	spare parts kit no.	
	~	=
SCG238A044/046	**C132486**	**C132487**
SCG238A045/047/048	**C132488**	**C132489**
SCG238A049/050	**C132490**	**C132491**

ORDERING EXAMPLES:

SC G 238 **A** 044 230V / 50 Hz
SC G 238 **A** 046 **E** 115V / 50 Hz
SC G 238 **A** 049 24V / DC
SC G 238 **A** 050 48V / 50 Hz

prefix
pipe thread
basic number
voltage
suffix

ORDERING EXAMPLES KITS:

C132486(1)
C132489 **E**
C132490


basic number
suffix

DIMENSIONS (mm), WEIGHT (kg)



TYPE 01

Prefix “SC” Solenoid
Epoxy moulded
IEC 335 / ISO 4400
IP65

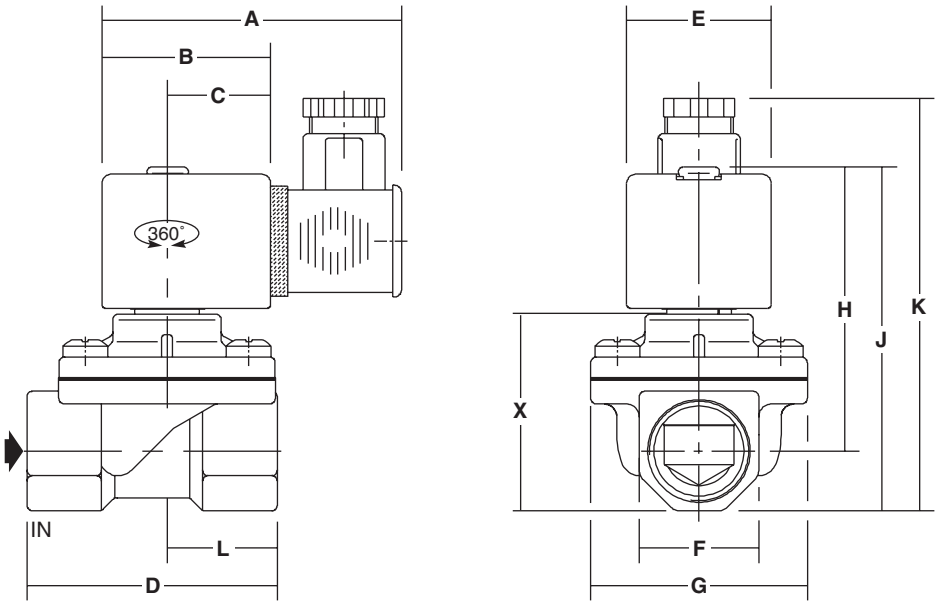

type	prefix option	catalogue number	A	B	C	D	E	F	G	H	J	K	L	X	weight (1)
01	SC	SCG238A044	80	45	27,5	52	39	27	37	72	85	104	23	40	0,55
		SCG238A046	80	45	27,5	52	39	27	37	72	85	104	23	40	0,50
		SCG238A047	80	45	27,5	65	39	27	58	74	87	106	29,5	42	0,75
		SCG238A048	80	45	27,5	67	39	32	58	76	92	111	29,5	47	0,70
		SCG238A049	80	45	27,5	86	39	41	73	92	112	131	37	67	1,30
		SCG238A050	80	45	27,5	86	39	41	73	92	112	131	37	67	1,20

(1) Incl. coil(s) and connector(s).

00039GB-2016/R01
Availability, design and specifications are subject to change without notice. All rights reserved.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP