ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Emerson / Rosemount Analytical 5301* at our website: ***Click HERE***

Product Data Sheet
December 2017
00813-0100-4530, Rev HE

Rosemount™ 5300 Level Transmitter


Guided Wave Radar



- Industry leading measurement capability and reliability
- Safety certified to IEC 61508 for SIL2 applications
- Increased plant availability with predictive maintenance and easy troubleshooting
- Reduced instrument count and process penetrations with a multivariable transmitter

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Taking guided wave radar benefits to the next level

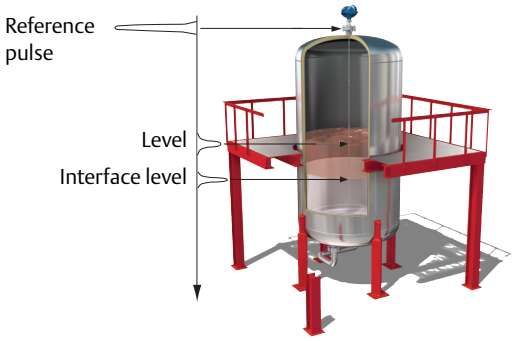

High application flexibility



Measurement principle

Low power, nano-second microwave pulses are guided down a probe submerged in the process media. When a microwave pulse reaches a medium with a different dielectric constant, part of the energy is reflected back to the transmitter.

The transmitter uses the residual wave of the first reflection for measuring the interface level. Part of the wave, which was not reflected at the upper product surface, continues until it is reflected at the lower product surface. The speed of this wave depends fully on the dielectric constant of the upper product.

The time difference between the transmitted and the reflected pulse is converted into a distance, and the total level or interface level is then calculated. The reflection intensity depends on the dielectric constant of the product. The higher the dielectric constant value, the stronger the reflection is.

Guided wave radar technology benefits

- Highly accurate and reliable direct level measurement with no compensation needed for changing process conditions (such as density, conductivity, viscosity, pH, temperature, and pressure)
- No moving parts and no re-calibration result in minimized maintenance
- Handles vapor, dust, turbulence, and foam well
- Suitable for small tanks, difficult tank geometry, internal obstacles, and unaffected by the mechanical design of chambers
- Top down installation minimizes risk for leakages

Contents

Ordering Information 5
Specifications 27
Product Certifications 52
Dimensional Drawings 60

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Special Rosemount 5300 features

Optimized to suit more applications


- Suitable for most liquid and solids level applications and liquid interface applications
- Handles even the most challenging applications reliably, including process vessels, control, and safety systems
- Easy retrofit in existing chambers or available as complete assembly with high quality Rosemount 9901 chambers
- Dynamic Vapor Compensation assures accuracy also in saturated steam


Best performance and uptime


- Unique Direct Switch Technology and Probe End Projection improve capability and reliability particularly in challenging applications
- Single lead probe for long measuring ranges, obstructions and low dielectrics ensures reliability in more applications, such as viscous media
- Smart Galvanic Interface results in a more stable microwave and EMI performance with minimized effects from outside disturbances

Robust design and increased safety


- Heavy-duty unique hardware for extreme temperature and pressures with multiple layers of protection
- EchoLogics® and smart software functions provide enhanced ability to keep track of the surface and detect a full vessel situation
- Third party approved for overfill prevention and Safety Integrated System SIL3 suitability
- Electronics and cable connections in separate compartments provides safer handling and improved moisture protection
- Online device verification and reliable detection of high level conditions with the verification reflector

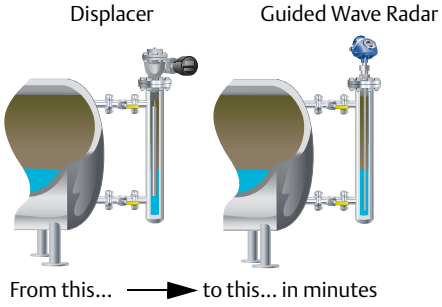

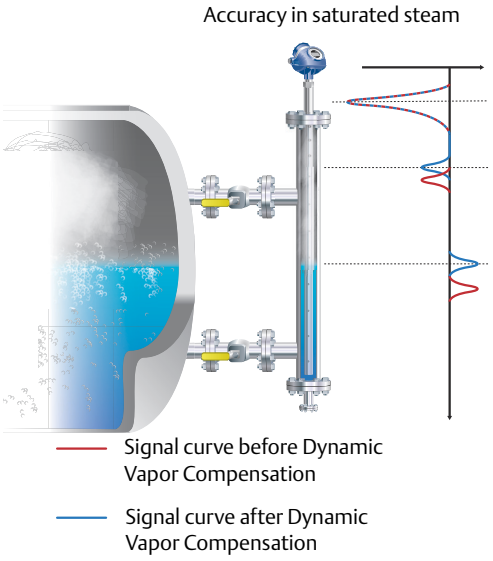

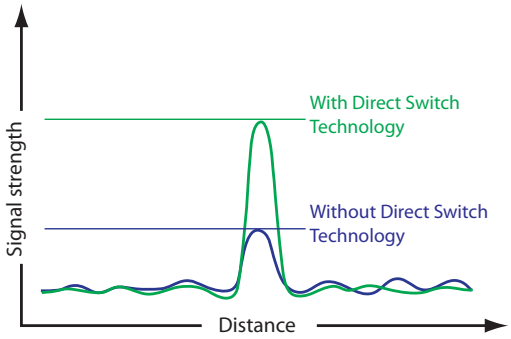


Direct Switch Technology provides a signal that is two to five times stronger than other GWR transmitters'

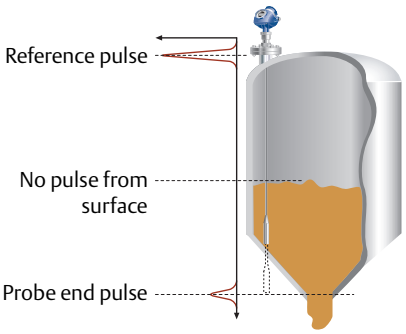


With Probe End Projection, the surface position is calculated if the surface echo becomes unavailable

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Robust modular design

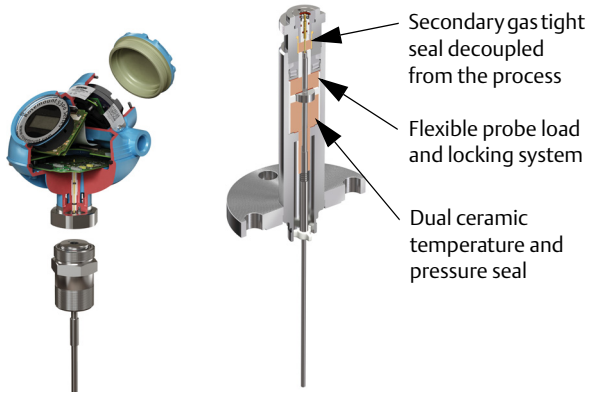

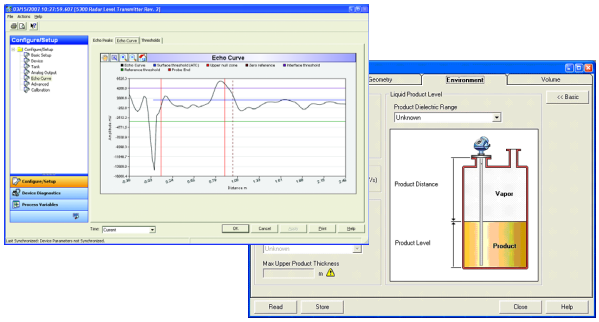

Rosemount Radar Master enables easy configuration and service with wizard, online help, echo curve and logging tools, and much more

Easy installation and plant integration

- Easy upgrade by matching existing tank connections and cut-to-fit probes
- Long lengths of rigid probes for robust measurements become cost-effective and practical to ship, store and install with the segmented probe option (code 4S)
- Multivariable device reduces the number of process penetrations
- Seamless system integration with HART®, FOUNDATION™ Fieldbus, Modbus®, or IEC 62591 (*Wireless*HART®) with the Emerson™ Wireless 775 THUM™ Adapter
- Pre-configured or easy configuration in Rosemount Radar Master with a five-step wizard, auto connect, and online help
- Enhanced DD with step-by-step configuration and echo curve capability (HART) in tools such as AMS Device Manager, and Field Communicator
- DTM™ with echo curve capability for use in FDT®/DTM compatible configuration tools such as PACT*ware*™, Yokogawa FieldMate/PRM

Minimized maintenance reduces cost

- Easy online troubleshooting with user friendly software, utilizing powerful echo curve and logging tools
- Signal Quality Metrics diagnostics detect product build-up on probe to monitor turbulence, boiling, foam, and emulsions
- Predictive maintenance with advanced diagnostics and Plantweb™ alerts
- Modular design for reduced spare parts and easy replacement of the transmitter housing without opening the tank

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ordering Information

Rosemount 5301 and 5302 Level and/or Interface in Liquids



Rosemount 5301 and 5302 Guided Wave Radar Level Transmitters provide industry leading measurement capabilities and reliability in liquids. Characteristics include:

- Direct Switch Technology and Probe End Projection to handle low reflective media and long measuring ranges
- Wide range of probe styles, materials, and temperatures and pressures for application flexibility
- HART 4-20 mA, FOUNDATION Fieldbus, Modbus, or IEC 62591 (*Wireless*HART) with the THUM Adapter (see page 27 for details)
- Safety-certified to IEC 61508 (option code QT)
- Advanced Diagnostics (option code D01 or DA1)
- Transmitter verification and high level supervision (option code HL1, HL2, or HL3)

Additional information

Specifications: page 27
Certifications: page 52
Dimensional drawings: page 60

Specification and selection of product materials, options, or components must be made by the purchaser of the equipment. See page 44 for more information on Material Selection.

Table 1. Rosemount 5301 and 5302 Level and/or Interface in Liquids Ordering Information
The starred options (★) represent the most common options and should be selected for best delivery.
The non-starred offerings are subject to additional delivery lead time.

Model	Product description	
5301	Guided Wave Radar Liquid Level or Interface Transmitter (interface available for fully submerged probe)	★
5302	Guided Wave Radar Liquid Level and Interface Transmitter	★
Signal output		
H	4-20 mA with HART communication (default output from factory is HART 5, add option code HR7 for HART 7) (see page 27 for details)	★
F	FOUNDATION Fieldbus (see page 29 for details)	★
M	RS-485 with Modbus communication (see page 30 for details)	★
U	Rosemount 2410 Tank Hub Connectivity	
Housing material		
A	Polyurethane-covered Aluminum	★
S	Stainless Steel, Grade CF8M (ASTM A743)	
Conduit / cable threads		
1	½ - 14 NPT	★
2	M20 x 1.5 adapter	★
4	2 pcs M20 x 1.5 adapter	★
G	Metal cable gland (½ - 14 NPT)	★

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 1. Rosemount 5301 and 5302 Level and/or Interface in Liquids Ordering Information
The starred options (★) represent the most common options and should be selected for best delivery.
The non-starred offerings are subject to additional delivery lead time.

E[1]	M12, 4-pin, Male connector (eurofast®)			★
M[1]	A size Mini, 4-pin, Male connector (minifast®)			★
Operating temperature and pressure (see page 32)[2]			**Probe type**	
S	Standard: - 15 to 580 psig @ 302 °F (-1 to 40 bar @ 150 °C)		1A, 2A, 3A, 3B, 4A, 4B, 4S, 5A, and 5B	★
H[3]	High Temperature / High Pressure: 2940 psi @ 752 °F and 5000 psi @ 100 °F (203 bar @ 400 °C and 345 bar @ 38 °C)		3A, 3B, 3V, 4A, 4B, 4S, 4U, 5A, and 5B	★
P[3]	High Pressure: 3320 psi @ 482 °F and 5000 psi @ 100 °F (228.9 bar @ 250 °C and 345 bar @ 38 °C)		3A, 3B, 4A, 4B, 4S, 5A, and 5B	★
C[3]	Cryogenic Temperature: 3524 psi @ 392 °F and 5000 psi @ -321 °F (243 bar @ 200 °C and 345 bar @ -196 °C)		3A, 3B, 4A, 4B, 4S, 5A, 5B (Only SST)	
Material of construction[4]: Process connection / probe		**Probe type**	**Valid operation temperature and pressure**	
1	316/316L/EN 1.4404	All	S, H, P, C	★
2	Alloy C-276 (UNS N10276). With plate design if flanged version. Up to class 600/PN 63 for HTHP/HP probes.	3A, 3B, 4A, 4B, 5A, 5B	S, H, P	
3	Alloy 400 (UNS N04400). With plate design if flanged version.	3A, 3B, 4A, 4B, 5A, 5B	S	
7	PTFE covered probe and flange. With plate design.	4A and 5A	S	
8	PTFE covered probe	4A and 5A	S	
H	Alloy C-276 (UNS N10276) process connection, flange, and probe	3A, 3B, 4A, 4B, 5A, 5B	S, H, P	
D	Duplex 2205 (EN 1.4462/UNS S31803) process connection, flange, and probe	4B, 5A, 5B	S, H, P	
Sealing, O-ring material (consult the factory for other O-ring materials)				
N[5]	None			★
V	Viton® Fluoroelastomer			★
E	Ethylene Propylene (EPDM)			★
K	Kalrez® 6375 Perfluoroelastomer			★
B	Nitrile Butadiene (NBR)			★

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 1. Rosemount 5301 and 5302 Level and/or Interface in Liquids Ordering Information
The starred options (★) represent the most common options and should be selected for best delivery.
The non-starred offerings are subject to additional delivery lead time.

Probe type		Process connections	Probe lengths	
3B	Coaxial, perforated. For level and interface measurement.	Flange / 1-in.[6], 1½-in., 2- in.[6] Thread	Min: 1 ft. 4 in. (0.4 m) Max: 19 ft. 8 in. (6 m)	★
3V[7]	Integrated Still Pipe Vapor Probe. For 3-in. chambers and above. Refer to page 15 to specify reference reflector length.	Flange	Min: 2 ft. 11 in. (0.9 m) for the short reflector (R1 option) Min: 3 ft. 7 in. (1.1 m) for the long reflector (R2 option) Max: 13 ft. 1 in. (4 m)	★
4A	Rigid Single Lead (8 mm)	Flange / 1- in.[6], 1½-in., 2- in.[6] Thread / Tri Clamp	Min: 1 ft. 4 in. (0.4 m) Max: 9 ft. 10 in. (3 m)	★
4B	Rigid Single Lead (13mm)	Flange / 1-in., 1½-in., 2-in. Thread / Tri Clamp	Min: 1 ft. 4 in. (0.4 m) Max: 19 ft. 8 in. (6 m)	★
4U[7]	Single Rigid Vapor Probe (equipped with a 1½-in. centering disc). For 2-in. chambers. Refer to page 15 to specify reference reflector length.	Flange / 1½-in. Thread	Min: 2 ft. 11 in. (0.9 m) for the short reflector (R1 option) Min: 3 ft. 7 in. (1.1 m) for the long reflector (R2 option) Max: 9 ft. 10 in. (3 m)	★
5A[8]	Flexible Single Lead with weight	Flange / 1-in.[6], 1½-in., 2-in.[6] Thread / Tri Clamp	Min: 3 ft. 4 in. (1 m) Max: 164 ft. (50 m)[9]	★
5B[10]	Flexible Single Lead with chuck	Flange / 1-in.[6], 1½-in., 2-in.[6] Thread / Tri Clamp	Min: 3 ft. 4 in. (1 m) Max: 164 ft. (50 m)[9]	★
1A[6]	Rigid Twin Lead	Flange / 1½-in., 2-in.[6] Thread	Min: 1 ft. 4 in. (0.4 m) Max: 9 ft. 10 in. (3 m)	
2A[6]	Flexible Twin Lead with weight	Flange / 1½-in., 2-in.[6] Thread	Min: 3 ft. 4 in. (1 m) Max: 164 ft. (50 m)	
3A[11]	Coaxial (for level measurement)	Flange / 1-in.[6], 1½-in., 2-in.[6] Thread	Min: 1 ft. 4 in. (0.4 m) Max: 19 ft. 8 in. (6 m)	
4S	Segmented Rigid Single Lead (13mm)	Flange / 1-in., 1½-in., 2-in. Thread / Tri Clamp	Min: 1 ft. 4 in. (0.4 m) Max: 32 ft. 9 in. (10 m)	
Probe length units				
E	English (feet, in.)			★
M	Metric (meters, centimeters)			★
Total probe length (feet/m)[12]				
XXX	0-164 ft. or 0-50 m			★
Total probe length (in./cm)[12]				
XX	0-11 in. or 0-99 cm			★

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 1. Rosemount 5301 and 5302 Level and/or Interface in Liquids Ordering Information
The starred options (★) represent the most common options and should be selected for best delivery.
The non-starred offerings are subject to additional delivery lead time.

Process connection - size / type (consult the factory for other process connections)				
ASME flanges		**Material of construction**	**Operating temperature and pressure**	
AA	2-in. Class 150, RF (Raised Face Type)	1, 2, 3, 7, 8, H, D	S, H, P, C	★
AB	2-in. Class 300, RF (Raised Face Type)	1, 2, 3, 7, 8, H, D	S, H, P, C	★
AC	2-in. Class 600, RF (Raised Face Type)	1, 2, H, D	H, P, C	★
AD	2-in. Class 900, RF (Raised Face Type)	1, H, D	H, P, C	★
BA	3-in. Class 150, RF (Raised Face Type)	1, 2, 3, 7, 8, H, D	S, H, P, C	★
BB	3-in. Class 300, RF (Raised Face Type)	1, 2, 3, 7, 8, H, D	S, H, P, C	★
BC	3-in. Class 600, RF (Raised Face Type)	1, 2, H, D	H, P, C	★
BD	3-in. Class 900, RF (Raised Face Type)	1, H, D	H, P, C	★
CA	4-in. Class 150, RF (Raised Face Type)	1, 2, 3, 7, 8, H, D	S, H, P, C	★
CB	4-in. Class 300, RF (Raised Face Type)	1, 2, 3, 7, 8, H, D	S, H, P, C	★
CC	4-in. Class 600, RF (Raised Face Type)	1, 2, H, D	H, P, C	★
CD	4-in. Class 900, RF (Raised Face Type)	1, H, D	H, P, C	★
AE	2-in. Class 1500, RF (Raised Face Type)	1, H, D	H, P, C	
AF	2-in. Class 2500, RF (Raised Face Type)	1	H, P, C	
AI	2-in. Class 600, RTJ (Ring Type Joint)	1, H, D	H, P, C	
AJ	2-in. Class 900, RTJ (Ring Type Joint)	1, H, D	H, P, C	
AK	2-in. Class 1500, RTJ (Ring Type Joint)	1, H, D	H, P, C	
BE	3-in. Class 1500, RF (Raised Face Type)	1, H, D	H, P, C	
BF	3-in. Class 2500, RF (Raised Face Type)	1	H, P, C	
BI	3-in. Class 600, RTJ (Ring Type Joint)	1, H, D	H, P, C	
BJ	3-in. Class 900, RTJ (Ring Type Joint)	1, H, D	H, P, C	
BK	3-in. Class 1500, RTJ (Ring Type Joint)	1, H, D	H, P, C	
CE	4-in. Class 1500, RF (Raised Face Type)	1, H, D	H, P, C	
CF	4-in. Class 2500, RF (Raised Face Type)	1	H, P, C	
CI	4-in. Class 600, RTJ (Ring Type Joint)	1, H, D	H, P, C	
CJ	4-in. Class 900, RTJ (Ring Type Joint)	1, H, D	H, P, C	
CK	4-in. Class 1500, RTJ (Ring Type Joint)	1, H, D	H, P, C	
DA	6-in. Class 150, RF (Raised Face Type)	1, 2, 3, 7, 8, H	S, H, P, C	

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 1. Rosemount 5301 and 5302 Level and/or Interface in Liquids Ordering Information
The starred options (★) represent the most common options and should be selected for best delivery.
The non-starred offerings are subject to additional delivery lead time.

EN flanges		Material of construction	Operating temperature and pressure	
HB	DN50, PN40, Type A flat face	1, 2, 3, 7, 8	S, H, P, C	★
HC	DN50, PN63, Type A flat face	1, 2, 3, 7, 8	H, P, C	★
HD	DN50, PN100, Type A flat face	1	H, P, C	★
IA	DN80, PN16, Type A flat face	1, 2, 3, 7, 8	S, H, P, C	★
IB	DN80, PN40, Type A flat face	1, 2, 3, 7, 8	S, H, P, C	★
IC	DN80, PN63, Type A flat face	1, 2, 3, 7, 8	H, P, C	★
ID	DN80, PN100, Type A flat face	1	H, P, C	★
JA	DN100, PN16, Type A flat face	1, 2, 3, 7, 8	S, H, P, C	★
JB	DN100, PN40, Type A flat face	1, 2, 3, 7, 8	S, H, P, C	★
JC	DN100, PN63, Type A flat face	1, 2, 3, 7, 8	H, P, C	★
JD	DN100, PN100, Type A flat face	1	H, P, C	★
HE	DN50, PN160, Type B2 raised face	1	H, P, C	
HF	DN50, PN250, Type B2 raised face	1	H, P, C	
HI	DN50, PN40, EN 1092-1 Type E spigot face (DIN 2513 Form V13)	1, 8	S, H, P, C	
HP	DN50, PN16, EN 1092-1 Type C tongue face (DIN 2512 Form F)	1, 8	S, H, P, C	
HQ	DN50, PN40, EN 1092-1 Type C tongue face (DIN 2512 Form F)	1, 8	S, H, P, C	
IE	DN80, PN160, Type B2 raised face	1	H, P, C	
IF	DN80, PN250, Type B2 raised face	1	H, P, C	
IH	DN80, PN16, EN 1092-1 Type E spigot face (DIN 2513 Form V13)	1, 8	S, H, P, C	
II	DN80, PN40, EN 1092-1 Type E spigot face (DIN 2513 Form V13)	1, 8	S, H, P, C	
IP	DN80, PN16, EN 1092-1 Type C tongue face (DIN 2512 Form F)	1, 8	S, H, P, C	
IQ	DN80, PN40, EN 1092-1 Type C tongue face (DIN 2512 Form F)	1, 8	S, H, P, C	
JE	DN100, PN160, Type B2 raised face	1	H, P, C	
JF	DN100, PN250, Type B2 raised face	1	H, P, C	
JH	DN100, PN16, EN 1092-1 Type E spigot face (DIN 2513 Form V13)	1, 8	S, H, P, C	
JI	DN100, PN40, Type E spigot face (DIN 2513 Form V13)	1, 8	S, H, P, C	
JP	DN100, PN16, EN 1092-1 Type C tongue face (DIN 2512 Form F)	1, 8	S, H, P, C	
JQ	DN100, PN40, EN 1092-1 Type C tongue face (DIN 2512 Form F)	1, 8	S, H, P, C	
KA	DN150, PN16, Type A flat face	1, 2, 3, 7, 8	S, H, P, C	

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 1. Rosemount 5301 and 5302 Level and/or Interface in Liquids Ordering Information
The starred options (★) represent the most common options and should be selected for best delivery.
The non-starred offerings are subject to additional delivery lead time.

JIS flanges		**Material of construction**	**Operating temperature and pressure**	
UA	50A, 10K, RF (Raised Face Type)	1, 2, 3, 7, 8	S, H, P, C	★
VA	80A, 10K, RF (Raised Face Type)	1, 2, 3, 7, 8	S, H, P, C	★
XA	100A, 10K, RF (Raised Face Type)	1, 2, 3, 7, 8	S, H, P, C	★
UB	50A, 20K, RF (Raised Face Type)	1, 2, 3, 7, 8	S, H, P, C	
VB	80A, 20K, RF (Raised Face Type)	1, 2, 3, 7, 8	S, H, P, C	
XB	100A, 20K, RF (Raised Face Type)	1, 2, 3, 7, 8	S, H, P, C	
YA	150A, 10K, RF (Raised Face Type)	1, 2, 3, 7, 8	S, H, P, C	
YB	150A, 20K, RF (Raised Face Type)	1, 2, 3, 7, 8	S, H, P, C	
ZA	200A, 10K, RF (Raised Face Type)	1, 2, 3, 7, 8	S, H, P, C	
ZB	200A, 20K, RF (Raised Face Type)	1, 2, 3, 7, 8	S, H, P, C	
Threaded connections		**Material of construction**	**Probe type**	
RA	1½-in. NPT thread	1, 2, 3, 8, H, D	1A, 2A, 3A, 3B, 4A, 4B, 4S, 4U, 5A, 5B	★
RC	2-in. NPT thread	1, 8	1A, 2A, 3A, 3B, 4A, 4B, 4S, 5A, 5B, standard temperature and pressure	★
RB	1-in. NPT thread	1, 8	3A, 3B, 4A, 4B, 4S, 5A, 5B, standard temperature and pressure	
SA	1½-in. BSP (G 1½-in.) thread	1, 2, 3, 8, H, D	1A, 2A, 3A, 3B, 4A, 4B, 4S, 4U, 5A, 5B	
SB	1-in. BSP (G 1-in.) thread	1, 8	3A, 3B, 4A, 4B, 4S, 5A, 5B, standard temperature and pressure	

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 1. Rosemount 5301 and 5302 Level and/or Interface in Liquids Ordering Information
The starred options (★) represent the most common options and should be selected for best delivery.
The non-starred offerings are subject to additional delivery lead time.

Tri Clamp fittings		**Material of construction**	**Probe type**	
FT	1½-in. Tri Clamp	1, 7, 8	4A, 5A, 5B standard temperature and pressure	
AT	2-in. Tri Clamp	1, 7, 8	4A, 4B, 5A, 5B, 4S standard temperature and pressure	
BT	3-in. Tri Clamp	1, 7, 8	4A, 4B, 5A, 5B, 4S standard temperature and pressure	
CT	4-in. Tri Clamp	1, 7, 8	4A, 4B, 5A, 5B, 4S standard temperature and pressure	
Proprietary flanges				
TF	Fisher™ - proprietary 316/316L SST (for 249B, 259B chambers) Torque Tube Flange	1, 7, 8	S, H, P, C	★
TT	Fisher - proprietary 316/316L SST (for 249C chambers) Torque Tube Flange	1, 7, 8	S, H, P, C	★
TM	Masoneilan™ - proprietary 316/316L SST Torque Tube Flange	1, 7, 8	S, H, P, C	★
Hazardous locations certifications (see page 52-59)				
NA	No Hazardous Locations Certifications			★
E1[13]	ATEX Flameproof			★
E3[13]	NEPSI Flameproof			★
E5[13]	FM Explosion-proof			★
E6[13]	CSA Explosion-proof			★
E7[13]	IECEx Flameproof			★
I1	ATEX Intrinsic Safety			★
IA[14]	ATEX FISCO Intrinsic Safety			★
I3	NEPSI Intrinsic Safety			★
IC[14]	NEPSI FISCO Intrinsic Safety			★
I5	FM Intrinsic Safety and Non-Incendive			★
IE[14]	FM FISCO Intrinsic Safety			★
I6	CSA Intrinsic Safety			★
IF[14]	CSA FISCO Intrinsic Safety			★
I7	IECEx Intrinsic Safety			★
IG[14]	IECEx FISCO Intrinsic Safety			★
E2	INMETRO Flameproof			
EM[13]	Technical Regulations Customs Union (EAC) Flameproof			

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 1. Rosemount 5301 and 5302 Level and/or Interface in Liquids Ordering Information
The starred options (★) represent the most common options and should be selected for best delivery.
The non-starred offerings are subject to additional delivery lead time.

I2	INMETRO Intrinsic Safety	
IB	INMETRO FISCO Intrinsic Safety	
IM	Technical Regulations Customs Union (EAC) Intrinsic Safety	
E4[15]	TIIS Flameproof	
KA[13]	ATEX, FM, CSA Flameproof/Explosion-proof	
KB[13]	ATEX, FM, IECEx Flameproof/Explosion-proof	
KC[13]	ATEX, CSA, IECEx Flameproof/Explosion-proof	
KD[13]	FM, CSA, IECEx Flameproof/Explosion-proof	
KE	ATEX, FM, CSA Intrinsic Safety	
KF	ATEX, FM, IECEx Intrinsic Safety	
KG	ATEX, CSA, IECEx Intrinsic Safety	
KH	FM, CSA, IECEx Intrinsic Safety	
KI[14]	FISCO - ATEX, FM, CSA Intrinsic Safety	
KJ[14]	FISCO - ATEX, FM, IECEX Intrinsic Safety	
KK[14]	FISCO - ATEX, CSA, IECEX Intrinsic Safety	
KL[14]	FISCO - FM, CSA, IECEX Intrinsic Safety	
N1	ATEX Type n	
N7	IECEx Type n	

Options (include with selected model number)

Display		
M1	Integral digital display	★
Communication		
HR7	4–20 mA with digital signal based on HART 7 protocol	★
Hydrostatic testing		
P1[16]	Hydrostatic testing	★
Factory configuration		
C1	Factory configuration (Configuration Data Sheet required with order, available at Emerson.com/Rosemount)	★
Alarm limit configuration		
C4	Namur alarm and saturation levels, high alarm	★
C5	Namur alarm and saturation levels, low alarm	★
C8[17]	Low alarm (standard Rosemount alarm and saturation levels)	★

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 1. Rosemount 5301 and 5302 Level and/or Interface in Liquids Ordering Information
The starred options (★) represent the most common options and should be selected for best delivery.
The non-starred offerings are subject to additional delivery lead time.

Welding documentation[18]		
Q66	Welding Procedure Qualification Record Documentation	
Q67	Welder Performance Qualification Record	
Q68	Welding Procedure Specification	
Special certifications		
Q4	Calibration Data Certification	★
Q8[19]	Material Traceability Certification consistent with ISO10474-3.1:2013 / EN10204-3.1:2004	★
QG	GOST Primary Verification Certificate	
Safety certifications		
QS	Prior-use certificate of FMEDA Data. Only available with HART 4-20 mA output (output code H).	★
QT[20]	Safety-certified to IEC 61508 with certificate of FMEDA data. Only available with HART 4-20 mA output (output code H).	★
Country certification		
J1	Canadian Registration Number (CRN)	★
J2[21]	ASME B31.1	★
J8[22][23]	EN Boiler (European Boiler Approval in accordance with EN 12952-11 and EN 12953-9)	★
Dye penetration test certificate		
Q73	Certificate of Liquid Penetrant Inspection	★
Positive material identification certificate		
Q76	Positive Material Identification Certificate of Conformance	★
Materials certification		
N2[24]	NACE® material recommendation per NACE MR0175/ISO 15156 and NACE MR0103/ISO 17945	★
Marine / shipboard approvals[25]		
SBS	American Bureau of Shipping Type Approval	
SDN	Det Norske Veritas (DNV) Type Approval	
SLL	Lloyd's Register Type Approval	
SBV	Bureau Veritas Type Approval	
Installation options		
LS[26]	Long stud 9.8 in (250 mm) for flexible single lead probe to prevent contact with wall/nozzle. Standard stud length is 3.9 in (100 mm) for probes 5A and 5B.	★
BR	316L SST Mounting Bracket for 1½-in. NPT Process Connection (RA) (see page 74)	

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 1. Rosemount 5301 and 5302 Level and/or Interface in Liquids Ordering Information
The starred options (★) represent the most common options and should be selected for best delivery.
The non-starred offerings are subject to additional delivery lead time.

Weight and anchoring options for flexible single probes (probe type 5A)			
W3	Heavy weight (recommended choice for most applications) Weight=2.43 lb (1.10 kg), Length=5.5 in. (140 mm), Diameter=1.5 in. (37.5 mm)		★
W2	Short weight (when measuring close to the probe end) Weight=0.88 lb (0.40 kg. Length=2 in. (50 mm), Diameter=1.5 in. (37.5 mm)		
Weight assembly options for flexible single probes			
WU	Weight or chuck not mounted on the probe		★
Transient protection			
T1	Transient Protection Terminal Block. Selectable with HART 4-20 mA output (output code H). Already included in all FOUNDATION Fieldbus variations.		★
Diagnostic functionality			
D01	FOUNDATION Fieldbus Diagnostics Suite (includes Signal Quality Metrics diagnostics)		★
DA1	HART Diagnostics Suite (includes Signal Quality Metrics diagnostics)		★
Verification reflectors (high level supervision)			
HL1[27]	Verification reflector - 3- to 6-in. pipe/chamber (High Level Supervision). See page 31 for details.		
HL2[27]	Verification reflector - 8-in. pipe/chamber (High Level Supervision). See page 31 for details.		
HL3[27]	Verification reflector - tanks and 10-in. or wider pipe/chamber (High Level Supervision). See page 31 for details.		
Overfill prevention			
U1[28]	WHG Overfill Approval		★
Extended product warranty			
WR3	3-year limited warranty		★
WR5	5-year limited warranty		★
Centering discs (see page 51 for size recommendation)		**Outer diameter**	
S2[29]	2-in. Centering disc	1.8 in. (45 mm)	★
S3[29]	3-in. Centering disc	2.7 in. (68 mm)	★
S4[29]	4-in. Centering disc	3.6 in. (92 mm)	★
P2[30]	2-in. Centering disc PTFE	1.8 in. (45 mm)	★
P3[30]	3-in. Centering disc PTFE	2.7 in. (68 mm)	★
P4[30]	4-in. Centering disc PTFE	3.6 in. (92 mm)	★
S6[29]	6-in. Centering disc	5.55 in. (141 mm)	
S8[29]	8-in. Centering disc	7.40 in. (188 mm)	
P6[30]	6-in. Centering disc PTFE	5.55 in. (141 mm)	
P8[30]	8-in. Centering disc PTFE	7.40 in. (188 mm)	

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 1. Rosemount 5301 and 5302 Level and/or Interface in Liquids Ordering Information
The starred options (★) represent the most common options and should be selected for best delivery.
The non-starred offerings are subject to additional delivery lead time.

Remote housing mounting (see page 75)		
B1	1 m / 3.2 ft. Remote Housing Mounting Cable and 316L SST Bracket	
B2	2 m / 6.5 ft. Remote Housing Mounting Cable and 316L SST Bracket	
B3	3 m / 9.8 ft. Remote Housing Mounting Cable and 316L SST Bracket	
Reference reflectors for dynamic vapor compensation probes (required for probe type 3V and 4U) (See page 37 for reflector length guidelines)		
R1	Short reflector. Length=14 in. (350 mm)	
R2	Long reflector. Length=20 in. (500 mm)	
Consolidate to chamber (see page 49)		
XC(31)	Consolidate to Chamber	
Engineered solutions (see page 49)		
Rxxxx	Engineered Solutions beyond standard model codes. (Consult factory for details)	
Example model string: 5301-H-A-1-S-1-V-1A-M-002-05-AA-I1-M1C1 E-002-05, means 2 ft. and 5 in. probe length. M-002-05, means 2.05 m.		

1. Not available with Flame/Explosion-proof approvals (E1, E3, E5, E6, E7, KA, KB, KC, and KD)
2. Process seal rating. Final rating depends on flange and O-ring selection. See "Temperature and pressure limits" on page 32-35.
3. Requires option None for sealing (no O-ring).
4. For other materials, consult the factory.
5. Requires Operating Temperature and Pressure code H, P, or C.
6. Only available with Operating Temperature and Pressure code S.
7. Only available with Operating Temperature and Pressure code H.
8. 0.79 lb (0.36 kg) standard weight for flexible single lead probe. L=5.5 in. (140 mm).
   For PTFE covered probes: 2.2 lb (1 kg) standard weight for flexible single lead probe. L=17.1 in. (434 mm).
9. Maximum probe length for Duplex 2205 probes is 105 ft (32 m).
10. Extra length for fastening is added in factory.
11. Requires Rosemount 5301.
12. Probe weight included if applicable. Give the total probe length in feet and inches or meters and centimeters, depending on selected probe length unit.
    If tank height is unknown, please round up to an even length when ordering. Probes can be cut to exact length in field. Maximum allowable length is determined by process conditions. See "Total probe length" on page 45 for more probe length guidance.
13. Probes are intrinsically safe.
14. Requires FOUNDATION Fieldbus signal output (U_i parameter listed in "Product Certifications" on page 52).
15. G ½ in. SST cable gland is included in delivery.
16. Available for tank connection with flange.
17. The standard alarm setting is high.
18. Weldings in accordance with EN/ISO standards.
19. Certificate includes all pressure retaining wetted parts.
20. Not available for the Verification Reflector options (HL1, HL2, HL3).
21. Design and manufacturing according to ASME B31.1. No code stamp available. Welding in accordance with ASME IX.
22. Only available with Signal output code H and Probe type code 3V or 4U.
23. Suitable for use as a level sensor part of a limiting device, in accordance with EN 12952-11 and EN 12953-9.
24. For Probe Type 3A, 3B, 4A, 4B, 4S, and 4U, and PTFE-coated 5A.
25. Only for Housing Material code S and Operating Temperature and Pressure code S.
26. Not available with PTFE covered probes.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

27. Only available with HART 4-20 mA output (code H), standard operating temperature and pressure (code S), material of construction code 1, and flexible single lead probes (probe type 5A or 5B). Not available with option codes QS and QT, and remote housing mounting (option code B1, B2, or B3).
28. Cannot be combined with E2 (INMETRO Flameproof) or I2 (INMETRO Intrinsic Safety).
29. Available for SST, Alloy C-276, Alloy 400, and Duplex 2205 probes, type 2A, 4A, 4B, 4S, and 5A. Same disc material as probe material. For more information, see "Centering discs" on page 50.
30. Available for probe types 2A, 4A, 4B, 4S, and 5A. Not available with Operating Temperature and Pressure code H or Material of Construction codes 7 and 8.
31. Selecting the XC option code on the Rosemount 5300 and the Rosemount 9901 Chamber will result in matching, consolidating, configuring, and shipping of the two products in one crate. Note that the flange bolts are only hand-tightened. Long rigid single lead probes (>8 ft./2.5 m) are shipped separately in order to reduce transportation risk damage.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Rosemount 5303 Level for Solids



Rosemount 5303 Guided Wave Radar Level Transmitter provides industry leading measurement capabilities and reliability on solids. Characteristics include:

- Direct Switch Technology and Probe End Projection to handle low reflective media and long measuring ranges
- Measurement independent of dust, moisture and material fluctuations
- HART 4-20 mA, FOUNDATION Fieldbus, Modbus, or IEC 62591 (*Wireless*HART) with the THUM Adapter (see page 27 for details)
- Probes for high physical weight loads (probe type 6A and 6B)
- Long stud available to prevent contact with nozzle (LS option)

Additional information

Specifications: page 27
Certifications: page 52
Dimensional drawings: page 60

Specification and selection of product materials, options, or components must be made by the purchaser of the equipment. See page 44 for more information on Material Selection.

Table 2. Rosemount 5303 Level for Solids Ordering Information

The starred options (★) represent the most common options and should be selected for best delivery.
The non-starred offerings are subject to additional delivery lead time.

Model	Product description		
5303	Guided Wave Solids Level Transmitter		★
Signal output			
H	4-20 mA with HART communication (default output from factory is HART 5, add option code HR7 for HART 7) (see page 27 for details)		★
F	FOUNDATION Fieldbus (see page 29 for details)		★
M	RS-485 with Modbus communication (see page 30 for details)		★
Housing material			
A	Polyurethane-covered Aluminum		★
S	Stainless Steel, Grade CF8M (ASTM A743)		
Conduit / cable threads			
1	½ - 14 NPT		★
2	M20 x 1.5 adapter		★
4	2 pcs M20 x 1.5 adapter		★
G	Metal cable gland (½ - 14 NPT)		★
E[1]	M12, 4-pin, Male connector (eurofast)		★
M[1]	A size Mini, 4-pin, Male connector (minifast)		★
Operating temperature and pressure (see page 32)[2]		**Probe type**	
S	Standard: - 15 to 580 psig @ 302 °F (-1 to 40 bar @ 150 °C)	All	★

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 2. Rosemount 5303 Level for Solids Ordering Information
The starred options (★) represent the most common options and should be selected for best delivery.
The non-starred offerings are subject to additional delivery lead time.

Material of construction: process connection / probe[3]			**Probe type**	
1	316/316L/ EN 1.4404		All	★
Sealing, O-ring material (consult factory for other O-ring materials)				
V	Viton Fluoroelastomer			★
E	Ethylene Propylene (EPDM)			★
K	Kalrez 6375 Perfluoroelastomer			★
B	Nitrile Butadiene (NBR)			★
Probe type		**Process connection**	**Probe lengths**	
5A[4]	Flexible Single Lead with weight, 4 mm	Flange / 1-in., 1½-in., 2-in. Thread	Min: 3 ft. 4 in. (1 m) Max: 115 ft. (35 m)	★
5B[5]	Flexible Single Lead with chuck, 4 mm	Flange / 1-in., 1½-in., 2-in. Thread	Min: 3 ft. 4 in. (1 m) Max: 115 ft. (35 m)	★
6A[6]	Flexible Single Lead with weight, 6 mm	Flange / 1-in., 1½-in., 2-in. Thread	Min: 3 ft. 4 in. (1 m) Max: 164 ft. (50 m)	★
6B[5]	Flexible Single Lead with chuck, 6 mm	Flange / 1-in., 1½-in., 2-in. Thread	Min: 3 ft. 4 in. (1 m) Max: 164 ft. (50 m)	★
Probe length units				
E	English (feet, in.)			★
M	Metric (meters, centimeters)			★
Total probe length (feet/m)[7]				
XXX	0-164 ft. or 0-50 m			★
Total probe length (in./cm)[7]				
XX	0-11 in. or 0-99 cm			★
Process connection - size / type (consult the factory for other process connections)				
ASME flanges[8]				
AA	2 in. Class 150, RF (Raised Face Type)			★
AB	2 in. Class 300, RF (Raised Face Type)			★
BA	3 in. Class 150, RF (Raised Face Type)			★
BB	3 in. Class 300, RF (Raised Face Type)			★
CA	4 in. Class 150, RF (Raised Face Type)			★
CB	4 in. Class 300, RF (Raised Face Type)			★
DA	6 in. Class 150, RF (Raised Face Type)			

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 2. Rosemount 5303 Level for Solids Ordering Information
The starred options (★) represent the most common options and should be selected for best delivery.
The non-starred offerings are subject to additional delivery lead time.

EN flanges[9]			
HB	DN50, PN40, Type A flat face		★
IA	DN80, PN16, Type A flat face		★
IB	DN80, PN40, Type A flat face		★
JA	DN100, PN16, Type A flat face		★
JB	DN100, PN40, Type A flat face		★
HI	DN50, PN40, EN 1092-1 Type E spigot face (DIN 2513 Form V13)		
HP	DN50, PN16, EN 1092-1 Type C tongue face (DIN 2512 Form F)		
HQ	DN50, PN40, EN 1092-1 Type C tongue face (DIN 2512 Form F)		
IH	DN80, PN16, EN 1092-1 Type E spigot face (DIN 2513 Form V13)		
II	DN80, PN40, EN 1092-1 Type E spigot face (DIN 2513 Form V13)		
IP	DN80, PN16, EN 1092-1 Type C tongue face (DIN 2512 Form F)		
IQ	DN80, PN40, EN 1092-1 Type C tongue face (DIN 2512 Form F)		
JH	DN100, PN16, EN 1092-1 Type E spigot face (DIN 2513 Form V13)		
JI	DN100, PN40, Type E spigot face (DIN 2513 Form V13)		
JP	DN100, PN16, EN 1092-1 Type C tongue face (DIN 2512 Form F)		
JQ	DN100, PN40, EN 1092-1 Type C tongue face (DIN 2512 Form F)		
KA	DN150, PN16, Type A flat face		
JIS flanges[9]			
UA	50A, 10K, RF (Raised Face Type)		★
VA	80A, 10K, RF (Raised Face Type)		★
XA	100A, 10K, RF (Raised Face Type)		★
UB	50A, 20K, RF (Raised Face Type)		
VB	80A, 20K, RF (Raised Face Type)		
XB	100A, 20K, RF (Raised Face Type)		
YA	150A, 10K, RF (Raised Face Type)		
YB	150A, 20K, RF (Raised Face Type)		
ZA	200A, 10K, RF (Raised Face Type)		
ZB	200A, 20K, RF (Raised Face Type)		
Threaded connections[8]		**Probe type**	
RA	1½-in. NPT thread	All	★
RC	2-in. NPT thread	All	★

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 2. Rosemount 5303 Level for Solids Ordering Information
The starred options (★) represent the most common options and should be selected for best delivery.
The non-starred offerings are subject to additional delivery lead time.

RB	1-in. NPT thread	All	
SA	1½-in. BSP (G 1½-in.) thread	All	
SB	1-in. BSP (G 1-in.) thread	All	
Hazardous locations certifications (see page 52-59)			
NA	No Hazardous Locations Certifications		★
E1	ATEX Flameproof		★
E3	NEPSI Flameproof		★
E5	FM Explosion-proof		★
E6	CSA Explosion-proof		★
E7	IECEx Flameproof		★
I1	ATEX Intrinsic Safety		★
IA(10)	ATEX FISCO Intrinsic Safety		★
I3	NEPSI Intrinsic Safety		★
IC(10)	NEPSI FISCO Intrinsic Safety		★
I5	FM Intrinsic Safety and Non-Incendive		★
IE(10)	FM FISCO Intrinsic Safety		★
I6	CSA Intrinsic Safety		★
IF(10)	CSA FISCO Intrinsic Safety		★
I7	IECEx Intrinsic Safety		★
IG(10)	IECEx FISCO Intrinsic Safety		★
E2	INMETRO Flameproof		
EM	Technical Regulations Customs Union (EAC) Flameproof		
I2	INMETRO Intrinsic Safety		
IB	INMETRO FISCO Intrinsic Safety		
IM	Technical Regulations Customs Union (EAC) Intrinsic Safety		
E4(11)	TIIS Flameproof		
KA	ATEX, FM, CSA Flameproof/Explosion-proof		
KB	ATEX, FM, IECEx Flameproof/Explosion-proof		
KC	ATEX, CSA, IECEx Flameproof/Explosion-proof		
KD	FM, CSA, IECEx Flameproof/Explosion-proof		
KE	ATEX, FM, CSA Intrinsic Safety		
KF	ATEX, FM, IECEx Intrinsic Safety		
KG	ATEX, CSA, IECEx Intrinsic Safety		

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 2. Rosemount 5303 Level for Solids Ordering Information
The starred options (★) represent the most common options and should be selected for best delivery.
The non-starred offerings are subject to additional delivery lead time.

KH	FM, CSA, IECEx Intrinsic Safety	
KI[10]	FISCO - ATEX, FM, CSA Intrinsic Safety	
KJ[10]	FISCO - ATEX, FM, IECEX Intrinsic Safety	
KK[10]	FISCO - ATEX, CSA, IECEX Intrinsic Safety	
KL[10]	FISCO - FM, CSA, IECEX Intrinsic Safety	
N1	ATEX Type n	
N7	IECEx Type n	

Options (include with selected model number)

Display		
M1	Integral digital display	★
Communication		
HR7	4–20 mA with digital signal based on HART 7 protocol	★
Hydrostatic testing		
P1[12]	Hydrostatic testing	★
Factory configuration		
C1	Factory configuration (Configuration Data Sheet required with order, available at Emerson.com/Rosemount)	★
Alarm limit configuration		
C4	Namur alarm and saturation levels, high alarm	★
C5	Namur alarm and saturation levels, low alarm	★
C8	Low alarm[13] (standard Rosemount alarm and saturation levels)	★
Welding documentation[14]		
Q66	Welding Procedure Qualification Record Documentation	
Q67	Welder Performance Qualification Record	
Q68	Welding Procedure Specification	
Safety certifications		
QS	Prior-use certificate of FMEDA Data. Only available with HART 4-20 mA output (output code H).	★
QT	Safety-certified to IEC 61508 with certificate of FMEDA data. Only available with HART 4-20 mA output (output code H).	★
Special certifications		
Q4	Calibration Data Certification	★
Q8[15]	Material Traceability Certification consistent with ISO10474-3.1:2013 / EN10204-3.1:2004	★
QG	GOST Primary Verification Certificate	

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 2. Rosemount 5303 Level for Solids Ordering Information
The starred options (★) represent the most common options and should be selected for best delivery.
The non-starred offerings are subject to additional delivery lead time.

Dye penetration test certificate		
Q73	Certificate of Liquid Penetrant Inspection	★
Positive material identification certificate		
Q76	Positive Material Identification Certificate of Conformance	★
Installation options		
LS	Long stud 9.8 in (250 mm) for flexible single lead probe to prevent contact with wall/nozzle. Standard stud length is 3.9 in (100 mm) for probes 5A and 5B; 5.9 in. (150 mm) for probes 6A and 6B	★
BR	316L SST Mounting Bracket for 1½-in. NPT Process Connection (RA) (see page 74)	
Transient protection		
T1	Transient Protection Terminal Block. Selectable with HART 4-20 mA output (output code H). Already included in all FOUNDATION Fieldbus variations.	★
Diagnostic functionality		
D01	FOUNDATION Fieldbus Diagnostics Suite (includes Signal Quality Metrics diagnostics)	★
DA1	HART Diagnostics Suite (includes Signal Quality Metrics diagnostics)	★
Overfill prevention		
U1(16)	WHG Overfill Approval	★
Extended product warranty		
WR3	3-year limited warranty	★
WR5	5-year limited warranty	★
Remote housing mounting (see page 75)		
B1	1m / 3.2 ft. Remote Housing Mounting Cable and 316L SST Bracket	
B2	2m / 6.5 ft. Remote Housing Mounting Cable and 316L SST Bracket	
B3	3m / 9.8 ft. Remote Housing Mounting Cable and 316L SST Bracket	
Engineered solutions (see page 49)		
Rxxxx	Engineered Solutions beyond standard model codes. (Consult factory for details)	
Example model string: 5303-H-A-1-S-1-V-6A-M-025-50-AA-I1-M1C1. E-025-05, means 25 ft. and 5 in. probe length. M-025-50, means 25.5 m.		

1. Not available with Flame/Explosion-proof approvals (E1, E3, E5, E6, E7, KA, KB, KC, and KD)
2. Process seal rating. Final rating depends on flange and O-ring selection. See "Temperature and pressure limits" on page 32-35.
3. For other materials, consult the factory.
4. 0.79 lb (0.36 kg) standard weight for flexible single lead probe. L=5.5 in. (140 mm).
5. Extra length for fastening is added in the factory.
6. 1.2 lb (0.56 kg) standard weight for flexible single lead probe. L=5.5 in. (140 mm).
7. Probe weight included if applicable. Give the total probe length in feet and inches or meters and centimeters, depending on selected probe length unit. If tank height is unknown, please round up to an even length when ordering. Probes can be cut to exact length in field. Maximum allowable length is determined by process conditions. See "Total probe length" on page 45 for more probe length guidance.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

8. Available in 316L SST. For other materials, consult the factory.
9. Available in 316L and EN 1.4404. For other materials consult the factory.
10. Requires FOUNDATION Fieldbus signal output (U_i parameter listed in "Product Certifications" on page 52).
11. G ½ in. SST cable gland is included in delivery.
12. Available for tank connection with flange.
13. The standard alarm setting is high.
14. Weldings in accordance with EN/ISO standards.
15. Certificate includes all pressure retaining wetted parts.
16. Can not be combined with E2 (INMETRO Flameproof) or I2 (INMETRO Intrinsic Safety).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Accessories

Table 3. Accessories Ordering Information

The starred options (★) represent the most common options and should be selected for best delivery.
The non-starred offerings are subject to additional delivery lead time.

Centering discs for rigid single lead probe (d=0.3"/8 mm)[1][2]		**Outer diameter**	
03300-1655-0001	Kit, 2-in. Centering Disc, SST	1.8 in. (45 mm)	★
03300-1655-0006	Kit, 2-in. Centering Disc, PTFE	1.8 in. (45 mm)	★
03300-1655-0002	Kit, 3-in. Centering Disc, SST	2.7 in. (68 mm)	★
03300-1655-0007	Kit, 3-in. Centering Disc, PTFE	2.7 in. (68 mm)	★
03300-1655-0003	Kit, 4-in. Centering Disc, SST	3.6 in. (92 mm)	★
03300-1655-0008	Kit, 4-in. Centering Disc, PTFE	3.6 in. (92 mm)	★
03300-1655-0004	Kit, 6-in. Centering Disc, SST	5.55 in. (141 mm)	
03300-1655-0009	Kit, 6-in. Centering Disc, PTFE	5.55 in. (141 mm)	
03300-1655-0005	Kit, 8-in. Centering Disc, SST	7.40 in. (188 mm)	
03300-1655-0010	Kit, 8-in. Centering Disc, PTFE	7.40 in. (188 mm)	
Centering discs for rigid single lead probe (d=0.5"/13 mm)[1][2]		**Outer diameter**	
03300-1655-0301	Kit, 2-in. Centering Disc, SST	1.8 in. (45 mm)	★
03300-1655-0306	Kit, 2-in. Centering Disc, PTFE	1.8 in. (45 mm)	★
03300-1655-0302	Kit, 3-in. Centering Disc, SST	2.7 in. (68 mm)	★
03300-1655-0307	Kit, 3-in. Centering Disc, PTFE	2.7 in. (68 mm)	★
03300-1655-0303	Kit, 4-in. Centering Disc, SST	3.6 in. (92 mm)	★
03300-1655-0308	Kit, 4-in. Centering Disc, PTFE	3.6 in. (92 mm)	★
03300-1655-0304	Kit, 6-in. Centering Disc, SST	5.55 in. (141 mm)	
03300-1655-0309	Kit, 6-in. Centering Disc, PTFE	5.55 in. (141 mm)	
03300-1655-0305	Kit, 8-in. Centering Disc, SST	7.40 in. (188 mm)	
03300-1655-0310	Kit, 8-in. Centering Disc, PTFE	7.40 in. (188 mm)	
Centering discs for flexible single/twin lead probes[1][2]		**Outer diameter**	
03300-1655-1001	Kit, 2-in. Centering disc, SST	1.8 in. (45 mm)	★
03300-1655-1006	Kit, 2-in. Centering disc, PTFE	1.8 in. (45 mm)	★
03300-1655-1002	Kit, 3-in. Centering disc, SST	2.7 in. (68 mm)	★
03300-1655-1007	Kit, 3-in. Centering disc, PTFE	2.7 in. (68 mm)	★
03300-1655-1003	Kit, 4-in. Centering disc, SST	3.6 in. (92 mm)	★
03300-1655-1008	Kit, 4-in. Centering disc, PTFE	3.6 in. (92 mm)	★
03300-1655-1004	Kit, 6-in. Centering disc, SST	5.55 in. (141 mm)	
03300-1655-1009	Kit, 6-in. Centering disc, PTFE	5.55 in. (141 mm)	
03300-1655-1005	Kit, 8-in. Centering disc, SST,	7.40 in. (188 mm)	
03300-1655-1010	Kit, 8-in. Centering disc, PTFE	7.40 in. (188 mm)	

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 3. Accessories Ordering Information

The starred options (★) represent the most common options and should be selected for best delivery.
The non-starred offerings are subject to additional delivery lead time.

Centering discs for mounting between segments (probe type 4S only)		**Outer diameter**	
03300-1656-1002	2-in. Centering Disc (1 pc), PTFE, Segmented Rigid Single Lead	1.8 in. (45 mm)	
03300-1656-1003	3-in. Centering Disc (1 pc), PTFE, Segmented Rigid Single Lead	2.7 in. (68 mm)	
03300-1656-1004	4-in. Centering Disc (1 pc), PTFE, Segmented Rigid Single Lead	3.6 in. (92 mm)	
03300-1656-1006	6-in. Centering Disc (1 pc), PTFE, Segmented Rigid Single Lead	5.55 in. (141 mm)	
03300-1656-1008	8-in. Centering Disc (1 pc), PTFE, Segmented Rigid Single Lead	7.40 in. (188 mm)	
03300-1656-3002	2-in. Centering Disc (3 pcs), PTFE, Segmented Rigid Single Lead	1.8 in. (45 mm)	
03300-1656-3003	3-in. Centering Disc (3 pcs), PTFE, Segmented Rigid Single Lead	2.7 in. (68 mm)	
03300-1656-3004	4-in. Centering Disc (3 pcs), PTFE, Segmented Rigid Single Lead	3.6 in. (92 mm)	
03300-1656-3006	6-in. Centering Disc (3 pcs), PTFE, Segmented Rigid Single Lead	5.55 in. (141 mm)	
03300-1656-3008	8-in. Centering Disc (3 pcs), PTFE, Segmented Rigid Single Lead	7.40 in. (188 mm)	
03300-1656-5002	2-in. Centering Disc (5 pcs), PTFE, Segmented Rigid Single Lead	1.8 in. (45 mm)	
03300-1656-5003	3-in. Centering Disc (5 pcs), PTFE, Segmented Rigid Single Lead	2.7 in. (68 mm)	
03300-1656-5004	4-in. Centering Disc (5 pcs), PTFE, Segmented Rigid Single Lead	3.6 in. (92 mm)	
03300-1656-5006	6-in. Centering Disc (5 pcs), PTFE, Segmented Rigid Single Lead	5.55 in. (141 mm)	
03300-1656-5008	8-in. Centering Disc (5 pcs), PTFE, Segmented Rigid Single Lead	7.40 in. (188 mm)	
Segmented rigid single lead probe spare part kit			
03300-0050-0001	15.2 in. / 385 mm Segment for Top connection (1 pc)		
03300-0050-0002	31.5 in. / 800 mm Segment (1 pc)		
03300-0050-0003	31.5 in. / 800 mm Segment (3 pcs)		
03300-0050-0004	31.5 in. / 800 mm Segment (5 pcs)		
03300-0050-0005	31.5 in. / 800 mm Segment (12 pcs)		
Vented flanges[(3)]			
03300-1812-0092	Fisher 249B, 259B		
03300-1812-0093	Fisher 249C		
03300-1812-0091	Masoneilan		
Flushing connection rings			
DP0002-2111-S6	2 in. ANSI, ¼ in. NPT connection		
DP0002-3111-S6	3 in. ANSI, ¼ in. NPT connection		
DP0002-4111-S6	4 in. ANSI, ¼ in. NPT connection		
DP0002-5111-S6	DN50, ¼ in. NPT connection		
DP0002-8111-S6	DN80, ¼ in. NPT connection		

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 3. Accessories Ordering Information

The starred options (★) represent the most common options and should be selected for best delivery.
The non-starred offerings are subject to additional delivery lead time.

HART modem and cables		
03300-7004-0001	MACTek® VIATOR® HART Modem and cables (RS232 connection)	★
03300-7004-0002	MACTek VIATOR HART Modem and cables (USB connection)	★
Remote housing mounting spare part kit		
03300-7006-0001	1 m / 3.2 ft. Remote Housing Mounting Cable and 316L SST Bracket	
03300-7006-0002	2 m / 6.5 ft. Remote Housing Mounting Cable and 316L SST Bracket	
03300-7006-0003	3 m / 9.8 ft. Remote Housing Mounting Cable and 316L SST Bracket	
Verification reflector (high level supervision) spare part kit (requires Rosemount 5300 firmware version 2.H0 or later)		
05300-7200-0001	For 3- to 8-in. pipe/chamber (inner diameter)	
05300-7200-0002	For tanks or 10-in. pipe/chamber (inner diameter) or wider	

1. If a centering disc is required for a flanged probe, the centering disc can be ordered with options Sx or Px on page 14 in the model code. If a centering disc is required for a threaded connection, or as a spare part, it should be ordered using the item numbers listed below. Refer to Table 9 for centering disc size recommendation for different pipe schedules.
2. To order a centering disc in a different material consult the factory.
3. 1-½ in. NPT threaded connection (RA) is required.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specifications

Functional specifications

General

Field of applications

Liquids and semi-liquids level and/or liquid/liquid interfaces or solids level

- Rosemount 5301, for liquid level or submerged interface measurements
- Rosemount 5302, for liquid level and interface measurements
- Rosemount 5303, for solid level measurements

Measurement principle

Time Domain Reflectometry (TDR)

(See "Measurement principle" on page 2 for a description of how it works)

Microwave output power

Nominal 300 µW, Max. 45 mW

Telecommunication (FCC and R&TTE)

FCC part 15 (1998) subpart B and R&TTE (EU directive 99/5/EC). Considered to be an unintentional radiator under the Part 15 rules

Humidity

0 - 100% Relative Humidity

Start-up time


< 40 s

4-20 mA HART (output option code H)

Output

Two-wire, 4–20 mA. Digital process variable is superimposed on 4–20 mA signal, and available to any host that conforms to the HART protocol. The HART signal can be used in a multidrop mode.

The default output is HART Revision 5. To order HART Revision 7 factory configured, add option code HR7. The device can also be field configured to HART Revision 7 if needed.

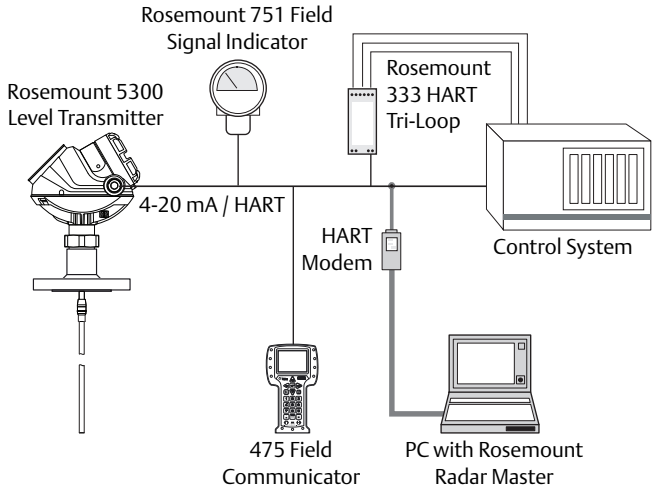

Signal wiring

Recommended output cabling is twisted shielded pairs, 24-12 AWG

Rosemount Tri-Loop™

By sending the digital HART signal to the optional HART Tri-Loop, it is possible to have up to three additional 4–20 mA analog signals. See the Rosemount 333 HART Tri-Loop Product Data Sheet for additional information.



Emerson Wireless THUM Adapter

The optional THUM Adapter can be mounted directly on the transmitter or by using a remote mounting kit. IEC 62591 (*Wireless*HART) enables access to multivariable data and diagnostics, and adds wireless to almost any measurement point.




See the Emerson 775 Wireless THUM Adapter Product Data Sheet and Technical Note.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

External power supply[1]

Approval type	Input voltage (U_i)
None	16 - 42.4 Vdc
Non-sparking/Energy Limited	16 - 42.4 Vdc
Intrinsically Safe	16 - 30 Vdc
Explosion-proof/Flameproof	20 - 42.4 Vdc

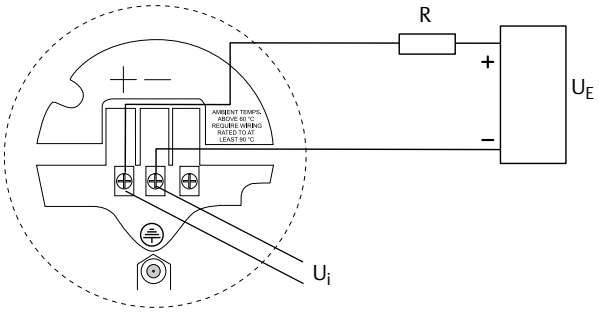

R = Load Resistance (Ω)
U_E = External Power Supply Voltage (Vdc)
U_i = Input Voltage (Vdc)

For Explosion-proof/Flameproof installations the Rosemount 5300 Level Transmitters have a built-in barrier; no external barrier needed.[2]

When a THUM Adapter is fitted, it adds a maximum drop of 2.5 Vdc in the connected loop.

Minimum input voltage (U_i) at different currents

Approval type	Current	
	3.75 mA	21.75 mA
Non-hazardous installations and Intrinsically Safe installations	16 Vdc	11 Vdc
Explosion-proof/Flameproof installations	20 Vdc	15.5 Vdc

IS parameters

See "Product Certifications" on page 52.

Signal on alarm

	High	Low
Standard	21.75 mA	3.75 mA
Namur NE43	22.50 mA	3.60 mA


Saturation levels

	High	Low
Standard	20.8 mA	3.9 mA
Namur NE43	20.5 mA	3.8 mA


Load limitations

Maximum loop resistance is determined by the voltage level of the external power supply, as described by:


Non-Hazardous and Non-sparking/energy limited Installations

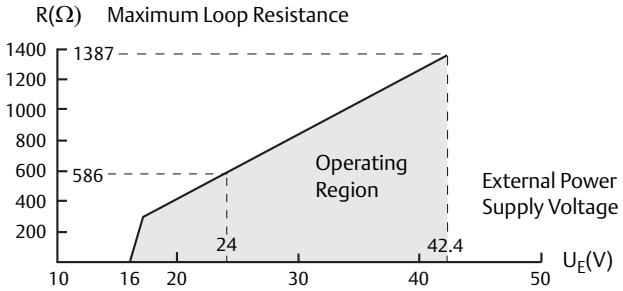

Intrinsically Safe Installations

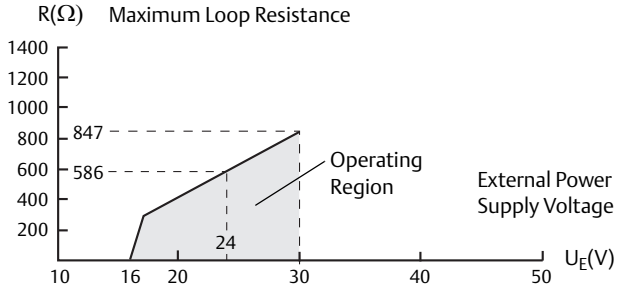

Explosion-proof/Flameproof (Ex d) Installations

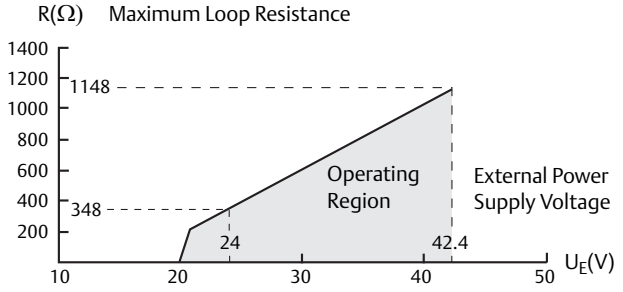


Note
For the Ex d case, the diagram is only valid if the HART load resistance is at the + side and if the - side is grounded, otherwise the loop resistance value is limited to 435 Ω.

1. *Reverse polarity protection.*
2. *An external galvanic isolator is always recommended to be used for Flame-proof/Explosion-proof installations.*

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

FOUNDATION Fieldbus (output option code F)

Output

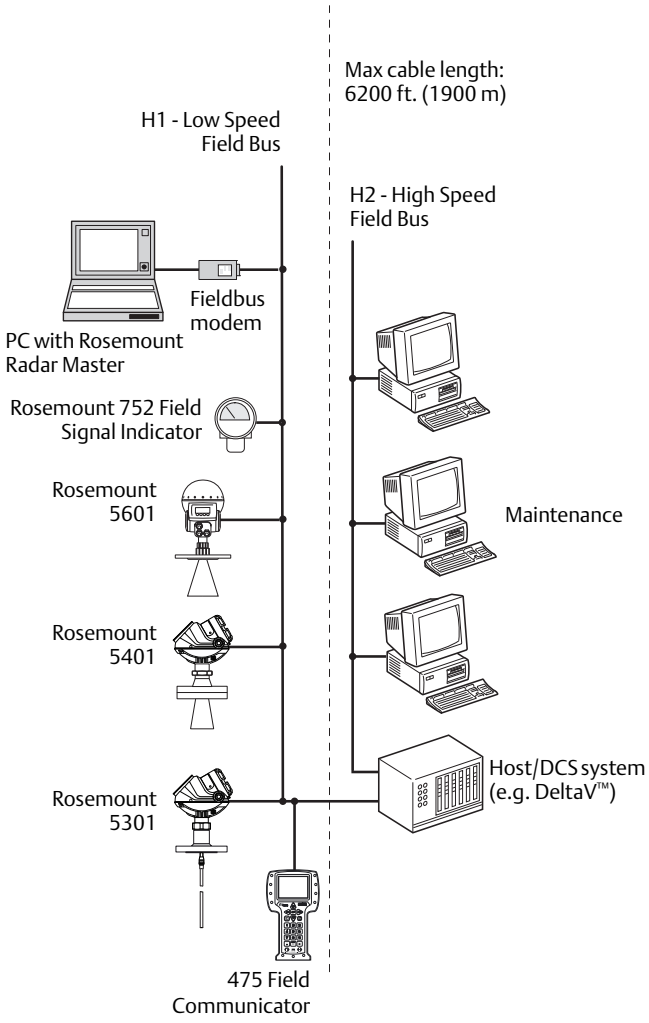

External power supply[1]

Approval type	Input voltage (U_i)
None	9 - 32 Vdc
Non-sparking/Energy Limited	9 - 32 Vdc
Intrinsically Safe	9 - 30 Vdc
FISCO	9 - 17.5 Vdc
Explosion-proof/Flameproof	16 - 32 Vdc

For Explosion-proof/Flameproof installations the Rosemount 5300 Level Transmitters have a built-in barrier; no external barrier needed.[2]

Quiescent current draw

22 mA

Blocks and execution time

Block	Execution time
1 Resource	N/A
3 Transducer	N/A
6 Analog Input (AI)	10 ms
1 Proportional/Integral/Derivate (PID)	15 ms
1 Signal Characterizer (SGCR)	10 ms
1 Integrator (INT)	10 ms
1 Arithmetic (ARTH)	10 ms
1 Input Selector (ISEL)	10 ms
1 Control Selector (CS)	10 ms
1 Output Splitter (OS)	10 ms

FOUNDATION Fieldbus class (Basic or Link Master)

Link Master (LAS)

FOUNDATION Fieldbus Instantiation

Yes

Conforming FOUNDATION Fieldbus

ITK 6.0.1

FOUNDATION Fieldbus alerts

- Field Diagnostics Alerts
- Plantweb Alerts

1. *Reverse polarity protection.*
2. *An external galvanic isolator is always recommended to be used for Flame-proof/Explosion-proof installations.*

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Modbus (output option code M)

Output

The RS-485 Modbus version communicates by Modbus RTU, Modbus ASCII, and Levelmaster protocols.


8 data bits, 1 start bit, 1 stop bit, and software selectable parity. Baud Rate: 1200, 2400, 4800, 9600 (default), and 19200 bits/s. Address Range: 1 to 255 (default device address is 246).

HART communication is used for configuration via the HART terminals or tunneling via the RS-485.

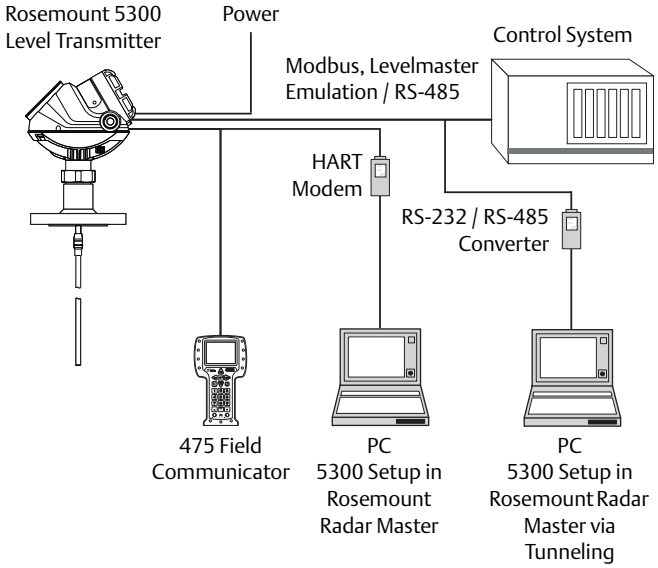

External power supply[1]

The input voltage U_i for Modbus is 8-30 Vdc (max. rating)

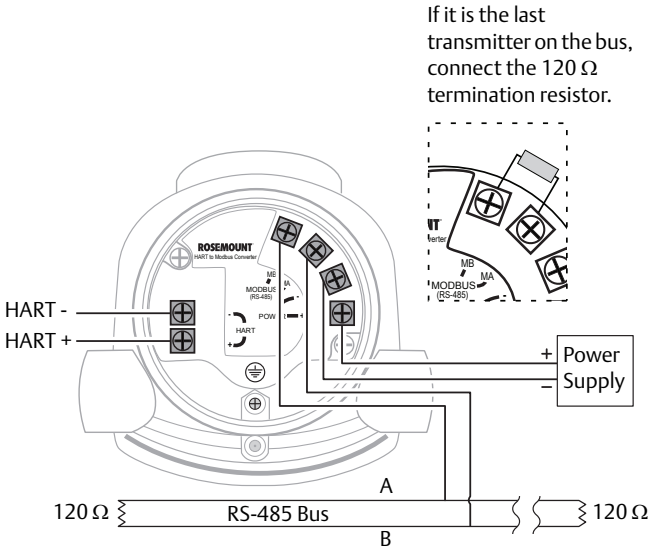

For Explosion-proof/Flameproof installations the Rosemount 5300 Level Transmitters have a built-in barrier; no external barrier needed.[2]

Power consumption

< 0.5 W (with HART address=1)

< 1.2 W (incl. four HART slaves)

Display and configuration

Integral display (option code M1)

The integral digital display can toggle between: level, distance, volume, internal temperature, interface distance, interface level, peak amplitudes, interface thickness, percentage of range, analog current out.

Note

The display cannot be used for configuration purposes.

Remote display

Data can be read from the optional integral display or remotely using the Rosemount 751 Field Signal Indicator for 4-20 mA / HART (see Product Data Sheet), or the Rosemount 752 Remote Indicator for FOUNDATION Fieldbus (see Product Data Sheet).

Configuration tools

- Rosemount Radar Master (included in the delivery)
- Device Descriptor (DD) based systems, e.g. AMS Device Manager, 475 Field Communicator, and DeltaV
- Device Type Manager (DTM) based systems (compliant with version 1.2 of the FDT/DTM specification), supporting configuration in for instance Yokogawa Fieldmate/PRM, E+H FieldCare®, and PACT*ware*

Output units

- Level, Interface and Distance: ft., in., m, cm, or mm
- Level Rate: ft./s, m/s, in./min, m/h
- Volume: $ft.^3$, $in.^3$, US gals, Imp gals, barrels, yd^3, m^3, or liters
- Temperature: °F and °C

1. *Reverse polarity protection.*

2. *An external galvanic isolator is always recommended to be used for Explosion-proof/Flameproof installations.*

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Output variables

	5301	5302	5303	PV, SV, TV, QV
Level	✓	✓	✓	✓
Distance to Level (Ullage)	✓	✓	✓	✓
Level Rate	✓	✓	✓	✓
Signal Strength	✓	✓	✓	✓
Volume	✓	✓	✓	✓
Internal Temperature	✓	✓	✓	✓
Interface Level	(✓)(1)	✓	N/A	✓
Interface Distance	(✓)(1)	✓	N/A	✓
Interface Level Rate	(✓)(1)	✓	N/A	✓
Interface Signal Strength	(✓)(1)	✓	N/A	✓
Upper Layer Thickness	(✓)(1)	✓	N/A	✓
Lower Volume	(✓)(1)	✓	N/A	✓
Upper Volume	(✓)(1)	✓	N/A	✓
Signal Quality	✓	✓	✓	(✓)(2)
Surface/Noise Margin	✓	✓	✓	(✓)(2)
Vapor DC	✓	N/A	N/A	(✓)(2)
Analog Output Current(3)	✓	✓	✓	N/A
% of Range(4)	✓	✓	✓	N/A

1. Interface measurement only for fully submerged probe, see page 36.
2. Not available as primary variable.
3. LCD display variable only. Not available for FOUNDATION Fieldbus, Modbus Signal Output, or for HART units in fixed current mode.
4. LCD display variable only. Not available for FOUNDATION Fieldbus Signal Output.

Damping

0-60 s (2 s, default value)

Diagnostics

General


Transmitter diagnostics with alerts include hardware and software errors, electronics temperature, probe missing, and invalid measurement and configuration error diagnostics. In addition to this, echo curve and variable logging including signal strength facilitate easy on-line troubleshooting.

Diagnostics Suite (option code D01 or DA1)

Signal Quality Metrics - Diagnostics package that monitors the relations between surface, noise, and threshold. The function can be used to detect abnormal conditions in the process such as probe contamination or sudden loss of signal strength. Signal Quality Metrics parameters are available as Output Variables in Rosemount Radar Master, and can be sent to Distributed Control System (DCS) to trigger an alarm.

Verification reflector (option code HL1, HL2, or HL3)

The reflector, which is available with single lead flexible probes, is used to test and continuously verify that the transmitter is functioning properly in both tank and chamber/pipe installations. Compared to traditional diagnostics that only monitor the transmitter electronics, the reflector can also be used to diagnose the upper parts of the probe inside the tank (e.g. build-up, corrosion monitoring and other process related conditions).

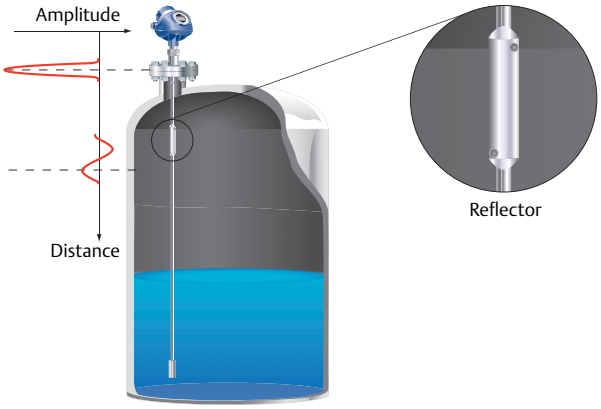

The primary use-cases for the reflector are:

- Verification of transmitter and probe (i.e. proof-testing)
- High level supervision (i.e. continuous monitoring of high level condition)

Verification

During commissioning, the location and amplitude characteristics of the reflector are stored in the transmitter. When the test procedure is later initiated, the stored reflector data is compared to the current measurement to verify the integrity of the measurement electronics and upper part of the probe.

During the test, the transmitter will output a level corresponding to the reflector position, which can be used to verify the integrity of the transmitter output.

High level supervision

Additionally, the reflector's unique echo characteristics aid the transmitter to locate a liquid surface above the reflector, thereby offering increased reliability to detect high level conditions at a user selectable limit.

The transmitter continuously monitors the status of the reflector and abnormal conditions generate alarms and alerts as appropriate.

Limitations for verification reflector

- Not to be used in fully submerged applications
- Minimum dielectric constant: 2.4 (for code HL1)
  2.0 (for codes HL2 and HL3)


For more information and installation requirements, refer to the Rosemount 5300 High Level Supervision Manual Supplement.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Process temperature and pressure rating

Figure 1 gives the maximum process temperature (measured at the lower part of the flange or threaded connection) and pressure rating for tank connections:

- Standard (model code S)
- HTHP - High Temperature and High Pressure (model code H)
- HP - High Pressure (model code P)
- C - Cryogenic temperature (model code C)

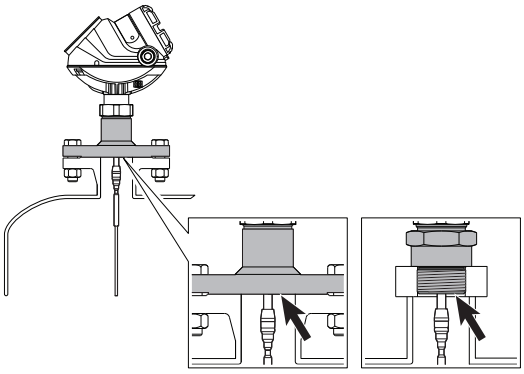

For standard tank connection, final rating may be lower depending on flange, material of construction, and O-ring selection. The following table gives the temperature ranges for standard tank seals with different O-ring materials.

O-ring material	Temperature °F (°C) in air	
	Min.[1]	Max.
Viton Fluoroelastomer	5 (-15)	302 (150)
Ethylene Propylene (EPDM)	-40 (-40)	266 (130)
Kalrez 6375 Perfluoroelastomer	14 (-10)	302 (150)
Nitrile Butadiene (NBR)	-31 (-35)	230 (110)


1. The O-ring can be stored at lower temperatures (refer to "Storage temperature" on page 33).

Note
Always check the chemical compatibility of the O-ring material with your application. If the O-ring material is not compatible with its chemical environment, the O-ring may eventually malfunction.


No wetted O-rings are used in the HTHP, HP, and C versions. Final rating may be lower depending on flange and material of construction selection.

Figure 1. Process Temperature and Pressure - Max Rating


Standard tank connections

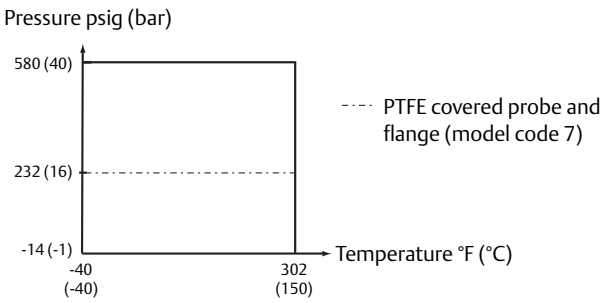


HTHP tank connections

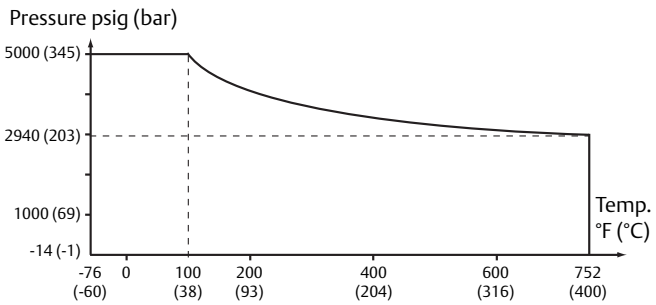

HP tank connections

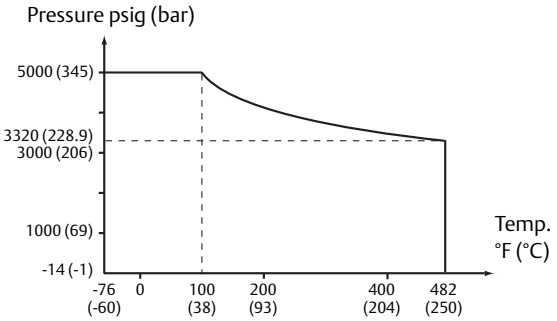


C tank connections

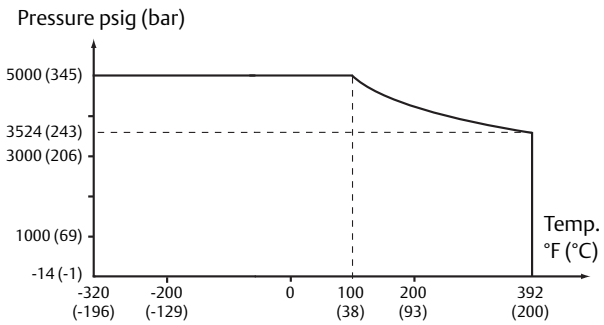

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ambient temperature

The maximum and minimum ambient temperature for the electronics depends on the process temperature (as described by the graph below) and on the approval (see "Product Certifications" on page 52).

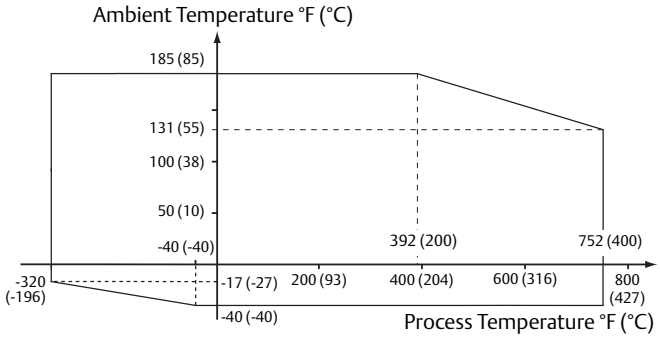

Note
Nozzle insulation for the HTHP version (Operating Temperature and Pressure code H) should not exceed 4 in. (10 cm).

Note
The temperature range for the optional Integral Display is -4 °F to 158 °F (-20 °C to 70 °C).

Note
In applications where the ambient temperature exceeds the limits of the electronics, a Remote Mounting connection can be used. The maximum temperature for the Remote Mounting connection at the vessel connection point is 302 °F (150 °C).

Storage temperature

-58 °F to 194 °F (-50 °C to 90 °C)
With Integral Display: -40 °F to 185 °F (-40 °C to 85 °C)

Flange rating

The flanges, except the Fisher and Masoneilan flanges, are triple certified for the materials 316, 316L, and EN 1.4404.

ASME flange rating

316 SST up to Class 1500 flanges according to ASME B16.5 Table 2-2.2 and 316L SST for Class 2500 flanges according to ASME B16.5 Table 2-2.3:

- Standard: Max. 302 °F/580 psig (150 °C/40 Bar)
- HP: Class 2500 up to max 482 °F (250 °C)
- C: Class 2500 up to max 392 °F (200 °C)
- HTHP: Class 2500 up to max 752 °F (400 °C)

Alloy C-276 (UNS N10276) flanges according to ASME B16.5 Table 2-3.8:

- Standard: Max. 302 °F/580 psig (150 °C/40 Bar)
- HP: Class 1500 up to max 482 °F (250 °C)
- HTHP: Class 1500 up to max 752 °F (400 °C)

Duplex 2205 (UNS S31803) flanges according to ASME B16.5 table 2-2.8:

- Standard: Max. 302 °F/580 psig (150 °C/40 Bar)
- HP: Class 1500, -51 °F (-46 °C) up to max 482 °F (250 °C)
- HTHP: Class 1500, -51 °F (-46 °C) up to max 599 °F (315 °C)

EN flange rating

EN 1.4404 according to EN 1092-1 material group 13E0:

- Standard: Max. 302 °F/580 psig (150 °C/40 Bar)
- HP: PN 320 up to max 482 °F (250 °C)
- C: PN 320 up to max 392 °F (200 °C)
- HTHP: PN 320 up to max 752 °F (400 °C)

Alloy C-276 (UNS N10276) flanges according to EN 1092-1 material group 12E0:

- Standard: Max. 302 °F/580 psig (150 °C/40 Bar)
- HP: PN 320 up to max 482 °F (250 °C)
- HTHP: PN 320 up to max 752 °F (400 °C)

Duplex 2205 (EN 1.4462) flanges according to EN 1092-1 material group 16E0:

- Standard: Max. 580 psig (40 Bar), -22 °F (-30 °C) up to max 302 °F (150 °C)[(1)]
- HP: PN 320, -22 °F (-30 °C) up to max 482 °F (250 °C)[(1)]
- HTHP: PN 320, -22 °F (-30 °C) up to max 482 °F (250 °C)[(1)]

1. *Minimum temperature limit due to EN13445-2.*

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Fisher and Masoneilan flange rating

316 SST according to ASME B16.5 Table 2-2.2:

- Standard: Max. 302 °F/580 psig (150 °C/40 Bar)
- HP: Class 600 up to max 250 °C
- C: Class 600 up to max 200 °C
- HTHP: Class 600 up to max 400 °C

JIS flange rating

316 SST according to JIS B2220 material group 2.2:

- Standard: Max. 302 °F/580 psig (150 °C/40 Bar)
- HP: Max. temp. 250 °C. Final rating depends on flange.
- C: Max. temp. 200 °C. Final rating depends on flange.
- HTHP: Max. temp. 400 °C. Final rating depends on flange.

Plate design

Certain models of flanged alloy and PTFE covered probes have a tank connection design with a protective flange plate of the same material as the probe and with a backing flange in 316L / EN 1.4404. The protective flange plate prevents the backing flange from being exposed to the tank atmosphere.

Flange rating according to SST backing flange ASME B16.5 Table 2-2.3, EN 1092-1 material group 13E0, and JIS B2220 material group 2.3.

Alloy C-276 protective plate:

- Standard: Max. 302 °F/580 psig (150 °C/40 Bar). Flange plate design is available up to Class 300/PN 40
- HP: Max. temp. 250 °C. Flange plate design is available up to Class 600/PN 63
- HTHP: Max. temp. 400 °C. Flange plate design is available up to Class 600/PN 63

Alloy 400 protective plate:

- Standard: Max. 302 °F/580 psig (150 °C/40 Bar). Flange plate design is available up to Class 300/PN 40

PTFE protective plate:

- Standard: Max. 302 °F/232 psig (150 °C/16 Bar)

Tri Clamp rating

Maximum pressure is 16 bar for 1½-in. (37.5 mm) and 2-in. (50 mm) housing; and 10 bar for 3-in. (75 mm) and 4-in. (100 mm) housing. The final rating depends on the clamp and gasket. Tri Clamp is available for the Standard Temperature and Pressure seal.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Conditions used for flange strength calculations

316/316L SST flanges

	Bolting material	Gasket		Flange material	Hub material
		Standard/HP/HTHP/C	HP/HTHP/C		
ASME	Stainless steel SA193 B8M Cl.2	Soft (1a) with min. thickness 1.6 mm	Spiral wound gasket with nonmetallic filler (1b)	Stainless steel A182 Gr. F316 and EN 10222-5-1.4404	Stainless steel SA479M 316, and EN 10272-1.4404
EN, JIS	EN 1515-1/-2 group 13E0, A4-70.	Soft (EN 1514-1) with min. thickness 1.6 mm	Spiral wound gasket with nonmetallic filler (EN 1514-2)		

Process connection with plate design

	Bolting material	Gasket		Flange material	Hub material
		Standard/HP/HTHP	HP/HTHP		
ASME	Stainless steel SA193 B8M Cl.2	Soft (1a) with min. thickness 1.6 mm	Spiral wound gasket with nonmetallic filler (1b)	Stainless steel A182 Gr. F316L/F316 and EN 10222-5-1.4404	SB574 Gr. N10276 or SB164 Gr. N04400
EN, JIS	EN 1515-1/-2 group 13E0, A4-70.	Soft (EN 1514-1) with min. thickness 1.6 mm	Spiral wound gasket with nonmetallic filler (EN 1514-2)		

Alloy C-276 flanges

	Bolting material	Gasket		Flange material	Hub material
		Standard/HP/HTHP	HP/HTHP		
ASME	UNS N10276	Soft (1a) with min. thickness 1.6 mm	Spiral wound gasket with nonmetallic filler (1b)	SB462 Gr. N10276 (solution annealed condition) or SB575 Gr. N10276 (solution annealed condition)	SB574 Gr. N10276
EN, JIS		Soft (EN 1514-1) with min. thickness 1.6 mm	Spiral wound gasket with nonmetallic filler (EN 1514-2)		


Duplex 2205 flanges

	Bolting material	Gasket		Flange material	Hub material
		Standard/HTHP	HP/HTHP		
ASME	A193 B7 or A320 L7	Soft (1a) with min. thickness 1.6 mm	Spiral wound gasket with nonmetallic filler (1b)	Duplex stainless steel SA/A182 F51 and EN10222-5-1.4462 or SA/A240 Gr. S31803 and EN10028-7-1.4462	Stainless steel SA479M S31803 and EN 10272-1.4462
EN, JIS	Bumax® 88	Soft (EN 1514-1) with min. thickness 1.6 mm	Spiral wound gasket with nonmetallic filler (EN 1514-2)		

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Interface measurements

The Rosemount 5302 is a good choice for measuring the interface of oil and water, or other liquids with significant dielectric differences. It is also possible to measure interfaces with a Rosemount 5301 in applications where the probe is fully submerged in the liquid.

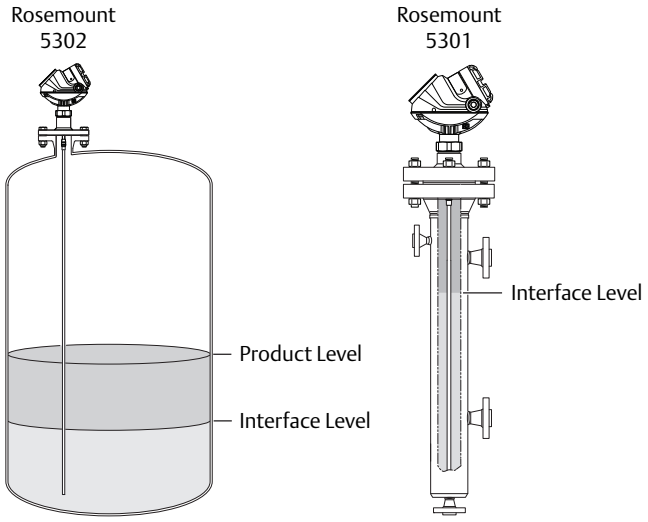

If interface is to be measured, follow these criteria:

- The dielectric constant of the upper product should be known and should not vary. The Radar Master software has a built-in dielectric constant calculator to help the user estimate the upper product dielectric constant.
- The dielectric constant of the upper product must have a smaller dielectric constant than the lower product.
- The difference between the dielectric constants for the two products must be larger than 6.
- The maximum dielectric constant for the upper product is 7 for the single lead probes, 10 for the coaxial, and 8 for the twin lead probes.
- The upper product thickness must be larger than 5.1 in. (0.13 m) for all probes, except the HTHP coaxial probe, which requires 8 in. (0.2 m) to distinguish echoes from the two liquids.
- Sometimes there is an emulsion layer (mix of the products) between the two products which can affect interface measurements. For guidelines on emulsion, consult your local Emerson representative.

For information on the maximum allowable product thickness and measuring range, see "Interface measuring range" on page 43.

For additional information, see the Guided Wave Radar Interface Measurement Technical Note.

Solids measurements

Rosemount 5303 with a flexible single lead probe is a good choice for measuring solids, such as powders, granulates, or pellets with a grain size of up to 0.8 in. (20 mm). The measurement is made where the probe comes in contact with the material, which means that the shape of the material surface is not critical for the measurement. Measurements are also independent of moisture and material fluctuations such as density and temperature.

The following should be kept in mind:

- In solid applications, media may cause down-pull forces on silo roofs. The silo roof must be able to withstand the probe collapse load, or at least the maximum probe tensile load.
- The tensile load depends on the silo size, material density, and the friction coefficient. Forces increase with the buried length, the silo, and probe diameter. In critical cases, such as products with a risk of build-up, probe for high physical weight loads are available.
- Forces on probes, depending on their position, are generally two to ten times greater on probes with a tie-down than on probes with ballast weights.
- For environments where electrostatic discharges (plastics) are likely to occur, grounding of the probe and vessel may be required.

Note
Abrasive media can wear out the probe, so consider using non-contacting radar.

For more information, refer to the Measuring Level and Volume of Solid Materials Technical Note.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


High pressure steam applications

Considerations


Saturated steam under high pressure can influence radar level transmitter measurements. Rosemount 5301 with Dynamic Vapor Compensation will automatically compensate for this and maintain the level accuracy.

- Probe type 3V (for 3- to 4-in. chambers) or 4U (for 2-in. chambers) must be used.
- Mount in a 2-, 3-, or 4-in. bypass chamber with flanges appropriately sized for the pressure and temperature of the application.
- Dynamic Vapor Compensation requires a minimum distance from the flange to the surface level in order to measure the change in the vapor dielectric constant. If the level rises within this area, the unit switches over to static compensation, using the last known vapor dielectric constant.


Probe Type 3V

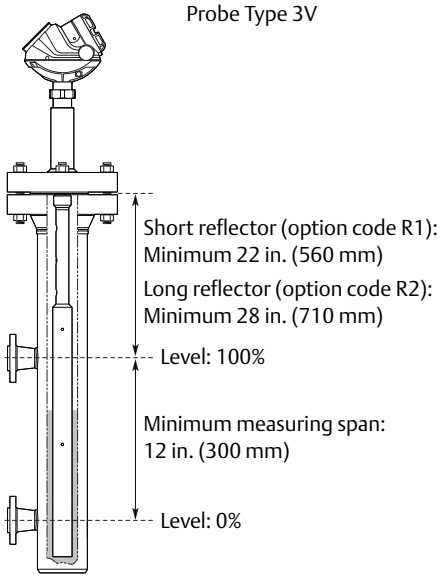

Probe Type 4U

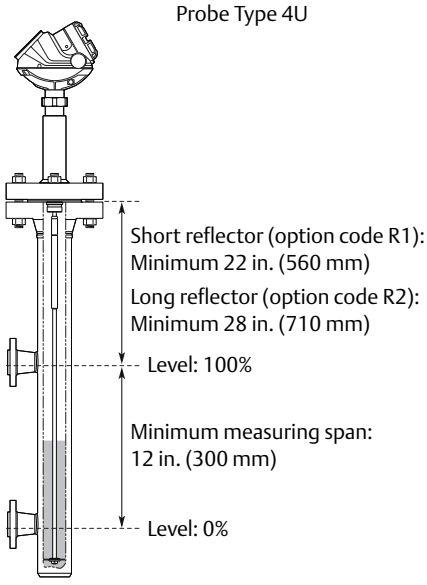

- If a Rosemount 5300 Level Transmitter is ordered together with a Rosemount 9901 Chamber, these space requirements are met by using the option code G1or G2 for the chamber. G1 is used with the short reference reflector and G2 is used with the long reference reflector. If an existing chamber is used which does not meet these space requirements, a spool piece can be added.

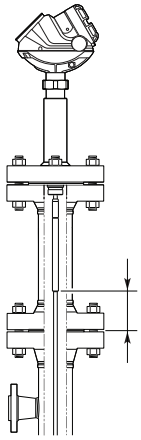

For the 4U probe, the spool piece needs to be at least 2 in. (50 mm) longer or shorter than the reference reflector.

For a spool piece with the 3V probe, this is not a requirement.

- Always ensure there are no disturbances from inlets close to the reference reflector end when using probe type 4U.

Select reference reflector

- The long reflector, 20 in. (500 mm), has the best accuracy and is recommended for all chambers where the dimensions of the chamber allow for it.
- If the distance from the flange to the upper inlet is less than 28 in. (710 mm), the short reflector should be chosen. This distance is a minimum when dynamic compensation is required within the whole measuring range from the lower to the upper inlet. If this is not required, the long reflector can be used and dynamic compensation is possible up to 28 in. (710 mm) from the flange.

For more information, refer to the Using Guided Wave Radar for Level in High Pressure Steam Applications Technical Note.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Performance specifications

General

Reference conditions

Single Standard probe, 77 °F (25 °C) in water (DC=80) and ambient pressure in a 4" pipe using Trim Near Zone function.

Reference accuracy[1]

± 0.12 in. (3 mm) or 0.03% of measured distance, whichever is greatest

Repeatability

± 0.04 in. (1 mm)

Ambient temperature effect

± 0.008 in. (0.2 mm) /°K or ± 30 ppm/°K of measured value, whichever is greatest

Electromagnetic interference effect[2][3][4]

- Shielded cable: ± 0.2 in. (5 mm)
- Unshielded cable: ± 2 in. (50 mm)

Update interval

Minimum 1 update per second

Environment

Vibration resistance

- Aluminum housing: Level 1 IEC 60770-1/IEC 61298-3 ed 1 chapter 7
- Stainless Steel housing: IACS E10

Electromagnetic compatibility[5]

Emission and Immunity: EMC directive 2004/108/EC, EN61326-1:2006 and EN61326-3-1:2006. NAMUR recommendations NE21

CE-mark

Complies with applicable directives (EMC, ATEX)

Built-in lightning protection

EN 61326, IEC 61000-4-5, level 2kV (6kV with T1 terminal block)

Contamination/product build-up

- Single lead probes are preferred when there is a risk of contamination (because build-up can result in the product bridging across the two leads for twin versions; between the inner lead and outer pipe for the coaxial probe).
- For viscous or sticky applications, PTFE probes are recommended. Periodic cleaning may also be required.
- For viscous or sticky applications, it is not recommended to use centering discs mounted along the probe.
- Signal Quality Metrics (option code D01, or DA1) can be used in determining when to clean the probe. Transmitters equipped with the Diagnostics Suite option can calculate Signal Quality Metrics.
- Maximum error due to contamination is 1-10% depending on probe type, dielectric constant, contamination thickness and contamination height above product surface.

Maximum recommended viscosity and contamination/build-up

	Coaxial	Twin lead	Single lead
Maximum viscosity	500 cP	1500 cP	8000 cP [1][2][3]
Contamination/ build-up	Not recommended	Thin build-up allowed, but no bridging	Build-up allowed

1. Consult your local Emerson representative in the case of agitation/turbulence and high viscous products.
2. Be cautious in HTHP viscous or crystallizing media applications where temperature at instrument connection is significantly lower than process temperature with risk of coating in the upper part of probe that may reduce the measurement signal. Consider using HP or STD probes in such applications.
3. For viscous or sticky applications, it is not recommended to use centering discs mounted along the probe.

1. *For probes with spacers, the accuracy may deviate close to the spacers. Accuracy may be affected by remote housing.*
2. *Deviation through electromagnetic interference according to EN 61326.*
3. *For FOUNDATION Fieldbus units it may be required to ground the signal cable shield at the power supply and transmitter to achieve optimum performance.*
4. *Thresholds may need to be adjusted, see section "Threshold settings" of the Rosemount 5300 Reference Manual for general guidelines on manual threshold settings.*
5. *Namur NE21 not available with option code QT.*

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Measuring range

See Table 4 for each probe's measuring range and minimum dielectric constant. Due to the measuring range depending on the application and factors described below, the values are a guideline for clean liquids. For more information, ask your local Emerson representative.

Note
For Remote Housing, see Table 5 on page 40 for the maximum recommended measuring range for different Remote Housing lengths, installation types, Dielectric Constants, and probe types.

Different parameters (factors) affect the echo and therefore the maximum measuring range differs depending on application according to:

- Disturbing objects close to the probe.
- Media with higher dielectric constant (e_r) gives better reflection and allows a longer measuring range.
- Surface foam and particles in the tank atmosphere may affect measuring performance.
- Heavy coating or contamination on the probe should be avoided since it can reduce measuring range and might cause erroneous level readings.

Table 4. Measuring Range and Minimum Dielectric Constant

	Rigid single lead/ segmented rigid single lead	Flexible single lead[2]	Coaxial	Rigid twin lead	Flexible twin lead
Maximum measuring range	9 ft. 10 in. (3 m) for 8 mm probes (code 4A) 19 ft. 8 in. (6 m) for 13 mm probes (code 4B) 32 ft. 9 in. (10 m) for 13 mm probes (code 4S)	164 ft. (50 m)[1]	19 ft. 8 in. (6 m)	9 ft. 10 in. (3 m)	164 ft. (50 m)
Minimum dielectric constant	1.4 (Std) (1.25 if installed in a metallic bypass or stilling well)[2][3] 1.6 (HP/HTHP/C) (1.4 if installed in a metallic bypass or stilling well)[2][3]	1.4 (Std), up to 49 ft. (15 m)[2] 1.6 (HP/HTHP/C), up to 49 ft. (15 m)[2] (Std/HP/HTHP/C) 1.8, up to 82 ft. (25 m)[2] 2.0, up to 115 ft. (35 m)[2][4] 3, up to 138 ft. (42 m) 4, up to 151 ft. (46 m) 6, up to 164 ft. (50 m)	1.2 (Std) 1.4 (HP/C) 2.0 (HTHP)	1.4 (Std)	(Std) 1.4, up to 82 ft. (25 m)[2] 2.0, up to 115 ft. (35 m)[2] 2.5, up to 131 ft. (40 m)[2] 3.5, up to 148 ft. (45 m) 6, up to 164 ft. (50 m)

1. Maximum measuring range for Duplex 2205 probes type 5A and 5B is 105 ft. (32 m).
2. Probe end projection software function will improve the minimum measurable dielectric constant. Consult the factory for details.
3. May be lower depending on installation.
4. Up to 49 ft. (15 m) for Duplex 2205 probes type 5A and 5B.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 5. Remote Housing Measuring Range

		Dielectric constant	Rigid single 8 mm	Rigid single 13 mm/ segmented rigid single	Flexible single	Coaxial	Rigid twin	Flexible twin
1 m remote housing	Chamber / pipe installations ≤ 4 in. (100 mm)	1.4	4 ft. (1.25 m)	19 ft. (6 m)(1)	33 ft. (10 m)(1)(2)	19 ft. (6 m)	10 ft. (3 m)(1)	33 ft. (10 m)(1)(2)
		2	10 ft. (3 m)(1)	19 ft. (6 m)(1)	33 ft. (10 m)(1)(2)	19 ft. (6 m)	10 ft. (3 m)(1)	33 ft. (10 m)(1)(2)
		80	10 ft. (3 m)	19 ft. (6 m)(1)	33 ft. (10 m)(1)(2)	19 ft. (6 m)	10 ft. (3 m)(1)	33 ft. (10 m)(1)(2)
	Tank installations	1.4	4 ft. (1.25 m)	4 ft. (1.25 m)	4 ft. (1.25 m)	19 ft. (6 m)	4 ft. (1.25 m)	4 ft. (1.25 m)
		2	4 ft. (1.25 m)	4 ft. (1.25 m)	4 ft. (1.25 m)	19 ft. (6 m)	4 ft. (1.25 m)	98 ft. (30 m)(1)
		80	10 ft. (3 m)(1)	10 ft. (3 m)(1)	159 ft. (48.5 m)(1)	19 ft. (6 m)	10 ft. (3 m)(1)	159 ft. (48.5 m)(1)
2 m remote housing	Chamber / pipe installations ≤ 4 in. (100 mm)	1.4	9 ft. (2.75 m)	19 ft. (6 m)(1)	33 ft. (10 m)(1)(2)	19 ft. (6 m)	10 ft. (3 m)(1)	33 ft. (10 m)(1)(2)
		2	10 ft. (3 m)(1)	19 ft. (6 m)(1)	33 ft. (10 m)(1)(2)	19 ft. (6 m)	10 ft. (3 m)(1)	33 ft. (10 m)(1)(2)
		80	10 ft. (3 m)	19 ft. (6 m)	33 ft. (10 m)(1)(2)	19 ft. (6 m)	10 ft. (3 m)(1)	33 ft. (10 m)(1)(2)
	Tank installations	1.4	9 ft. (2.75 m)	9 ft. (2.75 m)	9 ft. (2.75 m)	19 ft. (6 m)	9 ft. (2.75 m)	9 ft. (2.75 m)
		2	9 ft. (2.75 m)	9 ft. (2.75 m)	9 ft. (2.75 m)	19 ft. (6 m)	9 ft. (2.75 m)	98 ft. (30 m)(1)
		80	10 ft. (3 m)(1)	10 ft. (3 m)(1)	154 ft. (47 m)(1)	19 ft. (6 m)	10 ft. (3 m)(1)	154 ft. (47 m)(1)
3 m remote housing	Chamber / pipe installations ≤ 4 in. (100 mm)	1.4	10 ft. (3 m)	19 ft. (6 m)	33 ft. (10 m)(1)(2)	19 ft. (6 m)	10 ft. (3 m)(1)	33 ft. (10 m)(1)(2)
		2	10 ft. (3 m)	19 ft. (6 m)	33 ft. (10 m)(1)(2)	19 ft. (6 m)	10 ft. (3 m)(1)	33 ft. (10 m)(1)(2)
		80	10 ft. (3 m)	19 ft. (6 m)	33 ft. (10 m)(1)(2)	19 ft. (6 m)	10 ft. (3 m)(1)	33 ft. (10 m)(1)(2)
	Tank installations	1.4	10 ft. (3 m)	14 ft. (4.25 m)	14 ft. (4.25 m)	19 ft. (6 m)	10 ft. (3 m)(1)	14 ft. (4.25 m)
		2	10 ft. (3 m)	14 ft. (4.25 m)	14 ft. (4.25 m)	19 ft. (6 m)	10 ft. (3 m)(1)	98 ft. (30 m)(1)
		80	10 ft. (3 m)	19 ft. (6 m)(1)	149 ft. (45.5 m)(1)	19 ft. (6 m)	10 ft. (3 m)(1)	149 ft. (45.5 m)(1)

1. Accuracy may be affected up to ± 1.2 in. (30 mm).
2. Required chamber/pipe size is 3 or 4 in. (75 -100 mm).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Accuracy over measuring range

The measuring range depends on probe type, dielectric constant of the product and installation environment, and is limited by the Blind Zones at the very top and bottom of the probe. In the Blind Zones, the accuracy exceeds ±1.18 in. (30 mm), and measurements may not be possible. Measurements close to the Blind Zones will have reduced accuracy.

The following conditions will impact the Blind Zones:

- If the single lead probes or twin probes are installed in a nozzle, the nozzle height shall be added to the specified Upper Blind Zone.
- The measuring range for the PTFE covered Flexible Single Lead probe includes the weight when measuring on a high dielectric media.
- When using a metallic centering disc, the Lower Blind Zone is 8 in. (20 cm), including weight if applicable. When using a PTFE centering disc, the Lower Blind Zone is not affected.


Figure 2, Figure 3, and Figure 4 illustrate the accuracy over measuring range at reference condition with alternating probe types and varying dielectric constant of the product.

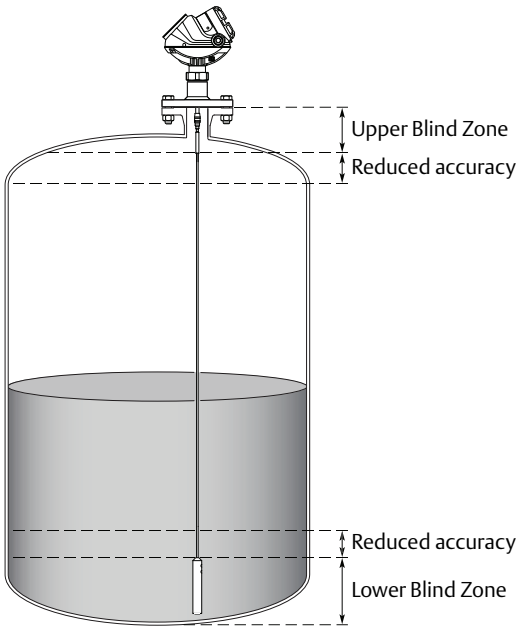

Note

Measurements may not be possible in the Blind Zones, and measurements close to the Blind Zones will have reduced accuracy. Therefore, the 4-20 mA points should be configured outside these zones.

Figure 2. Accuracy Over Measuring Range for Single Lead Probes (Rigid, Segmented Rigid, and Flexible)

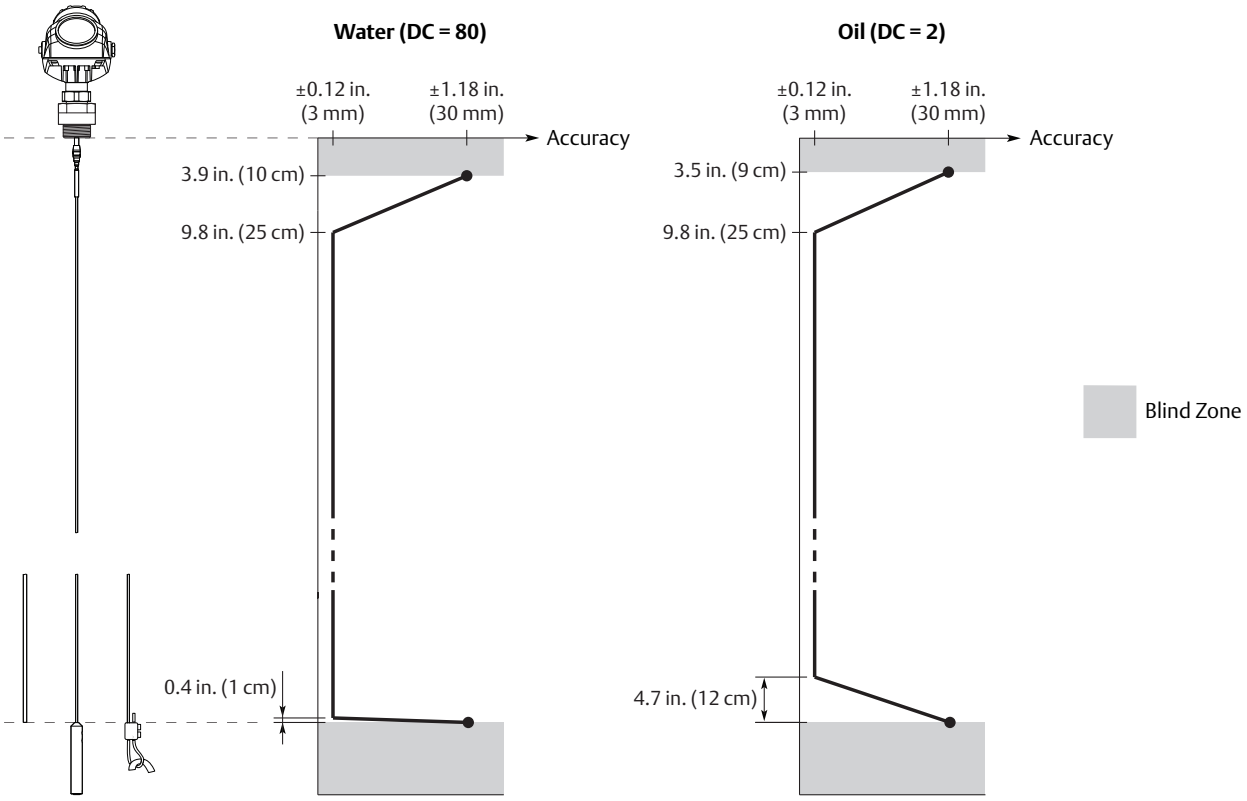

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figure 3. Accuracy Over Measuring Range for Coaxial Probe


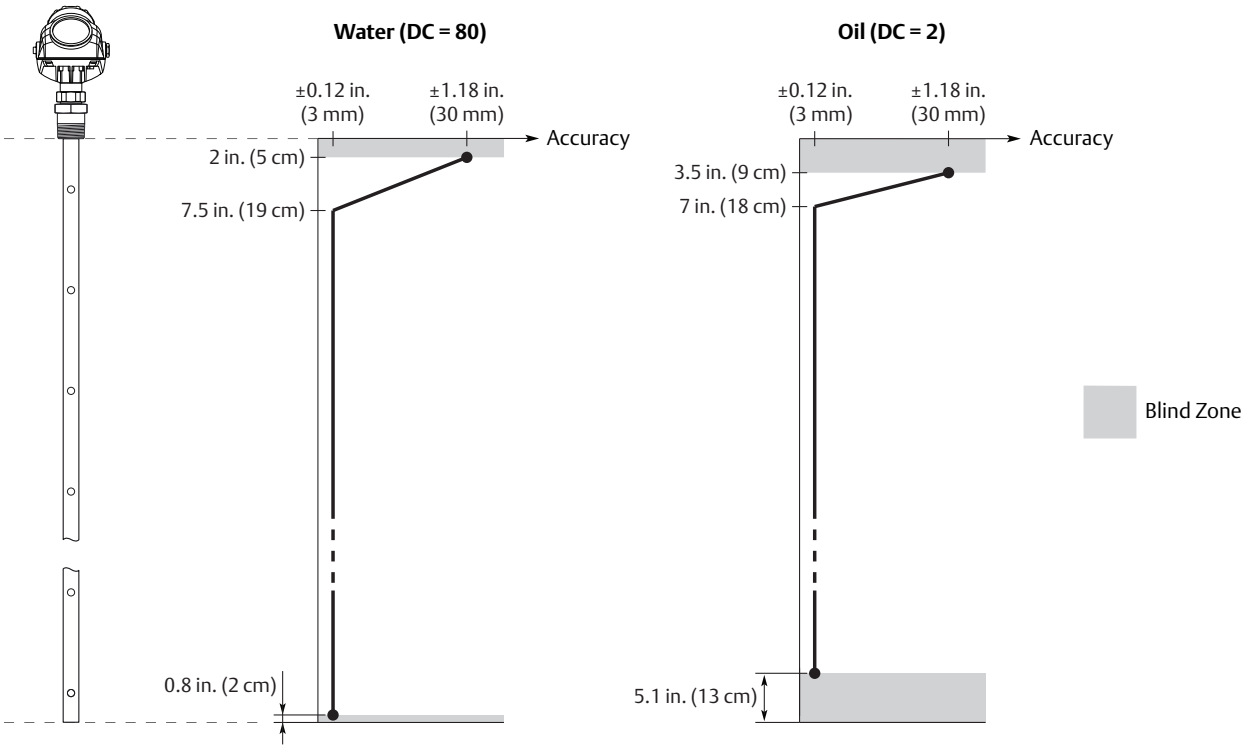


Figure 4. Accuracy Over Measuring Range for Twin Lead Probes

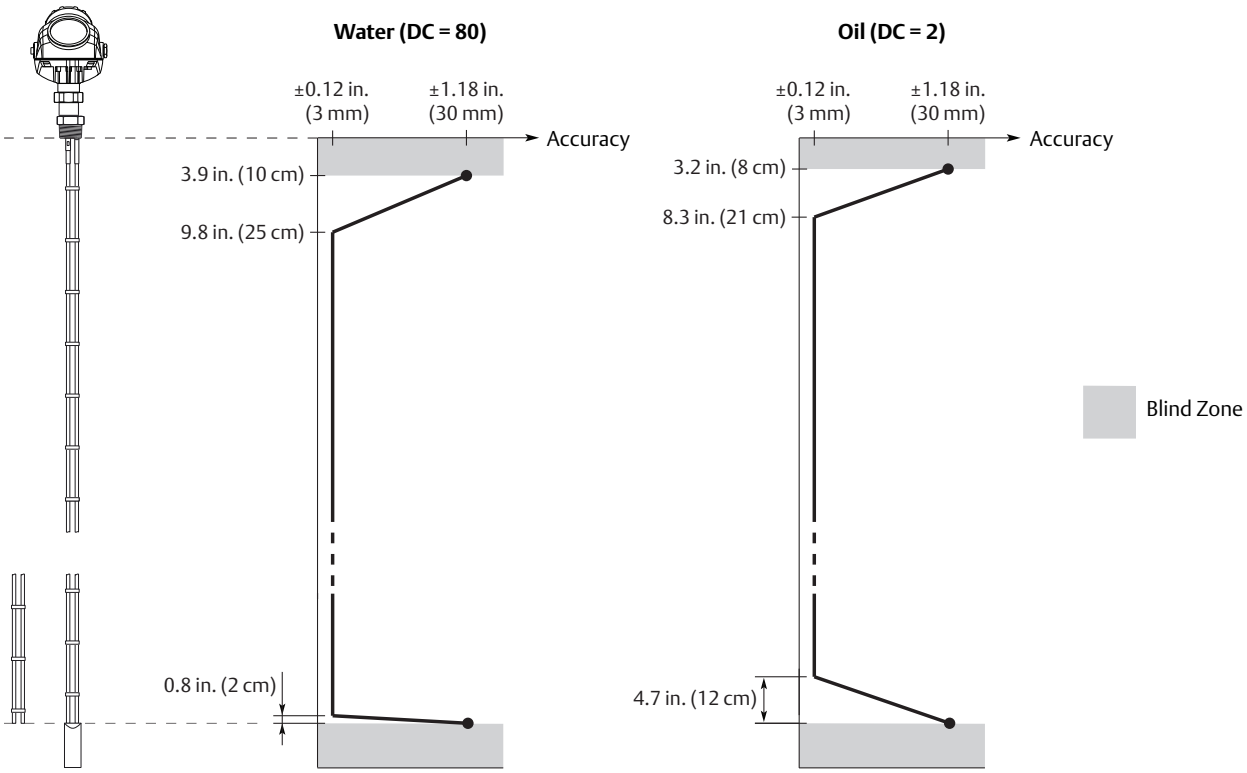

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Interface measuring range

The maximum allowable upper product thickness/measuring range is primarily determined by the dielectric constants of the two liquids.


Typical applications include interfaces between oil / oil-like and water / water-like liquids with a low (<3) dielectric constant for the upper product and a high (>20) dielectric constant for the lower product. For such applications, the maximum measuring range is limited by the length of the coaxial, rigid twin, and rigid single lead probes.

For flexible probes, the maximum measuring range is reduced by the maximum upper product thickness, according to the diagram below. The maximum interface distance is 164 ft. (50 m) minus the maximum product thickness. However, characteristics may vary between the different applications.

Maximum upper product thickness for the flexible single lead probe in ft. (m)

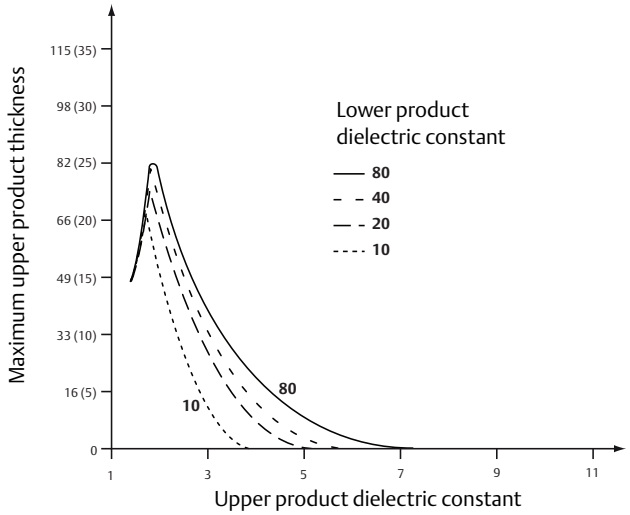

Maximum upper product thickness for the flexible twin lead probe in ft. (m)

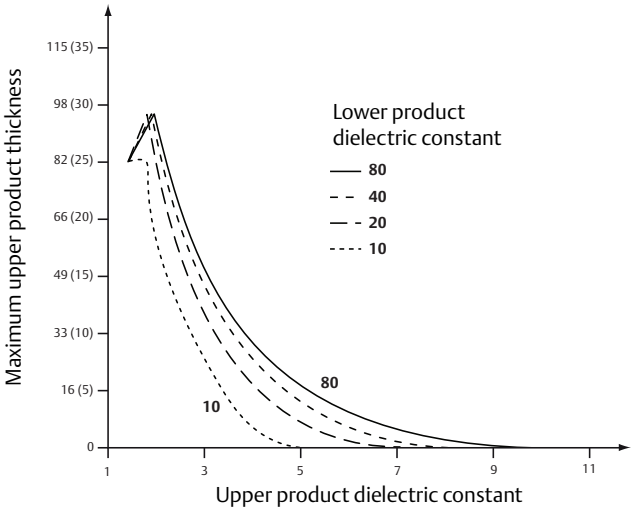

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Physical specifications

Material selection

Emerson provides a variety of Rosemount product with various product options and configurations including materials of construction that can be expected to perform well in a wide range of applications. The Rosemount product information presented is intended as a guide for the purchaser to make an appropriate selection for the application. It is the purchaser's sole responsibility to make a careful analysis of all process parameters (such as all chemical components, temperature, pressure, flow rate, abrasives, contaminants, etc.), when specifying product, materials, options and components for the particular application. Emerson is not in a position to evaluate or guarantee the compatibility of the process fluid or other process parameters with the product, options, configuration or materials of construction selected.

Housing and enclosure

Type

- Dual compartment (terminal compartment and the electronics are completely separated).
- Two entries for conduit or cable connections.
- The transmitter housing is separable from probe assembly.
- The transmitter housing can be rotated in any direction.

Electrical connection

½ - 14 NPT for cable glands or conduit entries.

Optional: M20 x 1.5 conduit / cable adapter, M12 4-pin male eurofast connector or A size Mini 4-pin male minifast connector.

Recommended output cabling is twisted shielded pairs, 24-12 AWG

Housing material

Polyurethane-covered Aluminum, or Stainless Steel Grade CF8M (ASTM A743)

Ingress protection

NEMA® 4X, IP 66, IP67

Factory sealed


Yes

Weight

- Aluminum transmitter head: 4.4 lb (2 kg)
- SST transmitter head: 10.8 lb (4.9 kg)

Remote housing mounting


Kit that includes a flexible armored extension cable and a bracket for wall or pipe mounting. See "Remote Housing (Option Code B1, B2, B3)" on page 75 for the dimensions.

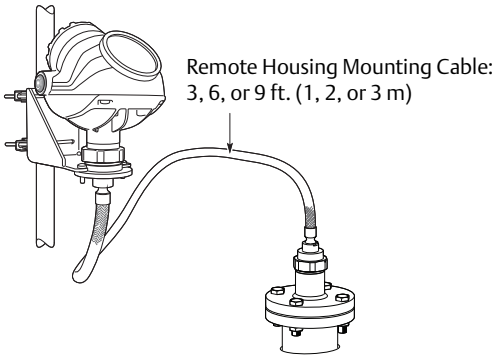

Tank connection

The tank connection consists of a tank seal, a flange, Tri Clamp, or NPT or BSP/G threads. See "Dimensional Drawings" on page 60.

Certain models of flanged alloy and PTFE covered probes have a tank connection design with a protective plate of the same material as the probe. This is to prevent the stainless steel flange from being exposed to the tank atmosphere.

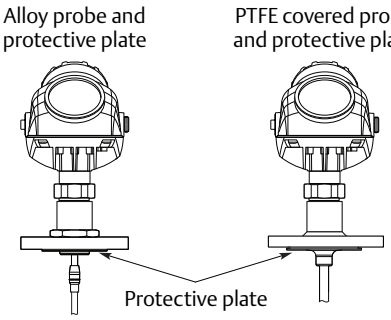

Flange dimensions

Follows ASME B 16.5, JIS B2220, and EN 1092-1 standards for blind flanges. For proprietary Fisher and Masoneilan flanges, see "Special flanges and flushing connection rings" on page 76.

Vented flanges

Available with Masoneilan and Fisher vented flanges. Vented flanges must be ordered as accessories with a 1½-in. NPT threaded process connection (code RA); see "Special flanges and flushing connection rings" on page 76. As an alternative to a vented flange, it is possible to use a flushing connection ring on top of the standard nozzle.

Pressure Equipment Directive (PED)

Complies with 2014/68/EU article 4.3

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Probes


Probe versions

Coaxial, Rigid Twin Lead, Rigid Single Lead, Segmented Rigid Single Lead, Flexible Twin Lead, and Flexible Single Lead. Probes can be ordered in different materials and options for extreme temperatures and pressure.

For guidelines on which probe to select depending on application, see the Guided Wave Radar Application Guidelines Technical Note.

Total probe length

This is defined from the upper reference point to the end of the probe (weight included, if applicable).

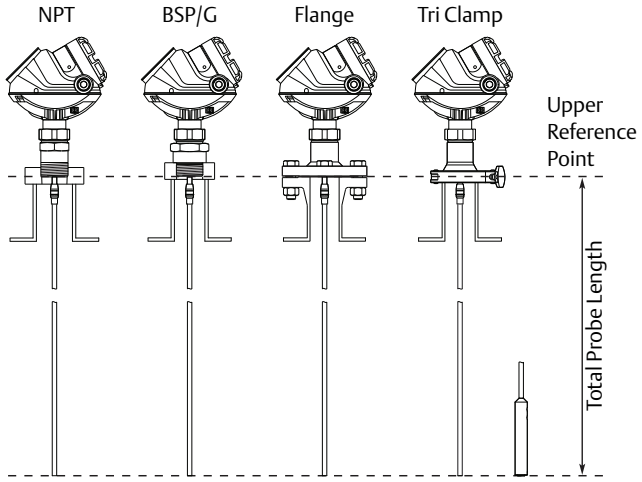

Select the probe length according to the required measuring range (the probe must be hung and fully extended through the entire distance where level readings are desired).

Cut-to-fit probes

Most of the probes can be cut in field. However, there are some restrictions for the standard and HP/C coaxial probes: these can be cut up to 2 ft. (0.6 m). Probes shorter than 4.1 ft. (1.25 m) can be cut to the minimum length of 1.3 ft. (0.4 m). The HTHP coaxial probe and the PTFE covered probes cannot be cut in the field.

Minimum and maximum probe length

Probe type	Probe length
Coaxial	1.3 to 19.7 ft. (0.4 to 6 m)
Rigid Twin Lead	1.3 to 9.8 ft. (0.4 to 3 m)
Flexible Twin Lead	3.3 to 164 ft. (1 to 50 m)
Rigid Single Lead (0.3 in./8 mm)	1.3 to 9.8 ft. (0.4 to 3 m)
Rigid Single Lead (0.5 in./13 mm)	1.3 to 19.7 ft. (0.4 to 6 m)
Segmented Rigid Single Lead	1.3 to 32.8 ft. (0.4 to 10 m)
Flexible Single Lead	3.3 to 164 ft. (1 to 50 m)

Probe angle

0 to 90 degrees from vertical axis

Note
Models with QT option code should not be installed in angled probe installations.

Tensile strength

- 0.16 in. (4 mm) Flexible Single Lead:
  SST: 2698 lb (12 kN)
  Alloy C-276: 1798 lb (8 kN)
  Alloy 400: 1124 lb (5 kN)
  Duplex 2205: 1349 lb (6 kN)
- 0.24 in. (6 mm) Flexible Single Lead SST: 6519 lb (29 kN)
- Flexible Twin Lead SST: 2023 lb (9 kN)

Collapse load

- 0.16 in. (4 mm) Flexible Single Lead:
  SST: 3597 lb (16 kN)
  Alloy C-276: 2023 lb (9 kN)
  Alloy 400: 1349 lb (6 kN)
  Duplex 2205: 1574 lb (7 kN)
- 0.24 in. (6 mm) Flexible Single Lead SST: 7868 lb (35 kN)

Sideway capacity

- Coaxial: 73.7 ft. lbf, 3.7 lb at 19.7 ft. (100 Nm, 1.67 kg at 6 m)
- Rigid Twin Lead: 2.2 ft. lbf, 0.22 lb at 9.8 ft. (3 Nm, 0.1 kg at 3 m)
- Rigid Single Lead/Segmented Rigid Single Lead: 4.4 ft. lbf, 0.44 lb at 9.8 ft. (6 Nm, 0.2 kg at 3 m)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Material exposed to tank atmosphere

Standard probe
(Operating Temperature and Pressure code S)

Material of construction code	Material
1 (probe types 6A and 6B)	316L SST (EN 1.4404), 316 SST[1], Duplex 2507 (UNS S32750/EN 1.4410), PTFE, PFA, and O-ring materials
1 (all other probe types)	316L SST (EN 1.4404), 316 SST[1], PTFE, PFA, and O-ring materials
2 and H	Alloy C-276 (UNS N10276), PTFE, PFA, and O-ring materials
3	Alloy 400 (UNS N04400), Alloy K500, PTFE, PFA, and O-ring materials
7	PTFE (1 mm PTFE cover)
8	PTFE, 316/316L SST (EN 1.4404), and O-ring materials
D	Duplex 2205 (UNS S31803/EN 1.4462), Duplex 2507 (UNS S32750/EN 1.4410), PTFE, PFA, and O-ring materials

1. For flexible single/twin lead probes only.

HTHP probe
(Operating Temperature and Pressure code H)

Material of construction code	Material
1	316L SST (EN 1.4404), 316 SST[1], Ceramic (Al2O3), Graphite, and Alloy 625
2 and H	Alloy C-276 (UNS N10276), Ceramic (Al2O3), Graphite, and Alloy 625
D	Duplex 2205 (UNS S31803/EN 1.4462), Ceramic (Al2O3), Graphite, and Alloy 625

1. For flexible single/twin lead probes only.

HP probe
(Operating Temperature and Pressure code P)

Material of construction code	Material
1	316L SST (EN 1.4404), 316 SST[1], Ceramic (Al2O3), Graphite, PFA, PTFE, and Alloy 625
2 and H	Alloy C-276 (UNS N10276), Ceramic (Al2O3), Graphite, PFA, PTFE, and Alloy 625
D	Duplex 2205 (UNS S31803/EN 1.4462), Ceramic (Al2O3), Graphite, PFA, PTFE, and Alloy 625

1. For flexible single/twin lead probes only.

Cryogenic probe
(Operating Temperature and Pressure code C)

Material of construction code	Material
1	316L SST (EN 1.4404), 316 SST[1], Ceramic (Al2O3), Graphite, PFA, PTFE, and Alloy 625

1. For flexible single/twin lead probes only.

Weight

Flange and probes

Item	Weight
Flange	Depends on flange size
Coaxial probe	0.67 lb/ft. (1 kg/m)
Rigid Single Lead probe (0.3 in./8 mm)	0.27 lb/ft. (0.4 kg/m)
Rigid Single Lead probe (0.5 in./13 mm)	0.71 lb/ft. (1.06 kg/m)
Segmented Rigid Single Lead probe	0.71 lb/ft. (1.06 kg/m)
Rigid Twin Lead probe	0.40 lb/ft. (0.6 kg/m)
Flexible Single Lead probe	0.05 lb/ft. (0.08 kg/m)
Flexible Twin Lead probe	0.09 lb/ft. (0.14 kg/m)


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

End weight


Item	Weight
Standard weight for 4 mm Single Lead probe	0.88 lb (0.40 kg)
Short weight (W2) for 4 mm Single Lead probe	0.88 lb (0.40 kg)
Heavy weight (W3) for 4 mm Single Lead	2.43 lb (1.10 kg)
Weight for 6 mm Single Lead probe	1.2 lb (0.55 kg)
Weight for PTFE covered Single Lead	2.2 lb (1 kg)
Weight for Twin Lead probe	1.3 lb (0.60 kg)

Installation in non-metallic tanks and open-air applications

- Avoid major sources of electrical disturbance in proximity of the installation (e.g. electrical motors, stirrers, servo mechanisms).

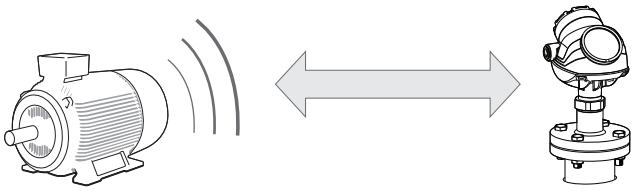


- For clean liquids, use a coaxial probe to reduce effect of potential electrical disturbances.




- For optimal single lead probe performance in non-metallic tanks, the probe must be mounted with a metal flange, or screwed in to a metal sheet (d > 14 in./350 mm) if a threaded version is used.

Metal flange




Metal sheet (d > 14 in./350 mm)




Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Nozzle considerations

- Make sure the nozzle does not extend into the tank.

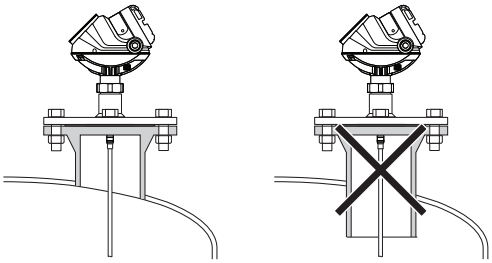

- When using single flexible probes in tall and narrow nozzles, a Long Stud (LS option) is recommended to prevent the probe from contacting the nozzle.

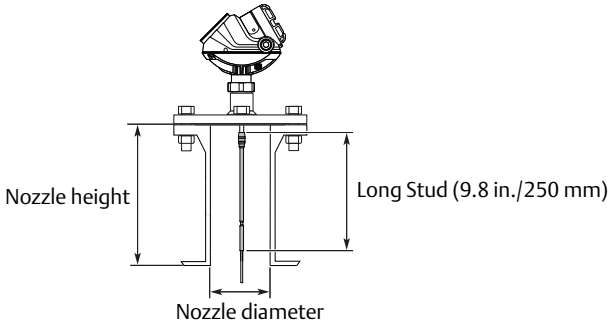

Minimum clearance

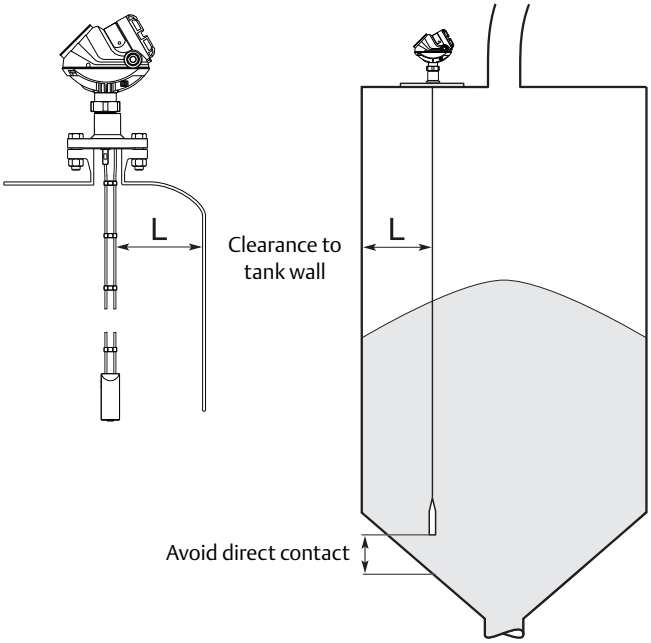


Table 6. Nozzle Considerations

	Rigid single lead/ segmented rigid single lead	Flexible single lead	Coaxial	Rigid twin lead	Flexible twin lead
Recommended nozzle diameter	6 in. (15 cm)	6 in. (15 cm)	> probe diameter	4 in. (10 cm)	4 in. (10 cm)
Minimum nozzle diameter(1)	2 in. (5 cm)	2 in. (5 cm)	> probe diameter	2 in. (5 cm)	2 in. (5 cm)
Recommended nozzle height	4 in. (100 mm) + nozzle diameter	4 in. (100 mm) + nozzle diameter(2)	N/A	4 in. (100 mm) + nozzle diameter	4 in. (100 mm) + nozzle diameter

1. The Trim Near Zone (TNZ) function may be necessary or an Hold Off Distance/Upper Null Zone (UNZ) setup may be required to mask the nozzle.
2. For nozzles taller than 4 in. (100 mm), the Long Stud version is recommended (option code LS) to prevent the flexible portion from touching the edge of the nozzle.

Table 7. Minimum Clearance

	Rigid single lead/ segmented rigid single lead	Flexible single lead	Coaxial	Rigid twin lead	Flexible twin lead
Min. clearance to tank wall (L) or obstruction(1)	4 in. (10 cm) if smooth metallic wall. 20 in. (50 cm) if disturbing objects, rugged metallic or concrete/plastic wall.	4 in. (10 cm) if smooth metallic wall. 20 in. (50 cm) if disturbing objects, rugged metallic or concrete/plastic wall.	0 in. (0 cm)	4 in. (10 cm)	4 in. (10 cm)
Min. chamber/ still pipe diameter	2 in. (5 cm)(2)	Consult the factory	1.5 in. (3.8 cm)	2 in. (5 cm)(3)	Consult the factory


1. Minimum clearance from tank bottom for the coaxial and rigid single probes is 0.2 in. (5 mm).
2. The probe must be centered in the pipe/bypass. A centering disc (see "Centering discs" on page 50 and page 14) can be used to prevent the probe from contacting the chamber wall.
3. The centermost lead must be at least 0.6 in. (15 mm) away from the pipe/bypass wall.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Other mechanical considerations

To get best possible performance, the following must be considered before installing the transmitter:

- Inlets should be kept at a distance in order to avoid product filling on the probe
- Avoid physical contact between probes and agitators, as well as applications with strong fluid movement unless the probe is anchored
- Probe tie-down is recommended if the probe can move to within 1 ft. (30 cm) of any object during operations
- In order to stabilize the probe for side forces, it is possible to fix or guide the probe to the tank bottom



Flexible single lead probe with chuck installed in liquids and in solids.



For solids, it is recommended that the probe should be slack to prevent high tensile loads.

See the Rosemount 5300 Reference Manual for more mechanical installation information.

Engineered solutions

When standard model codes are not sufficient to fulfill requirements, please consult the factory to explore possible Engineered Solutions. This is typically, but not exclusively, related to the choice of wetted materials or the design of a process connection. These Engineered Solutions are part of the expanded offerings and may be subject to additional delivery lead time. For ordering, factory will supply a special R-labeled numeric option code that should be added at the end of the standard model string. See example model string below.

Example Model String:
5301-H-A-1-S-1-V-1A-M-002-05-AA-I1-M1C1-**R1234**

Chamber/pipe installations

General chamber considerations

A chamber or pipe installation is the preferred option due to the increase in stability and performance of the transmitter. When selecting a smaller diameter chamber or pipe (such as 2-in.) a flexible probe is not suitable due to the chance of it coming into contact with the walls, and relatively large side inlets may interfere with the signal.


When gas lift and/or turbulence may occur (e.g. boiling hydrocarbons), a 3- or 4-in. chamber/pipe diameter is recommended for maximum measurement reliability. This is especially true in high pressure and high temperature installations.

Rosemount 9901 Chamber


Rosemount 9901 allows external mounting of process level instrumentation. It supports a variety of process connections, and optional drain and vent connections. The Rosemount 9901 chamber is designed to the ASME B31.3 standard, and is Pressure Equipment Directive (PED) compliant. Use option code XC to order together with the Rosemount 5300 Level Transmitters.

Use a centering disc if the probe length >3.3 ft. (1 m). See "Probe type in chamber considerations" on page 50 and "Centering discs" on page 50 for which probe and disc to use.

Side-and-Side dimension

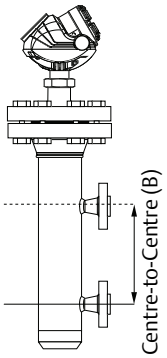

Side-and-Bottom dimension

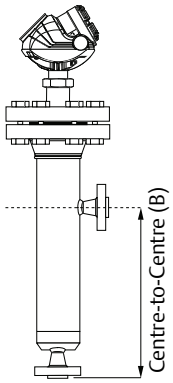

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Probe length determination for Rosemount 9901 Chambers


Chamber	Probe length	
	Side-and-side chamber	Side-and-bottom chamber
Rosemount 9901 Standard	B + 19 in. (480 mm)	B + 4 in. (100 mm)
Rosemount 9901 with option G1[1]	B + 25 in. (650 mm)	B + 10 in. (260 mm)
Rosemount 9901 with option G2[2]	B + 36 in. (920 mm)	B + 21 in. (530 mm)

1. For use with Dynamic Vapor Compensation probe and short reference reflector (GWR option code R1).
2. For use with Dynamic Vapor Compensation probe and long reference reflector (GWR option code R2).

For additional information, see the Rosemount 9901 Chamber Product Data Sheet and Technical Note.

Existing chamber

A Rosemount 5300 Level Transmitter is the perfect replacement in an existing displacer chamber. Proprietary flanges are offered, enabling use of existing chambers to make installation easy.



Considerations when changing to Rosemount 5300 Level Transmitters:

- The Rosemount 5300 Level Transmitter flange choice and probe length must be correctly matched to the chamber. Both standard ASME and EN, as well as proprietary chamber flanges, are available. See "Special flanges and flushing connection rings" on page 76 to identify the proprietary flanges.
- See "Probe type in chamber considerations" on page 50 and "Centering discs" on page 50 for which probe and disc to use.
- See table below for guidelines on the required probe length.

Required Probe Length in Existing Displacer Chambers

Chamber manufacturer	Probe length[1]
Major torque-tube manufacture (249B, 249C, 249K, 249N, 259B)	Displacer + 9 in. (229 mm)
Masoneilan (Torque tube operated), proprietary flange	Displacer + 8 in. (203 mm)
Other - torque tube[2]	Displacer + 8 in. (203 mm)
Magnetrol (spring operated)[3]	Displacer + between 7.8 in. (195 mm) to 15 in. (383 mm)
Others - spring operated[2]	Displacer + 19.7 in. (500 mm)

1. If flushing ring is used, add the ring height to the probe length.
2. For other manufacturers, there are small variations. This is an approximate value, actual length should be verified.
3. Lengths vary depending on model, SG and rating, and should be verified.

For additional information, see the Replacing Displacers with Guided Wave Radar Technical Note.

Probe type in chamber considerations

When installing a Rosemount 5300 in a chamber, the single lead probe is recommended. An exception is with liquefied gas > 40 bar where the coaxial probe is recommended.


The probe length determines if a Single Rigid or Single Flexible probe should be used:

- Less than 20 ft. (6 m):
  Rigid Single Probe is recommended. Use a centering disc for probe > 3.3 ft. (1 m). If installation requires less head-space, use a Flexible Single Probe with a weight and centering disc.
- More than 20 ft. (6 m):
  Use Flexible Single Probe with a weight and centering disc.

A short weight is available for the single flexible probe. It is used for measuring close to the probe end and shall be used where the measuring range must be maximized. The height is 2 in. (50 mm) and the diameter is 1.5 in. (37.5 mm). The option code is W2.

Centering discs

To prevent the probe from contacting the chamber or pipe wall, centering discs are available for rigid single, flexible single, and flexible twin lead probes. The disc is attached to the end of the probe. Discs are made of stainless steel, Alloy C-276, Duplex 2205, or PTFE. The centering disc in PTFE is not available for HTHP probes.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

For the segmented rigid single lead probe, up to five PTFE centering discs can be mounted along the probe, but keep a minimum distance of two segments between the discs. Additionally, a disc in SST or PTFE (part number 03300-1655-xxxx) can be attached to the end of the probe.

When mounting a centering disc, it is important that it fits correctly in the chamber/pipe. See Table 8 for Dimension D. Table 9 shows which centering disc diameter to choose for a particular pipe and Table 10 shows which centering disc diameter to choose for a Rosemount 9901 Chamber.

Table 8. Centering Disc Dimensions

Disc size	Actual disc diameter (D)
2 in.	1.8 in. (45 mm)
3 in.	2.7 in. (68 mm)
4 in.	3.6 in. (92 mm)
6 in.	5.55 in. (141 mm)
8 in.	7.40 in. (188 mm)

Table 9. Centering Disc Size Recommendation for Different Pipe Schedules

Pipe size	Pipe schedule			
	5s, 5 and 10s,10	40s, 40 and 80s, 80	120	160
2 in.	2 in.	2 in.	N/A(1)	N/A(2)
3 in.	3 in.	3 in.	N/A(1)	2 in.
4 in.	4 in.	4 in.	4 in.	3 in.
5 in.	4 in.	4 in.	4 in.	4 in.
6 in.	6 in.	6 in.	4 in.	4 in.
7 in.	N/A(1)	6 in.	N/A(1)	N/A(1)
8 in.	8 in.	8 in.	6 in.	6 in.

1. Schedule is not available for pipe size.
2. No centering disc is available.

Table 10. Centering Disc Size Recommendations for Rosemount 9901 Chambers

Chamber size	Chamber rating	Centering disc
3 in.	Up to Class 600/PN 100	3 in.
	Class 900, 1500/PN160, 250	2 in.
3 in. T-piece	Up to Class 600/PN 100	2 in.
4 in.	Up to Class 600/PN 100	4 in.
	Class 900, 1500/PN160, 250	3 in.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Product Certifications

Rev 9.4

European Directive Information

A copy of the EU Declaration of Conformity can be found at the end of the Quick Start Guide. The most recent revision of the EU Declaration of Conformity can be found at Emerson.com/Rosemount.

Safety Instrumented Systems (SIS)

SIL 3 Capable: IEC 61508 certified for use in safety instrumented systems up to SIL 3 (Minimum requirement of single use (1oo1) for SIL 2 and redundant use (1oo2) for SIL 3).

Ordinary Location Certification

As standard, the transmitter has been examined and tested to determine that the design meets the basic electrical, mechanical, and fire protection requirements by a nationally recognized test laboratory (NRTL) as accredited by the Federal Occupational Safety and Health Administration (OSHA).

Installing Equipment in North America

The US National Electrical Code (NEC®) and the Canadian Electrical Code (CEC) permit the use of Division marked equipment in Zones and Zone marked equipment in Divisions. The markings must be suitable for the area classification, gas, and temperature class. This information is clearly defined in the respective codes.

USA

E5 Explosionproof (XP), Dust-Ignitionproof (DIP)

Certificate: FM16US0444X

Standards: FM Class 3600 – 2011; FM Class 3610 – 2010; FM Class 3611 – 2004; FM Class 3615 – 2006; FM Class 3810 – 2005; ANSI/ISA 60079-0 – 2013; ANSI/ISA 60079-11 – 2012; ANSI/NEMA 250 – 2003;

Markings: XP CL I, DIV 1, GP B, C, D; DIP CLII/III, DIV 1, GP E, F, G; T4 Ta=60 °C and 70 °C; Type 4X

Specific Conditions for Safe Use (X):

1. WARNING – Potential Electrostatic Charging Hazard – The enclosure contains non-metallic material. To prevent the risk for electrostatic sparking the plastic surface should only be cleaned with a damp cloth.
2. WARNING – The apparatus enclosure contains aluminum and is considered to constitute a potential risk of ignition by impact or friction. Care must be taken into account during installation and use to prevent impact or friction.

I5 Intrinsic Safety (IS), Nonincendive (NI)

Certificate: FM16US0444X

Standards: FM Class 3600 – 2011; FM Class 3610 – 2010; FM Class 3611 – 2004; FM Class 3615 – 2006; FM Class 3810 – 2005; ANSI/ISA 60079-0 – 2013; ANSI/ISA 60079-11 – 2012; ANSI/NEMA 250 – 2003;

Markings: IS CL I, II, III, DIV 1, GP A, B, C, D, E, F, G in accordance with control drawing 9240030-936; IS (Entity) CL I, Zone 0, AEx ia IIC T4 in accordance with control drawing 9240030-936, NI CL I, II, DIV 2, GP A, B, C, D, F, G; Suitable for use in CL III DIV 2, indoor and outdoor, T4 Ta=60 °C and 70 °C; Type 4X

Specific Conditions for Safe Use (X):

1. WARNING – Potential Electrostatic Charging Hazard – The enclosure contains non-metallic material. To prevent the risk for electrostatic sparking the plastic surface should only be cleaned with a damp cloth.
2. WARNING – The apparatus enclosure contains aluminum and is considered to constitute a potential risk of ignition by impact or friction. Care must be taken into account during installation and use to prevent impact or friction.

	Ui	Ii	Pi	Ci	Li
Entity parameters HART	30 V	130 mA	1 W	7.26 nF	0
Entity parameters Fieldbus	30 V	300 mA	1.3 W	0	0

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

IE FISCO

Certificate: FM16US0444X

Standards: FM Class 3600 – 2011; FM Class 3610 – 2010; FM Class 3611 – 2004; FM Class 3615 – 2006; FM Class 3810 – 2005; ANSI/ISA 60079-0 – 2013; ANSI/ISA 60079-11 – 2012; ANSI/NEMA 250 – 2003;

Markings: IS CL I, II, III, DIV 1, GP A, B, C, D, E, F, G in accordance with control drawing 9240030-936; IS (Entity) CL I, Zone 0, AEx ia IIC T4 in accordance with control drawing 9240030-936, NI CL I, II, DIV 2, GP A, B, C, D, F, G; Suitable for use in CL III DIV 2, indoor and outdoor, T4 Ta=60 °C and 70°C; Type 4X

Specific Conditions for Safe Use (X):

1. WARNING – Potential Electrostatic Charging Hazard – The enclosure contains non-metallic material. To prevent the risk for electrostatic sparking the plastic surface should only be cleaned with a damp cloth.
2. WARNING – The apparatus enclosure contains aluminum and is considered to constitute a potential risk of ignition by impact or friction. Care must be taken into account during installation and use to prevent impact or friction.

	Ui	Ii	Pi	Ci	Li
FISCO parameters	17.5 V	380 mA	5.32 W	0	0

Canada

E6 Explosionproof, Dust-Ignitionproof

Certificate: 1514653

Standards: CSA C22.2 No.0-M91, CSA C22.2 No.25-1966, CSA C22.2 No.30-M1986, CSA C22.2 No.94-M91, CSA C22.2 No.142-M1987, CSA C22.2 157-92, CAN/CSA C22.2 No. 60529:05, ANSI/ISA 12.27.01-2003

Markings: Explosionproof CL I, DIV 1, GP B, C, D; Dust-Ignitionproof CL II, DIV 1 and 2, GP E, F, G and coal dust, CL III, DIV 1, Type 4X/IP66/IP67

I6 Intrinsically Safe and Non-Incendive Systems

Certificate: 1514653

Standards: CSA C22.2 No.0-M91, CSA C22.2 No.25-1966, CSA C22.2 No.30-M1986, CSA C22.2 No.94-M91, CSA C22.2 No.142-M1987, CSA C22.2 157-92, CAN/CSA C22.2 No. 60529:05, ANSI/ISA 12.27.01-2003

Markings: CL I, DIV 1, GP A, B, C, D, T4 see installation drawing 9150079-906; Non-Incendive Class III, DIV 1, Haz-loc CL I DIV 2, GP A, B, C, D, Maximum Ambient Temperature +60 °C for Fieldbus and FISCO and +70 °C for HART, T4, Type 4X/IP66/IP67, Maximum Working Pressure 5000 psi, Dual Seal.

	Ui	Ii	Pi	Ci	Li
Entity parameters HART	30 V	130 mA	1 W	7.26 nF	0
Entity parameters Fieldbus	30 V	300 mA	1.3 W	0	0

IF FISCO

Certificate: 1514653

Standards: CSA C22.2 No.0-M91, CSA C22.2 No.25-1966, CSA C22.2 No.30-M1986, CSA C22.2 No.94-M91, CSA C22.2 No.142-M1987, CSA C22.2 157-92, CAN/CSA C22.2 No. 60529:05, ANSI/ISA 12.27.01-2003

Markings: CL I, DIV 1, GP A, B, C, D, T4 see installation drawing 9150079-906; Non-Incendive Class III, DIV 1, Haz-loc CL I DIV 2, GP A, B, C, D, Maximum Ambient Temperature +60 °C for Fieldbus and FISCO and +70 °C for HART, T4, Type 4X/IP66/IP67, Maximum Working Pressure 5000 psi, Dual Seal.

	Ui	Ii	Pi	Ci	Li
FISCO parameters	17.5 V	380 mA	5.32 W	0	0

Europe

E1 ATEX Flameproof

Certificate: Nemko 04ATEX1073X

Standards: EN 60079-0:2012, EN 60079-1:2014, EN 60079-11:2012, EN 60079-26:2015, EN 60079-31:2014

Markings: ⟨Ex⟩ II 1/2G Ex db ia IIC T4 Ga/Gb, (-40 °C ≤ Ta ≤ +60 °C /+70 °C) II 1D Ex ta IIIC T69 °C/T79 °C Da, (-40 °C/-50 °C ≤ Ta ≤ +60° C /+70 °C) Um = 250 V

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specific Conditions for Safe Use (X):

1. Potential ignition hazards by impact or friction need to be considered according to EN 60079-0:2012 clause 8.3 (for EPL Ga and EPG Gb), when the transmitter enclosure and antennas exposed to the exterior atmosphere of the tank, is made with light metals containing aluminium or titanium.
   The end user shall determine the suitability with regard to avoid hazards from impact and friction.
2. 1/2" NPT threads need to be sealed for dust and water ingress protection, IP 66, IP 67 or "Ex t", EPL Da or Db is required.

I1 ATEX Intrinsic Safety

Certificate: Nemko 04ATEX1073X

Standards: EN 60079-0:2012, EN 60079-1:2014, EN 60079-11:2012, EN 60079-26:2015, EN 60079-31:2014

Markings: II 1G Ex ia IIC T4 Ga (-50 °C ≤ Ta ≤ +70 °C)
II 1D Ex ia IIIC T69 °C/T79 °C Da,
(-50 °C ≤ Ta ≤ +60 °C /+70 °C)

Specific Conditions for Safe Use (X):

1. The intrinsically safe circuits do not withstand the 500V AB test as specified in EN 60079-11:2012 clause 6.4.13.
2. Potential ignition hazards by impact or friction need to be considered according to EN 60079-0:2012 clause 8.3 (for EPL Ga and EPG Gb), when the transmitter enclosure and antennas exposed to the exterior atmosphere of the tank, is made with light metals containing aluminium or titanium.
   The end user shall determine the suitability with regard to avoid hazards from impact and friction.
3. 1/2" NPT threads need to be sealed for dust and water ingress protection, IP 66, IP 67 or "Ex t", EPL Da or Db is required.

	Ui	Ii	Pi	Ci	Li
Entity parameters HART	30 V	130 mA	1 W	7.26 nF	0
Entity parameters Fieldbus	30 V	300 mA	1.5 W	4.95 nF	0

IA ATEX FISCO

Certificate: Nemko 04ATEX1073X

Standards: EN 60079-0:2012, EN 60079-1:2014, EN 60079-11:2012, EN 60079-26:2015, EN 60079-31:2014

Markings: II 1G Ex ia IIC T4 Ga (-50 °C ≤ Ta ≤+60 °C) or
II 1/2G Ex ia/ib IIC T4 Ga/Gb
(-50 °C ≤ Ta ≤ +60 °C)
II 1D Ex ia IIIC T69 °C Da, (-50 °C ≤ Ta ≤ +60 °C)
II 1D Ex ia/ib IIIC T69°C Da/Db,
(-50 °C ≤ Ta ≤ +60 °C)

Specific Conditions for Safe Use (X):

1. The intrinsically safe circuits do not withstand the 500V AB test as specified in EN 60079-11:2012 clause 6.4.13.
2. Potential ignition hazards by impact or friction need to be considered according to EN 60079-0:2012 clause 8.3 (for EPL Ga and EPG Gb), when the transmitter enclosure and antennas exposed to the exterior atmosphere of the tank, is made with light metals containing aluminium or titanium.
   The end user shall determine the suitability with regard to avoid hazards from impact and friction.
3. The Ex ia version of model 5300 FISCO device may be supplied by an "Ex ib" FISCO power supply, when the power supply is certified with three separate safety current limiting devices and voltage limitation which meets the requirements for type Ex ia.
4. 1/2" NPT threads need to be sealed for dust and water ingress protection, IP 66, IP 67 or "Ex t", EPL Da or Db is required.

	Ui	Ii	Pi	Ci	Li
FISCO parameters	17.5 V	380 mA	5.32 W	4.95 nF	<1 µH

N1 ATEX Type N

Certificate: Nemko 10ATEX1072X

Standards: EN 60079-0:2012, EN 60079-11:2012, EN 60079-15:2010, EN 60079-21:2013

Markings: II 3G Ex nA ic IIC T4 Gc
(-50 °C ≤ Ta ≤ +60 °C /+70 °C)
II 3G Ex ic IIC T4 Gc
(-50 °C ≤ Ta ≤ +60 °C /+70 °C)
II 3D Ex tc IIIC T69 °C/T79 °C Dc
(-50 °C ≤ Ta ≤ +60 °C /+70 °C)

Specific Conditions for Safe Use (X):

1. The transmitter circuits does not withstand 500V AC dielectric strength test according to EN 60079-11 clause 6.3.13 due to earth connected transient suppressing devices. Appropriate measures have to be considered by installation.

	Ui	Ii	Pi	Ci	Li
Safety parameters HART	42.4 V	23 mA	1 W	7.25 nF	Negligible
Safety parameters Fieldbus	32 V	21 mA	0.7 W	4.95 nF	Negligible

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

International

E7 IECEx Flameproof

Certificate: IECEx NEM 06.0001X

Standards: IEC 60079-0:2011, IEC 60079-1:2014-06, IEC 60079-11:2011; IEC 60079-26:2014, IEC 60079-31:2013

Markings: Ex db ia IIC T4 Ga/Gb
(-40 °C ≤ Ta ≤ +60 °C /+70 °C)
Ex ta IIIC T69 °C/T79 °C Da
(-40 °C ≤ Ta ≤ +60 °C /+70 °C)
Um=250 VAC, IP66/IP67

Specific Conditions for Safe Use (X):

1. Potential ignition hazards by impact or friction need to be considered according to IEC 60079-0:2011 clause 8.3 (for EPL Ga and EPL Gb), when the transmitter enclosure and antenna exposed to the exterior atmosphere of the tank, is made with light metals containing aluminum or titanium. The end used shall determine the suitability with regard to avoid hazards from impact and friction.
2. ½" NPT threads need to be sealed for dust and water ingress protection, IP 66, IP 67 or "Ex t", EPL Da or Db is required.

I7 IECEx Intrinsic Safety

Certificate: IECEx NEM 06.0001X

Standards: IEC 60079-0:2011, IEC 60079-1:2014-06, IEC 60079-11:2011; IEC 60079-26:2014, IEC 60079-31:2013

Markings: Ex ia IIC T4 Ga (-50 °C ≤ Ta ≤ +70 °C)
Ex ib IIC T4 Ga/Gb
Ex ia IIIC T69 °C/T79 °C Da
(-50 °C ≤ Ta ≤ +60 °C/+70 °C)
Ex ib IIIC T69 °C/T79 °C Da
(-50 °C ≤ Ta ≤ +60 °C/+70 °C)

Specific Conditions for Safe Use (X):

1. The Intrinsically safe circuits do not withstand the 500 V AC test as specified in IEC 60079-11 clause 6.4.13
2. Potential ignition hazards by impact or friction need to be considered according to IEC 60079-0:2011 clause 8.3 (for EPL Ga and EPL Gb), when the transmitter enclosure and antenna exposed to the exterior atmosphere of the tank, is made with light metals containing aluminum or titanium. The end used shall determine the suitability with regard to avoid hazards from impact and friction.
3. ½" NPT threads need to be sealed for dust and water ingress protection, IP 66, IP 67 or "Ex t", EPL Da or Db is required.

	Ui	Ii	Pi	Ci	Li
Entity parameters HART	30 V	130 mA	1 W	0 µF	Negligible
Entity parameters Fieldbus	30 V	300 mA	1.5 W	4.95 nF	Negligible

IG IECEx FISCO

Certificate: IECEx NEM 06.0001X

Standards: IEC 60079-0:2011, IEC 60079-1:2014-06, IEC 60079-11:2011; IEC 60079-26:2014, IEC 60079-31:2013

Markings: Ex ia IIC T4 Ga (-50 °C ≤ Ta ≤ +60 °C)
Ex ib IIC T4 Ga/Gb (-50 °C ≤ Ta ≤ +60 °C)
Ex ia IIIC T69 °C Da (-50 °C ≤ Ta ≤ +60 °C)
Ex ib IIIC T69 °C Da/Db (-50 °C ≤ Ta ≤ +60 °C)

Specific Conditions for Safe Use (X):

1. The Intrinsically safe circuits do not withstand the 500 V AC test as specified in IEC 60079-11 clause 6.4.13
2. Potential ignition hazards by impact or friction need to be considered according to IEC 60079-0:2011 clause 8.3 (for EPL Ga and EPL Gb), when the transmitter enclosure and antenna exposed to the exterior atmosphere of the tank, is made with light metals containing aluminum or titanium. The end used shall determine the suitability with regard to avoid hazards from impact and friction.
3. The Ex ia version of model 5300 FISCO field device may be supplied by an [Ex ib] FISCO power supply when the power supply is certified with three separate safety current limiting devices and voltage limitation which meets the requirements for type Ex ia.
4. ½" NPT threads need to be sealed for dust and water ingress protection, IP 66, IP 67 or "Ex t", EPL Da or Db is required.

	Ui	Ii	Pi	Ci	Li
FISCO parameters	17.5 V	380 mA	5.32 W	4.95 nF	<1 µH

N7 IECEx Type N

Certificate: IECEx NEM 10.0005X

Standards: IEC 60079-0:2011, IEC 60079-11:2011, IEC 60079-15:2010, IEC 60079-31:2010

Markings: Ex nA ic IIC T4 Gc (-50 °C ≤ Ta ≤ +60 °C /+70 °C)
Ex ic IIC T4 Gc (-50 °C ≤ Ta ≤ +60 °C /+70 °C)
Ex tc IIIC T69 °C/T79 °C Dc
(-50 °C ≤ Ta ≤ +60 °C /+70 °C)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specific Conditions for Safe Use (X):

1. The transmitter circuits does not withstand 500V AC dielectric strength test according to EN 60079-11 clause 6.3.13 due to earth connected transient suppressing devices. Appropriate measures have to be considered by installation.

	Ui	Ii	Pi	Ci	Li
Safety parameters HART	42.4 V	23 mA	1 W	7.25 nF	Negligible
Safety parameters Fieldbus	32 V	21 mA	0.7 W	4.95 nF	Negligible

Brazil

E2 INMETRO Flameproof

Certificate: UL-BR 17.0188X

Standards: ABNT NBR IEC 60079-0:2008 + Errata 2011,
ABNT NBR IEC 60079-1:2009 + Errata 1:2011,
ABNT NBR IEC 60079-11:2009,
ABNT NBR IEC 60079-26:2008 + Errata 1:2008,
ABNT NBR IEC 60079-31:2011

Markings: Ex db ia IIC T4 Ga/Gb
(-40 °C ≤ T_{amb} ≤ +60 °C /+70 °C)
Ex ta IIIC T69 °C/T79 °C Da
(-40 °C ≤ T_{amb} ≤ +60 °C /+70 °C)
Um=250 V_{AC}, IP66/67

Specific Conditions for Safe Use (X):

1. See certificate for Specific Conditions.

I2 INMETRO Intrinsic Safety

Certificate: UL-BR 17.0188X

Standards: ABNT NBR IEC 60079-0:2008 + Errata 2011,
ABNT NBR IEC 60079-11:2009,
ABNT NBR IEC 60079-26:2008 + Errata 1:2008,
ABNT NBR IEC 60079-31:2011

Markings: Ex ia IIC T4 Ga (- 50 °C ≤ T_{amb} ≤ +60 °C /+70 °C)
Ex ia IIIC T69 °C/T79 °C Da
(- 50 °C ≤ T_{amb} ≤ +60 °C /+70 °C)

Specific Conditions for Safe Use (X):

1. See certificate for Specific Conditions.

	Ui	Ii	Pi	Ci	Li
Entity parameters HART	30 Vcc	130 mA	1.0 W	7.26 nF	Negligible
Entity parameters Fieldbus	30 Vcc	300 mA	1.5 W	4.95 nF	Negligible

IB INMETRO FISCO

Certificate: UL-BR 17.0188X

Standards: ABNT NBR IEC 60079-0:2008 + Errata 2011,
ABNT NBR IEC 60079-11:2009,
ABNT NBR IEC 60079-26:2008 + Errata 1:2008,
ABNT NBR IEC 60079-31:2011

Markings: Ex ia IIC T4 Ga
Ex ia/ib IIC T4 Ga/Gb
Ex ia IIIC T69 °C Da
Ex ia/ib IIIC T69 °C Da/Db
(- 50 °C ≤ T_{amb} ≤ +60 °C)

Specific Conditions for Safe Use (X):

1. See certificate for Specific Conditions.

	Ui	Ii	Pi	Ci	Li
FISCO parameters	17.5 Vcc	380 mA	5.32 W	4.95 nF	<1 µH

China

E3 China Flameproof

Certificate: GYJ16.1095X

Standards: GB 3836.1/2/4/20-2010, GB 12476.1/5-2013,
GB 12476.4-2010

Markings: Ex d ia IIC T4 Ga/Gb (-40 °C ≤ Ta ≤ +60 °C/+70 °C)
Ex tD A20 IP 66/67 T69 °C /T79 °C
(-40 °C ≤ Ta ≤ +60 °C/+70 °C)

Specific Conditions for Safe Use (X):

1. See certificate for Specific Conditions.

I3 China Intrinsic Safety

Certificate: GYJ16.1095X

Standards: GB 3836.1/2/4/20-2010, GB 12476.1/5-2013,
GB 12476.4-2010

Markings: Ex ia IIC T4 Ga (-50 °C ≤ Ta ≤ +60 °C/+70 °C)
Ex iaD 20 T69 °C /T79 °C
Ex iaD/ibD 20/21 T69 °C (-50 °C ≤ Ta ≤ +60 °C)

Specific Conditions for Safe Use (X):

1. See certificate for Specific Conditions.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

	Ui	Ii	Pi	Ci	Li
Entity parameters HART	30 V	130 mA	1 W	7.26 nF	0 mH
Entity parameters Fieldbus	30 V	300 mA	1.5 W	4.95 nF	0 mH

IC China FISCO

Certificate: GYJ16.1095X

Standards: GB 3836.1/2/4/20-2000, GB 12476.4/5-2013, GB 12476.1-2010

Markings: Ex ia IIC T4 Ga (-50 °C ≤ Ta ≤ +60 °C)
Ex ia/ib IIC T4 Ga/Gb (-50 °C ≤ Ta ≤ +60 °C)
Ex iaD 20 T69 (-50 °C ≤ Ta ≤ +60 °C)
Ex iaD/ibD 20/21 T69 °C (-50 °C ≤ Ta ≤ +60 °C)

Specific Conditions for Safe Use (X):

1. See certificate for Specific Conditions.

	Ui	Ii	Pi	Ci	Li
FISCO parameters	17.5 V	380 mA	5.32 W	4.95 nF	<0.001 mH

N3 China Type N

Certificate: GYJ13.1387X

Standards: GB 3836.1-2010, GB 3836.8-2003

Markings: Ex nA nL IIC T4 Gc, (-50 °C ≤ Ta ≤ +60 °C/+70 °C)

Specific Conditions for Safe Use (X):

1. See certificate for Specific Conditions.

Technical Regulations Customs Union (EAC)

EM Technical Regulations Customs Union (EAC) Flameproof

Certificate: RU C-SE.AA87.B.00802

Markings: Ga/Gb Ex db ia IIC T4....T1 X,
(-40 °C ≤ Ta ≤ +60 °C/+70 °C)
Ex ta IIIC T69 °C/T79 °C Da X

Specific Conditions for Safe Use (X):

1. See certificate for Specific Conditions.

IM Technical Regulations Customs Union (EAC) Intrinsic Safety

Certificate: RU C-SE.AA87.B.00802

Markings: 0Ex ia IIC T4...T1 Ga X,
(-55 °C ≤ Ta ≤ +60 °C/+70 °C)
Ga/Gb Ex ia/ib IIC T4...T1 X,
(-55 °C ≤ Ta ≤ +60 °C/+70 °C)
Ex ia IIIC T69 °C/T79 °C Da X,
(-50 °C ≤ Ta ≤ +60 °C/+70 °C)
Da/Db Ex ia/ib IIIC T69 °C/T79 °C X,
(-50 °C ≤ Ta ≤ +60 °C/+70 °C)

Specific Conditions for Safe Use (X):

1. See certificate for Specific Conditions.

	Ui	Ii	Pi	Ci	Li
Entity parameters HART	30 V	130 mA	1 W	7.26 nF	0 mH
Entity parameters Fieldbus	30 V	300 mA	1.5 W	4.95 nF	0 mH

Japan

E4 Flameproof HART

Certificate: TC22110X

Markings: Ex d [ia Ga] IIC T4 Gb

Specific Conditions for Safe Use (X):

1. See certificate for Specific Conditions.

E4 Flameproof Foundation Fieldbus

Certificate: TC20192

Markings: Ex d [ia] IIC T4 X

Specific Conditions for Safe Use (X):

1. See certificate for Specific Conditions.

Republic of Korea

EP Flameproof HART

Certificate: 13-KB4BO-0019X

Markings: Ex ia/d ia IIC T4 Ga/Gb

Specific Conditions for Safe Use (X):

1. See certificate for Specific Conditions.

EP Flameproof Fieldbus

Certificate: 12-KB4BO-0179X

Markings: Ex ia/d ia IIC T4

Specific Conditions for Safe Use (X):

1. See certificate for Specific Conditions.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

India

Flameproof, Intrinsically safe

Certificate: P392482/1

Markings: Ex db ia IIC T4 Ga /Gb
Ex ia IIC T4 Ga

Specific Conditions for Safe Use (X):

1. See certificate for Specific Conditions.

Ukraine

Flameproof, Intrinsically Safe

Certificate: UA.TR.047.C.0352-13

Markings: 0 Ex ia IIC T4 X,
1 Ex d ia IIC T4 X

Specific Conditions for Safe Use (X):

1. See certificate for Specific Conditions.

Uzbekistan

Safety (import)

Certificate: UZ.SMT.01.342.2017121

Combinations

KA Combination of E1, E5 and E6

KB Combination of E1, E5 and E7

KC Combination of E1, E6 and E7

KD Combination of E5, E6 and E7

KE Combination of I1, I5 and I6

KF Combination of I1, I5 and I7

KG Combination of I1, I6 and I7

KH Combination of I5, I6 and I7

KI Combination of IA, IE and IF

KJ Combination of IA, IE and IG

KK Combination of IA, IF and IG

KL Combination of IE, IF and IG

Additional Certifications

SBS American Bureau of Shipping (ABS) Type Approval

Certificate: 15-LD1340199

Intended Use: For use on ABS Classed Vessels and Offshore Facilities in accordance with ABS rules and International Standards.

SBV Bureau Veritas (BV) Type Approval

Certificate: 22378_B0 BV

Requirements: Bureau Veritas rules for classification of steel ships.

Application: Class Notations: AUT-UMS, AUT-CCS, AUT-PORT and AUT-IMS.

SDN Det Norske Veritas (DNV) Type Approval

Certificate: A-14107

Intended Use: Det Norske Veritas´ Rules for Classification of Steel Ships, High Speed & Light Craft and Det Norske Veritas´ Offshore Standards.

Application:

Location Classes	
Temperature	D
Humidity	B
Vibration	A
EMC	B
Enclosure	C

SLL Lloyds Register (LR) Type Approval

Certificate: 15/20053

Application: Marine applications for use in environmental categories ENV1, ENV2, ENV3 and ENV5.

U1 Overfill prevention

Certificate: Z-65.16-476

Application: TÜV tested and approved by DIBt for overfill prevention according to the German WHG regulations.

J8 EN Boiler (European Boiler Approval in accordance with EN 12952-11 and EN 12953-9).

Note: Suitable for use as a level sensor part of a limiting device in accordance with EN 12952-11 and EN 12953-9.

QT Safety-certified to IEC 61508:2010 with certificate of FMEDA data. Certificate: exida ROS 13-06-005 C001 R1.3

Suitability for intended use

Compliant with NAMUR NE 95, version 22.01.2013 “Basic Principles of Homologation”

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Pattern Approval

GOST Belarus
Certificate: RB-03 07 2765 10

GOST Kazakhstan
Certificate: KZ.02.02.03473-2013

GOST Russia
Certificate: SE.C.29.010.A

GOST Uzbekistan
Certificate: 02.2977-14

China Pattern Approval
Certificate: CPA 2012-L135

Conduit plugs and adapters

IECEx Flameproof and Increased Safety

Certificate: IECEx FMG 13.0032X

Standards: IEC60079-0:2011, IEC60079-1:2007, IEC60079-7:2006-2007

Markings: Ex de IIC Gb

ATEX Flameproof and Increased Safety

Certificate: FM13ATEX0076X

Standards: EN60079-0:2012, EN60079-1:2007, IEC60079-7:2007

Markings: II 2 G Ex de IIC Gb

Conduit Plug Thread Sizes

Thread	Identification Mark
M20 x 1.5	M20
½ - 14 NPT	½ NPT

Thread Adapter Thread Sizes

Male Thread	Identification Mark
M20 x 1.5 – 6g	M20
½ - 14 NPT	½ - 14 NPT
¾ - 14 NPT	¾ - 14 NPT
Female Thread	**Identification Mark**
M20 x 1.5 – 6H	M20
½ - 14 NPT	½ - 14 NPT
G1/2	G1/2

Specific Conditions for Safe Use (X):


1. When the thread adapter or blanking plug is used with an enclosure in type of protection increased safety “e” the entry thread shall be suitably sealed in order to maintain the ingress protection rating (IP) of the enclosure.See certificate for Specific Conditions.
2. The blanking plug shall not be used with an adapter.
3. Blanking Plug and Threaded Adapter shall be either NPT or Metric thread forms. G½ thread forms are only acceptable for existing (legacy) equipment installations.


For detailed information on product certificates, refer to the Rosemount 5300 Reference Manual.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Dimensional Drawings

Figure 5. Rigid Single Lead Probe with Flange Connection

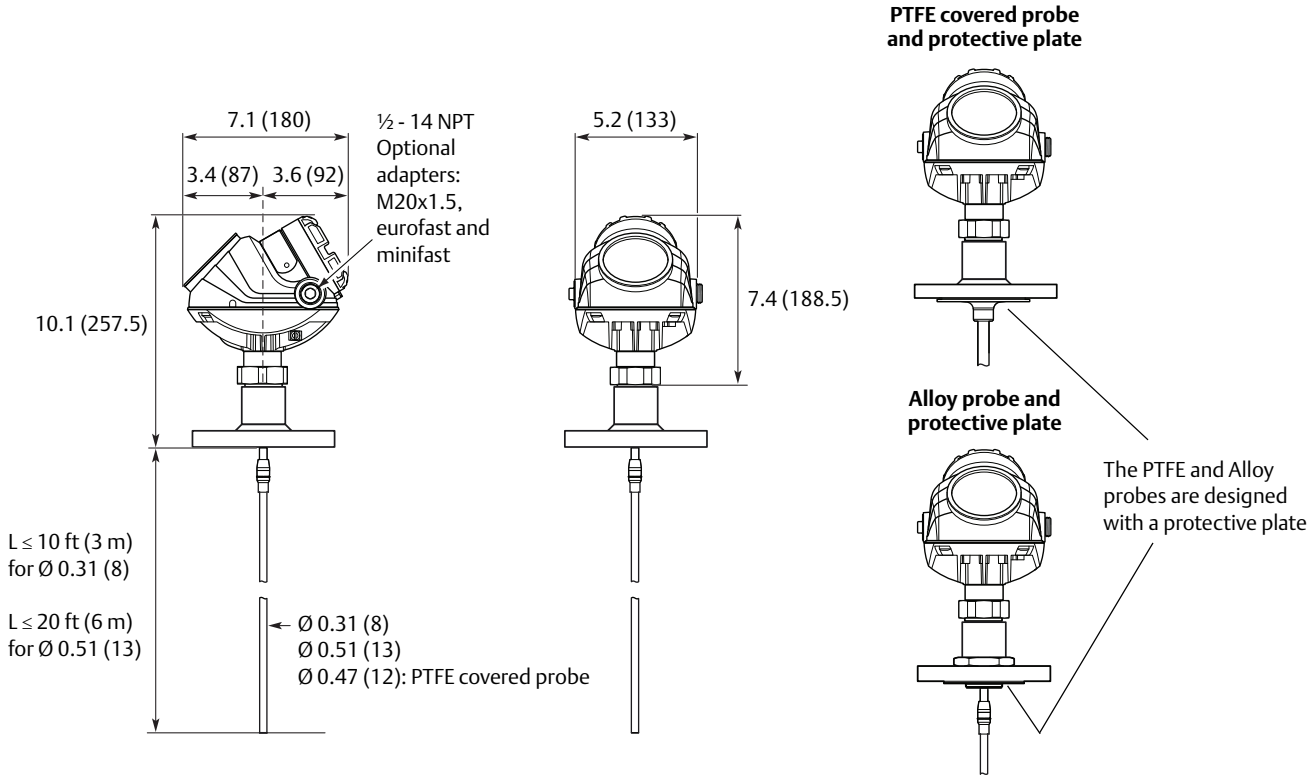


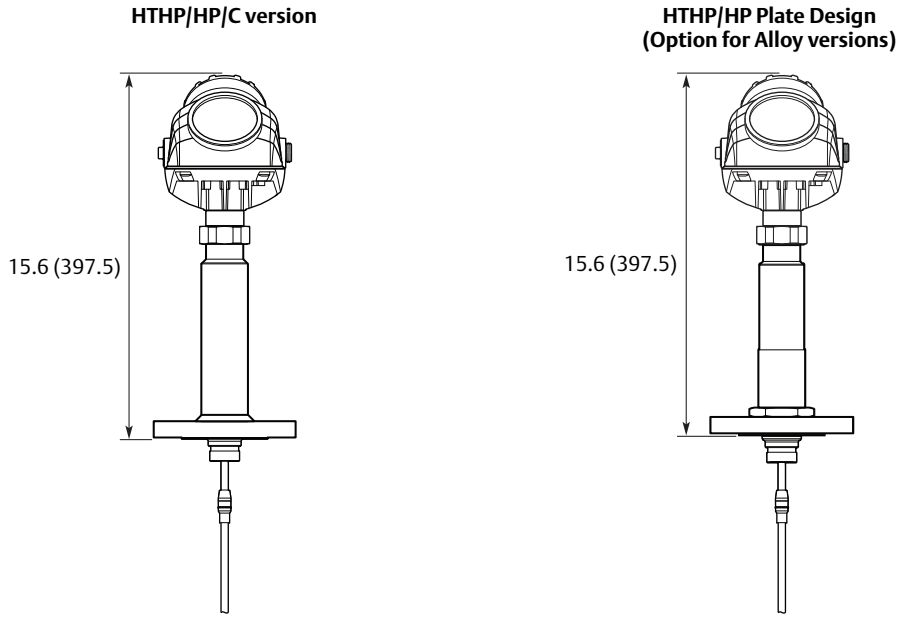

Dimensions are in inches (millimeters).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Figure 6. Rigid Single Lead Probe with Tri Clamp Connection

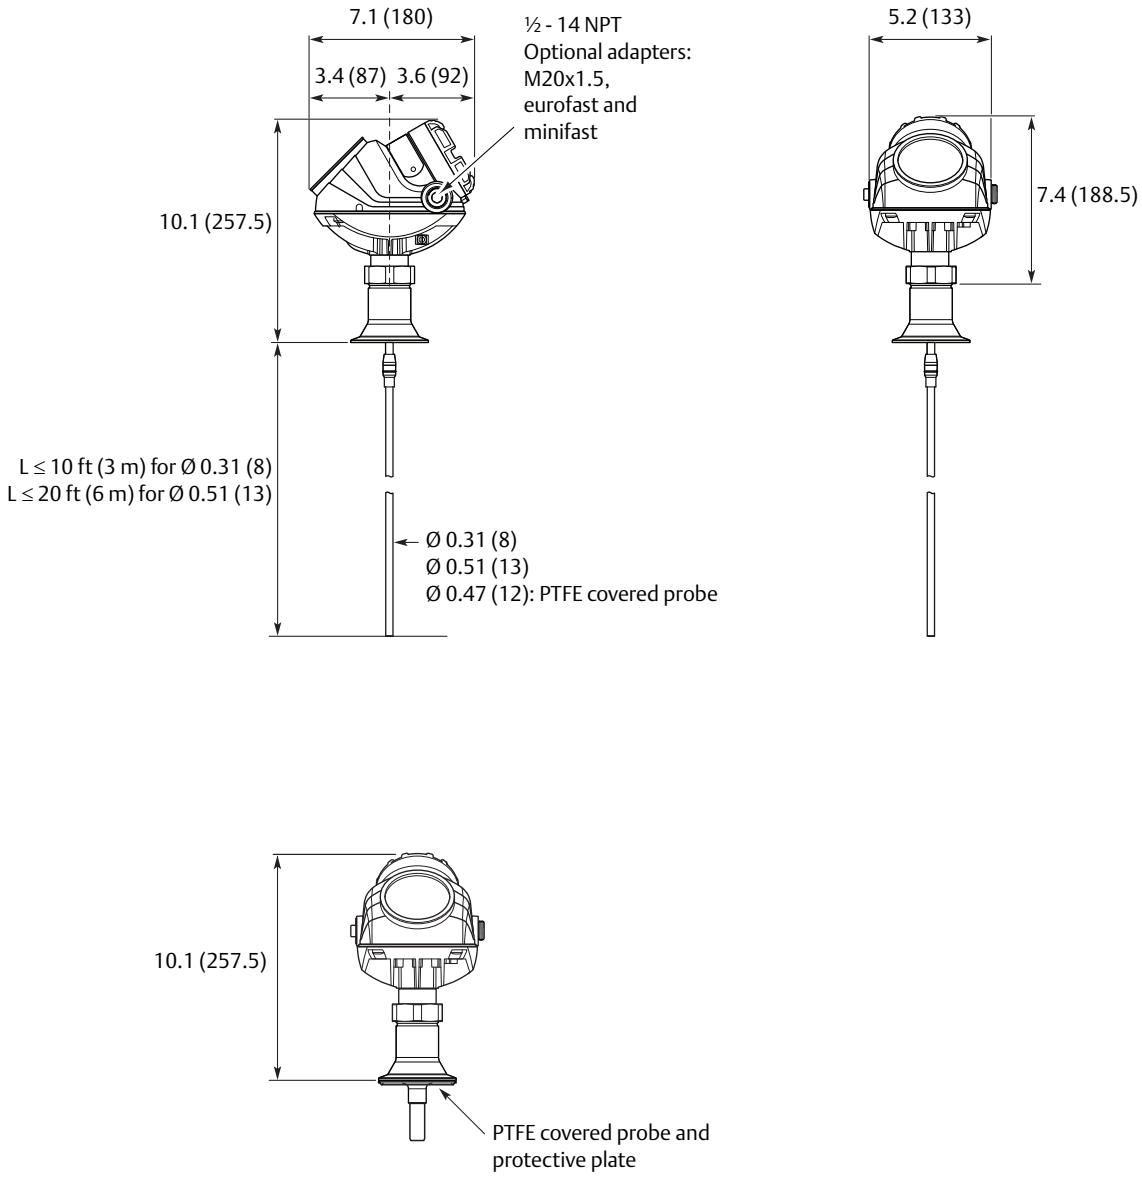

Dimensions are in inches (millimeters).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Figure 7. Rigid Single Lead Probe with Threaded Connection

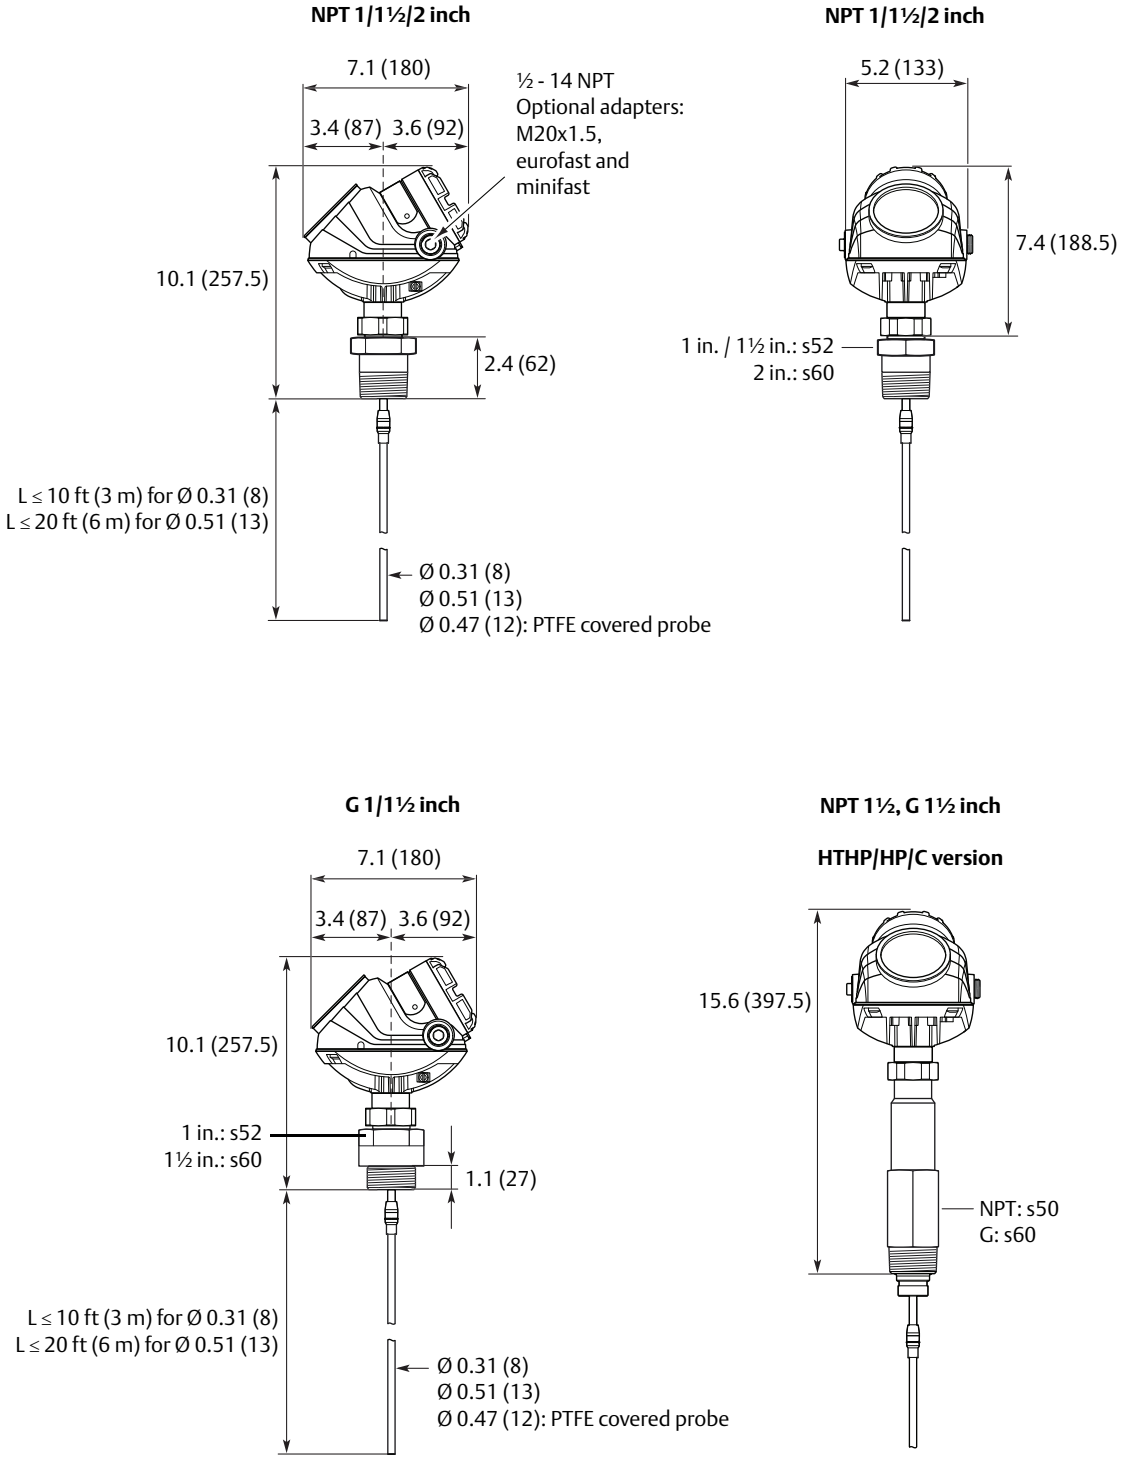

Dimensions are in inches (millimeters).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Figure 8. Segmented Rigid Single Lead Probe with Flange Connection

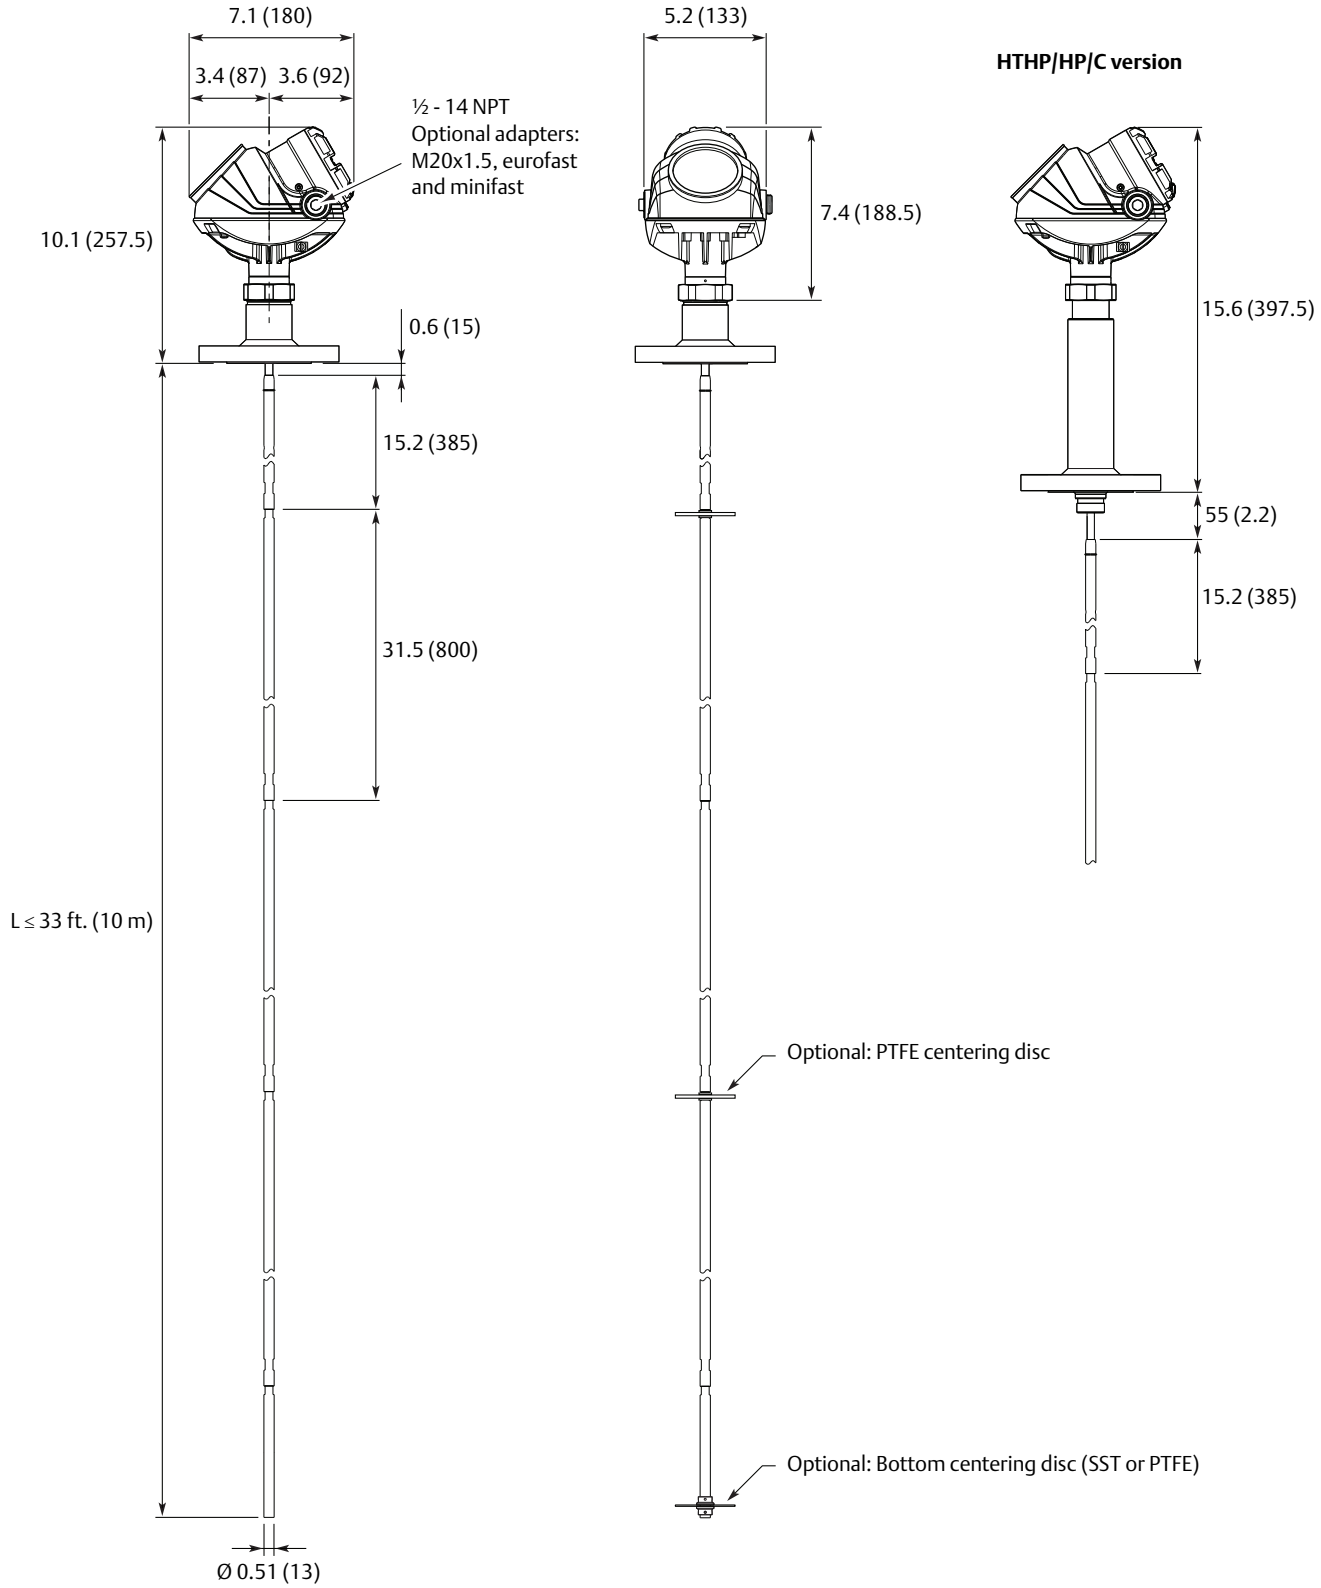

Dimensions are in inches (millimeters).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Figure 9. Segmented Rigid Single Lead Probe with Threaded Connection

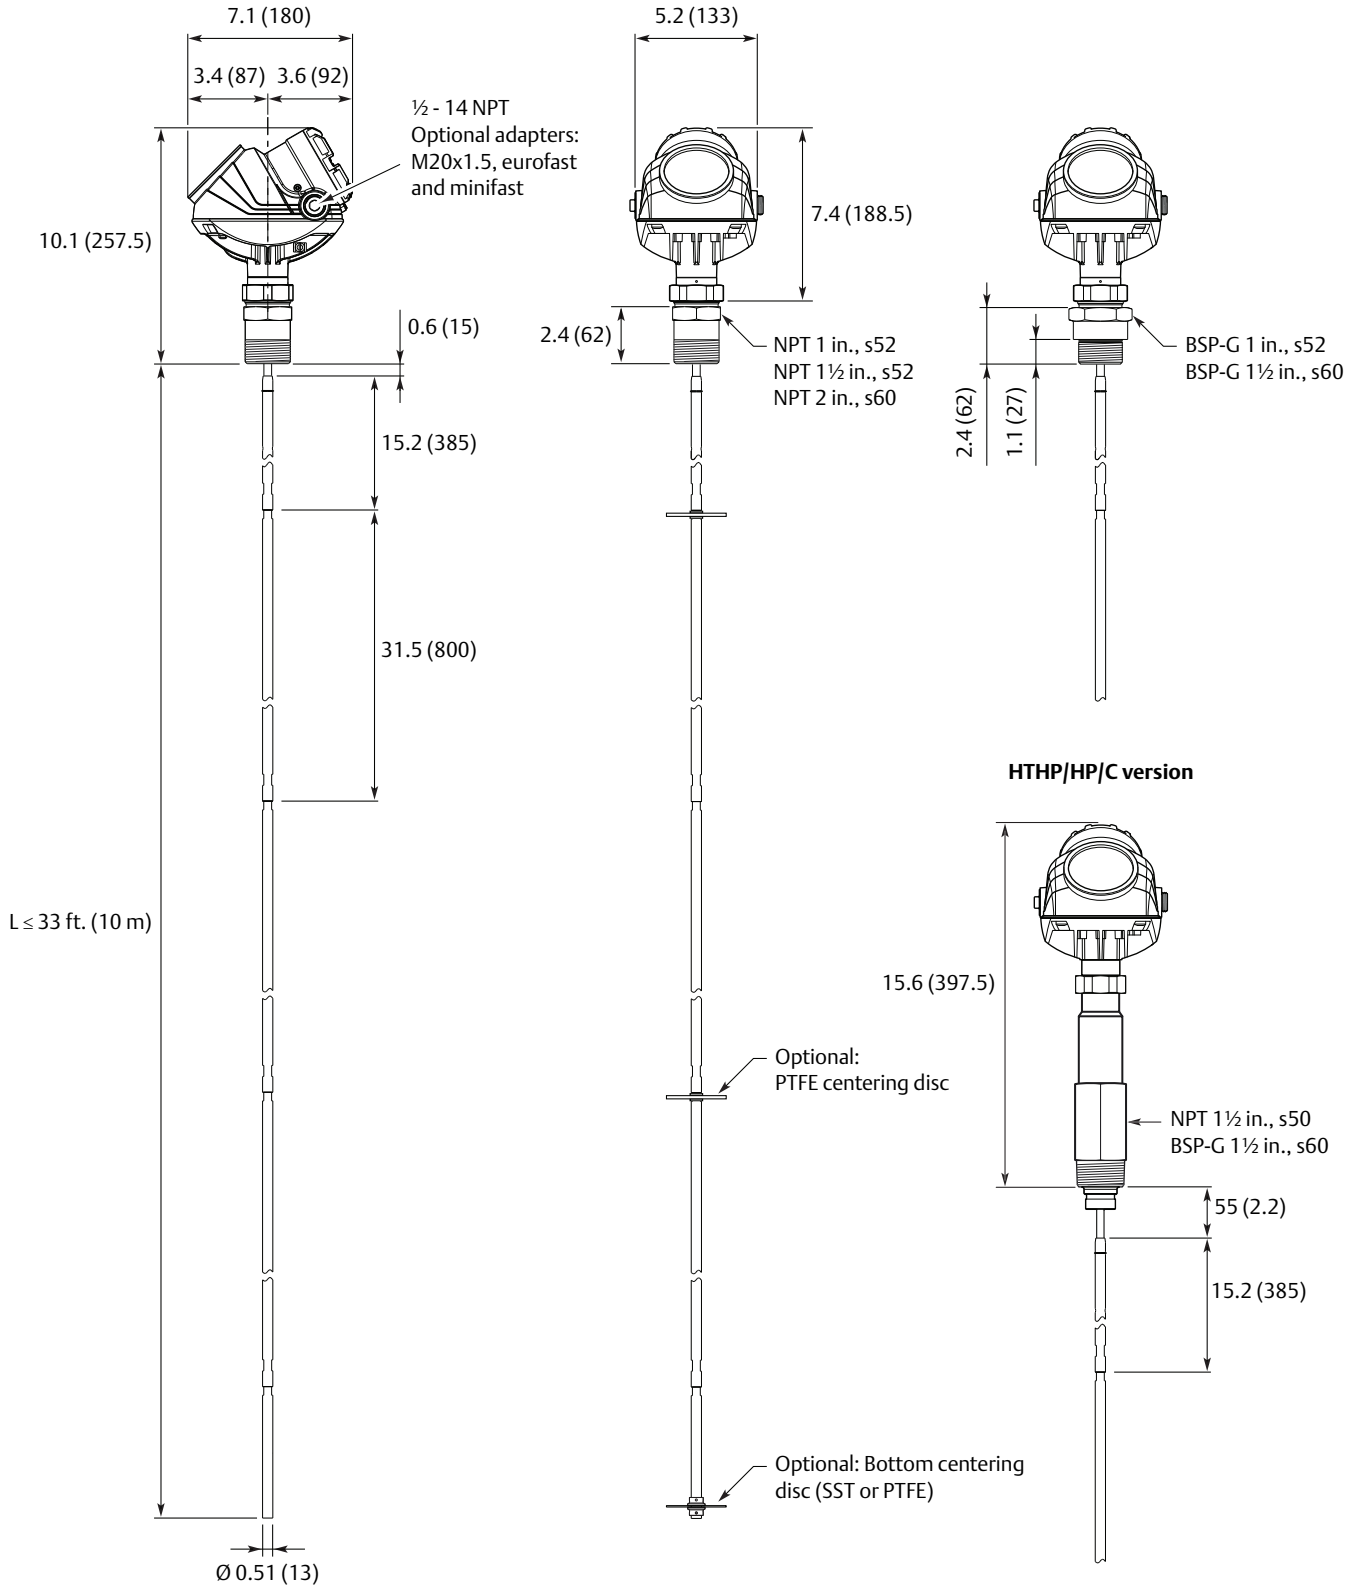

Dimensions are in inches (millimeters).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Figure 10. Single Rigid Vapor Probe for 2-in. Chambers

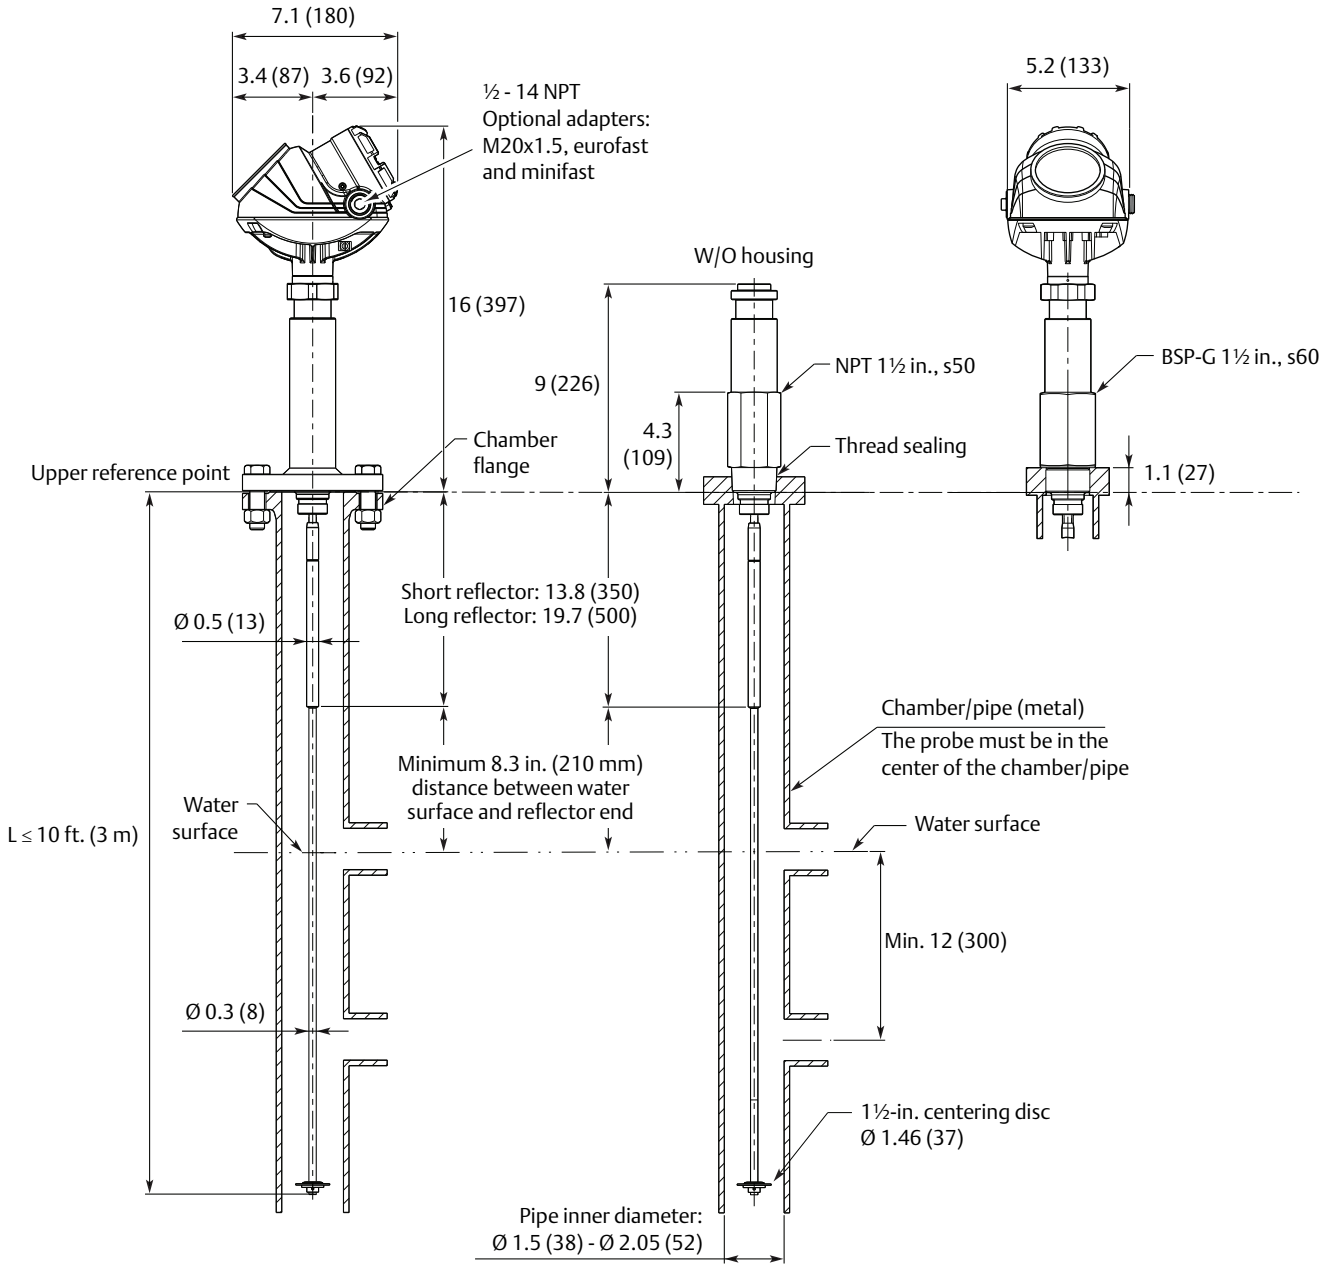

Dimensions are in inches (millimeters).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Figure 11. Flexible Single Lead Probe with Flange Connection

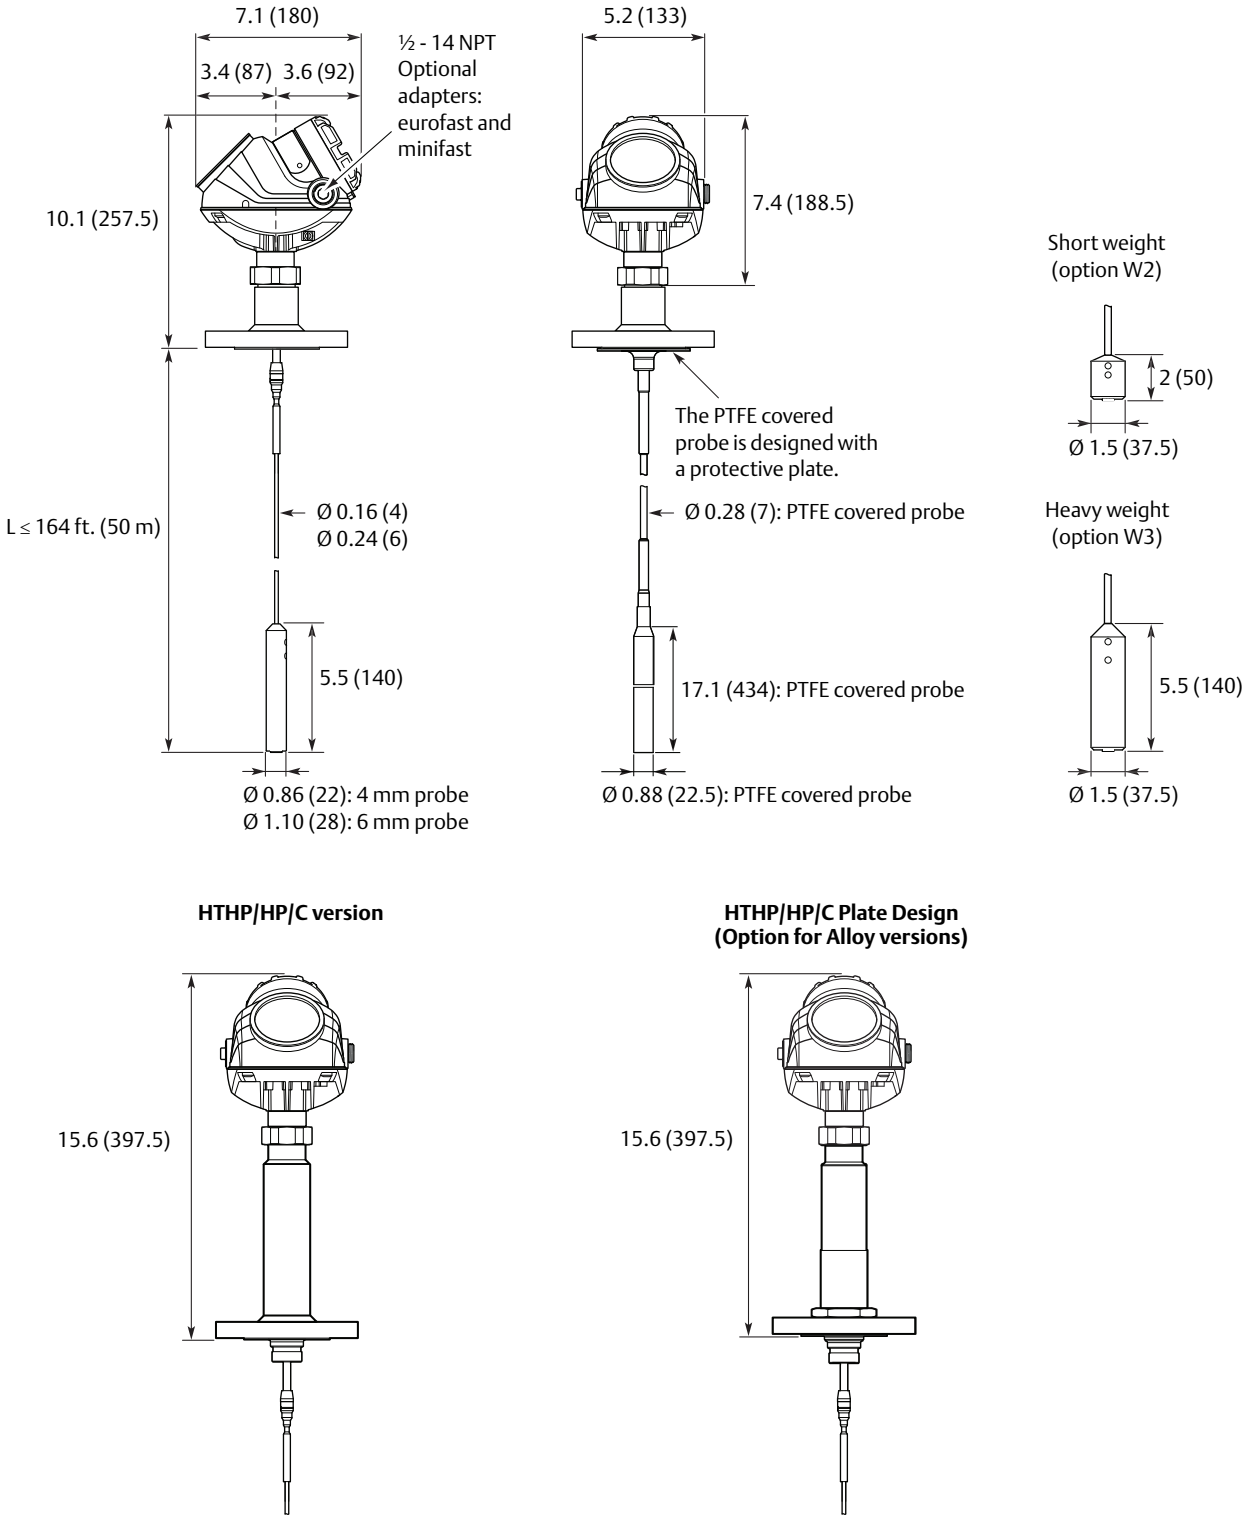

Dimensions are in inches (millimeters).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Figure 12. Flexible Single Lead Probe with Tri Clamp Connection

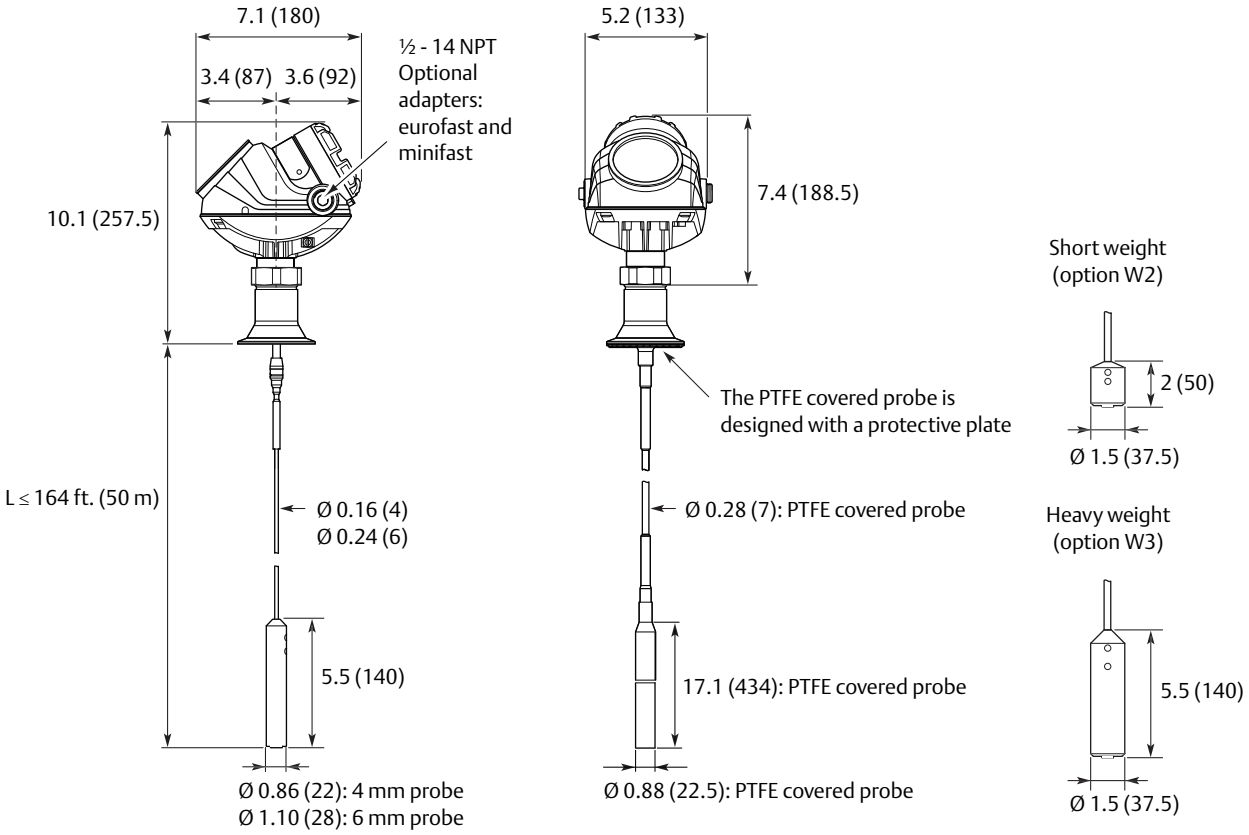

Dimensions are in inches (millimeters).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Figure 13. Flexible Single Lead Probe with Threaded Connection

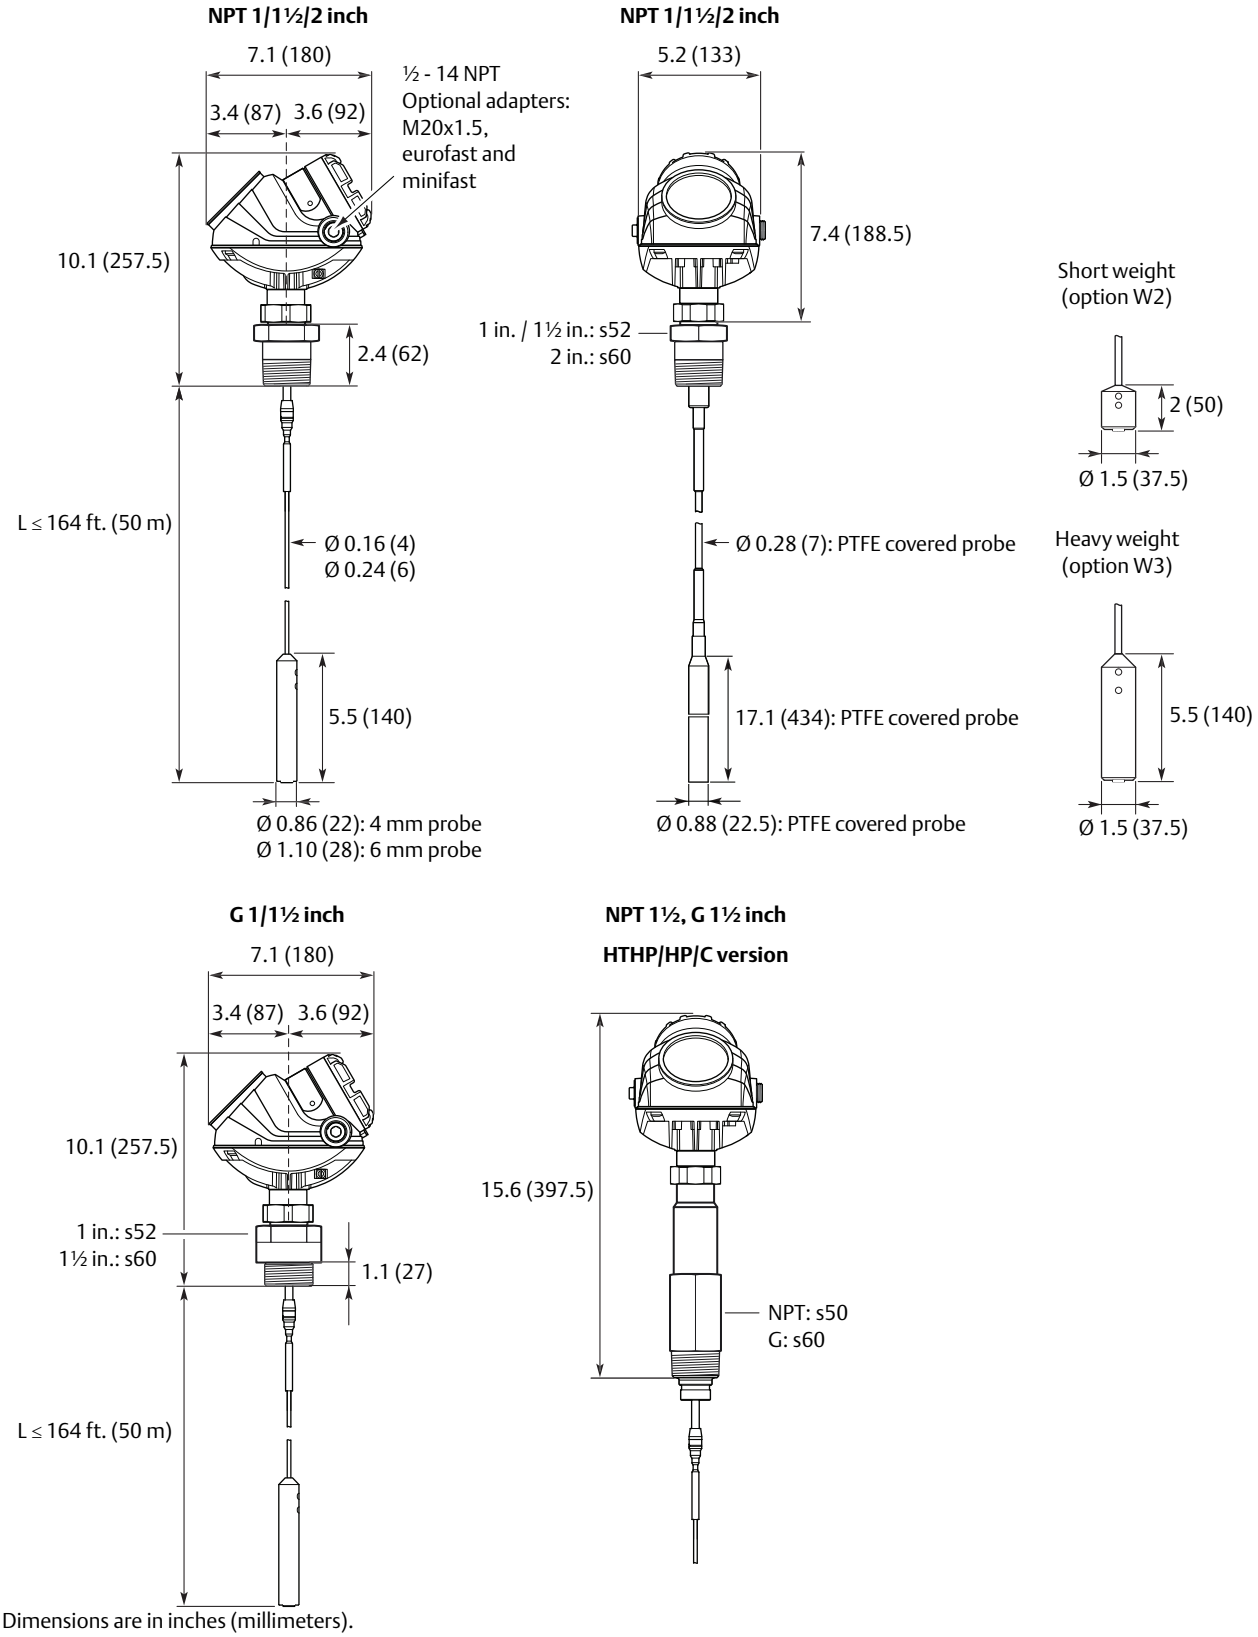

Dimensions are in inches (millimeters).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Figure 14. Coaxial Probe with Flange Connection

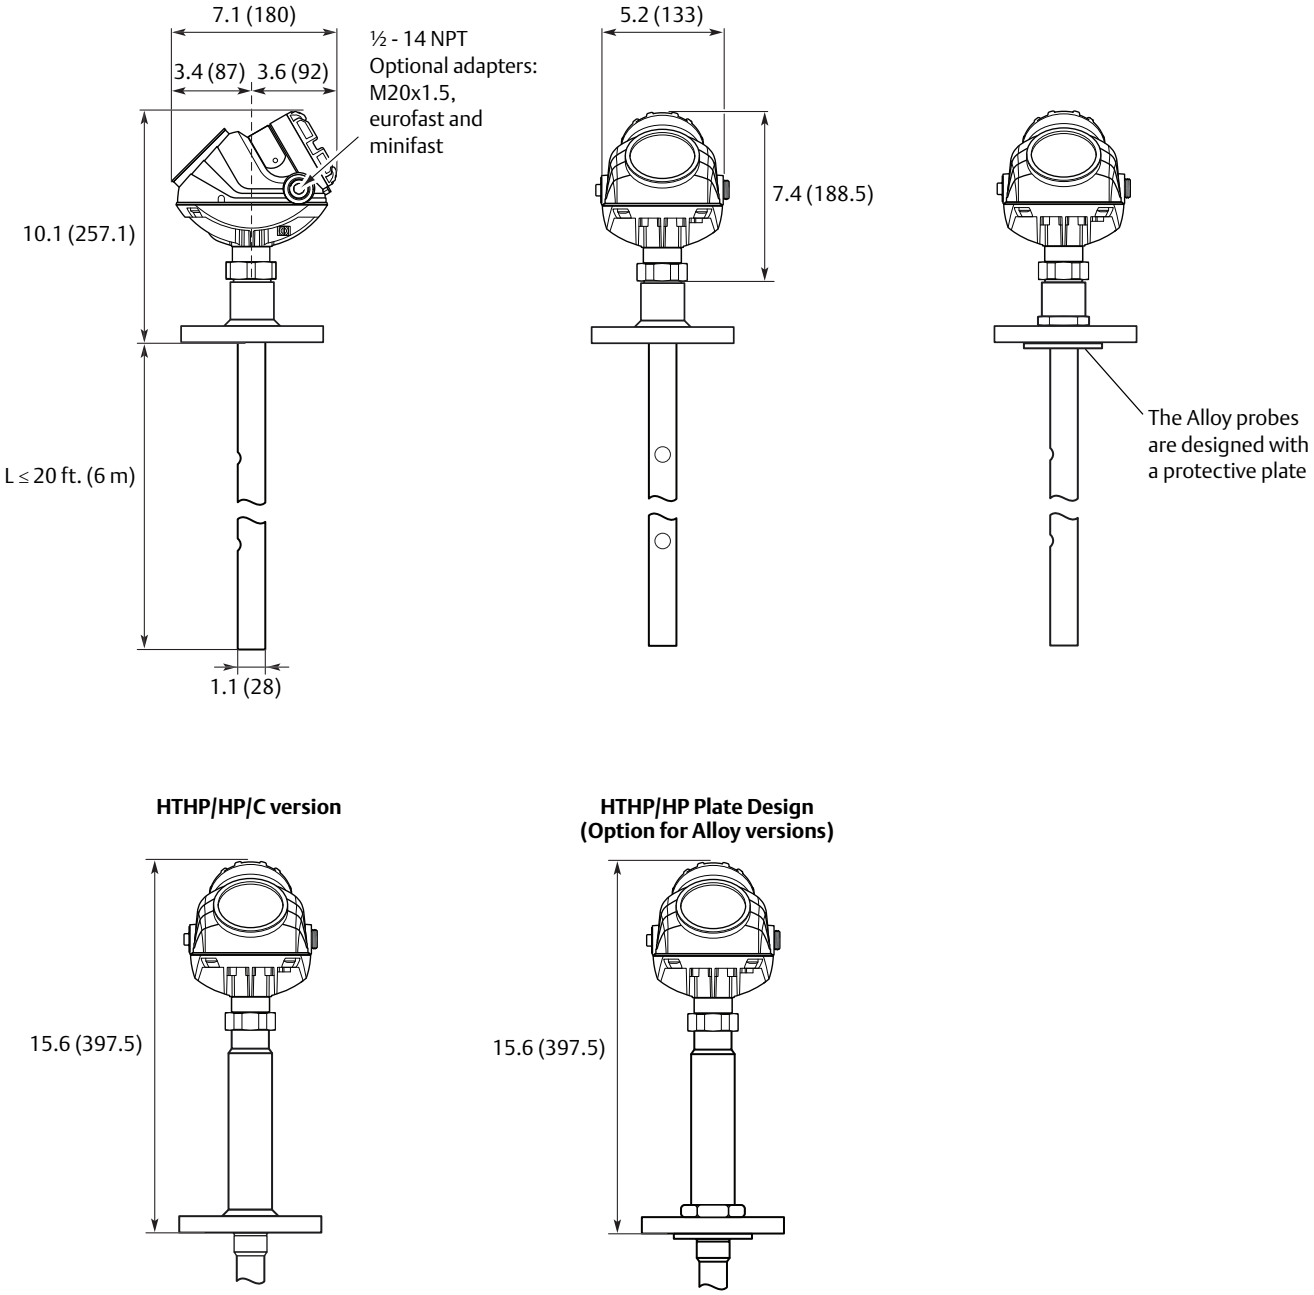

Dimensions are in inches (millimeters).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Figure 15. Coaxial Probe with Threaded Connection

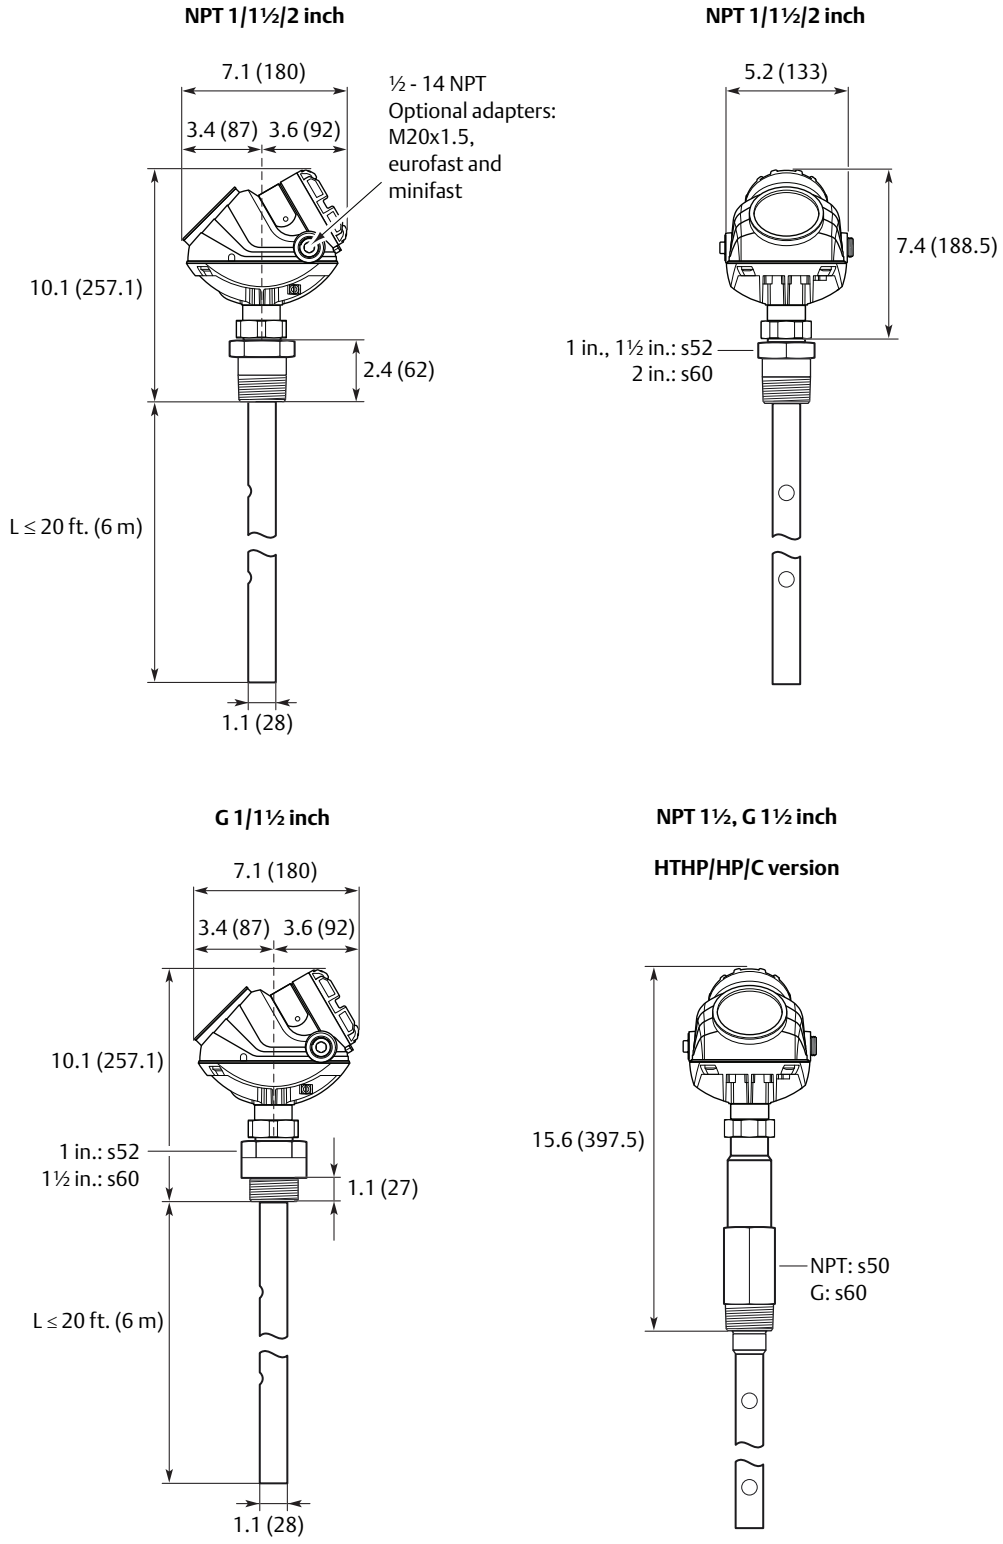

Dimensions are in inches (millimeters).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Figure 16. Integrated Still Pipe Vapor Probe for 3-in. Chambers and above

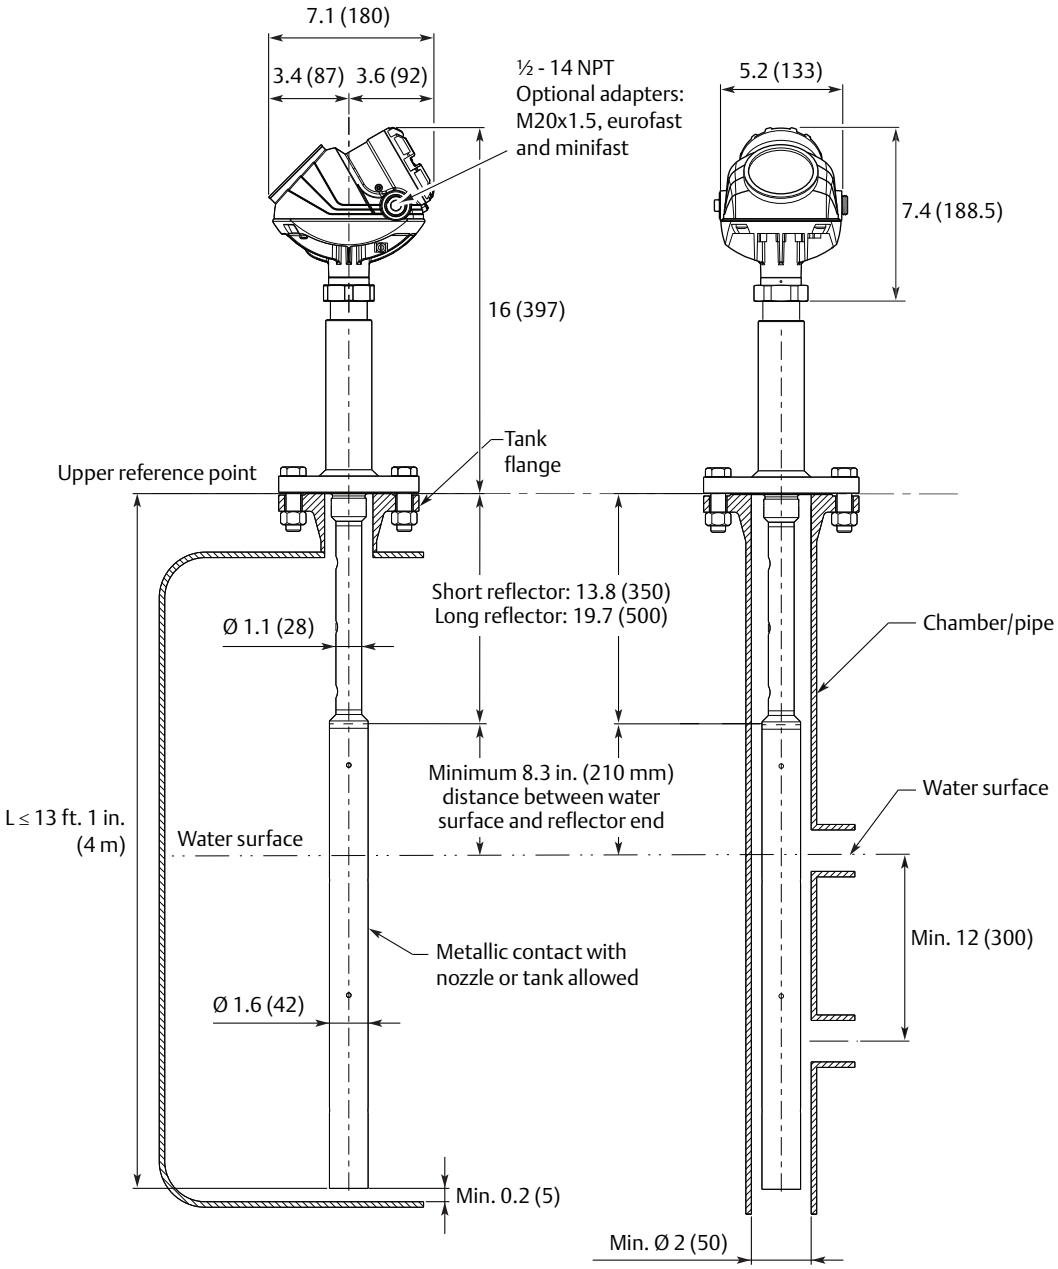

Dimensions are in inches (millimeters).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Figure 17. Rigid Twin Lead Probe

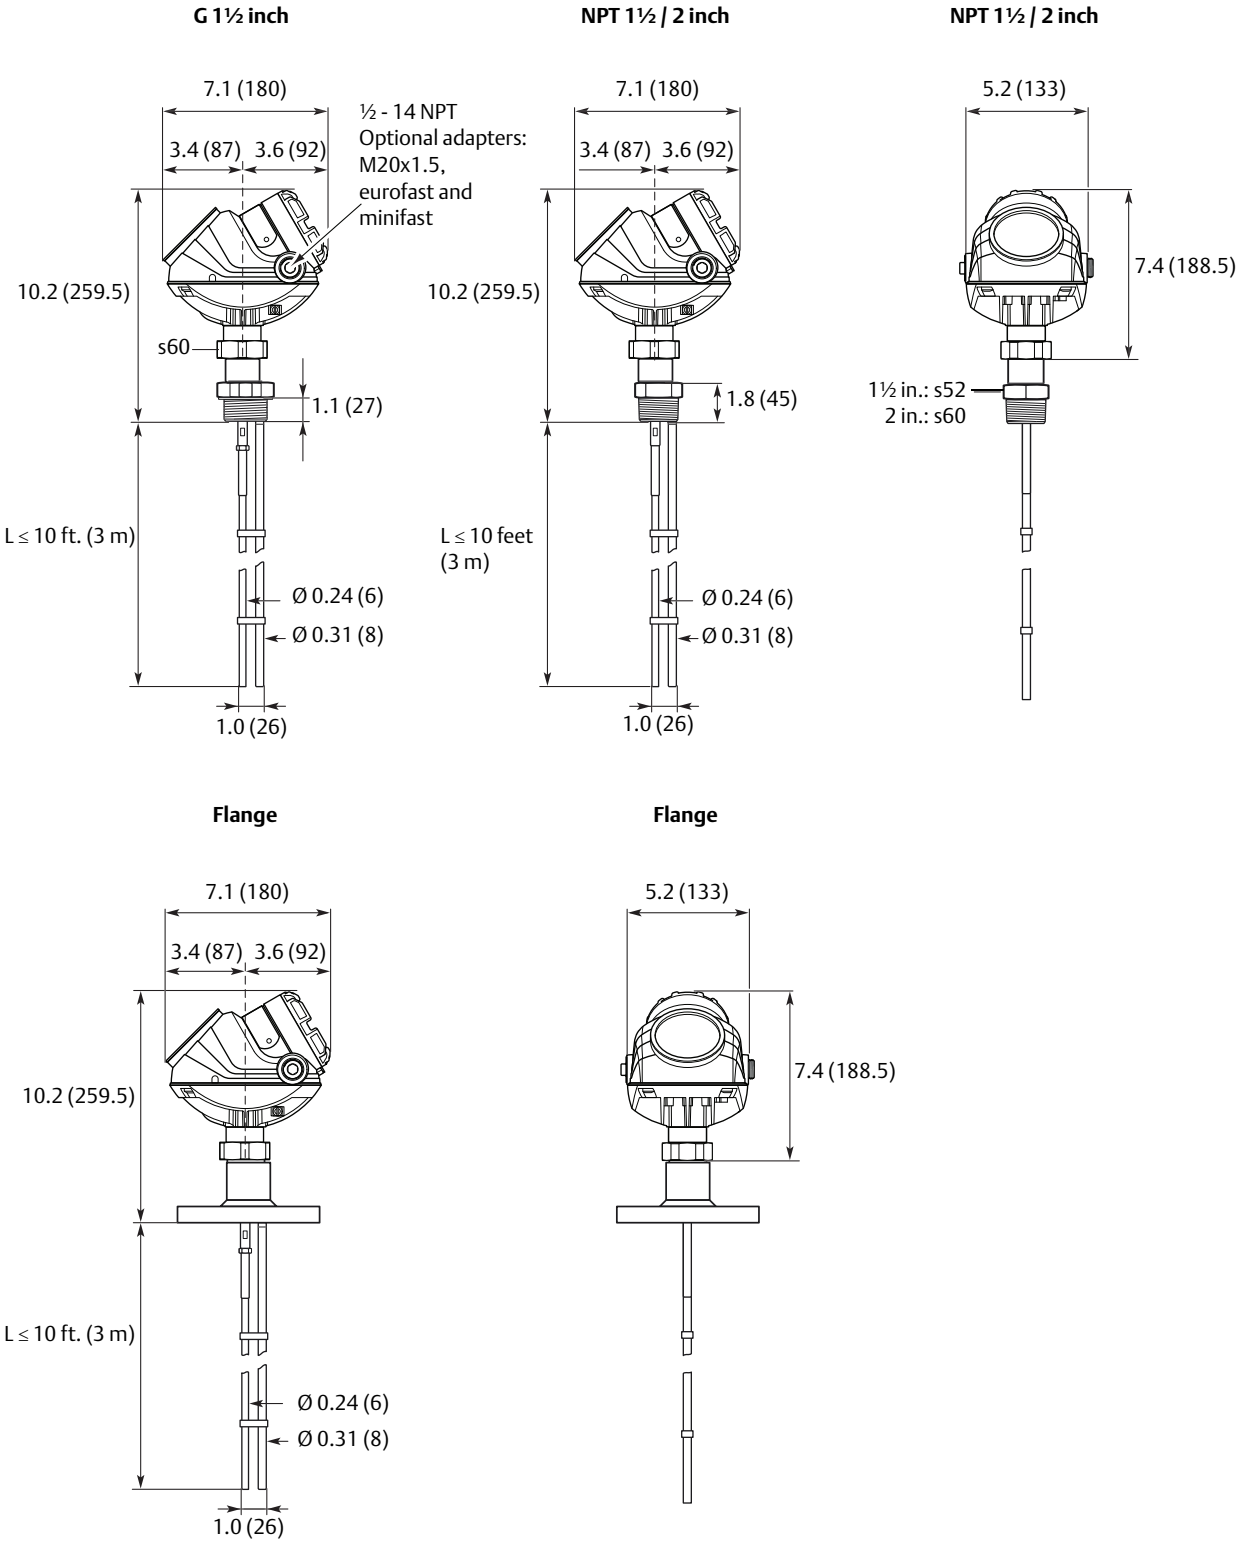

Dimensions are in inches (millimeters).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figure 18. Flexible Twin Lead Probe

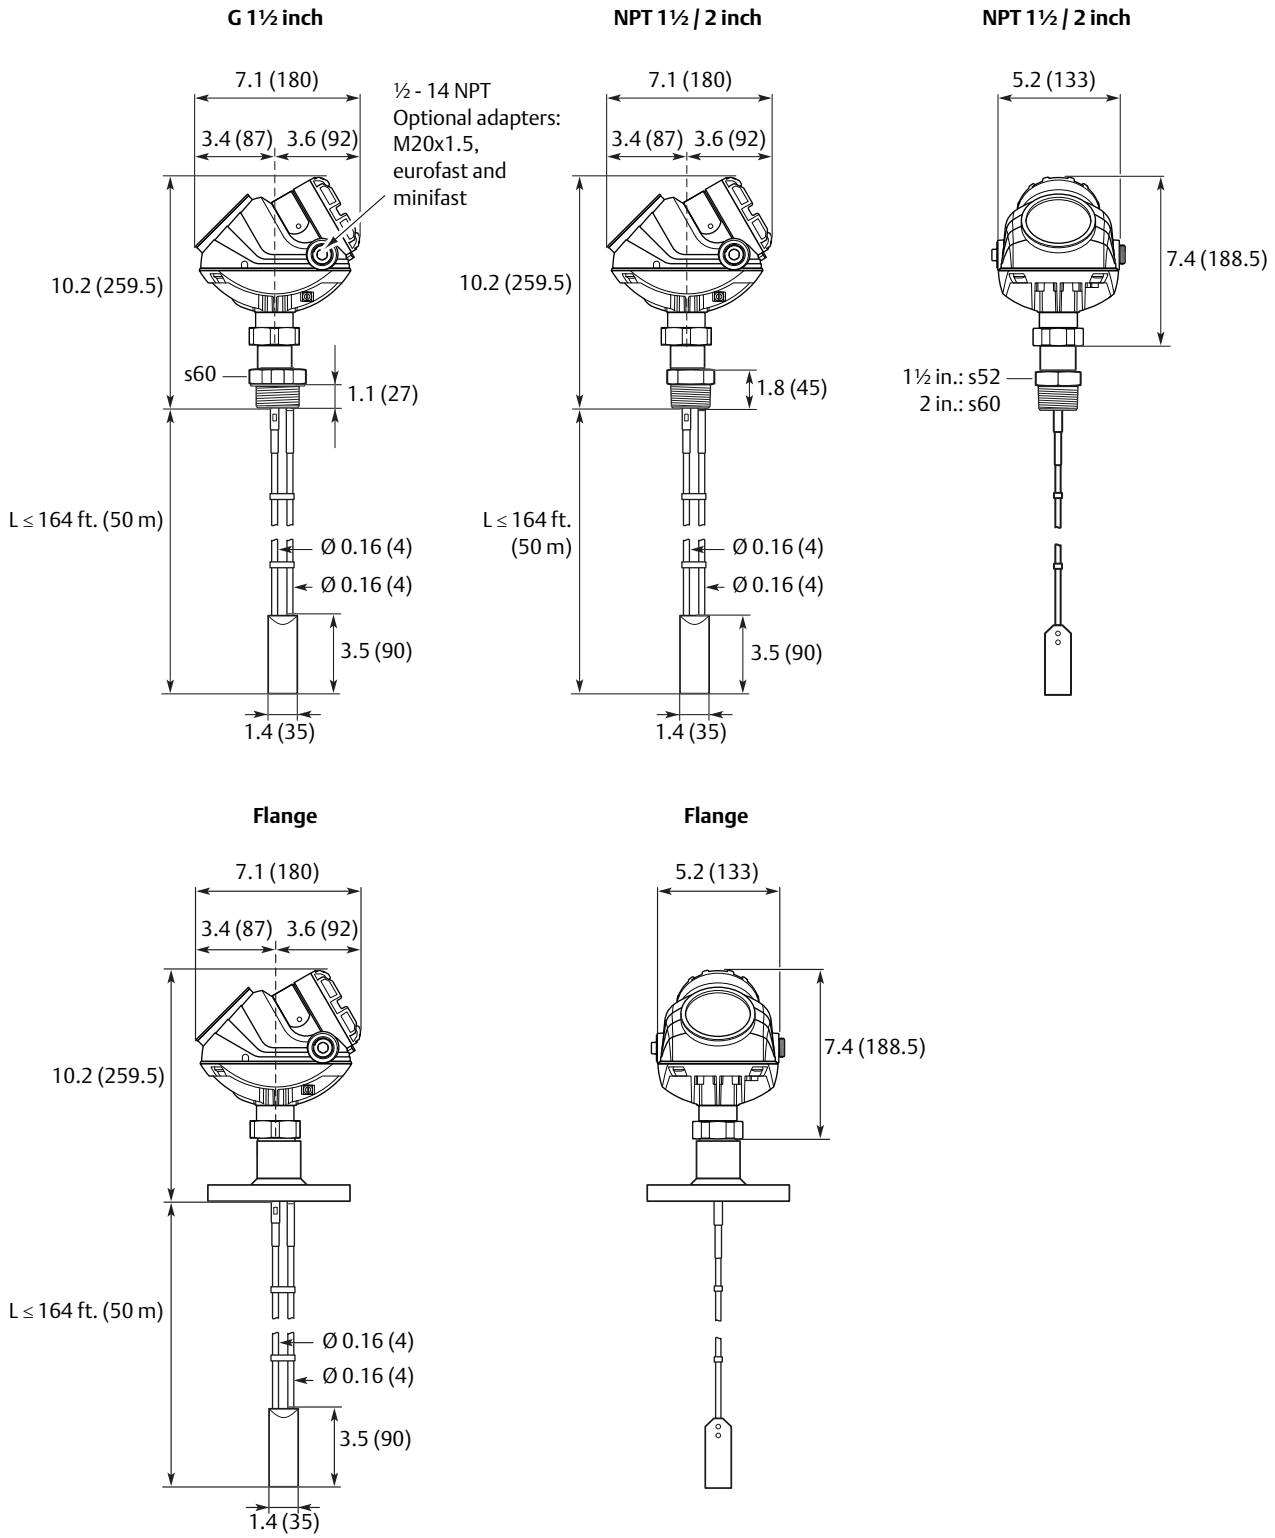


Dimensions are in inches (millimeters).


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figure 19. Mounting Bracket (Option Code BR)


Pipe mounting (vertical pipe)

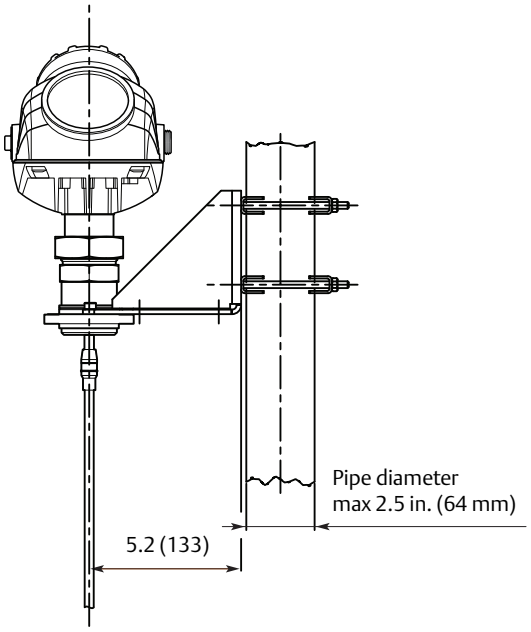


Pipe mounting (horizontal pipe)

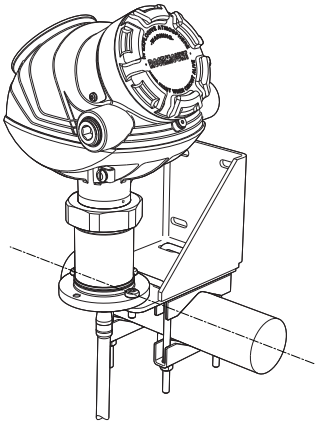

Wall mounting

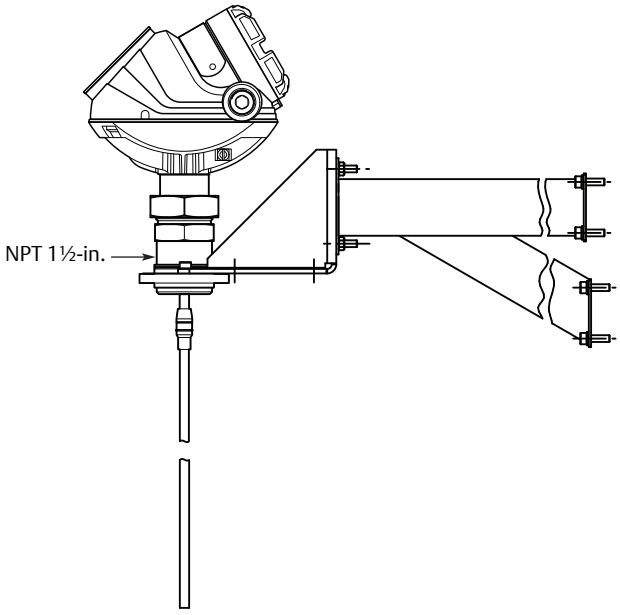


Hole pattern wall mounting

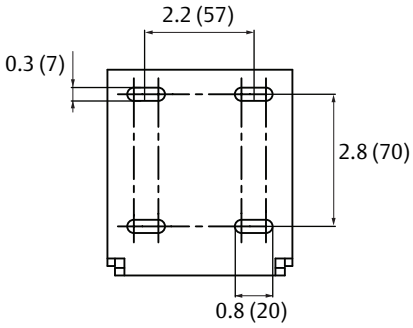

Dimensions are in inches (millimeters).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figure 20. Remote Housing (Option Code B1, B2, B3)

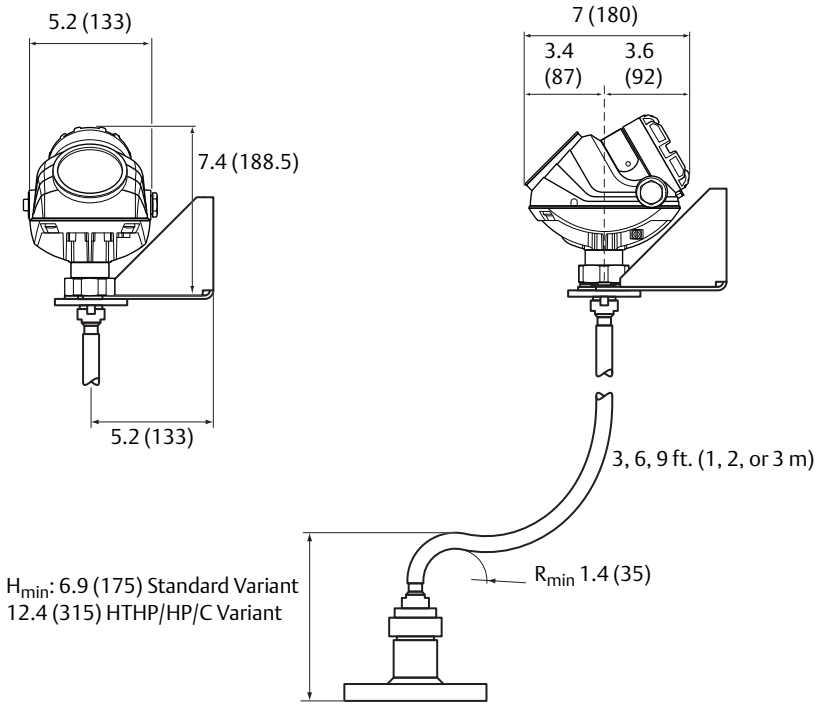


Dimensions are in inches (millimeters).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Special flanges and flushing connection rings

Raised face **Recessed face**

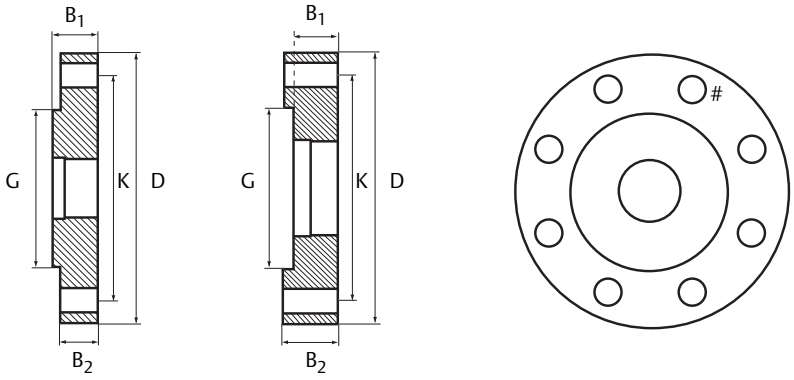

Dimensions are in inches (millimeters).

D: Outside diameter

B_1: Flange thickness with gasket surface

B_2: Flange thickness without gasket surface

$F=B_1-B_2$: Gasket surface thickness

G: Gasket surface diameter

Bolts: Number of bolts

K: Bolt hole circle diameter

Note
Dimensions may be used to aid in the identification of installed flanges. It is not intended for manufacturing use.

Special flanges[1]	D	B_1	B_2	F	G	# Bolts	K
Fisher 249B/259B[2]	9.00 (228.6)	1.50 (38.2)	1.25 (31.8)	0.25 (6.4)	5.23 (132.8)	8	7.25 (184.2)
Fisher 249C[3]	5.69 (144.5)	0.94 (23.8)	1.13 (28.6)	-0.19 (-4.8)	3.37 (85.7)	8	4.75 (120.65)
Masoneilan[2]	7.51 (191.0)	1.54 (39.0)	1.30 (33.0)	0.24 (6.0)	4.02 (102.0)	8	5.87 (149.0)


1. These flanges are also available in a vented version.
2. Flange with raised face.
3. Flange with recessed face.

Masoneilan and Fisher flanges are also available in vented versions (see **"Vented flanges"** on page 25), with the same dimensions as shown in the table above.

Vented flanges must be ordered with a 1½-in. NPT threaded process connection (code RA).

For information about flange temperature and pressure ratings, see page 34.

Flushing connection ring

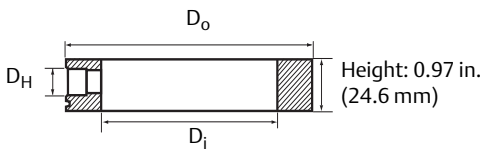




Table 11. Pressure and Temperature Rating for Flushing Ring up to Class 2500

Flushing connection rings	D_i	D_o	D_H
2 in. ANSI	2.12 (53.8)	3.62 (91.9)	¼ in. NPT
3 in. ANSI	3.60 (91.4)	5.00 (127.0)	¼ in. NPT
4 in. ANSI	3.60 (91.4)	6.20 (157.5)	¼ in. NPT
DN50	2.40 (61.0)	4.00 (102.0)	¼ in. NPT
DN80	3.60 (91.4)	5.43 (138.0)	¼ in. NPT

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Global Headquarters
Emerson Automation Solutions
6021 Innovation Blvd.
Shakopee, MN 55379, USA
+1 800 999 9307 or +1 952 906 8888
+1 952 949 7001
RFQ.RMD-RCC@Emerson.com

North America Regional Office
Emerson Automation Solutions
8200 Market Blvd.
Chanhassen, MN 55317, USA
+1 800 999 9307 or +1 952 906 8888
+1 952 949 7001
RMT-NA.RCCRFQ@Emerson.com

Latin America Regional Office
Emerson Automation Solutions
1300 Concord Terrace, Suite 400
Sunrise, FL 33323, USA
+1 954 846 5030
+1 954 846 5121
RFQ.RMD-RCC@Emerson.com

Europe Regional Office
Emerson Automation Solutions Europe GmbH
Neuhofstrasse 19a P.O. Box 1046
CH 6340 Baar
Switzerland
+41 (0) 41 768 6111
+41 (0) 41 768 6300
RFQ.RMD-RCC@Emerson.com

Asia Pacific Regional Office
Emerson Automation Solutions
1 Pandan Crescent
Singapore 128461
+65 6777 8211
+65 6777 0947
Enquiries@AP.Emerson.com

Middle East and Africa Regional Office
Emerson Automation Solutions
Emerson FZE P.O. Box 17033
Jebel Ali Free Zone - South 2
Dubai, United Arab Emirates
+971 4 8118100
+971 4 8865465
RFQ.RMTMEA@Emerson.com

Linkedin.com/company/Emerson-Automation-Solutions

Twitter.com/Rosemount_News

Facebook.com/Rosemount

Youtube.com/user/RosemountMeasurement

Google.com/+RosemountMeasurement

Standard Terms and Conditions of Sale can be found on the Terms and Conditions of Sale page.
The Emerson logo is a trademark and service mark of Emerson Electric Co.
DeltaV, Fisher, Plantweb, Rosemount, the Rosemount logotype, THUM Adapter, and Tri-Loop are trademarks of Emerson.
HART and *Wireless*HART are registered trademarks of the FieldComm Group.
FOUNDATION Fieldbus is a trademark of the FieldComm Group.
Modbus is a registered trademark of Gould Inc.
FDT is a registered trademark of the FDT Group.
DTM is a trademark of the FDT group.
eurofast and minifast are registered trademarks of TURCK.
FieldCare is a registered trademark of Endress+Hauser Process Solutions AG.
PACT*ware* is trademark of PACTware Consortium.
Viton and Kalrez are registered trademarks of DuPont.
MACTek and VIATOR are registered trademarks of MACTek Corporation.
NACE is a registered trademark of NACE International.
Masoneilan is a trademark of the General Electric Company.
Bumax is a registered trademark of the Bufab Group.
NEMA is a registered trademark and service mark of the National Electrical Manufacturers Association.
National Electrical Code is a registered trademark of National Fire Protection Association, Inc.
EchoLogics is a registered trademark of Mueller International LLC.
All other marks are the property of their respective owners.
© 2017 Emerson. All rights reserved.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP