ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Emerson / Rosemount Analytical 648* at our website: ***Click HERE***

Product Data Sheet
July 2016
00813-0100-4648 Rev GD

Rosemount™ 648 Wireless Temperature Transmitter

with Rosemount X-well™ Technology




- Rosemount X-well Technology provides accurate process temperature without the requirement of a thermowell or process penetration.
- Industry-leading temperature transmitter delivers field reliability as a wireless measurement solution.
- Achieve optimal efficiency with best-in-class product specifications and capabilities.
- Smart Wireless delivers innovative wireless solutions for temperature measurement and overall transmitter performance.

EMERSON
Process Management

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Rosemount 648 Wireless Temperature Transmitter


Rosemount X-well Technology provides a Complete Point Solution™ for accurately measuring process temperature without the requirement of a thermowell or process penetration.



- Simplify temperature measurement point specification, installation and maintenance, and eliminate possible leak points.
- Calculates a repeatable and accurate process temperature measurement via an in-transmitter thermal conductivity algorithm
- Measures pipe surface and ambient temperature, and utilizes the thermal conductivity properties of the installation and process piping in order to provide an accurate process measurement

Industry-leading temperature transmitter delivers field reliability as a wireless measurement solution

- Superior accuracy and stability
- Single sensor capability with universal sensor inputs (RTD, T/C, mV, ohms)
- Transmitter-Sensor Matching with Callendar-Van Dusen
- IEC-approved *Wireless*HART® protocol
- Dual-compartment housing, available in aluminum or stainless steel
- Large LCD display
- Extended range antenna options available

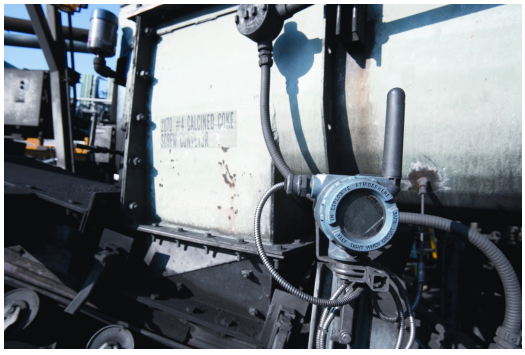

Achieve optimal efficiency with best-in-class product specifications and capabilities

- Two-year stability rating reduces maintenance costs
- Transmitter-sensor matching eliminates the interchangeability error of sensors, improving measurement point accuracy by 75 percent
- User-centric Device Dashboards communicate important diagnostics and ensure process health
- Compensation for ambient temperature enhances transmitter performance
- Dual-compartment housing provides the highest reliability in harsh industrial environments.

Contents

Ordering Information 5
How to order Rosemount X-well Technology 8
Specifications 10
Product Certifications 16
Dimensional Drawings 20


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

A standard diagnostic offering increases measurement reliability and provides visibility into process conditions



- Four user-configurable alerts provide increased process information and measurement point insight
- Open/short sensor diagnostics assist with detecting issues in sensor loops
- Terminal temperature feature verifies installation location temperature conditions to ensure optimal transmitter operation.


Smart Wireless delivers innovative wireless solutions for temperature measurement and overall transmitter performance

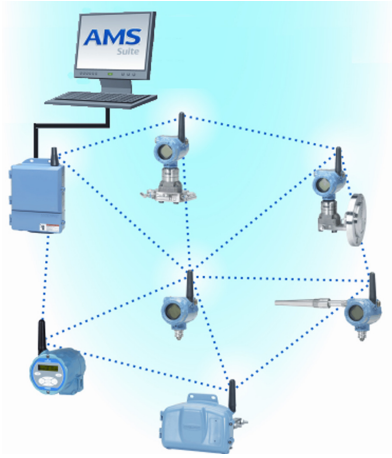

- Self-organizing network delivers information rich data with > 99% data reliability and establishes a highly stable network.
- Smart Wireless capabilities extend the full benefits of PlantWeb™ to previously inaccessible temperature measurement locations.
- SmartPower™ Solutions provide an intrinsically safe power module, allowing field replacements without removing the transmitter from the process, keeping personnel safe, and reducing maintenance costs.
- Emerson™ Process Management's layered approach to wireless network security ensures that data transmissions are secure.

Explore the benefits of a Complete Point Solution from Emerson

- An "Assemble To Sensor" option enables Emerson Process Management to provide a complete point temperature solution, delivering an installation-ready transmitter and sensor assembly.
- Emerson offers a selection of RTDs, thermocouples, and thermowells that bring superior durability and Rosemount reliability to temperature sensing, complementing the Rosemount Transmitter portfolio.

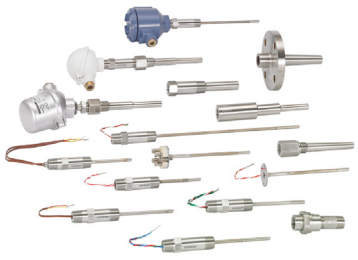

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Experience global consistency and local support from numerous worldwide Emerson manufacturing sites



- World-class manufacturing provides globally consistent product from every factory and the capacity to fulfill the needs of any project, large or small.
- Experienced instrumentation consultants help select the right product for any temperature application and advise on best installation practices.
- An extensive global network of Emerson service and support personnel can be on-site when and where they are needed.
- Make wireless installation and configuration easy with the Smart Wireless Gateway.

- For installations that have a high number of temperature measurements in close proximity, consider the **Rosemount 848T High Density** Temperature Transmitter.
- Explore how Emerson's intrinsically safe **SmartPower Solutions** reduce maintenance costs.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ordering Information



The Rosemount 648 Wireless delivers industry-leading temperature field reliability as a wireless process measurement with Best-in-Class specifications and capabilities.

Transmitter features include:

- Temperature Measurement Assembly with Rosemount X-well Technology (Option Code PT)
- IEC-approved *Wireless*HART protocol (Option Code WA3)
- External antenna (Option Code WK1)
- Extended range, External antenna (Option Code WM1)
- Large LCD display (Option Code M5)
- Transmitter-sensor matching (Option Code C2)
- 3-point calibration certificate (Option Code Q4)
- Assemble to sensor (Option Code XA)

Specification and selection of product materials, options, or components must be made by the purchaser of the equipment. See page 10 for more information on Material Selection.

When ordering Rosemount X-well Technology, specific option codes are required see page 8 for more information.

Table 1. Rosemount 648 Wireless Temperature Transmitter Ordering Information

★ The standard offering represents the most common options. The starred options (★) should be selected for best delivery. The expanded offering is subject to additional delivery lead time.

Model	Product description		
648	Temperature transmitter		
Transmitter type			
D	Wireless field mount		★
Transmitter output			
X	Wireless		★
Measurement configuration			
1	Single-sensor Input		★
Housing style		**Material**	
D	Dual compartment housing	Aluminum	★
E	Dual compartment housing	SST	★
Conduit entry size			
1	1/2-14 NPT		★
Product certifications			
NA	No approval		★
I5	FM Intrinsically Safe, Non-Incendive, and Dust Ignition-proof		★

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 1. Rosemount 648 Wireless Temperature Transmitter Ordering Information

★ The standard offering represents the most common options. The starred options (★) should be selected for best delivery. The expanded offering is subject to additional delivery lead time.

Product certifications		
N5	FM Non-Incendive and Dust Ignition-proof	★
I6	CSA Intrinsically Safe	★
I1	ATEX Intrinsic Safety	★
I7	IECEx Intrinsic Safety	★
I2	INMETRO Intrinsic Safety	★
I4	TIIS Intrinsic Safety	★
I3	China Intrinsic Safety	★
IM	Technical Regulations Customs Union (EAC) Intrinsic Safety	★
KQ	USA, Canada, ATEX Intrinsic Safety Combination (combination of I1, I5, and I6)	★

Wireless options (include with selected model number)

Assemble to options		
XA[(1)]	Sensor specified separately and assembled to transmitter	★
XC	Hand tight assembly of a transmitter and sensor	★
Wireless update rate, operating frequency, and protocol		
WA3	User configurable update rate, 2.4 GHz DSSS, IEC 62591 (*Wireless*HART)	★
Omni-directional wireless antenna and SmartPower[(2)]		
WK1	External antenna, adapter for black power module (I.S. power module sold separately)	★
WM1	Extended range, external antenna, adapter for black power module (I.S. power module sold separately)	★
Mounting bracket[(1)]		
B5	“L” mounting bracket for 2-in. pipe and panel mounting - All SST	★
Display		
M5	LCD display	★
Enhanced performance[(3)]		
PT	Temperature measurement assembly with Rosemount X-well Technology	★
Software configuration		
C1	Custom configuration of date, descriptor, message, and wireless parameters (requires CDS with order)	★
Line filter		
F5	50 Hz line voltage filter	★
F6	60 Hz line voltage filter	★
Sensor trim		
C2	Transmitter-sensor matching - trim to specific Rosemount RTD calibration schedule (CVD Constants)	★

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 1. Rosemount 648 Wireless Temperature Transmitter Ordering Information

★ The standard offering represents the most common options. The starred options (★) should be selected for best delivery. The expanded offering is subject to additional delivery lead time.

5-point calibration		
C4	5-point calibration (requires Q4 option code to generate a Calibration Certificate)	★
Calibration certificate		
Q4	Calibration Certificate (3-point calibration)	★
Cable gland option		
G2	Cable gland (7.5 – 11.9 mm)	★
G4	Thin wire cable gland (3 – 8 mm)	★
Extended product warranty		
WR3	3-year limited warranty	★
WR5	5-year limited warranty	★
Typical model number: 648 D X 1 D 1 NA WA 3 WK 1 M5 C1 F6		

1. When ordering the XA option, a mounting bracket is not included. If a bracket is required, please order option code B5.
2. Black power module must be shipped separately, order Model 701PBKKF or Part #00753-9220-0001.
3. When ordering the PT option code, the C1 and XA option codes are required. Rosemount X-well Technology is only available as a Rosemount 648 Wireless Temperature Transmitter and 0085 Pipe Clamp Sensor direct mount assembly.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

How to order Rosemount X-well Technology

Rosemount X-well Technology is only available as a Rosemount 648 Wireless and 0085 Pipe Clamp sensor direct mount assembly.

:

Table 2. Rosemount 648 Wireless Option Code Requirements

Code	Description
PT	Temperature measurement assembled with Rosemount X-well Technology
XA	Sensor specified separately and assembled to transmitter
C1	Custom configuration of date, descriptor, message, and wireless parameters (requires CDS with order)

:

Table 3. Rosemount 0085 Pipe Clamp Sensor Option Code Requirements

Code	Description
N	No connection head
3	Sensor connection
P1	Sensor type
J	Extension type
0080	Extension length
XA	Assemble sensor to specific temperature transmitter

Rosemount X-well assemblies are available in most Rosemount 0085 Pipe Clamp Sensor diameter sizes depending on the pipe schedule. The pipe diameters that correspond to the pipe schedules are:

Pipe schedule 40 and 80		
Code	**Suitable pipe size**	
	inch	**DIN**
0022	1/2	DN15
0027	3/4	DN 20
0034	1	DN 25
0043	1 1/4	DN 32
0049	1 1/2	DN 40
0061	2	DN 50
0077	2 1/2	DN 65
0089	3	DN 80
0115	4	DN 100
0140	5	DN 125

Pipe schedule 40 and 80		
Code	**Suitable pipe size**	
	inch	**DIN**
0324	12	DN 300
0356	14	DN 350
0407	16	DN 400
0458	18	DN 450
0508	20	DN 500
0610	24	DN 600
0660	26	N/A
0762	30	DN 790
0813	32	DN 900
0915	36	DN 1000

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

0169	6	DN 150
0220	8	DN 200
0273	10	DN 250

1016	42	N/A
1070	42	N/A
1219	48	N/A

Pipe schedule 120		
Code	**Suitable pipe size**	
	inch	**DIN**
0115	4	DN 100
0140	5	DN 125
0169	6	DN 150
0220	8	DN 200
0273	10	DN 250
0324	12	DN 300
0356	14	DN 350
0407	16	DN 400
0458	18	DN 450
0508	20	DN 500
0610	24	DN 600

Note
For pipe schedules larger than 120, consult factory for more information.

Typical model number of the assembly: 648 D X 1 D 1 NA WA3 WK1 M5 PT C1 XA
0085 N 3 P1 J 0080 C 00169 N XA

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specifications

Functional specifications

Input

Supports Thermocouple, RTD, millivolt, and ohm input types. See "Transmitter accuracy" on page 13 for sensor options.

Output

IEC 62591 (*Wireless*HART), 2.4 GHz DSSS

Local display

The optional five-digit integral LCD display can display sensor temperature in engineering units (°F, °C, °R, K, Ω, and millivolts) and percent of range. The display updates based on the Wireless Update Rate.

Humidity limits

0–99% Non-condensing Relative Humidity

Update rate

*Wireless*HART, user-selectable one second to 60 minutes

Accuracy

(Pt 100 at reference condition: 20 °C)
±0.225 °C (±0.405 °F)

Radio frequency power output from antenna

External Antenna (WK1 option): Maximum of 10 mW (10 dBm) EIRP

Physical specifications

Material selection

Emerson Process Management provides a variety of Rosemount product with various product options and configurations including materials of construction that can be expected to perform well in a wide range of applications. The Rosemount product information presented is intended as a guide for the purchaser to make an appropriate selection for the application. It is the purchaser's sole responsibility to make a careful analysis of all process parameters (such as all chemical components, temperature, pressure, flow rate, abrasives, contaminants, etc.), when specifying product, materials, options and components for the particular application. Emerson Process Management is not in a position to evaluate or guarantee the compatibility of the process fluid or other process parameters with the product, options, configuration or materials of construction selected.

Conformance to specification (±3σ [Sigma])

Technology leadership, advanced manufacturing techniques, and statistical process control ensure measurement specification conformance to at least ±3σ.

Electrical connections

Power module

The Emerson SmartPower Power Module is field replaceable, featuring keyed connections that eliminate the risk of incorrect installation.

The power module is an Intrinsically Safe solution, containing Lithium-thionyl chloride with a polybutadine terephthalate (PBT) enclosure.

The Rosemount 648 Wireless has power module life time rating of 10 years with a one-minute update rate, at reference conditions.[(1)]

Sensor terminals

Sensor terminals permanently fixed to terminal block.

Field Communicator connections

Communication Terminals

Clips permanently fixed to terminal block, designated by the text "COMM."

1. *Reference conditions are 70 °F (21 °C), and routing data for three additional network devices.*

   NOTE: Continuous exposure to ambient temperature limits (–40 °F or 185 °F; –40 °C or 85 °C) may reduce specified life by less than 20 percent.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Materials of construction

Enclosure

Housing - Low-copper aluminum or stainless steel

Paint - Polyurethane

Cover O-ring - Buna-N

Terminal block and power module

PBT

Antenna

PBT/Polycarbonate (PC) integrated omni-directional antenna

Mounting

Transmitters may be attached directly to the sensor. Mounting brackets also permit remote mounting. See "Dimensional Drawings" on page 20.

Weight

Low-copper aluminum

Rosemount 648 without LCD display - 4.1 lb. (1.9 kg)

Rosemount 648 with M5 LCD display - 4.2 lb. (2.0 kg)

Stainless steel

Rosemount 648 without LCD display - 8.0 lb. (3.5 kg)

Rosemount 648 with M5 LCD display - 8.1 lb. (3.6 kg)

Enclosure ratings (Rosemount 648)

Housing style option codes D and E are Type 4X and IP66/67 rated dual-compartment housings.

Performance specifications

Electromagnetic compatibility (EMC)

All Models:

Meets all relevant requirements of EN 61326-1; 2006; EN 61326-2-3; 2006

Transmitter stability

The Rosemount 648 has a stability of ±0.15% of output reading or 0.15 °C (whichever is greater) for 24 months.

Self calibration

The analog-to-digital measurement circuitry automatically self-calibrates for each temperature update by comparing the dynamic measurement to extremely stable and accurate internal reference elements.

Vibration effect

Tested to the following with no effect on performance per IEC 60770-1, 1999:

High Vibration Level - field or pipeline (10–60 Hz 0.21 mm displacement peak amplitude/60–2000 Hz 3 g).

Frequency	Acceleration
10-60 Hz	0.21 mm peak displacement
60-2000 Hz	3 g

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figure 1. Sensor Connections





Figure 2. Rosemount 648 Wireless Sensor Connections

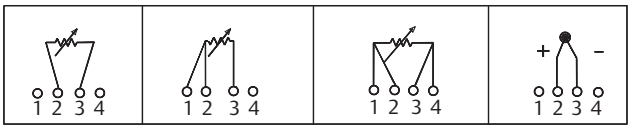

2-wire RTD and Ω[1] | 3-wire RTD and Ω[1] | 4-wire RTD and Ω | T/C and mV

1. Emerson Process Management provides 4-wire sensors for all single element RTDs. You can use these RTDs in 3- or 2-wire configurations by leaving the unneeded leads disconnected and insulated with electrical tape.

Temperature limits

Description	Operating limit	Storage limit
Without LCD display	–40 to 185 °F –40 to 85 °C	–40 to 185 °F –40 to 85 °C
With LCD display	–4 to 175 °F –20 to 80 °C	–40 to 185 °F –40 to 85 °C

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Transmitter accuracy

Table 4. Rosemount 648 Wireless Input Options and Accuracy

Sensor options	Sensor reference	Input ranges		Digital accuracy[1]	
2-, 3-, 4-wire RTDs		°C	°F	°C	°F
Pt 100 (α = 0.00385)	IEC 751	–200 to 850	–328 to 1562	±0.225	±0.405
Rosemount X-well Pt 100 (α = 0.00385)	IEC 751	-50 to 300	-58 to 572	±0.29	±0.52
Pt 200 (α = 0.00385)	IEC 751	–200 to 850	–328 to 1562	±0.405	±0.729
Pt 500 (α = 0.00385)	IEC 751	–200 to 850	–328 to 1562	±0.285	±0.513
Pt 1000 (α = 0.00385)	IEC 751	–200 to 300	–328 to 572	±0.285	±0.513
Pt 100 (α = 0.003916)	JIS 1604	–200 to 645	–328 to 1193	±0.225	±0.405
Pt 200 (α = 0.003916)	JIS 1604	–200 to 645	–328 to 1193	±0.405	±0.729
Ni 120	Edison Curve No. 7	–70 to 300	–94 to 572	±0.225	±0.405
Cu 10	Edison Copper Winding No. 15	–50 to 250	–58 to 482	±2.1	±3.78
Pt 50 (α = 0.00391)	GOST 6651-94	–200 to 550	–328 to 990	±0.45	±0.81
Pt 100 (α = 0.00391)	GOST 6651-94	–200 to 550	–328 to 990	±0.225	±0.405
Cu 50 (α = 0.00426)	GOST 6651-94	–50 to 200	–58 to 392	±0.72	±1.296
Cu 50 (α = 0.00428)	GOST 6651-94	–185 to 200	–301 to 392	±0.72	±1.296
Cu 100 (α = 0.00426)	GOST 6651-94	–50 to 200	–58 to 392	±0.36	±0.648
Cu 100 (α = 0.00428)	GOST 6651-94	–185 to 200	–301 to 392	±0.36	±0.648
Thermocouples[2]					
Type B[3]	NIST Monograph 175, IEC 584	100 to 1820	212 to 3308	±1.155	±2.079
Type E	NIST Monograph 175, IEC 584	–200 to 1000	–328 to 1832	±0.30	±0.54
Type J	NIST Monograph 175, IEC 584	–180 to 760	–292 to 1400	±0.525	±0.945
Type K[4]	NIST Monograph 175, IEC 584	–180 to 1372	–292 to 2501	±0.75	±1.35
Type N	NIST Monograph 175, IEC 584	–200 to 1300	–328 to 2372	±0.75	±1.35
Type R	NIST Monograph 175, IEC 584	0 to 1768	32 to 3214	±1.125	±2.025
Type S	NIST Monograph 175, IEC 584	0 to 1768	32 to 3214	±1.05	±1.89
Type T	NIST Monograph 175, IEC 584	–200 to 400	–328 to 752	±0.525	±0.945
DIN Type L	DIN 43710	–200 to 900	–328 to 1652	±0.525	±0.945
DIN Type U	DIN 43710	–200 to 600	–328 to 1112	±0.525	±0.945
Type W5Re/W26Re	ASTM E 988-96	0 to 2000	32 to 3632	±1.05	±1.89
GOST L	GOST R 8.585-2001	–200 to 800	–328 to 1472	±0.525	±0.945
Other input types					
Millivolt Input		–10 to 100 mV		±0.0225 mV	
2-, 3-, 4-wire Ohm Input		0 to 2000 ohms		±0.675 ohm	

1. The published digital accuracy applies over the entire sensor input range. Digital output can be accessed by HART® Communications or *Wireless*HART.
2. Total digital accuracy for thermocouple measurement: sum of digital accuracy +0.8 °C. (cold junction accuracy).
3. Digital accuracy for NIST Type B T/C is ±4.5 °C (±8.1 °F) from 100 to 300 °C (212 to 572 °F).
4. Digital accuracy for NIST Type K T/C is ±1.05 °C (±1.895 °F) from –180 to –90 °C (–292 to –130 °F).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Ambient temperature effect

Table 5. Ambient Temperature Effect on Digital Accuracy

Sensor options	Sensor reference	Effects per 1.0 °C (1.8 °F) change in ambient temperature[1][2]	Input temperature (T)
2-, 3-, 4-wire RTDs			
Pt 100 (α = 0.00385)	IEC 751	0.0045 °C (0.0081 °F)	Entire sensor input range
Rosemount X-well Pt 100 (α = 0.00385)	IEC 751	0.0058 °C (0.0104 °F)	Entire sensor input range
Pt 200 (α = 0.00385)	IEC 751	0.006 °C (0.0108 °F)	Entire sensor input range
Pt 500 (α = 0.00385)	IEC 751	0.0045 °C (0.0081 °F)	Entire sensor input range
Pt 1000 (α = 0.00385)	IEC 751	0.0045 °C (0.0081 °F)	Entire sensor input range
Pt 100 (α = 0.003916)	JIS 1604	0.0045 °C (0.0108 °F)	Entire sensor input range
Pt 200 (α = 0.003916)	JIS 1604	0.006 °C (0.0108 °F)	Entire sensor input range
Ni 120	Edison Curve No. 7	0.0045 °C (0.0081 °F)	Entire sensor input range
Cu 10	Edison Copper Winding No. 15	0.045 °C (0.081 °F)	Entire sensor input range
Pt 50 (α = 0.003910)	GOST 6651-94	0.009 °C (0.0162 °F)	Entire sensor input range
Pt 100 (α = 0.003910)	GOST 6651-94	0.0045 °C (0.0081 °F)	Entire sensor input range
Cu 50 (α = 0.00426)	GOST 6651-94	0.009 °C (0.0162 °F)	Entire sensor input range
Cu 50 (α = 0.00428)	GOST 6651-94	0.009 °C (0.0162 °F)	Entire sensor input range
Cu 100 (α = 0.00426)	GOST 6651-94	0.0045 °C (0.0081 °F)	Entire sensor input range
Cu 100 (α = 0.00428)	GOST 6651-94	0.0045 °C (0.0081 °F)	Entire sensor input range
Thermocouples			
Type B	NIST Monograph 175, IEC 584	0.021 °C	T ≥ 1000 °C
		0.048 °C – [0.00375% of (T – 300)]	300 °C ≤ T < 1000 °C
		0.081 °C – [0.0165% of (T – 100)]	100 °C ≤ T< 300 °C
Type E	NIST Monograph 175, IEC 584	0.0075 °C +(0.000645% of T)	All
Type J	NIST Monograph 175, IEC 584	0.0081 °C +(0.000435%of T)	T ≥ 0 °C
		0.0081 °C + (0.00375% of absolute value T)	T < 0 °C
Type K	NIST Monograph 175, IEC 584	0.0092 °C +(0.00081% of T)	T ≥ 0 °C
		0.0092 °C + (0.00375% of absolute value T)	T < 0 °C
Type N	NIST Monograph 175, IEC 584	0.0102 °C +(0.00054% of T)	All
Type R	NIST Monograph 175, IEC 584	0.024 °C	T ≥ 200 °C
		0.0345 °C – (0.0108% of T)	T < 200 °C
Type S	NIST Monograph 175, IEC 584	0.024 °C	T ≥ 200 °C
		0.0345 °C – (0.0108% of T)	T < 200 °C
Type T	NIST Monograph 175, IEC 584	0.0096 °C	T ≥ 0 °C
		0.0096 °C +(0.00645% of absolute value T)	T < 0 °C
DIN Type L	DIN 43710	0.0081 °C + (0.000435% of T)	T ≥ 0 °C
		0.0081 °C +(0.00375% of absolute value T)	T < 0 °C
DIN Type U	DIN 43710	0.0096 °C	T ≥ 0 °C
		0.0096 °C +(0.00645% of absolute value T)	T < 0 °C
Type W5Re/W26Re	ASTM E 988-96	0.024 °C	T ≥ 200 °C
		0.0345 °C – (0.0108% of T)	T < 200 °C
GOST L	GOST R. 8.585-2001	0.0105 °C	T ≥ 0 °C
		0.0105 °C + (0.0045% of absolute value T)	T < 0 °C
Other input types			
Millivolt Input		0.0008 mV	Entire sensor input range
2-, 3-, 4-wire Ohm Input		0.0126 Ω	Entire sensor input range

1. Change in ambient is with reference to the calibration temperature of the transmitter 68 °F (20 °C) from factory.
2. Ambient temperature effect specification valid over minimum temperature span of 28 °C (50 °F).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Transmitters can be installed in locations where the ambient temperature is between –40 and 85 °C (–40 and 185 °F). In order to maintain excellent accuracy performance, each transmitter is individually characterized over this ambient temperature range at the factory.

Process temperature effects

Table 6. Ambient and Process Temperature Difference Effect on Digital Accuracy

Sensor option	Sensor reference	Effects per 1.0 °C(1.8 °F) difference in Ambient and Process temperature[1]	Input temperature (T)
Rosemount X-well Pt 100 (α = 0.00385)	IEC 751	± 0.01 °C (0.018 °F)	Entire Sensor Input Range

1. Valid under steady state and process ambient conditions.

Temperature effects example

When using a Pt 100 (α = 0.00385) sensor input at 30 °C ambient temperature:

- Digital Temperature Effects: 0.0045 °C x (30 - 20) = 0.045 °C
- Worst Case Error: Digital + Digital Temperature Effects = 0.225 °C + 0.045 °C = 0.27 °C
- Total Probable Error: $\sqrt{0.225^2 + 0.045^2}$ = 0.23 °C

Rosemount X-well temperature effects example

When using Rosemount X-well Technology at 30 °C ambient temperature and 100 °C process temperature:

- Digital Ambient Temperature Effects: 0.0058 °C ×(30 - 20) =.058 °C
- Process Temperature Effects: 0.01 °C ×(100 – 30) =.70 °C
- Worst Case Error: Digital Accuracy + Digital Ambient Temperature Effects + Process Temperature Effects = 0.29 °C + 0.058 °C+ 0.70 °C = 1.05 °C
- Total Probable Error: $\sqrt{0.29^2 + 0.058^2 + 0.70^2}$ = 0.76 °C

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Product Certifications

Rev 3.0

European Directive Information

A copy of the EC Declaration of Conformity can be found at the end of the Quick Start Guide.The most recent revision of the EC Declaration of Conformity can be found at EmersonProcess.com/Rosemount.

Telecommunication Compliance

All wireless devices require certification to ensure they adhere to regulations regarding the use of the RF spectrum. Nearly every country requires this type of product certification. Emerson™ Process Management is working with governmental agencies around the world to supply fully compliant products and remove the risk of violating country directives or laws governing wireless device usage.

FCC and IC

This device complies with Part 15 of the FCC Rules. Operation is subject to the following conditions: This device may not cause harmful interference, this device must accept any interference received, including interference that may cause undesired operation. This device must be installed to ensure a minimum antenna separation distance of 20 cm from all persons.

Ordinary Location Certification

As standard, the transmitter has been examined and tested to determine that the design meets the basic electrical, mechanical, and fire protection requirements by a nationally recognized test laboratory (NRTL) as accredited by the Federal Occupational Safety and Health Administration (OSHA).

Installing in North America

The US National Electrical Code® (NEC) and the Canadian Electrical Code (CEC) permit the use of Division marked equipment in Zones and Zone marked equipment in Divisions. The markings must be suitable for the area classification, gas, and temperature class. This information is clearly defined in the respective codes.

North America

I5 U.S. Intrinsic Safety (IS), Nonincendive (NI), and Dust Ignition-proof (DIP)
Certificate: FM 3027705
Standards: FM Class 3600 - 2011, FM Class 3610 - 2010, FM Class 3611 - 2004, FM Class 3810 - 2005, ANSI/NEMA® 250 - 2003, ANSI/ISA-60079-0 - 2009, ANSI/ISA-60079-11 - 2009
Markings: IS CL I, DIV 1, GP 1, A, B, C, D; CL II, DIV 1, GP E, F, G; Class III, T4/T5; Class 1, Zone 0 AEx ia IIC T4/T5; T4(–50 °C ≤ T_a ≤ +70 °C), T5(–50 °C ≤ T_a ≤ +40 °C) when installed per Rosemount drawing 00648-1000; NI CL I, DIV 2, GP A, B, C, D T4/T5; T4(–50 °C ≤ T_a ≤ +70 °C), T5(–50 °C ≤ T_a ≤ +40 °C) when installed per Rosemount drawing 00648-1000; DIP CL II, DIV 1, GP E, F, G; CL III, T5; T5(–50 °C ≤ T_a ≤ +85 °C) Type 4X; IP66

Special Conditions for Safe Use (X):

1. The Rosemount 648 Wireless Transmitter housing contains aluminum and is considered a potential risk of ignition by impact or friction. Care must be taken into account during installation and use to prevent impact and friction
2. The surface resistivity of the polymeric antenna is greater than 1 GΩ. To avoid electrostatic charge build-up, it must not be rubbed or cleaned with solvents or a dry cloth.
3. The Rosemount 648 Wireless Transmitter shall only be used with the 701PBKKF Rosemount SmartPower Battery Pack (P/N 00753-9220-0001).

Sensor terminal parameters
U_O = 6.6 V
I_O = 26.2 mA
P_O = 42.6 mW
C_O = 23.8 µF
L_O = 50 mH

N5 U.S. Nonincendive (NI) and Dust Ignition-proof (DIP)
Certificate: FM 3027705
Standards: FM Class 3600 - 2011, FM Class 3611 - 2004, FM Class 3810 - 2005, ANSI/NEMA 250 - 2003
Markings: NI CL I, DIV 2, GP A, B, C, D
T4/T5; T4(–50 °C ≤ T_a ≤ +70 °C),
T5(–50 °C ≤ T_a ≤ +40 °C)
DIP CL II, DIV 1, GP E, F, G; CL III, T5;
T5(–50 °C ≤ T_a ≤ +85 °C)Type 4X; IP66/67

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Special Condition for Safe Use (X):

1. For use only with the Model 701PBKKF or Rosemount P/N 753-9220-XXXX SmartPower Battery Module.

Canada

I6 Canada Intrinsically Safe
Certificate: CSA 1143113
Standards: CAN/CSA C22.2 No. 0-10, CAN/CSA C22.2 No. 94-M91, CSA Std C22.2 No. 142-M1987, CSA Std C22.2 No. 157-92, CSA Std C22.2 No. 60529:05
Markings: Intrinsically Safe Class I, Division 1, Groups A, B, C and D T3C; Class 1, Zone 0, IIC, T3C; when connected per Rosemount drawing 00648-1020; Type 4X

Sensor terminal parameters
U_O = 6.6 V
I_O = 26.2 mA
P_O = 42.6 mW
C_a = 23.8 µF
L_a = 50 mH

Europe

I1 ATEX Intrinsic Safety
Certificate: Baseefa07ATEX0011X;
Standards: EN 60079-0: 2012 + A11:2013, EN 60079-11: 2012
Markings: ⟨Ex⟩ II 1 G Ex ia IIC T4 Ga, T4(–60 °C ≤ T_a ≤ +70 °C)
⟨Ex⟩ II 1 GEx ia IIC T5 Ga, T5(–60 °C ≤ T_a ≤ +40 °C)

For use with Rosemount SmartPower power module part number 753-9220-0001, or for use with Emerson SmartPower option 701PBKKF.

Sensor terminal parameters
U_O = 6.6 V
I_O = 26.2 mA
P_O = 42.6 mW
C_O = 11 µF
L_O = 25 mH

Special Condition for Safe Use (X):

1. The surface resistivity of the antenna is greater than 1 GΩ. To avoid electrostatic charge build-up, it must not be rubbed or cleaned with solvents or a dry cloth.
2. The power module may be replaced in a hazardous area. The power module has a surface resistivity greater than 1 GΩ and must be properly installed in the wireless device enclosure. Care must be taken during transportation to and from the point of installation to prevent electrostatic charge build-up.

NM ATEX Intrinsic Safety for Mining
Certificate: Baseefa07ATEX0011X;
Standards: EN 60079-0: 2012 + A11:2013, EN 60079-11: 2012
Markings: ⟨Ex⟩ I M 1 Ex ia I Ma (-60 °C ≤ T_a ≤+70 °C)

Sensor terminal parameters
U_O = 6.6 V
I_O = 26.2 mA
P_O = 42.6 mW
C_O = 11 µF
L_O = 25 mH

Special Condition for Safe Use (X):

1. The surface resistivity of the antenna is greater than 1 GΩ. To avoid electrostatic charge build-up, it must not be rubbed or cleaned with solvents or a dry cloth.
2. The power module may be replaced in a hazardous area. The power module has a surface resistivity greater than 1 GΩ and must be properly installed in the wireless device enclosure. Care must be taken during transportation to and from the point of installation to prevent electrostatic charge build-up.

International

I7 IECEx Intrinsic Safety
Certificate: IECEx BAS 07.0007X
Standards: IEC 60079-0: 2011, IEC 60079-11: 2011
Markings: Ex ia IIC T4 Ga, T4 (–60 °C ≤ T_a ≤ +70 °C)
Ex ia IIC T5 Ga, T5 (–60 °C ≤ T_a ≤ +40 °C)

Sensor terminal parameters
U_O = 6.6 V
I_O = 26.2 mA
P_O = 42.6 mW
C_o = 11 µF
L_o = 25 mH

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Special Conditions for Safe Use (X):

1. The surface resistivity of the antenna is greater than 1 GΩ. To avoid electrostatic charge build-up, it must not be rubbed or cleaned with solvents or a dry cloth.
2. The Model 701PBKKF Power Module may be replaced in a hazardous area. The Power Modules have a surface resistivity greater than 1 GΩ and must be properly installed I the wireless device enclosure. Care must be taken during transportation to and from the point of installation to prevent electrostatic charge build-up.
3. The Rosemount 648 Wireless enclosure may be made of aluminum alloy and given a protective polyurethane paint finish; however, care should be taken to protect it from impact or abrasion if located in a Zone 0 area.

Brazil

I2 INMETRO Intrinsic Safety
Certificate: UL-BR 15.0140X
Standards: ABNT NBR IEC 60079-0:2008 + Errata 1:2011, ABNT NBR IEC60079-11:2009
Markings: Ex ia IIC T4 (–60 °C ≤ T_a ≤ +70 °C), Ex ia IIC T5(–60 °C ≤ T_a ≤+40 °C) IP66

Sensor terminal parameters
U_O = 6.6 V
I_O = 26.2 mA
P_O = 42.6 mW
C_o = 11 µF
L_o = 25 mH

Special Condition for Safe Use (X):

1. See certificate for special conditions.

China

I3 China Intrinsic Safety
Certificate: GYJ11.1706X
Standards: GB3836.1-2010, GB3836.4-2010, GB3836.20-2010
Markings: Ex ia IIC T4/T5 Ga

T code	Ambient temperature
T4	–60 °C ≤ T_a ≤ +70 °C
T5	–60 °C ≤ T_a ≤ +45 °C

Sensor terminal parameters
U_O = 6.6 V
I_O = 26.2 mA
P_O= 42.6 mW
C_O= 11 µF
L_O = 25 µF

Special Condition for Safe Use (X):

1. See certificate for special conditions.

Japan

I4 TIIS Intrinsic Safety
Certificates: TC18638
Markings: Ex ia IIC T4 (–20 ~ +60 °C)

Special Condition for Safe Use (X):

1. See certificate for special conditions.

Sensor terminal parameters
U_O = 6.6 V
I_O = 26.2 mA
P_O= 42.6 mW
C_O= 11 µF
L_O = 25 µF

EAC - Belarus, Kazakhstan, Russia

IM Technical Regulation Customs Union Intrinsic Safety
Certificate: RU C-US.Gb05.B.00289
Markings: 0Ex ia IIC T4/T5 X
T4 (-60 °C ≤ T_a ≤ +70 °C)
T5(-60 °C ≤ T_a ≤ +40 °C)

Sensor terminal parameters
U_O = 6.6 V
I_O = 26.2 mA
P_O= 42.6 mW
C_O= 11 µF
L_O = 25 µF

Special Condition for Safe Use (X):

1. See certificate for special conditions.

Republic of Korea

IP Republic of Korea Intrinsic Safety
Certificate: 11-KB4BO-0071
Markings: Ex ia IIC T4/T5
T4 (-60 °C ~ +70 °C)
T5 (-60 °C ~ +40 °C)

Sensor terminal parameters
U_O = 6.6 V
I_O = 26.2 mA
P_O= 42.6 mW
C_O= 10.9 µF
L_O = 25 µF

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Special Condition for Safe Use (X):

1. See certificate for special conditions

Combination of Certification


KQ Combination of I1, I5, and I6

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Dimensional Drawings

Figure 3. Rosemount 648 Wireless Remote Mount

Pipe mounting

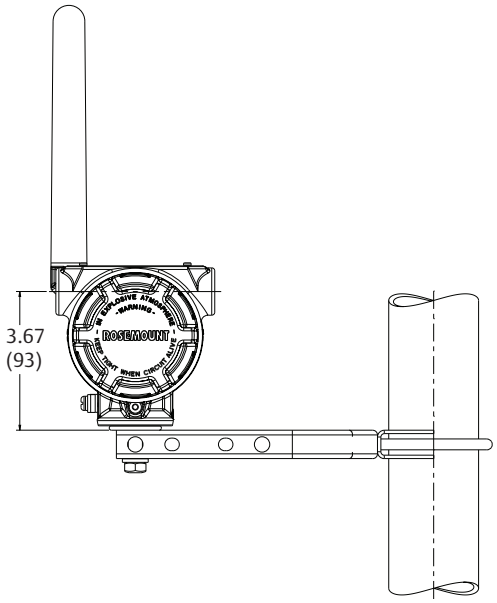

For transmitter mounting

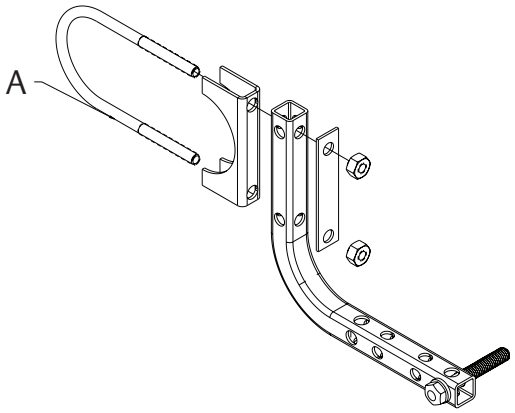


Dimensions are in inches (millimeters).
A. 2-in. U-bolt for pipe mounting


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figure 4. Rosemount 648 Wireless Direct Mount


Shown with 2.4 GHz extended range antenna

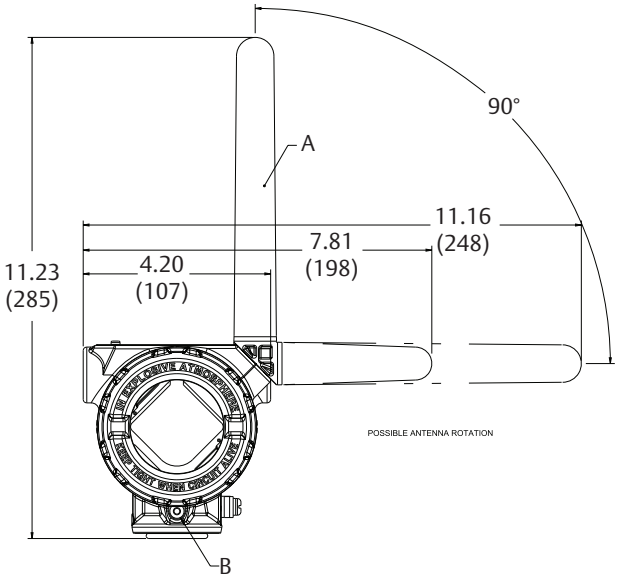

Shown with optional digital display and 2.4 GHz antenna

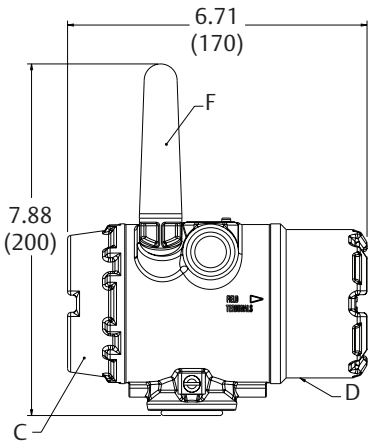


Shown without optional digital display

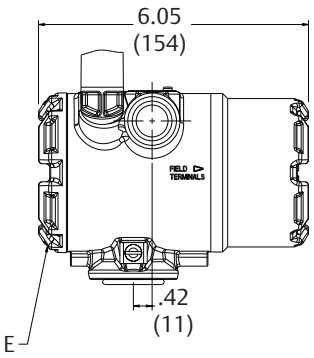

A. 2.4 GHz extended range antenna
B. Ground screw assembly
C. Digital display cover
D. Field terminals (This side)
E. Transmitter electronics (This side)
F. 2.4 GHz antenna
Dimensions are in inches (millimeters).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figure 5. Rosemount 648 with Option Code PT

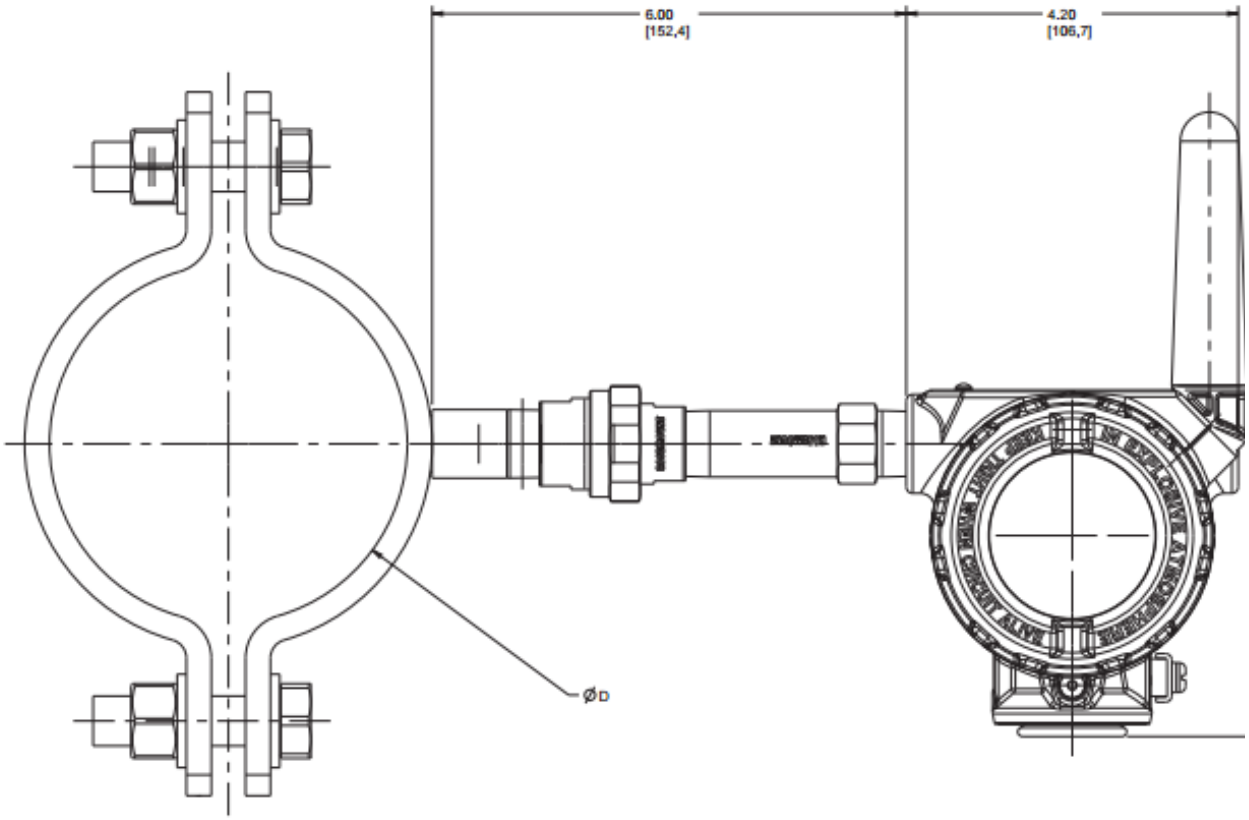

Dimensions are in inches (millimeters).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Global Headquarters

Emerson Process Management
6021 Innovation Blvd.
Shakopee, MN 55379, USA
+1 800 999 9307 or +1 952 906 8888
+1 952 949 7001
RFQ.RMD-RCC@EmersonProcess.com

North America Regional Office

Emerson Process Management
8200 Market Blvd.
Chanhassen, MN 55317, USA
+1 800 999 9307 or +1 952 906 8888
+1 952 949 7001
RMT-NA.RCCRFQ@Emerson.com

Latin America Regional Office

Emerson Process Management
1300 Concord Terrace, Suite 400
Sunrise, FL 33323, USA
+1 954 846 5030
+1 954 846 5121
RFQ.RMD-RCC@EmersonProcess.com

Europe Regional Office

Emerson Process Management Europe GmbH
Neuhofstrasse 19a P.O. Box 1046
CH 6340 Baar
Switzerland
+41 (0) 41 768 6111
+41 (0) 41 768 6300
RFQ.RMD-RCC@EmersonProcess.com

Asia Pacific Regional Office

Emerson Process Management Asia Pacific Pte Ltd
1 Pandan Crescent
Singapore 128461
+65 6777 8211
+65 6777 0947
Enquiries@AP.EmersonProcess.com

Middle East and Africa Regional Office

Emerson Process Management
Emerson FZE P.O. Box 17033,
Jebel Ali Free Zone - South 2
Dubai, United Arab Emirates
+971 4 8118100
+971 4 8865465
RFQ.RMTMEA@Emerson.com

Linkedin.com/company/Emerson-Process-Management

Twitter.com/Rosemount_News

Facebook.com/Rosemount

Youtube.com/user/RosemountMeasurement

Google.com/+RosemountMeasurement

Standard Terms and Conditions of Sale can be found at:
Emerson.com/en-us/pages/Terms-of-Use.aspx
The Emerson logo is a trademark and service mark of Emerson Electric Co.
SmartPower, Complete Point Solution, PlantWeb, Rosemount X-well, Rosemount, and the Rosemount logotype are of trademarks Emerson Process Management.
HART and *Wireless*HART are registered trademarks of the FieldComm Group.
All other marks are the property of their respective owners.
© 2016 Emerson Process Management. All rights reserved.

ROSEMOUNT™

EMERSON™
Process Management

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP