ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Excalibur Systems EXC-4000PCI* at our website: *Click HERE*


EXC-4000PCI

The EXC-4000PCI is part of the 4000 family of multiprotocol carrier boards. This PCI interface board supports up to four independent, removable modules. Each module can be any of the 4000 family modules.

AVIONICS COMMUNICATION CARRIER BOARD

General Features

- Supported Protocols:
  - ARINC 429/575 (5 or 10 ch. per module)
  - ARINC 708/453 (2 ch. per module)
  - MIL-STD-1553 (single function or multifunction)
  - MIL-STD-1760
  - Discrete I/O (20 ch. per module)
  - Serial RS485/RS422/RS232 (2 or 4 ch. per mod.)
  - H009
  - CAN (2, 4, or 6 ch. per module)
  - MMSI
- Half-size PCI Card
- 16-bit Count Down Timer
  - 1–65,635 µs resolution
  - Interrupt or global reset upon count down

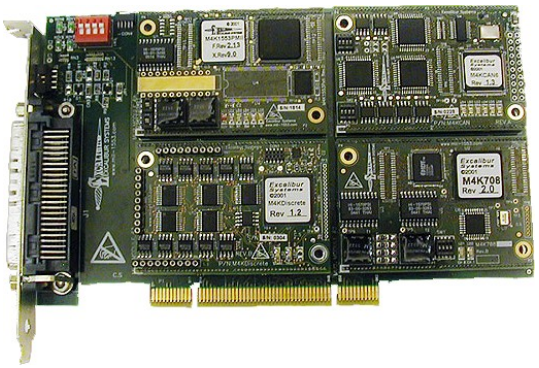

IRIG B Time Code Input

- Carrier wave:
  - 1KHz Amplitude modulated sine wave
- Rate Designation: 100 peaks per second
- Modulation ratio: 3:1
- Input Amplitude: 0.8–3.5 Vpp (3 Vpp Typ)
- Coded Expressions supported:
  - BCD time-of-year code word
  - Control functions
  - Straight Binary Seconds (SBS) time-of-day
- Application:
  - Synchronization of Time Tags, display and IRIG B time

Physical Characteristics

- Dimensions: 174mm x 107mm
- Weight: 135g (without modules)

Operation Environment

- Temperature: 0°–70°C standard temperature
  -40° to +85°C extended temperature (optional)
- Humidity: 5%–90% noncondensing
- MTBF: 201,400 hours at 25°C, G_F, S217F

Host Interface

- PCI compliance: Target 8/16 bit
- Memory space occupied:
  - 512 Kbytes (128K per module)
- Interrupts: INTA#
- Power: Depends on configuration. For more details, see the user's manual.

Software Support

- C drivers with source code
- Menu driven software for most of the supported protocols
- *Exalt Plus:* Excalibur Analysis Laboratory Tools for Windows 32/64-bit (optional)
- Additional software may be available on our website

Ordering Information

- **EXC-4000PCI/*xx***
  - Multi-protocol interface board for PCI compatible systems

Note: Replace "***xx***" with the carrier board modules ordered. Use the module code specified in the *Module Ordering Information* on our website, or in the *User's Manual* of the board.

- Additional Options:
  - **-E** Extended temperature option
  - **-001** With conformal coating

311 Meacham Ave ♦ Elmont NY 11003
Tel [516] 327-000 / Fax: [516] 327-4645
e-mail: excalibur@mil-1553.com
website: www.mil-1553.com

EXCALIBUR SYSTEMS

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP