

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Exfo IQS-2101D-EI* at our website: ***Click HERE***

IQS-2100/FLS-2100

OPTICAL LIGHT SOURCE



Please note that the IQS-2100 model has been discontinued. For more information on the IQS-2150, visit EXFO.com

Exceptional selection of single- or dual-wavelength, singlemode and multimode light-emitting diodes (LEDs) and Fabry-Perot lasers, perfect for IL and ORL testing of passive components (singlemode and multimode)

TECHNICAL SHEET

KEY FEATURES

- Single- or dual-wavelength LED or Fabry-Perot laser
- 10 dB variable output power
- Excellent stability
- Variable output power over a 10 dB range (6 dB range for LED sources)
- Available in benchtop (FLS) or modular (IQS) format

COMPLEMENTARY PRODUCTS



High-Speed Power Meter
IQS-1600



High-Performance Power Meter
IQS-1700



Variable Attenuator
IQS-3150

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

HIGH-PERFORMANCE OPTICAL LIGHT SOURCES

Advanced testing environments require a high-performance, stable light source to guarantee accurate and reliable test results. Designed for optimal stability, the modular IQS-2100 and benchtop FLS-2100 offer this and more. Steady drive circuitry maximizes optical output power and maintains excellent stability, while precision optical components ensure low-loss, narrow-beam, truly efficient output coupling.





KEY FEATURES AND BENEFITS
Variable output power over a 10 dB range (6 dB range for LED sources)
Adjustable power increments of 0.1 dB
Stabilized laser sources
User-friendly software solutions


THE IQS-600 INTELLIGENT TEST SYSTEM

The new IQS-600 Intelligent Test System provides a flexible approach to optical test and measurement for manufacturing, automation, optical qualification and R&D. It combines powerful features and control capabilities for up to 100 modules.

Based on standard industrial PC architecture, the IQS-600 Intelligent Test System is a scalable modular platform that includes controllers, expansion units and a comprehensive range of plug-in test modules. The IQS-600 is also backward-compatible with most modules from EXFO's IQS-500 and even IQ generation, allowing you to maximize the return on your previous investments. The IQS-600 Intelligent Test System offers a powerful, easy-to-use environment to match your most demanding needs.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

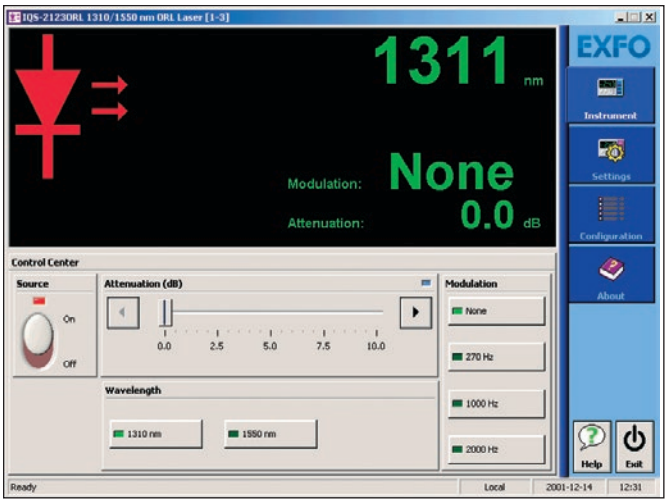

SIMPLE, FLEXIBLE SOFTWARE

› Store multiple-user configurations
› Run several applications simultaneously

Variable output power

› 10 dB power range variation (laser)
› 6 dB power range variation (LED)
› Fine-tuning of output power at 0.1 dB increments
› Simulation of small power losses

Choice of output signal

› Modulate the source
› Choose from three modulation frequencies: 270 Hz, 1 kHz and 2 kHz at 50 % duty cycle

Precise wavelength identification

› Save time when performing spectral tuning
› Display LED wavelength to the nearest 10 nm
› Display laser wavelength to the nearest 1 nm

AVAILABLE CONFIGURATIONS

Multimode LED sources


› 850 nm LED
› 850/1300 nm dual LED

Temperature-controlled lasers


› 1310/1550 nm dual Fabry-Perot laser
› 1550/1625 nm dual Fabry-Perot laser
› 1310/1550 nm dual Fabry-Perot laser (ORL)
› 1550/1625 nm dual Fabry-Perot laser (ORL)

Excellent stability

› ± 0.003 dB to ± 0.005 short-term stability (15 minutes)
› ± 0.03 dB to ± 0.05 long-term stability (8 hours)
› TEC lasers for guaranteed stability
› ORL sources include an optical isolator

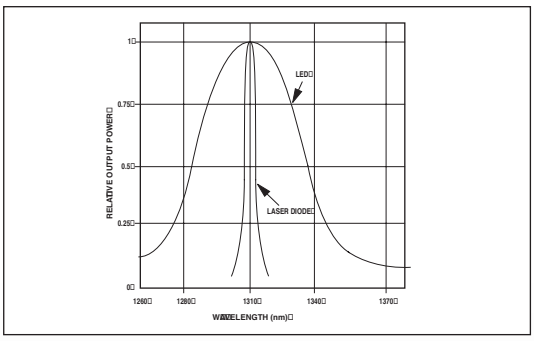

The difference between LED and laser spectral widths

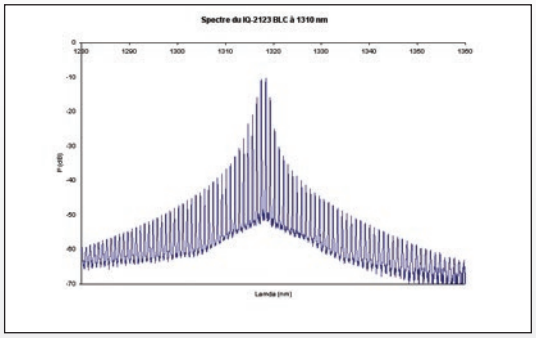

Typical Fabry-Perot spectral distribution

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

FLS-2100 FUNCTIONALILITY

The FLS-2100 Optical Light Source features variable output power over a 10 dB range (6 dB range for LED sources) to simulate power losses with precision. Fine-tune this output power in precise increments of 0.1 dB. Fabry-Perot laser sources are stabilized by thermo-electric coolers that regulate the submount's internal temperature. Both LED and laser versions come in various wavelengths to fit all singlemode and multimode applications.




REMOTE-CONTROL CAPABILITY

Enable remote operation of the FLS-2100 from any compatible PC or test station with standard GPIB, Ethernet and RS-232 interface. Use your computer to program software solutions for complex test procedures.

Universal Interface

Avoid high insertion loss, high return loss and measurement instability caused by dirty or contaminated connectors by using the Universal Interface. This patented universal connector gives you direct access to the ferrule, simplifying connector cleaning and ensuring better results. Designed to easily interchange from one connector type to another, the Universal Interface with fixed baseplate is available for PC, ultra-PC (UPC) and angled-PC (APC) connectors.

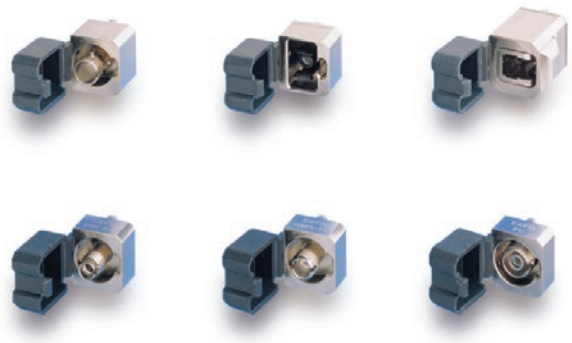

Rackmount

The FLS-2100 can be used as a stand-alone instrument or mounted on a 19-inch rack (optional).

APPLICATIONS:

- Linearity measurements of variable attenuators and power meters
- Insertion loss measurements
- Return loss measurements
- Spectral attenuation measurements in fibers
- Instrument calibration
- Component characterization
- Splicing test stations
- Stability measurements
- Polarization-dependent loss measurements

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

SPECIFICATIONS

TEC Fabry-Perot Laser Specifications [a]

Model	**23BLC**	**34BLC**
Wavelength [b] (nm)	1310 +20/–30	1550 ± 20
	1550 ± 20	1625 ± 15
Spectral width (rms) [c] (nm)	2/5	5/10
Output power (dBm)	≥ –1	≥ –4
Stability [d] (dB) (D/2)		
15 min	± 0.005	± 0.01
8 h	± 0.05	± 0.05
Temperature sensitivity [e] (dB)	± 0.25	± 0.25
Modulation	270 Hz, 1 kHz, 2 kHz (50 % duty cycle)	
Model	**23ORL**	**34ORL**
Wavelength [b] (nm)	1310 +20/–30	1550 ± 20
	1550 ± 20	1625 ± 15
Spectral width (rms) [c] (nm)	2/5	5/10
Output power (dBm)	≥ –3	≥ –6
Stability [d] (dB) (D/2)		
15 min	± 0.01	± 0.01
8 h	± 0.05	± 0.03
Temperature sensitivity [e] (dB)	± 0.25	± 0.25

SURFACE-EMITTING LED SPECIFICATIONS [a]

Model	**01C/D**	**12C**	**12D**
Wavelength [b] (nm)	850 ± 25	850 ± 25	850 ± 25
		1300 +45/–60	1300 +45/–60
Spectral width (FWHM) [f, g] (nm)	50	50/145	50/145
Output power (dBm)	≥ –17/≥ –14	≥ –18/–22	≥ –15/–18
Stability [d] (dB) (D/2)			
15 min	± 0.003	± 0.005	± 0.005
8 h	± 0.03	± 0.05	± 0.05
Temperature sensitivity [e] (dB)	± 0.4	± 0.4	± 0.4
Modulation	270 Hz, 1 kHz, 2 kHz (50 % duty cycle)		

Notes

a. All specifications are applicable to a 2 m fiber output (specified type) with FC/UPC (singlemode) and FC/PC (multimode) connectors, without any attenuation applied.

b. Valid over the operating temperature range.

c. rms = root mean square. Spectral width is a typical value.

d. Valid after a 1-hour warmup period at a constant temperature within the operating range. A 30-minute warmup period is needed if the module is stored beforehand at the same temperature. The stability is expressed as ± half the difference between the maximum and minimum values measured during the period.

e. For a temperature variation between 0 °C to 40 °C.

f. FWHM = full width at half maximum.

g. Typical value.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

IQS-2100 GENERAL SPECIFICATIONS

Size (H x W x D)	125 mm x 36 mm x 282 mm	(4 15/16 in x 1 7/16 in x 11 1/8 in)
Weight	0.5 kg	(1.1 lb)
Temperature		
Operating	0 °C to 40 °C	(32 °F to 104 °F)
Storage	–35 °C to 70 °C	(–31 °F to 158 °F)
Relative humidity	0 % to 95 % non-condensing	

FLS-2100 GENERAL SPECIFICATIONS

Size (H x W x D)	117 mm x 222 mm x 333 mm	(4 5/8 in x 8 3/4 in x 13 1/8 in)
Weight	1.2 kg	(2.6 lb)
Temperature		
Operating	0 °C to 40 °C	(32 °F to 104 °F)
Storage	–35 °C to 70 °C	(–31 °F to 158 °F)
Relative humidity	0 % to 80 % non-condensing	

INSTRUMENT DRIVERS

LabVIEW™ drivers and SCPI commands

REMOTE CONTROL

With IQS-600: GPIB (IEEE-488.1, IEEE-488.2) Ethernet and RS-232.

With IQS/FLS-2100: GPIB (IEEE-488.1, IEEE-488.2) and RS-232.

SAFETY

With IQS-600: GPIB (IEEE-488.1, IEEE-488.2) Ethernet and RS-232.

With IQS/FLS-2100: GPIB (IEEE-488.1, IEEE-488.2) and RS-232.

STANDARD ACCESSORIES

User guide, Certificate of Compliance and AC power cord for FLS-2100.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

ORDERING INFORMATION

FLS-21XXXXX-XX
IQS-21XXXXX-XX

Platform type
IQS = module in IQS-500/600

Source code
01C = 850 nm LED, 50/125 µm fiber
01D = 850 nm LED, 62.5/125 µm fiber
12C = 850/1300 nm dual LED, 50/125 µm fiber
12D = 850/1300 nm dual LED, 62.5/125 µm fiber
23BLC = 1310/1550 nm TEC laser
34BLC = 1550/1625 nm TEC laser
23ORL = 1310/1550 nm TEC laser for ORL measurements
34ORL = 1550/1625 nm TEC laser for ORL measurements

Connector or universal interface code
50 = FC/PC (multimode sources only)
58 = FC/APC narrow key
74 = ST/PC (multimode sources only)
89 = FC/UPC
90 = ST/UPC
EI-EUI-28 = UPC/DIN 47256
EI-EUI-76 = UPC/HMS-10/AG
EI-EUI-89 = UPC/FC narrow key
EI-EUI-90 = UPC/ST
EI-EUI-91 = UPC/SC
EI-EUI-95 = UPC/E-2000
EI-EUI-98 = UPC/LC
EA-EUI-28 = APC/DIN 47256
EA-EUI-89 = APC/FC narrow key
EA-EUI-91 = APC/SC
EA-EUI-95 = APC/E-2000
EA-EUI-98 = APC/LC

Fiber code
B = 9/125 µm fiber
C = 50/125 µm fiber
D = 62.5/125 µm fiber

Example: FLS-2103BLC-EI-EUI-89
IQS-2103BLC-EI-EUI-89

EXFO Headquarters > Tel.: +1 418 683-0211 | Toll-free: +1 800 663-3936 (USA and Canada) | Fax: +1 418 683-2170 | info@EXFO.com | **www.EXFO.com**

EXFO serves over 2000 customers in more than 100 countries. To find your local office contact details, please go to **www.EXFO.com/contact**.

EXFO is certified ISO 9001 and attests to the quality of these products. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. **Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.**

For the most recent version of this spec sheet, please go to the EXFO website at www.EXFO.com/specs.

In case of discrepancy, the web version takes precedence over any printed literature.

SPIQS/FLS2100.6AN
© 2015 EXFO Inc. All rights reserved.
Printed in Canada 15/04

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP