

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

Bulk Indium BH-900 Series **Hall** Sensors

High Linearity


Description

F.W. Bell 900 Series Hall Sensors are high-performance units providing high linearity and broad field and temperatures ranges for a wide variety of magnetic field measurements. All units in the series are encapsulated in rugged, epoxy, sealed cases. A room temperature linearity error curve from -30 to +30 kG is supplied, indicating optimum operating conditions for each device. The models 900 and 921 are not calibrated above 30 kG.


Mechanical Specifications

a. Leads
b. Material: AWG 34 Copper with Teflon Insulation (Model 921) or Polyurethane Insulation (Models 900 & 910).
c. Color Code
d. Control Current (I_C): Red (+ I_C) Black (- I_C)
Hall Voltage (V_H): Blue (+ V_H) Yellow (- V_H)
e. Polarity: With the magnetic field vector (+B) entering the top of the Hall plate and I_C entering the red lead, the positive Hall voltage will appear at the blue leads.

Axial Hall Sensors BHA-900, 910 & 921

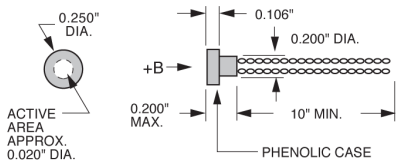

Transverse Hall Sensors BHT-900, 910 & 921

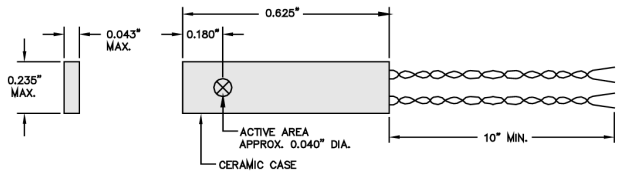

Note: cross indicates tail of magnetic field vector

Models

a. BH-910 High Linearity
b. BH-921 Cryogenic Operation (1.5 to 350° k)
c. BH 921 & 900 Wide Dynamic Range

SPECIFICATIONS	UNITS	BHT-900	BHT-910	BHT-921	BHA-900	BHA-910	BHA-921
Input resistance, R_{in} (1) (4)	ohms	1.2 max.	1.2 max.	1.2 max.	1.5 max.	1.5 max.	1.5 max.
Output resistance, R_{out} (4)	ohms	1.2 max.	1.2 max. ohms	1.2 max.	1.5 max	1.5 max.	1.5 max.
Magnetic sensitivity, V_H (1) (4)	mV/kG	.55 to 1.1	.55 to 1.1	.55 to 1.1	.55 to 1.1	.55 to 1.1	.55 to 1.1
Max. resistive residual voltage, V_M @ B=0 (1) (4)	µV	75	75	75	75	75	75
Max. control current @ 25°C, static air	mA	300	300	300	300	300	300
Nominal control current, I_{cn}	mA	100	100	100	100	100	100
Max linearity error (-30 to +30 kG) (1)	±% of RDG	1	.1 (2)	1	1	.25	1
Max linearity error (-150 to +150 kG) (1)	±% of RDG	1.5	–	2	1.5	–	2
Typical linearity resistance Rlin	ohms	500	50 to 500	500	500	50 to 500	500
Mean temperature coefficient of V_H (-20°C to +80°C) (1)	PPM/ C	±50 max.	±50 max.	±100 max. (3)	±50 max.	±50 max.	±100 max. (3)
Mean temperature coefficient of resistance (-20°C to +80°C) (1)	+% /°C	0.15 max.	0.15 max.	0.6 max. (3)	0.15 max.	0.15 max.	0.6 max. (3)
Temperature dependence of resistive residual voltage (-20° C to +80° C) (1)	±µV/°C	0.1 max.	0.1 max.	0.1 max. (3)	0.1 max.	0.1 max.	0.1 max. (3)
Operating temperature range	°C	-40 to +100	-40 to +100	-269 to +100	-40 to +100	-40 to +100	-269 to +100

Notes: Due to continuous process improvement, specifications subject to change without notice.

(1) $I_C = I_{cn}$
(2) ±.1% linearity error (0-30 kG)
±.3% reversibility error
(3) Specification applies over operating temperature range (-269 to +100°C)
(4) T= 25°C

Pacific Scientific-OECO
4607 SE International Way
Milwaukie, OR 97222
(503) 659-5999
www.oeco.com

PACIFIC SCIENTIFIC OECO

F.W. BELL ®

Rev. date 04/2003

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP