ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Fluke 8050A-01* at our website: *Click HERE*

Table 1-3. 8050A Specifications

ELECTRICAL: The electrical specifications given apply for an operating temperature of 18°C to 28°C (64.4°F to 82.4°F), relative humidity up to 90%, and a 1-year calibration cycle.

FUNCTIONS: DC volts, AC volts (linear and dB), DC current, AC current, resistance, diode test, conductance, relative.

DC VOLTS*:

RANGE	RESOLUTION	ACCURACY for 1-Year
±200 mV	10 μV	±(0.03% of reading +2 digits).
±2V	100 μV	
±20V	1 mV	
±200V	10 mV	
±1000V	100 mV	

INPUT IMPEDANCE: 10 MΩ in parallel with <100 pF, all ranges

NORMAL MODE REJECTION RATIO: >60 dB at 60 Hz or 50 Hz

COMMON MODE REJECTION RATIO: >90 dB at dc, 50 Hz or 60 Hz (1 kΩ unbalanced)
(>120 dB available on request)

COMMON MODE VOLTAGE (MAXIMUM): 500V dc or peak ac

RESPONSE TIME TO RATED ACCURACY: 1 second maximum

MAXIMUM INPUT: 1000V dc or peak ac continuous (less than 10 seconds duration on both the 200 mV and 2V ranges).

*DC Volts can also be measured using the dB mode with .01 dB resolution between 5% of range and full range.

AC VOLTS (TRUE RMS RESPONDING, AC COUPLED):

VOLTAGE READOUT ACCURACY: ± (% of reading + no. of digits), between 5% of range and full range.

INPUT VOLTAGE	RESOLUTION	RANGE	20 Hz**	45 Hz	1 kHz	10 kHz	20 kHz	50 kHz
10 mV - 200 mV	10 μV	200 mV	1%+10		.5%+10	1%+10	5%+30	NOT SPECIFIED
0.1V - 2V	100 μV	2V						
1V - 20V	1 mV	20V						
10V - 200V	10 mV	200V						
100V - 750V	100 mV	750V						

**Typically 3 to 5 digits of rattle will be observed at full scale at 20 Hz.*

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Table 1-3. 8050A Specifications (cont)

dB RANGES:

INPUT VOLTAGE	dBm (600 Ω REF)	ACCURACY: from 5% of range to full scale, 1-year					
		RANGE	20 Hz	45 Hz	1kHz	10 kHz	20 kHz	50 kHz
0.77 mV - 2 mV	-60 to -52	200 mV*	0.5 dBm					
2 mV - 2V	-52 to +8	200 mV*	±0.25 dBm		±0.15 dBm	±0.25 dBm	±0.75 dBm	
0.1V - 2V	-18 to +8	2V						
1V - 20V	+2 to +28	20V						
10V - 200V	+22 to +48	200V				NOT SPECIFIED		
100V - 750V	+42 to +60	750V						

**When 200 mV range is selected the 8050A autoranges for best accuracy for 2V inputs and less.*

RESOLUTION: 0.01 dB from 5% of scale to full scale; 0.1 dB from 1-5% of scale, 1 dB below 1% of scale.

VOLT - Hz PRODUCT: 10^7 max (200V max @ 50 kHz)

EXTENDED dB RESPONSE: Typically -72 dB (600Ω Ref) ± 1 dB to 10 kHz

EXTENDED FREQUENCY RESPONSE: Typically -3 dB at 200 kHz

COMMON MODE REJECTION RATIO (1 kΩ unbalance): >60 dB at 50 Hz or 60 Hz

CREST FACTOR RANGE: Waveforms with a Peak/RMS ratio of 1:1 to 3:1 at full scale, increasing down range

INPUT IMPEDANCE: 10 MΩ in parallel with <100 pF

MAXIMUM INPUT VOLTAGE: 750V rms or 1000V peak continuous (less than 10 seconds duration on both the 200 mV and 2V ranges), not to exceed the volt-hertz product of 10^7.

RESPONSE TIME: 2 seconds maximum within a range

REFERENCE IMPEDANCES: Fifteen user selectable impedance reference levels are provided to reference a 0 dBm, 1 mW level (50Ω, 75Ω, 93Ω, 110Ω, 125Ω, 135Ω, 150Ω, 250Ω, 300Ω, 500Ω, 600Ω, 800Ω, 900Ω, 1000Ω, 1200Ω), and an 8Ω impedance reference level is provided to reference a 0 dBW level.

DC CURRENT:

RANGE	RESOLUTION	ACCURACY for 1-Year	BURDEN VOLTAGE
200 μA	0.01 μA	±(0.3% of reading + 2 digits	0.3V max
2 mA	0.1 μA		
20 mA	1 μA		
200 mA	10 μA		
2000 mA	100 μA		0.9V max

OVERLOAD PROTECTION: 2A/250V fuse in series with 3A/600V fuse (for high energy sources).

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Table 1-3. 8050A Specifications (cont)

AC CURRENT (TRUE RMS RESPONDING, AC COUPLED):

INPUT CURRENT	RESOLUTION	RANGE	20 Hz**	45 Hz	2 kHz	10 kHz	20 kHz	BURDEN VOLTAGE
10 μA - 200 μA	0.01 μA	200 μA	2%+10	1%+10			2%+10	0.3V rms max
100 μA - 2 mA	0.1 μA	2 mA						
1 mA - 20 mA	1 μA	20 mA						
10 mA - 200 mA	10 μA	200 mA						
100 mA - 2000 mA	100 μA	2000 mA			Not specified			0.9V rms max

***Typically 3 to 5 digits of rattle will be observed at full scale at 20 Hz.*

CREST FACTOR RANGE: Waveforms with a Peak/RMS ratio of 1:1 to 3:1 at full scale.

RESISTANCE:

RANGE	RESOLUTION	ACCURACY for 1-Year	FULL SCALE VOLTAGE ACROSS UNKNOWN RESISTANCE
200Ω	0.01Ω	±(0.1% reading + 2 digits + .02Ω)	.19V
2 kΩ	0.1Ω		1.2V
20 kΩ	1Ω	±(.05% of reading + 2 digits)	.2V
200 kΩ	10Ω		2V
2000 kΩ	100Ω	±(0.25% reading + 3 digits)	.2V
20 MΩ	1 kΩ		2V

OVERLOAD PROTECTION: 500V dc/ac rms on all ranges

OPEN CIRCUIT VOLTAGE: Less than 3.5V on all ranges

RESPONSE TIME (TO RATED ACCURACY): 10 seconds maximum on 20 MΩ range
2 seconds maximum on all other ranges

DIODE TEST: ⏚ These three ranges have enough voltage to turn on silicon junctions to check for proper forward-to-back resistance. The 2 kΩ range is preferred and is marked with a larger diode symbol on the front panel of the instrument. The three non-diode test ranges will not turn on silicon junctions so in-circuit resistance measurements can be made with these three ranges.

CONDUCTANCE:

RANGE	RESOLUTION	ACCURACY for 1-Year
2 mS	.1 μS (10 MΩ)	±(0.1% of reading + 5 digits)
200 nS	.01 nS (100,000 MΩ)	±(0.5% of reading + 20 digits)

MAXIMUM OPEN CIRCUIT VOLTAGE: <3.5V

OVERLOAD PROTECTION: 500V dc/ac rms on all ranges

CONDUCTANCE UNITS: We use the international unit of conductance, the siemen = S = 1/Ω. Another unit of conductance is the mho.

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Table 1-3. 8050A Specifications (cont)

RELATIVE:

RELATIVE REFERENCE: An input applied when the RELATIVE button is depressed to the ON position is held as "0" reference point. Subsequent readings indicate the deviation (±) from this point. (Note: REL annunciator indicates when this mode is enabled.)

RELATIVE ACCURACY: Error will not exceed the sum of the errors of the two measurements.

ENVIRONMENTAL:

TEMPERATURE COEFFECIENT: <0.1 times the applicable accuracy specification per °C for 0°C to 18°C and 28°C to 50°C (32°F to 64.4°F and 82.4°F to 122°F).

OPERATING TEMPERATURE: 0°C to 50°C (32°F to 122°F).

STORAGE TEMPERATURE: (without batteries): −40°C to +70°C (−40°F to +158°F).
(with batteries): −40°C to +50°C (−40°F to +122°F).

RELATIVE HUMIDITY: Up to 90%, 0°C to 35°C (32-95°F), up to 70%, 35°C to 50°C (95-122°F), except on 2000 kΩ, 20 MΩ, and 200 nS ranges where it is up to 80%, 0°C to 35°C (32-95°F).

GENERAL:

MAXIMUM COMMON MODE VOLTAGE: 500V dc, or peak ac (low terminal potential with respect to power line ground)

SIZE: 22 cm X 6 cm X 25 cm (8-½" X 2-½" X 10") See Figure 1-8.

WEIGHT: 1.08 kg (2 lbs., 6 oz.)

POWER REQUIREMENTS (LINE ONLY MODELS):

LINE VOLTAGE: 90 to 110V ac 47 to 440 Hz
105 to 132V ac, 47 to 440 Hz
200 to 264V ac, 47 to 440 Hz
Factory configured for customerspecified voltage.

POWER CONSUMPTION: 4W max.

STANDARDS: IEC 348 Protection Class 1

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Table 1-4. 8050A Option Specifications

–01 BATTERY OPTION:

BATTERIES: TYPE: NiCAD
OPERATING TIME: 10 hours, typical
RECHARGE TIME: (with POWER switch in OFF position): 14 hours for full charge

POWER CONSUMPTION: 6W max.

LINE VOLTAGE: 90-264V, 47-440 Hz, field changeable

STANDARDS: IEC 348: Protection Class 1 when operated from supply mains
Protection Class 2 when operated from internal batteries

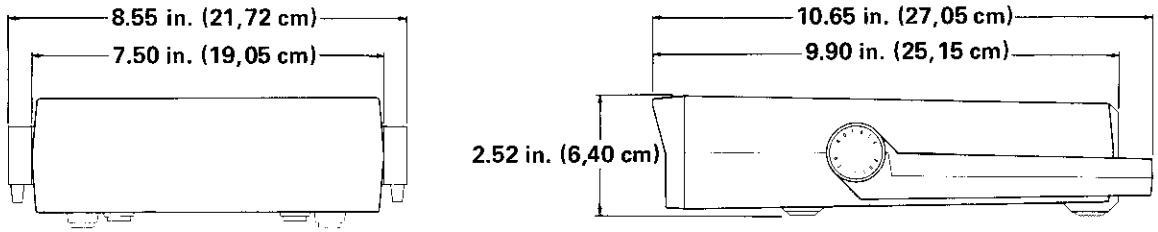


Figure 1-8. 8050A Dimensions

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP