

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

FUJIFILM
expect INNOVATION™

Pan & Tilt Lenses



CPT-70F-02A

Technology That Inspires...

FUJINON

Downloaded from www.Manualslib.com manuals search engine

PAN & TILT HEAD SPECIFICATIONS




MODEL	CPT-70F-02A
Pan Range	300°
Pan Speed	25° / Sec.
Tilt Speed	20° / Sec
Tilt Range	+/- 95°
Stopping Accuracy	+/- 5'
Lens Type	MD
Acoustic Noise	NC40db
Load Capacity	4 kg / 8.8 lbs.
Power Consumption	DC 15V / 10W (max)
Operating Temperature	-10° C ~ +50° C
Power Source (ESC-103K-04A)	15V DC
Drive System	DC Servo
Weight	2.3 kg / 5.06 lbs.
Dimensions WxDxH (mm)	130 x 102 x 222
Max. Cable Length	1350 m / 4430 ft.


* From power supply (CPS-401A-10DA) **EOP-102J-60B not available on CPT-70D-02A

PAN & TILT

EOP-102J-70B

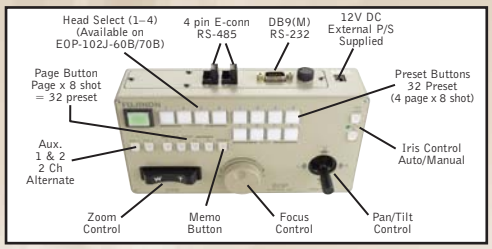


CPT-70F/70D CONFIGURATIONS

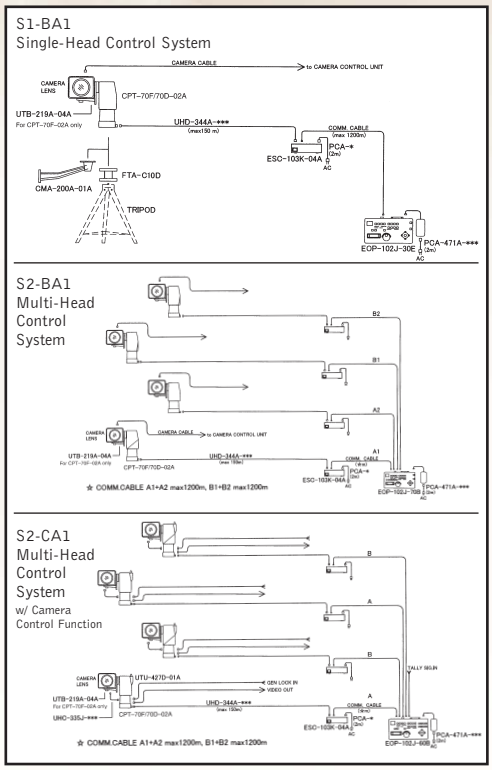


PAN & TILT

EPT-7G-H2A CONFIGURATIONS

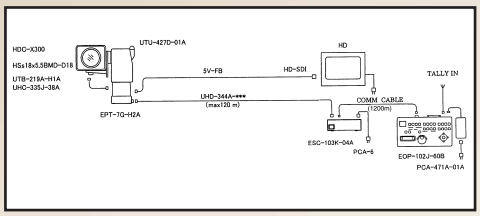

COMPATIBILITY WITH EXISTING SYSTEMS


Compatibility with existing CPT-1A and EPT-5E systems is possible by the utilization of certain adaptors. The diagrams below depict some common configuration scenarios.

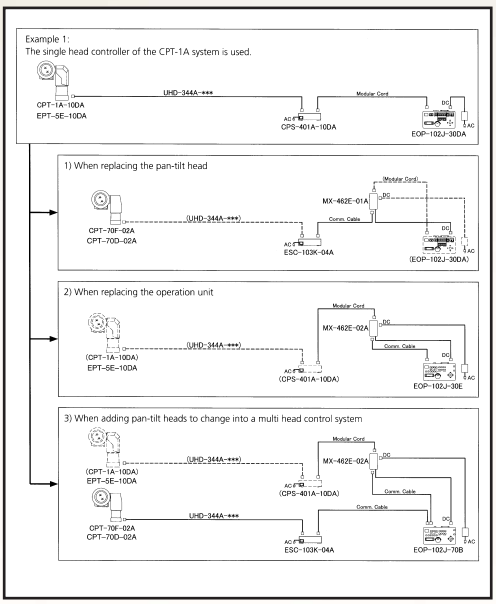

PAN & TILT CONTROLLERS



	EOP-102J-30E	EOP-102J-60B	EOP-102J-70B
Operation	RS-485 via twisted pair cable – E-connector/RS-232 via DB-9 connector		
Pan / Tilt	Variable-speed joystick		
Zoom	Variable-speed rocker switch		
Focus	Variable-speed potentiometer		
Iris	Close, open, auto, remote		
Shot Memory	32	32 per head	32 per head
Back-up	Reservable for more than 5 years (Lithium battery)		
Qty of Head Control	1	4	4
Auxiliary Input	2 auxiliary relay contacts for controlling accessory equipment at the pan and tilt head		
Power Source	120 VAC via 12 VDC adapter (included)		
Power Consumption	5 W		
Camera Control		Camera On/Off Shutter Speed Gain Adjust, Color Bar Auto White, Auto Black	
Weight	Approximately 0.8 kg		

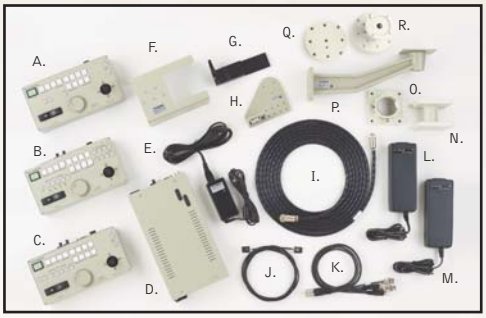

A. EOP-102J-30E
B. EOP-102J-60B
C. EOP-102J-70B
D. ESC-103K-04A
E. PS-470A-01A
F. UTB-219A-03A
G. CLH-8B
H. UTB-219A-02A/04A
I. UHD-344A-XXX
J. Communication Cable Between EOP & ESC
K. UHC-335J-XXX
L. MX-462E-01A
M. MX-462E-02A
N. FTA-C10D
O. FPA-C10D
P. CMA-200A-01A
Q. FHTA-10 Tripod Adapter
R. FH-10–High Hat Mount

For Sales Contact Information go to

www.Fujinon.com

Downloaded from www.Manualslib.com manuals search engine

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP