ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *FujiFilm / Fujinon HF16HA-1B* at our website: *Click HERE*

FUJINON
FUJIFILM



MP MEGA PIXELS

Maximum choice. Maximum precision.

Fujinon Machine Vision lenses.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com



Highest quality in industrial image processing.

The Machine Vision lenses from Fujinon.



Modern image processing places increasingly tough demands on each element of an inspection system. Lenses are one of the first constituent parts in the image processing chain and thus are responsible as well for the quality of the entire system.

Fujinon offers ideal solutions through various ranges of lenses for all kinds of applications with top optical and mechanical quality: with high resolution and low distortion while being robust as well.

Always the right solution.

The comprehensive range offers the optimal solution for any kind of application:

- Fixed focal lengths with 1.5 megapixels resolution
- Fixed focal lengths with 5 megapixels resolution
- IR-corrected fixed focal lengths with 5 megapixels resolution
- 3 CCD lenses, Zoom and fixed focal length lenses
- High-resolution UV lenses
- Fish-eye lenses

Maximum performance. Minimum distortion.

In addition to the high resolution of up to 5 megapixels these Machine Vision lenses are characterised by low distortion values of only 0.3% to 0.02%. Offering the possibility to use at very short working distances of only 0.1 m also makes the lenses the ideal choice for all applications in industrial image processing when there is only a limited amount of space between the lens and the object.

Robust and reliable.

The lenses comprise a solid metal mount and locking screws for iris and focus. This makes them especially robust against impacts and vibrations, and therefore they are an excellent choice for applications under tough conditions. Thanks to their compact and light construction the Fujinon Machine Vision lenses can be incorporated into your existing image processing system quickly and easily.

Technical data Machine Vision lenses.

Format	Product		Focal length in mm	Zoom factor	Iris range	Angle of view (HxV)	M.O.D. in m	Mount	Weight in g
Fish-eye lenses with fixed focal length Manual iris									
1/2"	FE185046HA-1	MP	1.4	–	F1.4~F16	185° x 185°	0.1	C	140
2/3"	FE185057HA-1	MP	1.8	–	F1.4~F16	185° x 185°	0.2	C	135
1"	FE185086HA-1	MP	2.7	–	F1.8~F16	185° x 185°	0.2	C	160
UV lenses Manual iris									
1/2"	UV12.5	MP	12.5	–	F2.5~F22	29° 01' x 21° 52'	0.1	C	180
1"	UV25	MP	25	–	F2.5~F22	27° 56' x 21° 07'	0.3	C	135
Fixed focal lengths for 1.5 megapixel cameras Manual iris, with locking screws for iris and focus									
1/2"	DF6HA-1B	MP	6	–	F1.2~F16	56° 09' x 43° 36'	0.1	C	55
2/3"	HF9HA-1B	MP	9	–	F1.4~F16	52° 06' x 40° 16'	0.1	C	55
	HF12.5HA-1B	MP	12.5	–	F1.4~F16	38° 47' x 29° 35'	0.1	C	45
	HF16HA-1B	MP	16	–	F1.4~F16	30° 45' x 23° 18'	0.1	C	45
	HF25HA-1B	MP	25	–	F1.4~F22	19° 58' x 15° 02'	0.15	C	45
	HF35HA-1B	MP	35	–	F1.6~F22	14° 20' x 10° 46'	0.25	C	45
	HF50HA-1B	MP	50	–	F2.3~F22	10° 03' x 07° 33'	0.5	C	45
	HF75HA-1B	MP	75	–	F2.8~F22	06° 43' x 05° 02'	1.1	C	55
1"	CF12.5HA-1	MP	12.5	–	F1.4~F22	54° 13' x 42° 01'	0.1	C	290
	CF16HA-1	MP	16	–	F1.4~F22	43° 36' x 33° 24'	0.1	C	280
	CF25HA-1	MP	25	–	F1.4~F22	28° 43' x 21° 44'	0.1	C	310
	CF35HA-1	MP	35	–	F1.4~F22	20° 43' x 15° 37'	0.2	C	180
	CF50HA-1	MP	50	–	F1.8~F22	14° 35' x 10° 58'	0.4	C	235
	CF75HA-1	MP	75	–	F1.8~F22	09° 45' x 07° 19'	0.9	C	295

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Technical data Machine Vision lenses.

Format	Product	Focal length in mm	Zoom factor	Iris range	Angle of view (HxV)	M.O.D. in m	Mount	Weight in g
Fixed focal lengths for 5 megapixel cameras								
Manual iris, with locking screws for iris and focus								
2/3"	HF12.5SA-1 MP	12.5	–	F1.4~F22	38° 47' x 29° 35'	0.1	C	295
	HF16SA-1 MP	16	–	F1.4~F22	30° 45' x 23° 18'	0.1	C	285
	HF25SA-1 MP	25	–	F1.4~F22	19° 58' x 15° 02'	0.1	C	315
	HF35SA-1 MP	35	–	F1.4~F22	14° 20' x 10° 46'	0.2	C	185
	HF50SA-1 MP	50	–	F1.8~F22	10° 03' x 07° 33'	0.4	C	240
	HF75SA-1 MP	75	–	F1.8~F22	06° 43' x 05° 02'	0.9	C	300
Fixed focal lengths for 5 megapixel cameras, IR-corrected								
2/3"	HF35SR4A-1*1 MP	35	–	F2.0~F22	14° 20' x 10° 46'	0.75	C	265
	HF50SR4A-1*1 MP	50	–	F2.8~F22	10° 03' x 07° 33'	1.0	C	255
	HF35SR4A-SA1L2 MP	35	–	F2.0~T360	14° 20' x 10° 46'	0.75	C	270
	HF50SR4A-SA1L2 MP	50	–	F2.8~T360	10° 03' x 07° 33'	1.0	C	260
Lenses for 3 CCD cameras								
Fixed focal length lenses, manual iris								
1/3"	TF2.8DA-8	2.8	–	F2.2~F16,Close	89° 08' x 69° 20'	0.1	C	75
	TF4DA-8	4	–	F2.2~F16,Close	61° 56' x 48° 27'	0.1	C	70
	TF8DA-8B	8	–	F2.2~F16,Close	33° 24' x 25° 22'	0.1	C	60
	TF15DA-8	15	–	F2.2~F16,Close	18° 11' x 13° 41'	0.1	C	60
	TF25DA-8B	25	–	F2.2~F16,Close	10° 58' x 08° 14'	0.2	C	60
Zoom lenses (motor drive for zoom, focus and iris)								
1/3"	T17x5DA-R11*3	5~85	17	F1.4~F16,Close	51° 30' x 36° 60' 03° 20' x 02° 40'	0.9	C	1400
	T17x5DA-D8*4	5~85	17	F1.4~F16,Close	51° 30' x 36° 60' 03° 20' x 02° 40'	0.9	C	1400
	T17x5DA-D58*4	5~85	17	F1.4~F16,Close	51° 30' x 36° 60' 03° 20' x 02° 40'	0.9	C	1400
1/2"	S17x6.6DA-R11*3	6.6~114	17	F1.5~F16,Close	51° 70' x 40° 0' 03° 30' x 02° 50'	0.9	C	1450

*1 manual iris *2 auto iris (DC), cable length 230 mm

*3 preset type *4 for Sony camera DXC-390

Distributed by:

MaxxVision®

Sigmaringer Str. 121
70567 Stuttgart
Tel.: +49 711 997 996 3
Fax: +49 711 997 996 50
www.maxxvision.com
info@maxxvision.com

Specifications are subject to change without notice. 08/10

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

FUJIFILM

FUJINON CCTV LENS

For FA/Machine Vision

FIXED FOCAL LENGTH LENS

The recent trend for cameras in the FA/machine vision industry has been towards higher pixel count. At FUJIFILM, we have developed a lineup of new fixed focal lenses, consisting of six 2/3" format lenses supporting up to 5 megapixel, and six 1" format lenses suporting up to 1.5 megapixel. With these lenses, in addition to the eight compact 2/3" format lenses supporting up to 1.5 megapixel, we aim to satisfy the diversifying needs of our customers.


3CCD CAMERA LENS

3CCD camera lenses are used by security and disaster surveillance, inspections, surveying, assembly line monitoring, image processing and image analysis. We have lined our products from fixed focal cameras to zoom lenses. If lenses for normal single CCD cameras are installed on 3CCD cameras,optimal performance of the optical color separation system in these cameras cannot be guaranteed. It is thus advisable to install lenses exclusively constructed for 3CCD cameras.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Manufacturing in Harmony with Nature

Saitama city, blessed with the vast nature of the Musashino plain, is where the FUJINON brand has laid down roots as it pursues manufacturing in harmony with nature. Protecting nature is our constant goal as we manufacture products that are friendly to people and the environment.

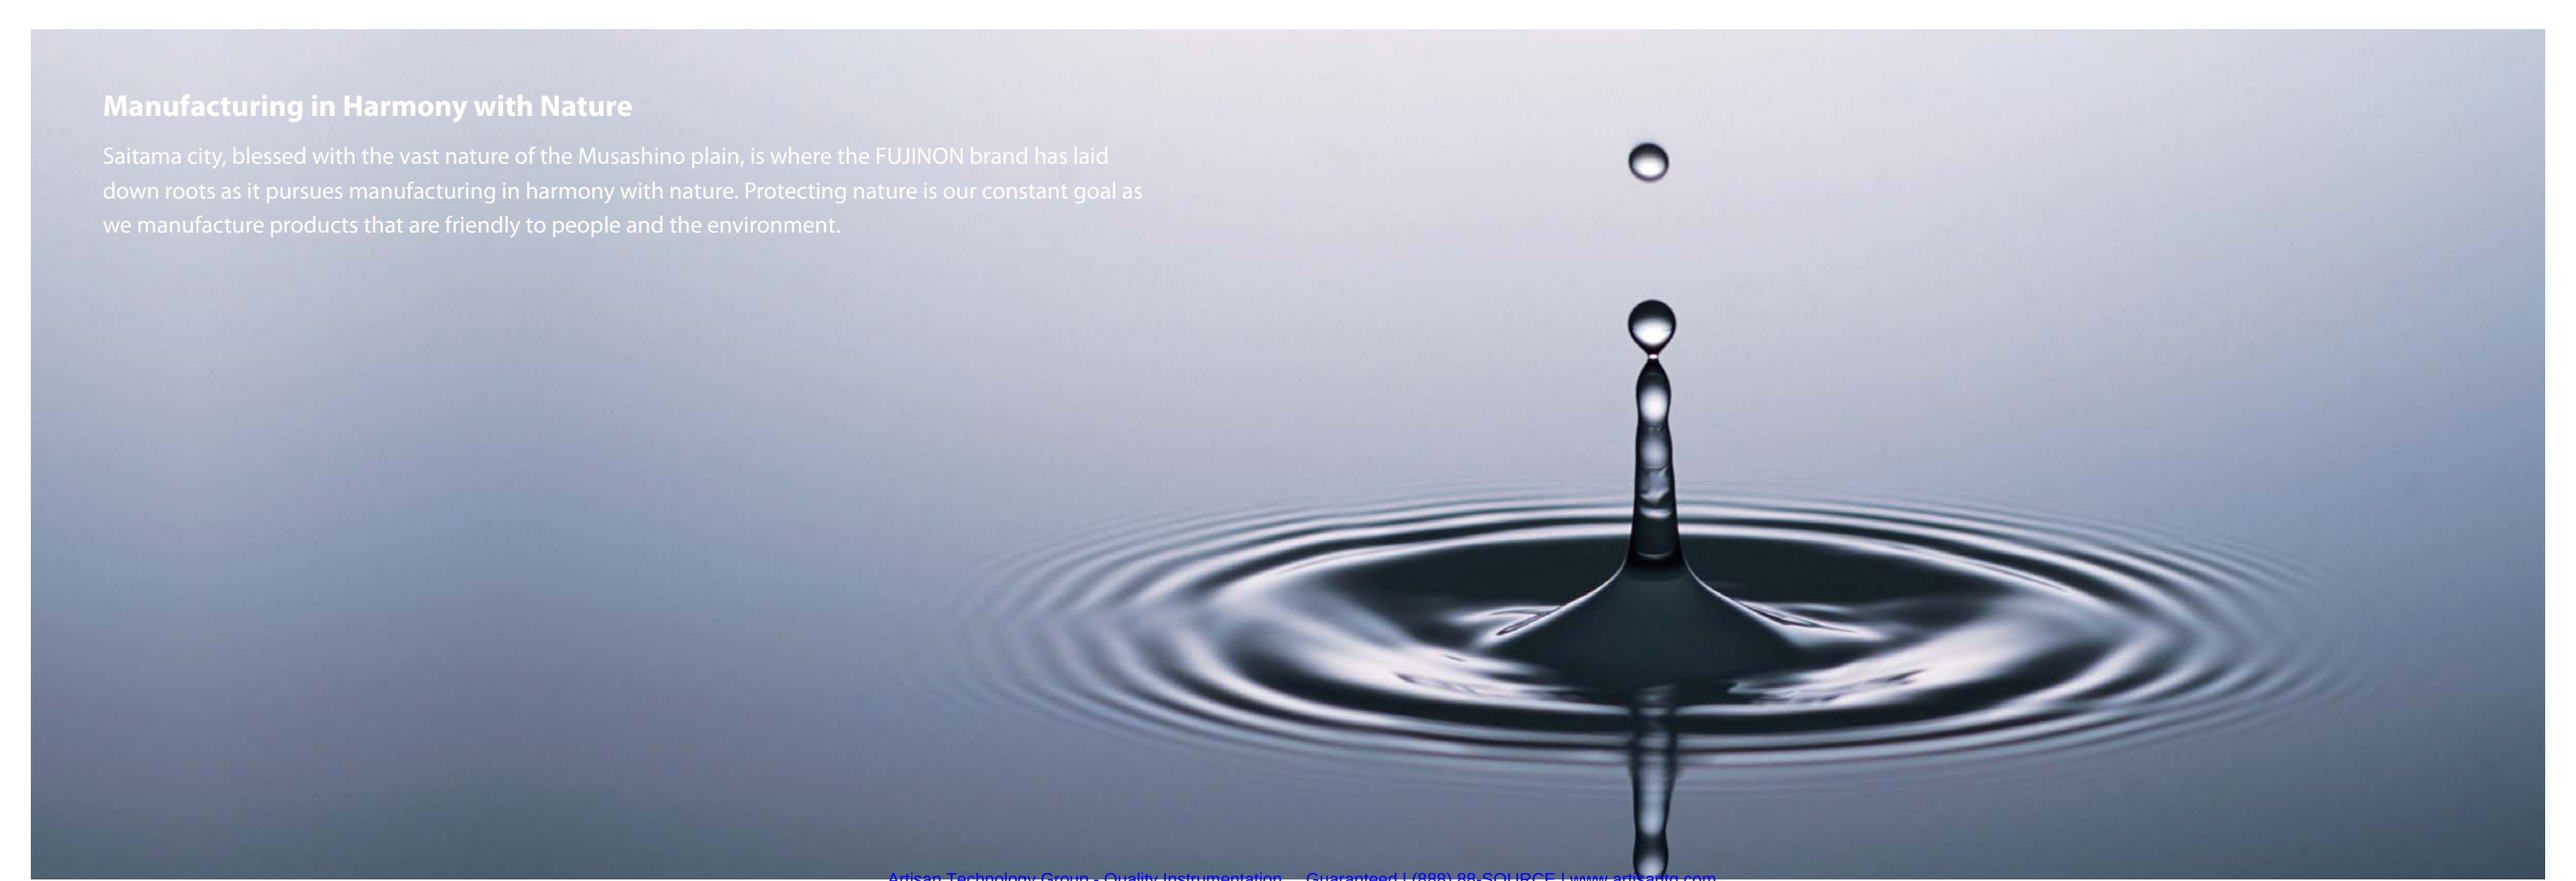


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

For FA/Machine Vision Fixed Focal

HF12.5SA-1


FIXED 5 Mega MANUAL C-mt METAL F1.4

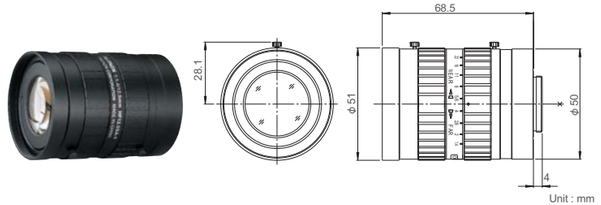

Unit : mm

HF16SA-1


FIXED 5 Mega MANUAL C-mt METAL F1.4

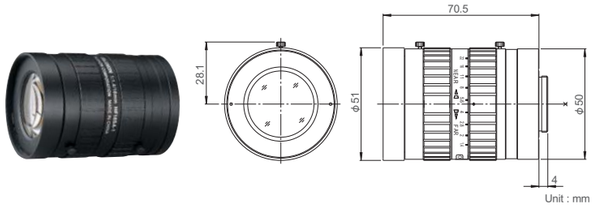

Unit : mm

HF25SA-1


FIXED 5 Mega MANUAL C-mt METAL F1.4

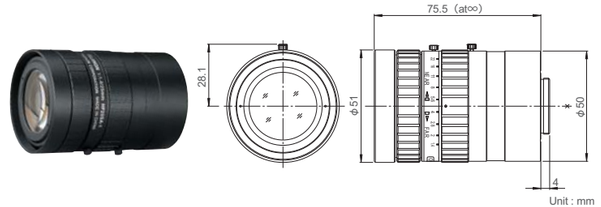

Unit : mm

HF35SA-1


FIXED 5 Mega MANUAL C-mt METAL F1.4

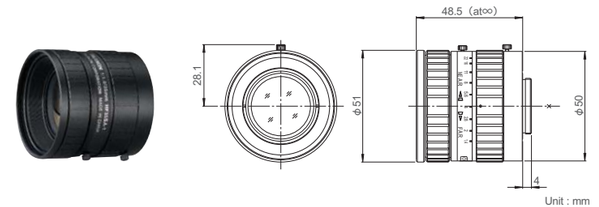

Unit : mm

HF50SA-1


FIXED 5 Mega MANUAL C-mt METAL

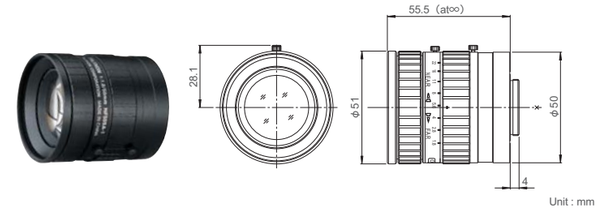

Unit : mm

HF75SA-1

FIXED 5 Mega MANUAL C-mt METAL

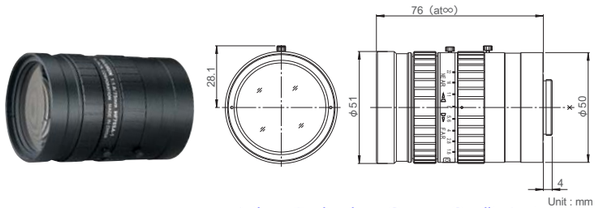

Unit : mm

Feature Indications

FIXED — Fixed Focal
High performance single focal lens for the best image quality

MANUAL — Manual Iris
Manually-operated iris

F1.4 — Wide Aperture Rate
Lens with the wide aperture rate, optimizing the sensitivity of cameras

5 Mega — For Megapixel Camera
For 5 Megapixel Camera


C-mt — C Mount
Screw-in mounting commonly used in FA lenses

METAL — Metal Mount
Metal mounting with high accuracy and durability

- ··· With locking knob for iris and foucs
- ··· Using an extension tube longer than 5mm the M.O.D. will increase to 0.3m
- ··· Using an extension tube longer than 5mm the M.O.D. will increase to 0.5m

Megapixel Supporting Lens

We have realized a high resolution, compact, and lightweight lens supporting to megapixel by thoroughly reducing aberrations based on design technology cultivated from broadcast TV lenses.
The chart shown at the right compares megapixel supporting lens and the MTF of an ordinary CCTV lens.
As the number of TV lines increases, the disparity in MTF becomes bigger.

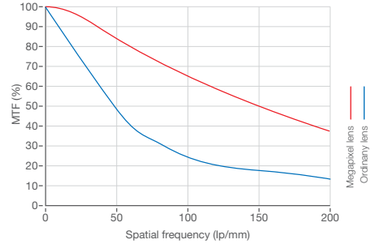


		HF12.5SA-1	HF16SA-1	HF25SA-1	HF35SA-1	HF50SA-1	HF75SA-1
Focal Length (mm)		12.5	16	25	35	50	75
Iris Range		F1.4~F22	F1.4~F22	F1.4~F22	F1.4~F22	F1.8~F22	F1.8~F22
Operation	Focus	Manual	Manual	Manual	Manual	Manual	Manual
	Iris	Manual	Manual	Manual	Manual	Manual	Manual
Angle Of View (H×V)	2/3"	38°47' × 29°35'	30°45' × 23°18'	19°58' × 15°02'	14°20' × 10°46'	10°03' × 7°33'	6°43' × 5°02'
	1/2"	28°43' × 21°44'	22°37' × 17°04'	14°35' × 10°58'	10°27' × 7°51'	7°19' × 5°30'	4°53' × 3°40'
	1/3"	21°44' × 16°23'	17°04' × 12°50'	10°58' × 8°14'	7°51' × 5°53'	5°30' × 4°07'	3°40' × 2°45'
Focusing Range (From Front Of The Lens) (m)		∞ ~ 0.1	∞ ~ 0.1	∞ ~ 0.1	∞ ~ 0.2	∞ ~ 0.4	∞ ~ 0.9
Object Dimensions at M.O.D. (H×V) (mm)	2/3"	83 × 62	69 × 51	44 × 33	50 × 38	70 × 52	101 × 76
	1/2"	60 × 45	50 × 37	32 × 24	37 × 27	51 × 38	74 × 55
	1/3"	45 × 34	37 × 28	24 × 18	27 × 21	38 × 28	55 × 41
Back Focal Distance (in air) (mm)		16.07	17.99	22.32	14.99	17.81	24.43
Exit Pupil Position (From Image Plane) (mm)		-101	-172	-140	-37	-49	-52
Filter Thread (mm)		M49 × 0.75	M49 × 0.75	M49 × 0.75	M49 × 0.75	M49 × 0.75	M49 × 0.75
Mount		C	C	C	C	C	C
Mass (g)		295	285	315	185	240	305
Remarks		With Metal Mount	With Metal Mount	With Metal Mount	With Metal Mount	With Metal Mount	With Metal Mount

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

For FA/Machine Vision Fixed Focal

DF6HA-1B


FIXED WIDE 1.5 Mega MANUAL C-mt METAL F1.2

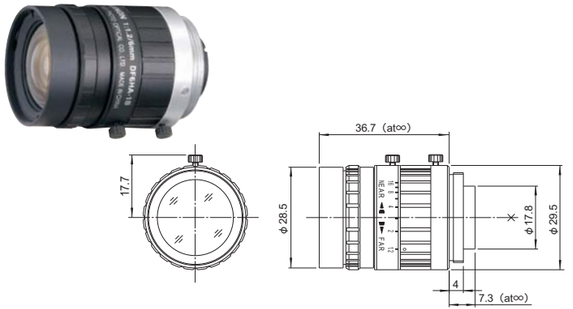

Unit : mm

HF9HA-1B


FIXED WIDE 1.5 Mega MANUAL C-mt METAL F1.4

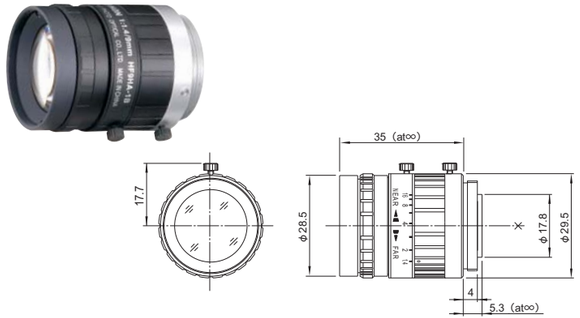

Unit : mm

HF12.5HA-1B


FIXED 1.5 Mega MANUAL C-mt METAL F1.4

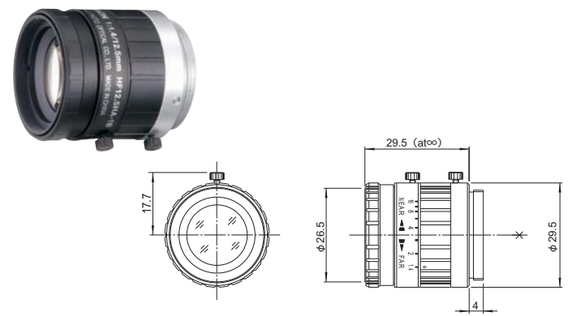

Unit : mm

HF16HA-1B

FIXED 1.5 Mega MANUAL C-mt METAL F1.4

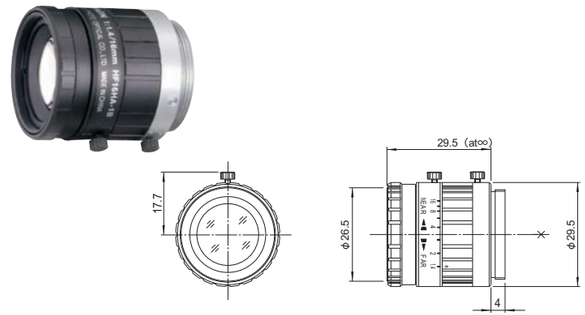

Unit : mm

Feature Indications

FIXED — Fixed Focal
High performance single focal lens for the best image quality

MANUAL — Manual Iris
Manually-operated iris

C-mt — C Mount
Screw-in mounting commonly used in FA lenses

F1.4 — Wide Aperture Rate
Lens with the wide aperture rate, optimizing the sensitivity of cameras

WIDE — Wide Angle
Wide angle lens which ensures wide field of view

1.5 Mega — For Megapixel Camera
For 1.5 Megapixel Camera

METAL — Metal Mount
Metal mounting with high accuracy and durability

··· With locking knob for iris and foucs

Model Explanation

Image Size		Fixed Focal	Focal Length	Megapixel Support	
D ···1/2" H ···2/3" C ···1"	H	F	9	HA-1	SA-1 5 megapixel HA-1B 1.5 megapixel

1.5 Megapixel

- High-resolution design, providing support for up to 1.5 megapixel camera resolution.
- Low-distortion design achieving accurate image input.
- Focus & iris lock tab provided, supporting environments such as vibration.

		DF6HA-1B	HF9HA-1B	HF12.5HA-1B	HF16HA-1B
Focal Length (mm)		6	9	12.5	16
Iris Range		F1.2~F16	F1.4~F16	F1.4~F16	F1.4~F16
Operation	Focus	Manual	Manual	Manual	Manual
	Iris	Manual	Manual	Manual	Manual
Angle Of View (H×V)	1/2"	56°09' × 43°36'	52°06' × 40°16'	38°47' × 29°35'	30°45' × 23°18'
	1/3"	43°36' × 33°24'	39°09' × 29°52'	28°43' × 21°44'	22°37' × 17°04'
	1/4"	33°24' × 25°22'	29°52' × 22°37'	21°44' × 16°23'	17°04' × 12°50'
Focusing Range (From Front Of The Lens) (m)		∞ ~ 0.1	∞ ~ 0.1	∞ ~ 0.1	∞ ~ 0.1
Object Dimensions at M.O.D. (H×V) (mm)	1/2"	122 × 92	108 × 81	78 × 58	63 × 47
	1/3"	92 × 69	79 × 59	57 × 42	46 × 34
	1/4"	69 × 52	59 × 44	42 × 32	34 × 26
Back Focal Distance (in air) (mm)		11.44	13.48	15.09	15.15
Exit Pupil Position (From Image Plane) (mm)		-46	-28	-31	-31
Filter Thread (mm)		M27 × 0.5	M27 × 0.5	M25.5 × 0.5	M25.5 × 0.5
Mount		C	C	C	C
Mass (g)		55	55	45	45
Remarks		With Metal Mount	With Metal Mount	With Metal Mount	With Metal Mount


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

For FA/Machine Vision Fixed Focal

HF25HA-1B

FIXED 1.5 Mega MANUAL C-mt METAL F1.4



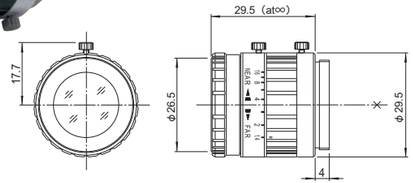


Unit : mm

HF35HA-1B

FIXED 1.5 Mega MANUAL C-mt METAL F1.6



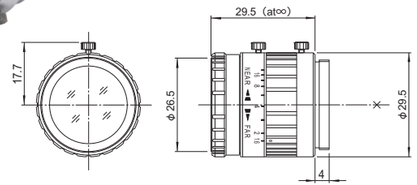


Unit : mm

HF50HA-1B

FIXED 1.5 Mega MANUAL C-mt METAL



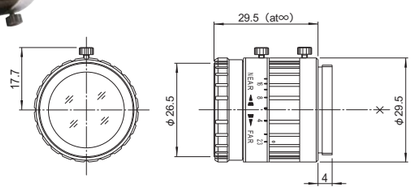


Unit : mm

HF75HA-1B

FIXED 1.5 Mega MANUAL C-mt METAL



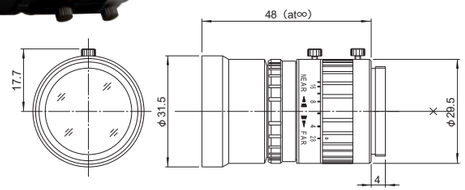

Unit : mm

Feature Indications

FIXED — Fixed Focal
High performance single focal lens for the best image quality

MANUAL — Manual Iris
Manually-operated iris

F1.4 F1.6 — Wide Aperture Rate
Lens with the wide aperture rate, optimizing the sensitivity of cameras

1.5 Mega — For Megapixel Camera
For 1.5 Megapixel Camera

METAL — Metal Mount
Metal mounting with high accuracy and durability

C-mt — C Mount
Screw-in mounting commonly used in FA lenses

··· With locking knob for iris and foucs

Model Explanation

Image Size	F	25	HA-1	
H ···2/3" (D ···1/2", C ···1")	Fixed Focal	Focal Length	Megapixel Support	SA-1: 5 megapixel HA-1B: 1.5 megapixel

1.5 Megapixel

- High-resolution design, providing support for up to 1.5 megapixel camera resolution.
- Low-distortion design achieving accurate image input.
- Focus & iris lock tab provided, supporting environments such as vibration.


		HF25HA-1B	HF35HA-1B	HF50HA-1B	HF75HA-1B
Focal Length (mm)		25	35	50	75
Iris Range		F1.4~F16	F1.6~F22	F2.3~F22	F2.8~F22
Operation	Focus	Manual	Manual	Manual	Manual
	Iris	Manual	Manual	Manual	Manual
Angle Of View (H×V)	2/3"	19°58' × 15°02'	14°20' × 10°46'	10°03' × 7°33'	6°43' × 5°02'
	1/2"	14°35' × 10°58'	10°27' × 7°51'	7°19' × 5°30'	4°53' × 3°40'
	1/3"	10°58' × 8°14'	7°51' × 5°53'	5°30' × 4°07'	3°40' × 2°45'
Focusing Range (From Front Of The Lens) (m)		∞ ~ 0.15	∞ ~ 0.25	∞ ~ 0.5	∞ ~ 1.1
Object Dimensions at M.O.D. (H×V) (mm)	2/3"	53 × 40	59 × 44	77 × 57	114 × 85
	1/2"	38 × 29	43 × 32	56 × 42	83 × 62
	1/3"	29 × 22	32 × 24	42 × 31	62 × 47
Back Focal Distance (in air) (mm)		14.58	15.03	15.26	15.74
Exit Pupil Position (From Image Plane) (mm)		-32	-27	-25	-27
Filter Thread (mm)		M25.5 × 0.5	M25.5 × 0.5	M25.5 × 0.5	M30.5 × 0.5
Mount		C	C	C	C
Mass (g)		45	45	45	55
Remarks		With Metal Mount	With Metal Mount	With Metal Mount	With Metal Mount

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

For FA/Machine Vision Fixed Focal

CF12.5HA-1


FIXED 1.5 Mega MANUAL C-mt METAL F1.4

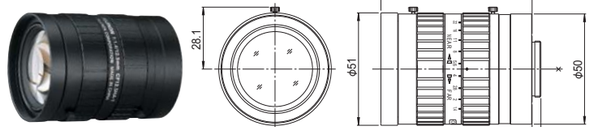

Unit : mm

CF16HA-1

FIXED 1.5 Mega MANUAL C-mt METAL F1.4

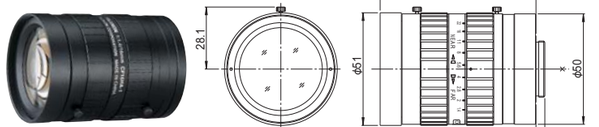


Unit : mm

CF25HA-1

FIXED 1.5 Mega MANUAL C-mt METAL F1.4



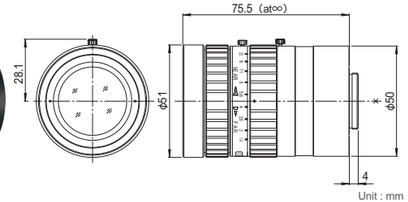


Unit : mm

CF35HA-1

FIXED 1.5 Mega MANUAL C-mt METAL F1.4



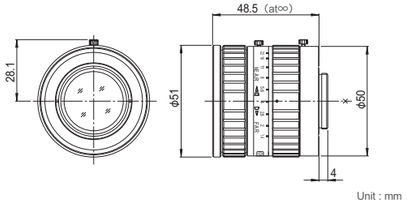


Unit : mm

CF50HA-1

FIXED 1.5 Mega MANUAL C-mt METAL



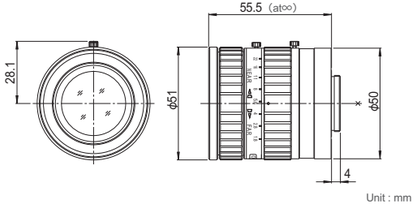


Unit : mm

CF75HA-1

FIXED 1.5 Mega MANUAL C-mt METAL



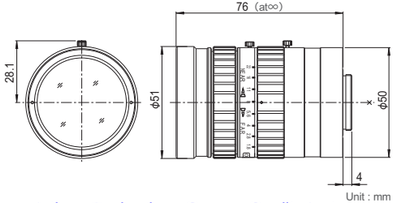

Unit : mm

Feature Indications

FIXED — Fixed Focal
High performance single focal lens for the best image quality

MANUAL — Manual Iris
Manually-operated iris

F1.4 — Wide Aperture Rate
Lens with the wide aperture rate, optimizing the sensitivity of cameras

1.5 Mega — For Megapixel Camera
For 1.5 Megapixel Camera

C-mt — C Mount
Screw-in mounting commonly used in FA lenses

METAL — Metal Mount
Metal mounting with high accuracy and durability

- ··· With locking knob for iris and foucs
- ··· Using an extension tube longer than 5mm the M.O.D. will increase to 0.3m
- ··· Using an extension tube longer than 5mm the M.O.D. will increase to 0.5m

Model Explanation

Image Size							
D ···1/2"	H ···2/3"	C ···1"	C	F Fixed Focal	12.5 Focal Length	HA-1 Megapixel Support	SA-1 5 megapixel / HA-1B 1.5 megapixel

1.5 Megapixel

- High-resolution design, providing support for up to 1.5 megapixel camera resolution.
- Low-distortion design achieving accurate image input.
- Focus & iris lock tab provided, supporting environments such as vibration.


		CF12.5HA-1	CF16HA-1	CF25HA-1	CF35HA-1	CF50HA-1	CF75HA-1
Focal Length (mm)		12.5	16	25	35	50	75
Iris Range		F1.4~F22	F1.4~F22	F1.4~F22	F1.4~F22	F1.8~F22	F1.8~F22
Operation	Focus	Manual	Manual	Manual	Manual	Manual	Manual
	Iris	Manual	Manual	Manual	Manual	Manual	Manual
Angle Of View (H×V)	1"	54°13' × 42°01'	43°36' × 33°24'	28°43' × 21°44'	20°43' × 15°37'	14°35' × 10°58'	9°45' × 7°19'
	2/3"	38°47' × 29°35'	30°45' × 23°18'	19°58' × 15°02'	14°20' × 10°46'	10°03' × 7°33'	6°43' × 5°02'
	1/2"	28°43' × 21°44'	22°37' × 17°04'	14°35' × 10°58'	10°27' × 7°51'	7°19' × 5°30'	4°53' × 3°40'
Focusing Range (From Front Of The Lens) (m)		∞ ~ 0.1	∞ ~ 0.1	∞ ~ 0.1	∞ ~ 0.2	∞ ~ 0.4	∞ ~ 0.9
Object Dimensions at M.O.D. (H×V) (mm)	1"	120 × 90	100 × 75	65 × 48	73 × 55	101 × 76	147 × 111
	2/3"	83 × 62	69 × 51	44 × 33	50 × 38	70 × 52	101 × 76
	1/2"	60 × 45	50 × 37	32 × 24	37 × 27	51 × 38	74 × 55
Back Focal Distance (in air) (mm)		16.07	17.99	22.32	14.99	17.81	24.43
Exit Pupil Position (From Image Plane) (mm)		-101	-172	-140	-37	-49	-52
Filter Thread (mm)		M49 × 0.75	M49 × 0.75	M49 × 0.75	M49 × 0.75	M49 × 0.75	M49 × 0.75
Mount		C	C	C	C	C	C
Mass (g)		290	280	310	180	235	300
Remarks		With Metal Mount	With Metal Mount	With Metal Mount	With Metal Mount	With Metal Mount	With Metal Mount

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

For FA/Machine Vision 3CCD Camera

TF2.8DA-8


FIXED WIDE 3CCD MANUAL C-mt METAL

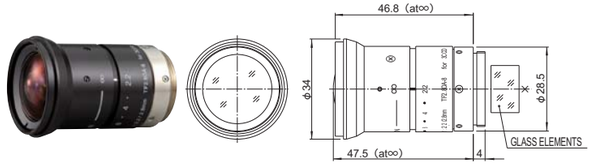

Unit : mm

TF4DA-8


FIXED 3CCD MANUAL C-mt METAL

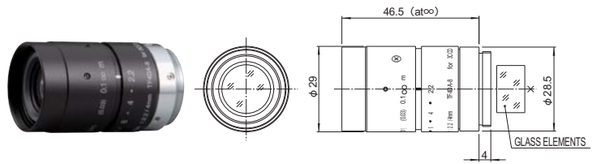

Unit : mm

TF8DA-8B


FIXED 3CCD MANUAL C-mt METAL

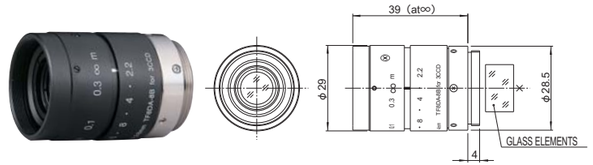

Unit : mm

TF15DA-8


FIXED 3CCD MANUAL C-mt METAL

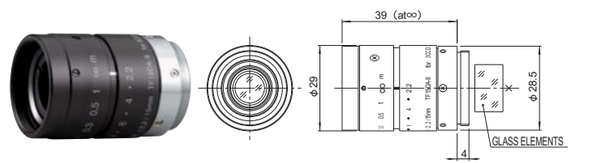

Unit : mm

TF25DA-8B

FIXED 3CCD MANUAL C-mt METAL

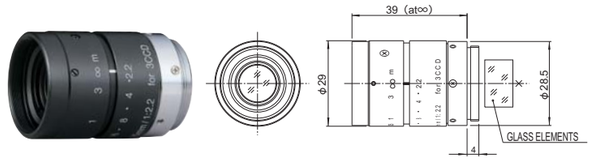

Unit : mm

Feature Indications

FIXED — Fixed Focal
High performance single focal lens for the best image quality

WIDE — Wide Angle
Wide angle lens which ensures wide field of view

MANUAL — Manual Iris
Manually-operated iris

3CCD — For 3CCD Camera
Lens exclusively for 3CCD cameras for the optimum color reproduction and high resolution of 3CCD cameras


C-mt — C Mount
Screw-in mounting commonly used in FA lenses

METAL — Metal Mount
Metal mounting with high accuracy and durability

··· With locking knob for iris and foucs

3CCD Camera Lens

3CCD cameras have thicker glass between the lens and the CCD than single CCD cameras because they have three CCDs to correspond with the red, blue and green colors separated in the prism. Fujinon 3CCD lenses are designed to optimally match with 3CCD cameras. The chart shown at the right explains the difference in MTF when a 3CCD lens and a single CCD lens is mounted on a 3CCD camera.

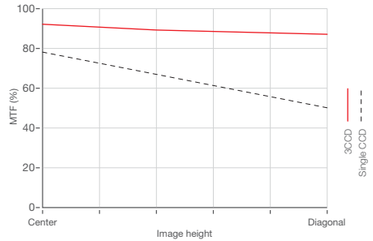

		TF2.8DA-8	TF4DA-8	TF8DA-8B	TF15DA-8	TF25DA-8B
Focal Length (mm)		2.8	4	8	15	25
Iris Range		F2.2~F16·Close	F2.2~F16·Close	F2.2~F16·Close	F2.2~F16·Close	F2.2~F16·Close
Operation	Focus	Manual	Manual	Manual	Manual	Manual
	Iris	Manual	Manual	Manual	Manual	Manual
Angle Of View (H×V)	1/3"	89°08' × 69°20'	61°56' × 48°27'	33°24' × 25°22'	18°11' × 13°41'	10°58' × 8°14'
Focusing Range (From Front Of The Lens) (m)		∞ ~ 0.1	∞ ~ 0.1	∞ ~ 0.1	∞ ~ 0.1	∞ ~ 0.2
Object Dimensions at M.O.D. (H×V) (mm)	1/3"	218 × 153	131 × 98	66 × 50	36 × 27	42 × 32
Back Focal Distance (in air) (mm)		14.49	14.61	14.83	16.32	15.12
Exit Pupil Position (From Image Plane) (mm)		98	88	-176	-89	-120
Filter Thread (mm)		-	M27 × 0.5	M25.5 × 0.5	M25.5 × 0.5	M25.5 × 0.5
Mount		C	C	C	C	C
Mass (g)		75	70	60	60	60
Remarks		With Metal Mount	With Metal Mount	With Metal Mount	With Metal Mount	With Metal Mount


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

For FA/Machine Vision Fish-Eye

FE185C046HA-1

FIXED Fish-Eye 185° 5 Mega MANUAL C-mt METAL F1.4

*Photograph is a similar model.

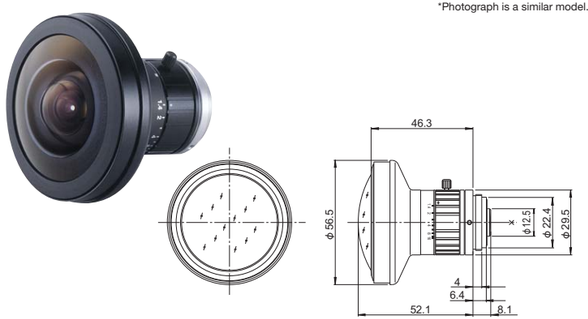


Unit : mm

FE185C057HA-1

FIXED Fish-Eye 185° 5 Mega MANUAL C-mt METAL F1.4

*Photograph is a similar model.

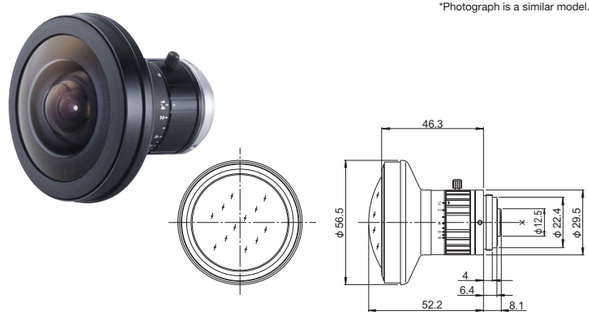


Unit : mm

FE185C086HA-1

FIXED Fish-Eye 185° 5 Mega MANUAL C-mt METAL

*Photograph is a similar model.

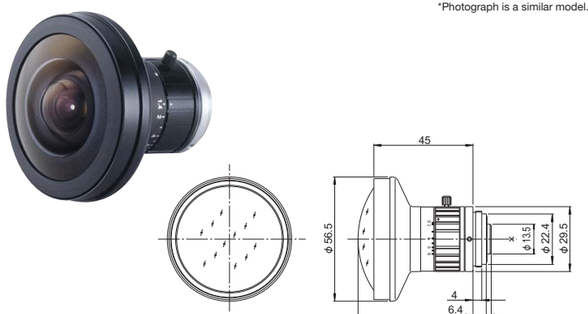

Unit : mm

Feature Indications

FIXED — Fixed Focal
High performance single focal lens for the best image quality

MANUAL — Manual Iris
Manually-operated iris

C-mt — C Mount
Screw-in mounting commonly used in FA lenses

F1.4 — Wide Aperture Rate
Lens with the wide aperture rate, optimizing the sensitivity of cameras

Fish-Eye 185° — Fish-Eye
Super wide angle lens realizing angle of 185 degrees

5 Mega — For Megapixel Camera
For 5 Megapixel Camera

METAL — Metal Mount
Metal mounting with high accuracy and durability

··· With locking knob for iris

Fish-Eye

- High-resolution design, providing support for up to 5 megapixel camera resolution.
- Super wide angle of 185 degrees that eliminates dead angles and enables effective, wide-area surveillance.
- Designed with the f-theta system, most suited for uniform displaying of images. Allows high-quality image display, partial enlargement, and conversion to ordinary-looking images to be performed easily with imaging software.

FE185C046HA-1	FE185C057HA-1	FE185C086HA-1
1/2"	2/3"	1"
1/3"	1/2"	2/3"
1/4"	1/3"	1/2"

		FE185C046HA-1	FE185C057HA-1	FE185C086HA-1
Focal Length (mm)		1.4	1.8	2.7
Iris Range		F1.4~F16	F1.4~F16	F1.8~F16
Operation	Focus	Fixed	Fixed	Fixed
	Iris	Manual	Manual	Manual
Angle Of View (H×V)		1/2": 185° × 185°(ϕ4.6mm) 1/3": 185° × 144°47' 1/4": 144°47' × 108°35'	2/3": 185° × 185°(ϕ5.7mm) 1/2": 185°01 × 154°08' 1/3": 154°08' × 115°27'	1": 185° × 185°(ϕ8.6mm) 2/3": 185° × 140°35' 1/2": 136°18 × 102°19'
Focusing Range (From Front Of The Lens) (m)		∞ ~ 0.1	∞ ~ 0.1	∞ ~ 0.2
Back Focal Distance (in air) (mm)		9.70	9.70	9.75
Exit Pupil Position (From Image Plane) (mm)		-61	-61	-49
Filter Thread (mm)		—	—	—
Mount		C	C	C
Mass (g)		140	135	160
Remarks		With Metal Mount	With Metal Mount	With Metal Mount


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


For Security Fixed Focal

HF35SR4A-SA1L / HF50SR4A-SA1L

FIXED | 5 Mega | Day~Night | D C | C-mt | METAL | N D | RoHS



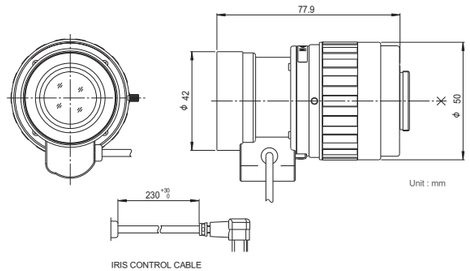




Design for ITS use


2 types for the different road condition

<HF35SR4A-SA1L>

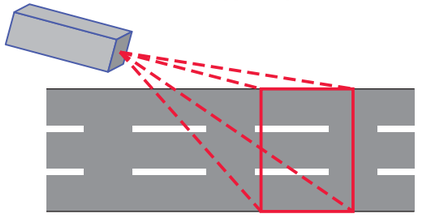

	H (m) × V (m)
10.0 (m)	2.7 × 1.5
50.0 (m)	13.7 × 7.7
100.0 (m)	27.4 × 15.4

<HF50SR4A-SA1L>

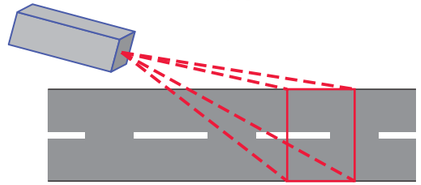

	H (m) × V (m)
10.0 (m)	1.9 × 1.1
50.0 (m)	9.6 × 5.4
100.0 (m)	19.2 × 10.8

Feature Indications

Fixed Focal — High performance single focal lens for the best image quality

Day & Night — Specially-designed lens supporting both visible light and near-infrared light to prevent out-of-focus of day & night cameras

C Mount — Screw-in mounting commonly used in FA lenses

ND Filter — With the built-in ND filter, enables to optimize the brightness of the bright object in direct sunlight

For Megapixel Camera — For 5 Megapixel Camera

DC Auto Iris — Auto iris supporting DC-controlled cameras

Metal Mount — Metal mounting with high accuracy and durability


RoHS Compliant

		HF35SR4A-SA1L	HF50SR4A-SA1L
Focal Length (mm)		35	50
Iris Range		F2.0~T360	F2.8~T360
Operation	Focus	Manual	Manual
	Iris	Auto (DC Type) (*1)	Auto (DC Type) (*1)
Angle Of View (H×V)	2/3"	14°20' × 10°46'	10°03' × 7°33'
	1/2"	10°27' × 7°51'	7°19' × 5°30'
	1/3"	7°51' × 5°53'	5°30' × 4°07'
Angle Of View (H×V) 16:9	2/3"	15°36' × 8°48'	10°57' × 6°10'
	1/2"	11°22' × 6°25'	7°58' × 4°29'
	1/3"	8°33' × 4°49'	5°59' × 3°22'
Focusing Range (From Front Of The Lens) (m)		∞ ~ 0.75	∞ ~ 1.0
Object Dimensions at M.O.D. (H×V) (mm) 4:3	2/3"	191 × 143	179 × 134
	1/2"	139 × 104	130 × 97
	1/3"	104 × 78	97 × 73
Object Dimensions at M.O.D. (H×V) (mm) 16:9	2/3"	208 × 117	195 × 109
	1/2"	151 × 85	142 × 80
	1/3"	114 × 64	106 × 60
Back Focal Distance (in air) (mm)		19.65	19.16
Exit Pupil Position (From Image Plane) (mm)		-75	599
Filter Thread (mm)		M40.5 × 0.5	M40.5 × 0.5
Mount		C	C
Mass (g)		270	260
Coil Resistance		Drive Coil 190Ω Damping Coil 1,150Ω	Drive Coil 190Ω Damping Coil 1,150Ω
Current Consumption		23mA (Max.) at DC 4V	23mA (Max.) at DC 4V
Remarks		With Metal Mount (*1) When power is turned off, iris will automatically close.	With Metal Mount (*1) When power is turned off, iris will automatically close.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Terminology / Technical Reference

Image Sizes

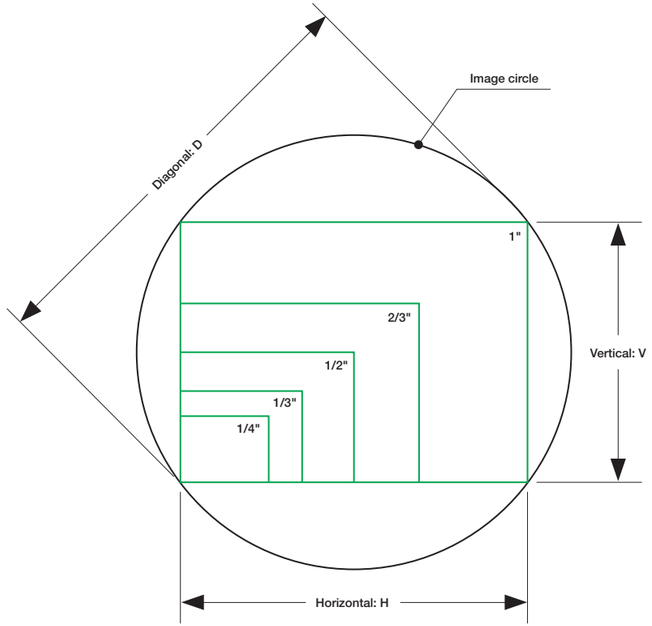


There are several types of imaging sensors for CCTV cameras, with different image sizes.
The aspect ratio of CCTV camera is normally 4:3 (H:V).

Product symbol	Image sensor	Image size (mm)		
		Horizontal:H	Vertical:V	Diagonal:D
C	1"	12.8	9.6	16.0
H	2/3"	8.8	6.6	11.0
D,S	1/2"	6.4	4.8	8.0
Y,T	1/3"	4.8	3.6	6.0
Q	1/4"	3.6	2.7	4.5
35mm camera lens (Reference)	35mm Film	36.0	24.0	43.3

Angle of View

The angle of view is the object size that can be captured at a specified image size, which is represented by angular measure. Normally the angle of view is measured assuming a lens is focused at infinity. When using a lens of the same focal length with a different image size, the angle of view will differ.

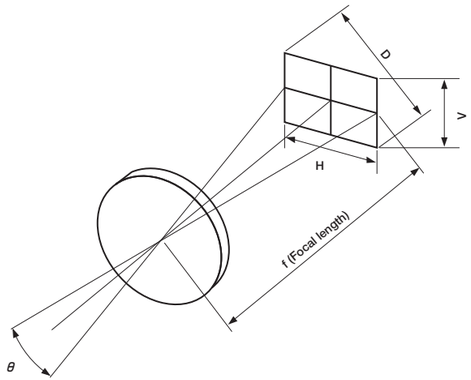

$$\theta = 2\tan^{-1}\frac{Y'}{2f}$$

θ : Angle of view
Y' : Image size
f : Focal length

Eg. The angle of view when the camera size is 1/2" and the focal length is 12.5mm:

Y' : 6.4
f : 12.5

$$\theta = 2\tan^{-1}\frac{6.4}{2\times 12.5} = 28.72^{\circ}$$

Depth of Field

When focusing on a certain area in front of and behind the deep object appears in focus. This area is called the depth of field. This is because the focus appears sharp if the focus misalignment is under a certain volume. This certain volume is called the permissible circle of confusion.

The depth of field has following properties.

1) The larger the F No. is, the wider the depth of field becomes.
2) The shorter the focal length is, the wider the depth of field becomes.
3) The longer the distance to the object is, the wider depth of field becomes.
4) The backward depth of field is wider than the forward depth of field.

Image sensor	Permissible circle of confusion
1"	0.03 mm
2/3"	0.021 mm
1/2"	0.015 mm
1/3"	0.011 mm
1/4"	0.008 mm

The depth of field can be calculated by the following formula.


Backward depth of field $Tr = \frac{\delta \cdot F \cdot L^2}{f^2 - \delta \cdot F \cdot L}$

Forward depth of field $Tf = \frac{\delta \cdot F \cdot L^2}{f^2 + \delta \cdot F \cdot L}$

Depth of field $= Tr + Tf$

Focal depth $= 2\delta \cdot F$

f : Focal distance
F : F No.
δ : Permissible circle diameter of confusion
L : Object distance

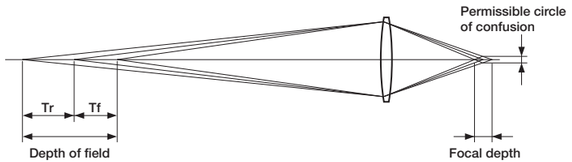


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Terminology / Technical Reference


Focal Length

The focal length will be the distance from the back principal point to the image plane.
Lower the focal length wider the image.

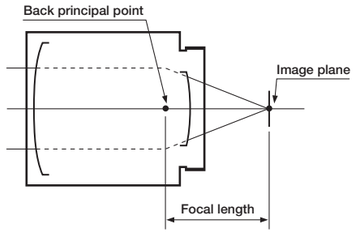

Exit Pupil Position

The exit pupil is the image (virtual image) reflected by the lens located at the back of the lens diaphragm. The exit pupil position is generally represented with the distance between the image plane and the exit pupil. "- (minus)" indicates closer to the object, and "+ (plus)" toward the camera.

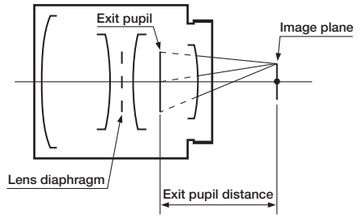


M.O.D

The M.O.D. (minimum object distance) is the closest distance to the object at which a image can be taken.
This is the distance from the vertec of the front lens.

Flange Back and Back Focal Distance

Flange back will be the distance between the mechanical mount surface and image plane.
Back focal distance will be the distance between the rear end of the lens part to the image plane.

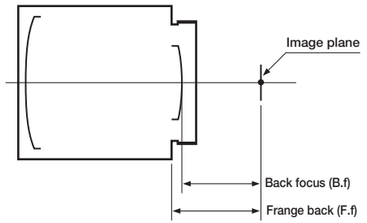

Brightness of a Lens (F and T No.)


The F No. is an indication of the brightness of lens. The smaller the value, the brighter the image produced by the lens. The F No. is inversely proportional to the effective diameter of the lens and directly proportional to the focal length.
The scale on the iris ring of lens uses a ratio of 2, because the value of light incident on a lens is proportional to the cross section of luminous flux (square of diameter). In other words, the brightness decreases by half each time the F No. is increased by one F stop.
The F No. is a value determined on the assumption that the transmittance of the lens is 100%. Virtually all lenses however, have different spectral transmittance, and thus, the same F No. can have different levels of brightness. To eliminate this inconvenience, a system has been developed to consider both F No. and spectral transmittance, the T No.
The T No. and the F No. are related to each other as shown in Right:

$$\text{F No.} = \frac{f}{d}$$

f : Focal length of a lens
d : Effective diameter of a lens

$$\text{T No.} = \frac{\text{F No.}}{\sqrt{\text{Transmittance (\%)}}} \times 10$$

Field of View and Focal Length

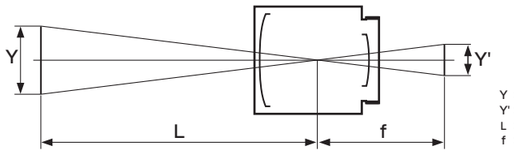

Y : Object size
Y' : Image size
L : Object distance
f : Focal length

(1) How to calculate the field of view

If the distance to the object is finite, you can use the following formula to calculate the field of view.

$$Y = Y' \cdot \frac{L}{f}$$

Eg. 1/3" CCD camera with an 8mm lens is used, and the distance to the object is 3m. The maximum horizontal width as viewed on the monitor can be calculated as follows.

Y' : 4.8
L : 3000
f : 8

$$Y = 4.8 \times \frac{3000}{8} = 1800 \rightarrow \text{Horizontal width 1.8 m}$$

(2) How to calculate focal length

If the distance to the object is finite, you can use the following formula to calculate the focal length.

$$f = Y' \cdot \frac{L}{Y}$$


Eg. 1/3" CCD camera is used, and the distance to the object is 3m and the horizontal width of the object is 2m. The focal length to capture the complete object size can be calculated as follows.

Y' : 4.8
L : 3000
Y : 2000

$$f = 4.8 \times \frac{3000}{2000} = 7.2 \rightarrow \text{Focal length approx. 7 mm}$$


Distortion

Distortion is an aberration where the geometric figure of the object is not reproduced faithfully at the image plane. It is normally represented by the level shift of an image point from its ideal position by a percentage of image height or width.



MTF (Modulation Transfer Function)


MTF (Modulation Transfer Function) represents the declining contrast rate when shooting a chart consisted of black and white lines.

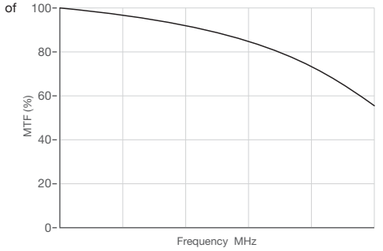

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

OPTICAL DATA (FA/Machine Vision LENS)

Sensor size	Product name	Focal Length	Aperture/Full open	Front principal point H_1 (from Mount)	Back principal point H_2 (from Mount)	Distance between the pincipal points △H	Entrance pupil position P_1 (from Mount)	Exit pupil position P_2 (from Image plane)	Back focal distance (in air)	Distortion	Relative illumination (Aperture: at full open. Image height: at diagonal)
1/2"	DF6HA-1B	6.15	1.2	-16.45	11.38	27.82	-21.8	-46	11.44	-1.93%	39
2/3"	HF9HA-1B	9.23	1.4	-12.91	8.30	21.21	-19.1	-28	13.48	-2.09%	32
	HF12.5HA-1B	12.88	1.4	-2.85	4.64	7.49	-10.3	-31	15.09	-2.01%	35
	HF16HA-1B	16.49	1.4	3.05	1.03	-2.02	-4.5	-30	15.15	-0.96%	35
	HF25HA-1B	25.81	1.4	1.82	-8.28	-10.10	-3.0	-32	14.58	-0.27%	46
	HF35HA-1B	34.99	1.6	-9.00	-17.47	-8.46	2.1	-27	15.00	0.03%	56
	HF50HA-1B	49.57	2.3	-42.64	-32.04	10.59	5.8	-25	15.25	0.04%	61
	HF75HA-1B	75.01	2.8	-100.77	-57.48	43.29	35.4	-27	15.75	0.27%	63
	HF12.5SA-1	12.83	1.4	-33.68	4.70	38.37	-44.9	-101	16.07	-0.30%	68
	HF16SA-1	16.33	1.4	-24.15	1.20	25.35	-38.9	-172	17.99	-0.08%	78
	HF25SA-1	24.00	1.4	-23.47	-6.47	17.00	-43.3	-139	22.32	-0.18%	72
	HF35SA-1	35.74	1.4	-1.27	-18.21	-16.94	-2.1	-37	14.99	-0.07%	62
	HF50SA-1	51.72	1.8	-1.87	-34.19	-32.32	0.5	-49	17.81	-0.03%	75
	HF75SA-1	74.97	1.8	-34.56	-57.45	-22.89	-2.2	-52	24.43	-0.03%	72
	HF35SR4A-SA1L	35.00	2.0	-19.33	-17.47	1.85	-37.8	-74	19.65	-0.02%	74
	HF50SR4A-SA1L	50.00	2.8	18.09	-32.47	-50.56	-26.7	-484	19.16	0.07%	80
1"	CF12.5HA-1	12.83	1.4	-33.68	4.70	38.37	-44.9	-101	16.07	0.17%	40
	CF16HA-1	16.33	1.4	-24.15	1.20	25.35	-38.9	-172	17.99	0.31%	34
	CF25HA-1	24.00	1.4	-23.47	-6.47	17.00	-43.3	-139	22.32	0.02%	39
	CF35HA-1	35.74	1.4	-1.27	-18.21	-16.94	-2.1	-37	14.99	-0.15%	43
	CF50HA-1	51.72	1.8	-1.87	-34.19	-32.32	0.5	-49	17.81	-0.06%	62
	CF75HA-1	74.97	1.8	-34.56	-57.45	-22.89	-2.2	-52	24.43	-0.06%	67
1/3" (3CCD)	TF2.8DA-8	2.86	2.2	-33.74	14.67	48.41	-36.7	101	14.51	-6.25%	51
	TF4DA-8	4.15	2.2	-28.46	13.37	41.83	-32.8	88	14.61	-3.78%	53
	TF8DA-8B	8.23	2.2	-10.81	9.30	20.10	-18.6	-178	14.83	-1.32%	30
	TF15DA-8	15.26	2.2	-0.33	2.27	2.60	-12.9	-89	16.32	-0.33%	34
	TF25DA-8B	24.94	2.2	14.49	-7.42	-21.91	-5.1	-120	15.12	-0.12%	30
Fish-Eye	FE185C046HA-1	1.43	1.4	-38.26	16.10	54.36	-39.7	-227	9.70	-0.47% ※	75
	FE185C057HA-1	1.78	1.4	-37.55	15.75	53.30	-39.3	-66	9.70	-0.80% ※	74
	FE185C086HA-1	2.68	1.8	-35.00	14.85	49.85	-37.5	-41	9.75	-0.53% ※	84

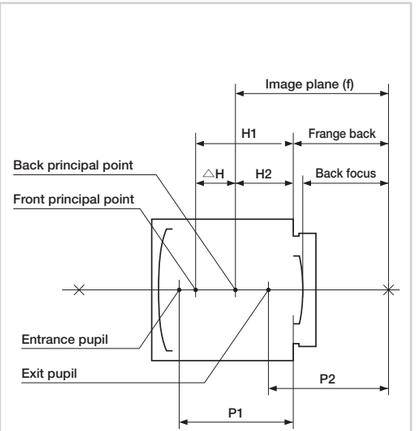

※y=f·θ

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

FUJINON
CCTV LENS
For FA/Machine Vision

FUJIFILM

FUJIFILM Corporation

http://www.fujifilm.com/

For your safty
Be certain to read the instructions for use before using any equipment.

GV2E-002
Printed in Japan 10.09 FPT.3000

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP