ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Galil Motion Control DMC-1832* at our website: *Click HERE*

ECONO SERIES

DMC-18x2 PCI BUS

FEATURES

MOTION

- Modes of motion include jogging, point-to-point positioning, contouring, linear and circular interpolation, electronic gearing and ECAM
- Servo loop update rates as low as 62.5 microsecond/axis—faster rates available as an option
- Encoder frequencies up to 12 MHz; Step motors up to 3 MHz
- Software PID control with velocity and acceleration feedforward, offsets and integration limits
- Motion smoothing to eliminate jerk
- Linear and circular interpolation includes ellipse scaling, slow-down around corners, infinite segment feed, feedrate override
- Two sets of coordinated axes can execute at the same time

INPUTS/OUTPUTS


- 8 uncommitted, buffered inputs and 8 TTL outputs
- TTL Forward and Reverse limits and home input for each axis
- High-speed position capture and position compare for each axis

PROGRAMMING

- On-board, non-volatile memory for storing application programs, variables and arrays
- Programmable event triggers including At Time, At Position, At Input, At Speed
- Automatic program execution upon power-up
- Intuitive, English-like command language with over 200 commands directly executable by controller
- Multitasking for simultaneous execution of up to eight applications programs
- Flash EEPROM for firmware updates
- Software tools for automatic servo tuning and analysis; ActiveX controls for Visual Basic
- Extensive DLLs and documentation for C/C++ programmers
- Drivers for Linux, QNX, DOS, and all Windows operating systems
- Binary communication mode

FORMATS

- 1- through 4-axis formats
- PCI bus
- Controls step motors and servo motors on any combination of axes
- On-board sinusoidal commutation for brushless motors
- 100-pin high density shielded connector minimizes EMI

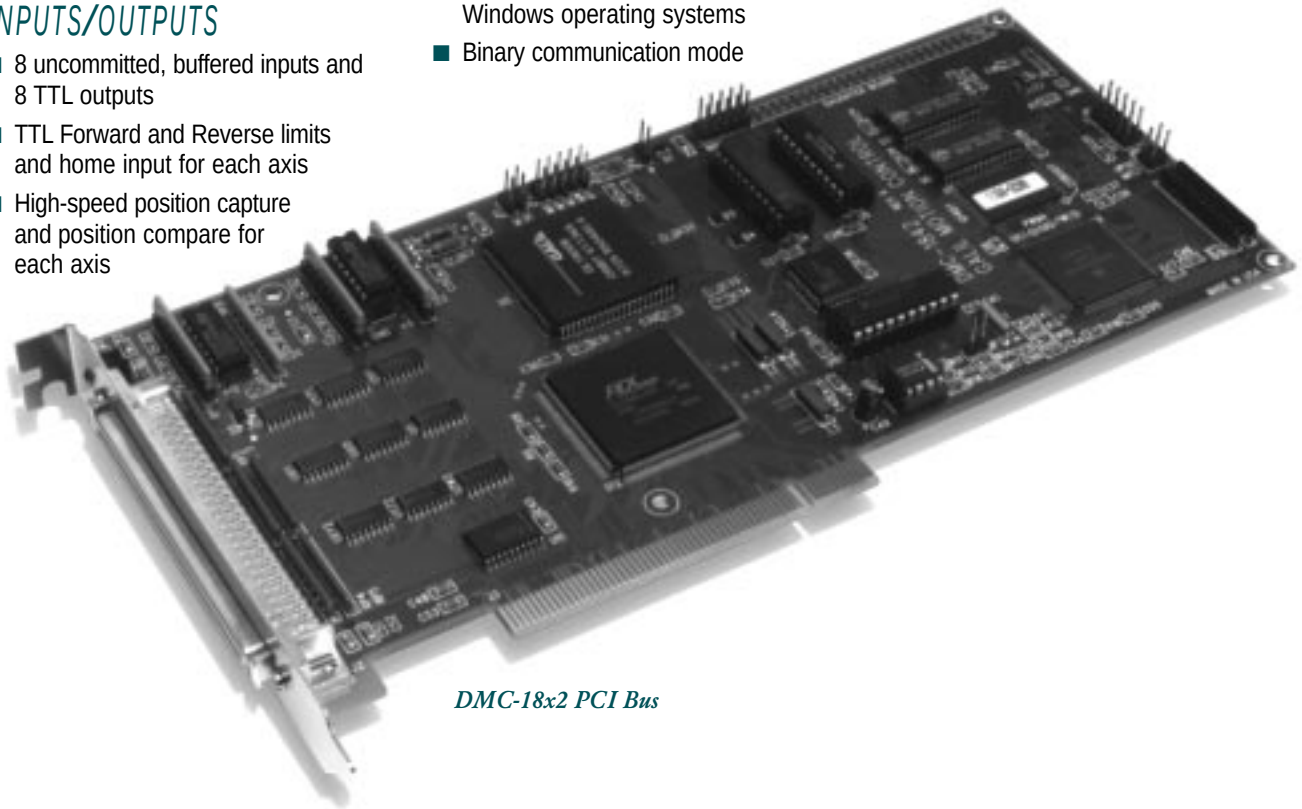

DMC-18x2 PCI Bus

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

ECONO SERIES


DMC-18x2 PCI BUS

DESCRIPTION

Galil's DMC-18x2 motion controllers for the PCI bus are designed for extremely cost-sensitive applications. Performance specifications are similar to the Optima series, but with some features removed for reduced cost such as uncommitted analog inputs, a secondary FIFO, optoisolation, and auxiliary encoders. However, most high-performance features are standard: program memory with multitasking, symbolic variables and arrays, uncommitted digital I/O and control of both step and servo motors on any combination of axes.

The DMC-18x2 is available in one-, two-, three- and four-axis versions. Modes of motion include linear and circular interpolation, contouring, electronic gearing and ECAM. Consult the Optima series specifications for a complete description of the modes of motion and programming.

The DMC-18x2 uses a single, high-density, 100-pin shielded cable. The ICM-2900 interconnect module breaks out the cable into screw terminals for easy connection to system elements.

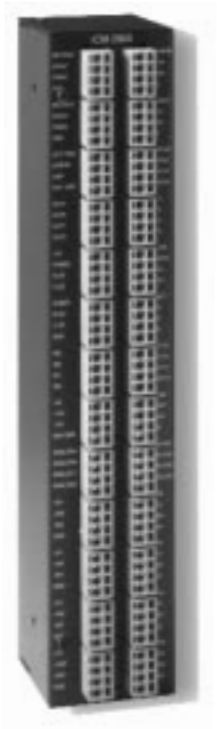

ICM-2900 Interconnect Module breaks out 100-pin cable into screw terminals.

CONNECTORS

Axis 1-4 DMC-18x2
100-pin, high density; Connector: Amp# 2-178238-9
Cable: Amp# 2-175677-9; Enclosure: Amp# 176793-9

1	Analog ground	51	NC
2	Ground	52	Ground
3	5 V	53	5 V
4	Error output	54	NC
5	Reset	55	Home W
6	Encoder–compare output	56	Reverse limit W
7	Ground	57	Forward limit W
8	Ground	58	Home Z
9	Motor command W	59	Reverse limit Z
10	Sign W / dir W	60	Forward limit Z
11	PWM W / step W	61	Home Y
12	Motor command Z	62	Reverse limit Y
13	Sign Z / dir Z	63	Forward limit Y
14	PWM Z / step Z	64	Home X
15	Motor command Y	65	Reverse limit X
16	Sign Y / dir Y	66	Forward limit X
17	PWM Y / step Y	67	Ground
18	Motor command X	68	5 V
19	Sign X / dir X	69	NC
20	PWM X / step X	70	Latch X/Input 1
21	Amp enable W	71	Latch Y/Input 2
22	Amp enable Z	72	Latch Z/Input 3
23	Amp enable Y	73	Latch W/Input 4
24	Amp enable X	74	Input 5
25	A+ X	75	Input 6
26	A- X	76	Input 7
27	B+ X	77	Input 8
28	B- X	78	Abort
29	I+ X	79	Output 1
30	I- X	80	Output 2
31	A+ Y	81	Output 3
32	A - Y	82	Output 4
33	B+ Y	83	Output 5
34	B- Y	84	Output 6
35	I+ Y	85	Output 7
36	I- Y	86	Output 8
37	A+ Z	87	5 V
38	A - Z	88	Ground
39	B+ Z	89	Ground
40	B- Z	90	Ground
41	I+ Z	91	NC
42	I- Z	92	NC
43	A+ W	93	NC
44	A - W	94	NC
45	B+ W	95	NC
46	B- W	96	NC
47	I+ W	97	NC
48	I- W	98	NC
49	+12 V	99	-12 V
50	+12 V	100	-12 V

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

ECONO SERIES

DMC-18x2 PCI BUS

SPECIFICATIONS

SYSTEM PROCESSOR

- Motorola 32-bit microcomputer

COMMUNICATIONS INTERFACE

- *DMC-18x2:* PCI with bi-directional FIFO

Commands are sent in ASCII. A binary communication mode is also available as a standard feature

MODES OF MOTION

- Point-to-point positioning
- Jogging
- 2D Linear and Circular Interpolation with feedrate override
- Linear Interpolation
- Tangential Following
- Helical
- Electronic Gearing with multiple masters
- Gantry Mode
- Electronic Cam
- Contouring
- Teach

MEMORY

- Program memory size–1000 lines × 80 characters
- 254 variables
- 8000 array elements in up to 30 arrays

FILTER

- PID (proportional-integral-derivative) with velocity and acceleration feedforward
- Velocity smoothing to minimize jerk
- Integration limits
- Torque limits
- Offset adjustments

KINEMATIC RANGES

- *Position:* 32 bit (±2.15 billion counts per move; automatic rollover; no limit in jog or vector modes)
- *Velocity:* Up to 12 million counts/sec for servo motors
- *Acceleration:* Up to 67 million counts/sec^2

UNCOMMITTED DIGITAL I/O

- 8 buffered inputs
- 8 TTL outputs

HIGH SPEED POSITION LATCH

- Uncommitted inputs 1-4 latch X, Y, Z, W (latches within .1 microsecond)

DEDICATED INPUTS (PER AXIS)

- Main encoder inputs–Channel A, A-, B, B-, I, I- (±12 V or TTL)
- Forward and reverse limit inputs–TTL
- Home input–TTL
- High-speed position latch input

DEDICATED OUTPUTS (PER AXIS)

- Analog motor command output with 16-bit DAC resolution
- Pulse and direction output for step motors
- Amplifier enable output
- Error output
- High-speed position compare output

MINIMUM SERVO LOOP UPDATE RATE

- *1–2 axes:* 125 microsecond
- *3–4 axes:* 250 microsecond

MAXIMUM ENCODER FEEDBACK RATE

- 12 MHz

MAXIMUM STEPPER RATE

- 3 MHz (Full, half or microstep)

POWER REQUIREMENTS

- +5V 750mA
- -12V 20mA
- +12V 20mA

ENVIRONMENTAL

- *Operating temperature:* 0–70° C
- *Humidity:* 20-95% RH, non-condensing

MECHANICAL

- *1-4 axes:* 4.23" × 9"

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

ECONO SERIES

DMC-18x2 PCI BUS

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	QUANTITY 1	QUANTITY 100
DMC-1812	1-axis PCI	**$ 795**	**$ 595**
DMC-1822	2-axis PCI	**$ 895**	**$ 665**
DMC-1832	3-axis PCI	**$1045**	**$ 725**
DMC-1842	4-axis PCI	**$1195**	**$ 795**
ICM-2900-FL	Interconnect module with mounting flange. Specify -HAEN for high amp enable or -LAEN for low amp enable	**$ 295**	**$ 195**
ICM-2900-OPTO	ICM with optoisolated digital output circuitry	**$ 345**	**$ 245**
DB-14064	Expansion for 64 I/O	**$ 295**	**$ 195**
Cable-100-1M	100-pin high-density cable in 1 meter length	**$ 125**	**$ 95**
Cable-100-2M	100-pin high-density cable in 2 meter length	**$ 135**	**$ 100**
Cable-100-4M	100-pin high-density cable in 4 meter length	**$ 150**	**$ 105**
AMP-1910	ICM with PWM amplifier for 1 brush-type servo motor	**$ 695**	**$ 470**
AMP-1920	ICM with PWM amplifiers for 2 brush-type servo motors	**$1045**	**$ 695**
AMP-1930	ICM with PWM amplifiers for 3 brush-type servo motors	**$1395**	**$ 920**
AMP-1940	ICM with PWM amplifiers for 4 brush-type servo motors	**$1745**	**$1145**
Galil Utilities	Communication drivers, terminal, DMCWIN, DMCDOS	**$ 20**	
CTOOLKIT	DMCWIN with C/C++ documentation and examples	**Included with Utilities**	
WSDK	Set-up, tuning and analysis software	**$ 195**	
ActiveX Tool Kit	Custom controls for ActiveX software such as Visual Basic	**$ 595**	

Galil offers additional quantity discounts for purchases between 1 and 100. Consult Galil for a quotation.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP