

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

3500/25 Enhanced Keyphasor® Module

Bently Nevada* Asset Condition Monitoring



Description

The 3500/25 Enhanced Keyphasor* Module is a half-height, two-channel module used to provide Keyphasor signals to the monitor modules in a 3500 rack. The module receives input signals from proximity probes or magnetic pickups and converts the signals to digital Keyphasor signals that indicate when the Keyphasor mark on the shaft coincides with the Keyphasor transducer. The 3500 Machinery Protection System can accept up to four Keyphasor signals for normal configuration and up to eight Keyphasor signals in a paired configuration.

Note: A Keyphasor signal is a once-per-turn or multiple-event-per-turn pulse from a rotating shaft or gear used to provide a precise timing measurement. This allows 3500 monitor modules and external diagnostic equipment to measure shaft rotative speed and vector parameters such as 1X vibration amplitude and phase.

The Enhanced Keyphasor Module is an improved 3500 system module. It offers expanded Keyphasor signal processing capabilities over the previous design while maintaining complete downward-compatibility in terms of form, fit and function with existing Keyphasor modules for use in legacy systems. The Keyphasor module, PWA 125792-01, is completely replaced by the more recent 149369-01 module.

When a system Keyphasor input is required for Triple Modular Redundant (TMR) applications, the 3500 system should employ two Keyphasor modules. In this configuration the modules work in parallel to provide both a primary and secondary Keyphasor signal to the other modules in the rack.

A system with more than four Keyphasor inputs may use a paired configuration provided that there are no more than four primary Keyphasor input signals. A paired configuration requires two consecutive monitoring positions in either the upper/lower or both half-slot positions. Four Keyphasor modules will accept four primary and four backup input channels and provide four output channels (one per module). A configuration of two paired and one non-paired (three Keyphasor modules total) is also possible. In such a configuration, the user may configure the one non-paired Keyphasor (order either two 2-channel or one 1-channel and one 2-channel option)

The Isolated Keyphasor I/O module is designed for applications in which the Keyphasor signals are tied in parallel to multiple devices and require isolation from other systems, such as a control system. The Isolated I/O module was created specifically for Magnetic Pickup applications but is compatible with and will provide isolation for Proximitor* applications as long as an external power supply is provided. Note that the intent of this I/O module was primarily to measure shaft speed and not phase. The module can provide phase measurements, but this I/O introduces a slightly higher phase shift than the Non-Isolated I/O version. Figure 1 shows the amount of phase shift that the Isolated I/O modules will add at different machine speeds.

Enhanced product features include generation of once-per-turn event signals from multi-event-per-turn inputs, field-upgradeable firmware, and asset management data reporting.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specifications

Inputs

Power Consumption

3.2 Watts typical.

Signal

Each Keyphasor Module accepts up to two transducer signals from proximity probe transducers or magnetic pickups. The input signal range is +0.8 V to -21.0 V (Non-Isolated I/O modules) or +5V to -11V (Isolated I/O modules). Signals exceeding this range are limited internally by the module. Passive magnetic pickups require a shaft rotative speed greater than 200 rpm (3.3 Hz).

Input Impedance

21.8 k Ω minimum.

Signal Conditioning

Speed/ Frequency Signal Ranges

Input range of 1 to 1,200,000 cpm (0.017 to 20 kHz). Supports multiple events per revolution to a maximum of 20 kHz.

Output range of 1 to 99,999 cpm

(0.017 to 1667 Hz)

Speed/ Frequency Signal Accuracy

Specified at +25 °C (+77 °F).

Non-processed Signals

- 0.017 to 100 Hz ... ±1 cpm
- 101 to 500 Hz ... ±8 cpm
- 501 to 20 kHz ... ±1% of cpm

Processed Signals

- 0.017 to 60 Hz ... ±1 cpm
- 61 to 150 Hz ... ±8 cpm
- 151 to 20 kHz ... ±1% of cpm

Transducer Conditioning

Auto Threshold

Minimum signal amplitude for triggering is 2 volts peak to peak and minimum frequency is 120 rpm (2 Hz).

Manual Threshold

Use for any input above 0.017 Hz (1 rpm for 1 event/revolution). User-selectable from 0 to -20 volts dc. Minimum signal amplitude for triggering is 500 millivolts peak to peak.

Hysteresis

User-selectable from 0.2 to 2.5 Volts.

Outputs

Buffered Keyphasor Signals

Two buffered Keyphasor outputs are available at the front of the rack via coaxial connectors. Two buffered Keyphasor outputs are also available at the back of the rack via Euro Style connectors.

Output Impedance

504 Ω maximum buffered output impedance.

Keyphasor Transducer Power Supply

-24 Vdc, 40 mA maximum per channel.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Front Panel LEDs

OK LED

Indicates when a fault has been detected in the Keyphasor Module.

TX/RX LED

Indicates when the Keyphasor Module is communicating with the Rack Interface Module (RIM).

Environmental Limits

Operating Temperature

-30 °C to +65 °C (-22 °F to +150 °F) when used with Keyphasor I/O Module other than the Internal Barrier version.

0 °C to +65 °C (32 °F to +150 °F) when used with Keyphasor Internal Barrier I/O Module (Internal Termination).

Storage Temperature

-40 °C to +85 °C (-40 °F to +185 °F).

Humidity

95%, non-condensing.

Compliance and Certifications

EMC

Standards:

EN 61000-6-2 Immunity for Industrial Environments

EN 55011/CISPR 11 ISM Equipment

EN 61000-6-4 Emissions for Industrial Environments

European Community Directives:

EMC Directive 2004/108/EC

Electrical Safety

Standards:

EN 61010-1

European Community Directives:

2006/95/EC Low Voltage

For further certification and approvals information please visit the following website:

http://www.ge-energy.com/prod_serv/products/oc/en/bently_nevada.htm

Hazardous Area Approvals

North American

Approval Option (01)

Class I, Div 2

Groups A, B, C, D

T4 @ Ta = -20 °C to +65 °C

(-4 °F to +150 °F)

North American

Approval Option (02)

When used with I/O module ordering options without internal barriers:

A/Ex nC[L] IIC

Class I, Zone 2

Class I, Div 2, Groups A,B,C,D

T4 @ Ta = -20 °C to +65 °C

(-4 °F to +150 °F)

When used with I/O module ordering options with internal barriers:

A/Ex nC[ia] IIC

Class I, Zone 2/(0)

Class I, Div I, Groups A,B,C,D

T4 @ Ta = -20 °C to +65 °C

(-4°F to +150 °F)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

ATEX

Approval Option (02)

For Selected Ordering Options with ATEX/CSA agency approvals:

 II 3/(3) G

EEx nCAL[L] IIC

T4 @ Ta = -20°C to +65°C

(-4°F to +150°F)

Brazil

Approval Option (02)

For Selected Ordering Options with ATEX/North American agency approvals:

Br-Ex nCAL [ia] IIC T4

Br-Ex nCAL [nL] IIC T4

T4 @ Ta = -20 °C to +65 °C

(-4 °F to +150 °F)

Note: When used with Internal Barrier I/O Module, refer to specification sheet 141495-01 for approvals information.

For further certification and approvals information please visit the following website:

http://www.ge-energy.com/prod_serv/products/oc/en/bently_nevada.htm

Physical

Main Module

Dimensions Height x Width x Depth)

119.9 mm x 24.4 mm x 256.5 mm

(4.72 in x 0.96 in x 10.10 in).

Weight

0.34 kg (0.76 lbs.).

I/O Module

Dimensions (Height x Width x Depth)

241.3 mm x 24.4 mm x 103.1 mm

(9.50 in x 0.96 in x 4.06 in).

Weight

0.46 kg (1.01 lbs.).

Rack Space Requirement

Main Module

1 half-height front slot.

The half-height main modules require a special mounting adapter for mounting in the full-height slots. The user can place the main modules in any one of the 14 available slots. Each rack may have no more than two main modules, one in a top half-slot and one in a bottom half-slot.

I/O Modules

1 full-height rear slot.

Ordering Considerations

General

External Termination Blocks cannot be used with Internal Termination I/O modules.

When ordering I/O Modules with External Terminations, the External Termination Blocks and Cables must be ordered separately.

There are a number of technical considerations involved in using the expanded signal processing functions of the Enhanced Keyphasor Module. A qualified Bently Nevada sales representative should be consulted prior to specifying or ordering modules for such applications.

Internal Barrier I/O Module

Consult the 3500 Internal Barrier specification sheet (part number 141495-01) if the Internal Barrier Option is selected.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Product Description

Enhanced Keyphasor Module

3500/25-AXX-BXX-CXX

A: Number of channels

0 1	Single half-height 2-channel Keyphasor card (order for 2-channels)
0 2	Two half-height 2-channel Keyphasor cards (order for 4-Channels)

B: Type of I/O Module

0 1	I/O module with Internal Terminations
0 2	I/O module with External Terminations
0 3	Internal Barrier I/O with Internal Terminations
0 4	Isolated I/O module with Internal Terminations
0 5	Isolated I/O module with External Terminations

C: Agency Approval Option

0 0	Not required
0 1	CSA/NRTL/C (Class 1, Div 2)
0 2	ATEX/CSA (Class 1 Zone 2)

Note: Agency Approval Option C 02 is only available with Ordering Options B 01 and B 03.

External Termination Blocks

128718-01	Keyphasor External Termination Block (Euro Style Connectors)
128726-01	Keyphasor External Termination Block (Terminal Strip Connectors)

Cables

3500 Keyphasor (KPH) Signal to External Termination (ET) Block Cable
129530-AXXXX-BXX

A: Cable Length

0 0 0 5	5 feet (1.5 metres)
0 0 0 7	7 feet (2.1 metres)
0 0 1 0	10 feet (3 metres)
0 0 2 5	25 feet (7.5 metres)
0 0 5 0	50 feet (15 metres)
0 1 0 0	100 feet (30.5 metres)

B: Assembly Instructions

0 1	Not assembled
0 2	Assembled

Spares

149369-01	Enhanced Keyphasor Module

Note: This module may be ordered as a direct plug-in replacement for Keyphasor Module 125792-01.

125800-01	Keyphasor I/O Module (Internal Terminations)
126648-01	Keyphasor I/O Module (External Terminations)
125800-02	Isolated Keyphasor I/O Module (Internal Terminations)
126648-02	Isolated Keyphasor I/O Module (External Terminations)
135473-01	Keyphasor I/O Module (Internal Barriers and Internal Terminations.
04425545	Grounding Wrist Strap (single use)
00580438	Connector Header, Internal Termination, 4-Position, Green
00502133	Connector Header, Internal Termination, 12-Position, Blue
129770-01	Keyphasor Module Manual

Half-height Card Adaptor:

125388-01	Half-height Chassis
125565-01	Card Guide
04300111	Assembly Screws (Order Qty. 3)

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figures and Tables

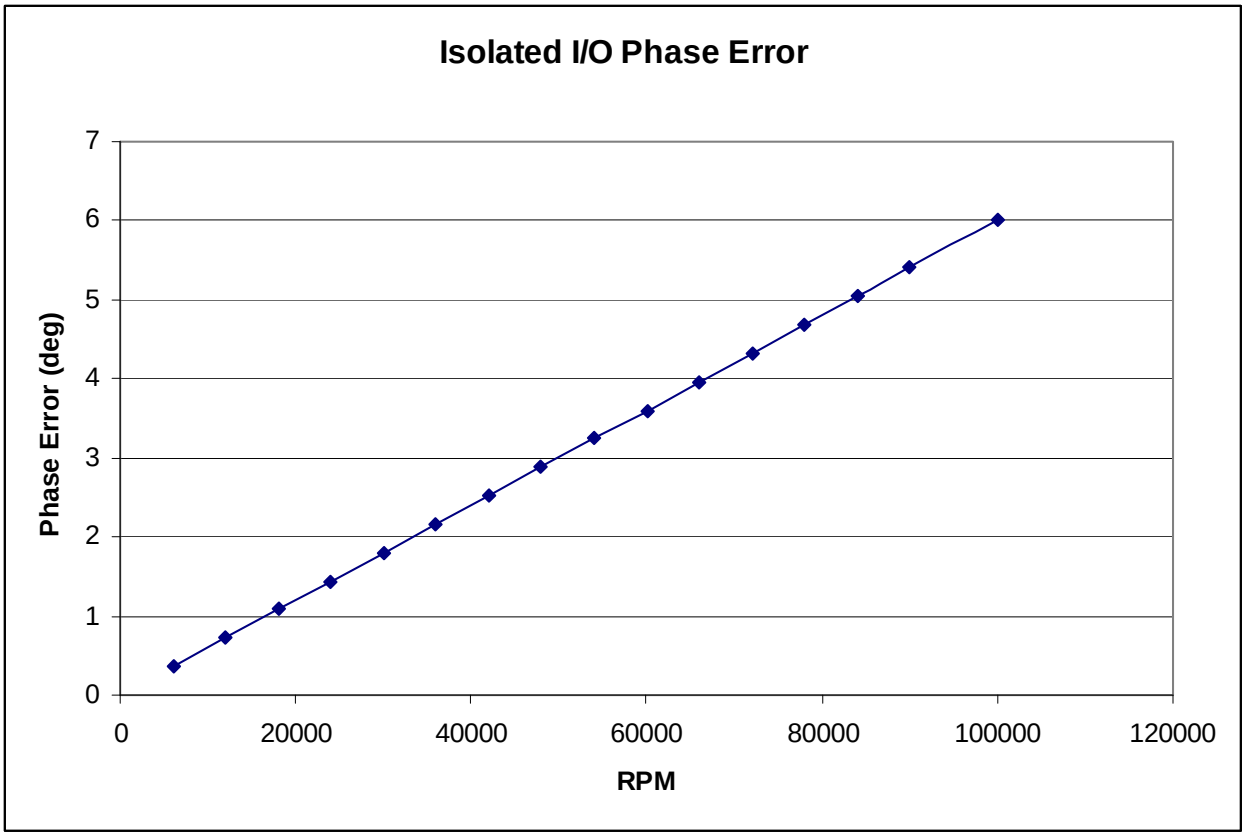


Figure 1

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

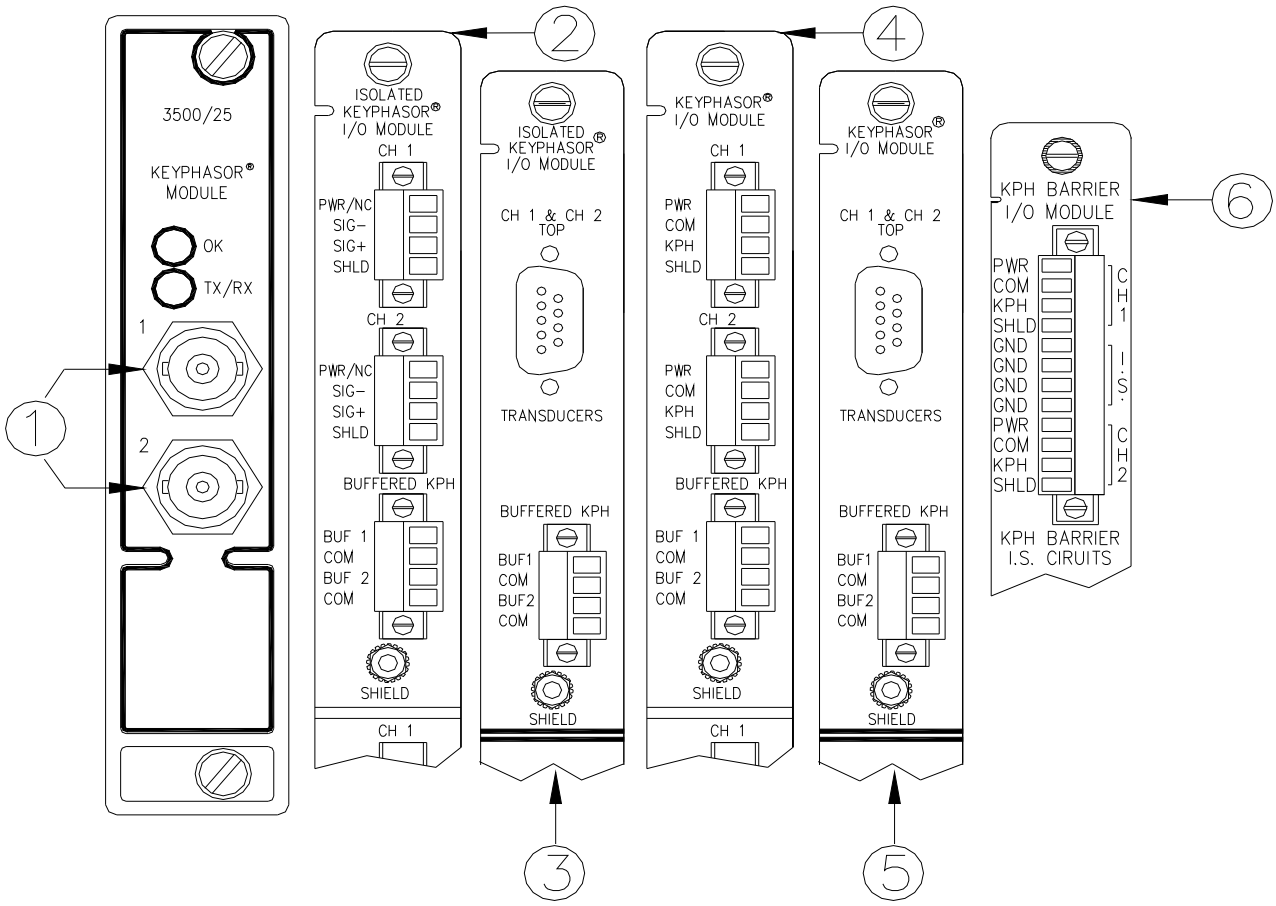


Figure 2: Front and Rear View of Keyphasor® module

1) Buffered Transducer Outputs
2) I/O Module, Isolated Internal Termination
3) I/O Module, Isolated External Termination
4) I/O Module, Non-Isolated Internal Termination
5) I/O Module, Non-Isolated External Termination
6) Barrier I/O Module, Internal Termination

All specifications are subject to change without notice.

* Denotes trademarks of Bently Nevada, Inc., a wholly owned subsidiary of General Electric Company.

© 1999 – 2010 Bently Nevada, Inc. All rights reserved.

1631 Bently Parkway South, Minden, Nevada USA 89423
Phone: 775.782.3611 Fax: 775.215.2873
www.ge-energy.com/bently

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP