ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

**Artisan Technology Group**
(217) 352-9330 | sales@artisantg.com | artisantg.com

**Full-service, independent repair center**
with experienced engineers and technicians on staff.

**We buy your excess, underutilized, and idle equipment**
along with credit for buybacks and trade-ins.

**Custom engineering**
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


**Expert team | Trust guarantee | 100% satisfaction**

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *GE / Bently Nevada 74712-06-05-03-00* at our website: *Click HERE*

# 9200, 74712 Seismoprobe*

## Bently Nevada* Asset Condition Monitoring



## Description

Bently Nevada Seismoprobe* Velocity Transducer Systems are designed to measure absolute (relative to free space) bearing housing, casing, or structural vibration. The two-wire systems consist of a transducer, appropriate cable, and an optional velocity-to-displacement converter.

The Seismoprobe family of velocity transducers is a two-wire design that uses moving-coil technology and provides a voltage output directly proportional to the transducer's vibration velocity. Unlike solid-state velocity transducers (which are inherently accelerometers with embedded integration electronics), moving-coil transducers are less sensitive to impact or impulsive excitation, and can represent a good choice for certain applications. Also, because they require no external power, they are convenient for portable measurement applications.

Note: For the majority of installations, Bently Nevada's Velomitor* family of velocity transducers, which incorporate solid-state technology, represent superior performance and robustness for casing velocity measurement applications.

Two types of Seismoprobe Velocity Transducers are available:

- **9200:** The 9200 is a two-wire transducer suitable for continuous monitoring or for periodic measurements in conjunction with test or diagnostic instruments. When ordered with the integral cable option, the 9200 has excellent resistance to corrosive environments without need of additional protection.
- **74712:** The 74712 is a high temperature version of the 9200.

Various interconnect cables are available for connecting the 9200 and 74712 transducers to other instruments or a velocity-to-displacement converter. These cables are available in one-foot (300 mm) increments, with or without stainless steel armor.

One type of velocity-to displacement converter (VDC) is available:
**9513:** to be used with 9200 and 74712 transducers.



imagination at work

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

**⚠ Caution**

If housing measurements are being made for overall protection of the machine, thought should be given to the usefulness of the measurement for each application. Most common machine malfunctions (imbalance, misalignment, etc.) originate at the rotor and cause an increase (or at least a change) in rotor vibration. In order for any housing measurement alone to be effective for overall machine protection, a significant amount of rotor vibration must be faithfully transmitted to the bearing housing or machine casing, or more specifically, to the mounting location of the transducer.

In addition, care should be exercised in the physical installation of the transducer. Improper installation can result in a decrease of the transducer amplitude and frequency, of the transducer amplitude and frequency response, and/or the generation of signals, which do not represent actual machine vibration.

Upon request, we can provide engineering services to determine the appropriateness of housing measurements for the machine in question and/or to provide installation assistance

# Specifications

## 9200 and 74712 Seismoprobe Velocity Transducers

Specifications are at approximately +22°C (+72°F) with 25 mm/s (1 in/s) of machine casing vibration at 100 Hz (6000 cpm) with a 10 kilo ohm load unless otherwise specified.

**Electrical**

***Sensitivity:***

20 mV/mm/s (500 mV/in/s), ±5% when properly terminated and oriented at the angle of calibration.

***Frequency Response:***

From minimum operating frequency (see ordering information) to 1 kHz (60,000 cpm); +0, -3dB typical.

Please contact BENTLY NEVADA, INC. for detailed calibration data.

***Dynamic Operating Range:***

2.54 mm (0.100 in) peak to peak maximum displacement.

***Shock Resistance:***

Withstands 50 g peak maximum acceleration along nonsensitive axis.

***Transverse Sensitivity:***

±10% maximum.

***Polarity of Output Signal***

Pin A goes positive with respect to Pin B when the transducer case velocity is towards the connector.

***Leadwire Length:***

305 meters (1,000 feet) maximum between Seismoprobe Velocity Transducer and 3300 or 3500 Monitor. Consult manual for frequency roll-off at longer lengths.

## Compliance and Certifications

**EMC**
**Standards**
**EN61326-1, Electrical Equipment for Measurement, Control, and Laboratory use, EMC Requirements.**

**European Community Directives:**

EMC Directive 2004/108/EC

EU Declarations of Conformity are available from www.bently.com

## Hazardous Area Approvals

**North America:**

Class I Div 1, Group A, B, C, and D,
Class II Div 1, Group E, F and G,
Class III
When installed per Dwg. CA22000



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

**Europe:**

 II 1 G Ex ia IIC T6 Ga

 II 3 G Ex nA IIC T6 Gc

**IECEx:**

Ex ia IIC T6 Ga
Ex nA IIC T6 Gc

For further certification and approvals information please visit the following website:
www.ge-mcs.com/bently

## Environmental Limits

**Operating and Storage Temperature:**

**9200:** -29°C to +121°C

(-20°F to +250°F).

**74712:** -29°C to +204°C

(-20°F to +400°F).

**Environment:**

Dust and moisture resistant.

**Note:** Contact your Sales Professional regarding transducer operation in a radiation environment.

**Relative Humidity:**

To 95%, noncondensing.

100%, non-submerged, when ordered with integral cable.

## Mechanical

**Case and Adapter Material:**

Anodized aluminum A204

**Gasket Material**

9200: Neoprene

74712: Silicone

**Connector Material:**

***Top and Side Mount Options:***

Cadmium-plated aluminum, neoprene, and silver plated copper

***Terminal Block Option:***

Polyphenylene Sulfide with nickel-plated copper contacts.

***Coaxial Connector Option:***

Silver-plated brass, fluoroethylene propylene (FEP), and beryllium copper

**Mounting Torque:**

***½-20, ¼-20, ¼-28, ⅝-18, or M10x1 mounting base options:***

5.6 N•m (50 in•lb)

***8-32 threaded studs:***

1.41 N•m (12.5 in•lb)

## Physical

**9200/74712**

***Height:***

102 mm (4 in) typical

(depends on connector option).

***Diameter:***

41 mm (1.6 in) typical.

***Weight:***

9200 = 300 grams (10.5 ounces) typical.

74712 = 480 grams (17 ounces) typical.



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

## 9513 Velocity-to-Displacement Converter

### Electrical

***Model 9513 requires:***

-18 Vdc.

***Output Sensitivity (with a 500 mV/in/s input)***

*9513-02:*

200 mV/mil (8 V/mm) ±5%. (Valid for frequencies above 5 Hz [300 cpm])

*9513-09*

100 mV/mil (4 V/mm) ±5%. (Valid for frequencies above 5 Hz [300 cpm])

***Frequency Range:***

Minimum operating frequency to 10 kHz (600,000 cpm).

***Output Impedance:***

For model 9513-02, 100 Ω.

***Output Bias:***

5.8 to 9.5 Vdc.

### Physical

**9513**

***Height:***

38 mm (1.50 in)

***Length:***

89 mm (3.50 in)

***Width:***

54 mm (2.12 in)

***Weight:***

180 g (6.50 oz)

***Mounting Holes:***

Four 4.8 mm (0.19 in) diameter holes centered in all corners of a rectangle 50.8 mm (2 in) long by 44.5 mm (1.75 in) wide.

***Seismoprobe Velocity Transducer Orientation:***

All Seismoprobe Velocity Transducers are specified for mounting orientations as shown in Figure 1.

## Ordering Information

**Note:** Country specific approvals may be available. Contact your local customer care representative.

**Two-wire Transducer**

The 9200 Two-wire Velocity Seismoprobe Transducer can be used with the 9513 VDC, which is ordered separately (see Velocity-to-Displacement Converter).

**9200-AXX-BXX-CXX-DXX**

**A:** Transducer Mounting Angle/Minimum Operating Frequency Option

| | |
|---|---|
| **0 1** | 0 ±2.5, 4.5 Hz (270 cpm) |
| **0 2** | 45 ±2.5, 4.5 Hz (270 cpm) |
| **0 3** | 90 ±2.5, 4.5 Hz (270 cpm) |
| **0 6** | 0 ±100, 10 Hz (600 cpm) |
| **0 9** | 0 ±180, 15 Hz (900 cpm) |
| **1 1** | 90 ±10, 10 Hz (600 cpm) |

**B:** Connector Option

| | |
|---|---|
| **0 1** | Top Mount |
| **0 2** | Side Mount |
| **0 5** | Terminal block top mount |
| **0 6** | Coaxial connector (for test equipment only) |
| **0 7 thru 5 0** | Environmentally resistant with integral cable. Option number corresponds to cable length 7.0 feet (2.1 metres) min., 50.0 feet (15 metres) max. When ordering with approvals, max length available is 32 feet (9.75 metres) max. Ordered in increments of 1.0 ft. |



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

**C:** Mounting Base Option

| | |
|---|---|
| **0 1** | Circular; 1/4-in 20 UNC stud |
| **0 2** | Circular; 1/4-in 28 UNF stud |
| **0 3** | Rectangular flange |
| **0 4** | Circular; with three 8-32 threaded studs on a 44 mm (1.75 in) diameter bolt circle |
| **0 5** | No base; 1/2-in 20 UNF-3A stud |
| **0 6** | Isolated circular 1/4-in 20 UNC stud |
| **0 7** | Isolated circular 1/4-in 28 UNF stud |
| **0 8** | Isolated rectangular flange |
| **0 9** | Isolated circular 5/8-in 18 UNF stud |
| **1 0** | Circular; M10X1 stud |
| **1 1** | Isolated circular M10X1 |
| **1 2** | Isolated circular ½-in 20 UNF-2A |

**D**: Agency Approval Option

| | |
|---|---|
| **0 0** | No approvals required |
| **0 1** | CSA/NRTL/C |
| **0 2** | EUROPEAN |
| **0 4** | Multiple Approvals |

**High-temperature two-wire transducer**

The 74712 High Temperature Two-Wire Seismoprobe Velocity Transducer can be used with the 9513 VDC, which is ordered separately (see Velocity-to-Displacement Converter).

**74712-AXX-BXX-CXX DXX**

**A:** Transducer Mounting Angle/Minimum Operating Frequency Option

| | |
|---|---|
| **0 1** | 0 ±2.5, 4.5 Hz (270 cpm) |
| **0 2** | 45 ±2.5, 4.5 Hz (270 cpm) |
| **0 3** | 90 ±2.5, 4.5 Hz (270 cpm) |
| **0 4** | 135 ±2.5, 4.5 Hz (270 cpm) |
| **0 5** | 180 ±2.5, 4.5 Hz (270 cpm) |
| **0 6** | 0 ±100, 10 Hz (600 cpm) |
| **0 7** | 0 ±180, 15 Hz (900 cpm) |

**B:** Mounting Base Option

| | |
|---|---|
| **0 1** | Circular; 1/4-in 20 UNC stud |
| **0 2** | Circular; 1/4-in 28 UNF stud |
| **0 3** | Rectangular flange |
| **0 4** | Circular base with three 8-32 studs |
| **0 5** | No base; 1/2-in 20 UNF-3A stud |
| **0 6** | Isolated circular ¼-in 20 UNC-2B |
| **0 7** | Isolated circular ¼-in 28 UNF-2B |
| **0 8** | Isolated rectangular flange |
| **0 9** | Isolated circular 5/8-in 18 UNF-2A |
| **1 0** | Circular M10X1 |
| **1 1** | Isolated circular base M10X1 |
| **1 2** | Isolated circular base ½-in 20 |

**C:** Connector Option

| | |
|---|---|
| **0 1** | Coaxial connector for test equipment only: rated to +165°C (+329°F). |
| **0 2** | Top mount |
| **0 3** | Terminal block top mount |
| **0 4** | Side mount |

**D:** Agency Approval Option

| | |
|---|---|
| **0 0** | No approvals required |
| **0 1** | CSA/NRTL/C |
| **0 2** | EUROPEAN |
| **0 4** | Multiple Approvals |

**Velocity-to-Displacement Converters**

**For 9200 and 74712 Seismoprobe Velocity Transducers (requires -18 Vdc supply):**
**9513 -02**

200 mV/mil (8 V/mm).

**Interconnect Cables**

***Standard Cables***

**9571**

2-conductor twisted, shielded 22 AWG (0.5 $mm^2$) cable with 2-socket moisture-resistant female connector at one end, terminal lugs at the other end. (Used with monitors or VDCs). Minimum length of 2.0 ft (0.6 m), maximum length of 99 ft (30 m).

**84661**

2-conductor twisted, shielded 22 AWG (0.5 $mm^2$) armored cable with 2-socket moisture-resistant female connector at one end, terminal lugs at the other end. (Used with monitors or VDCs). Minimum length of 3.0 ft (0.9 m), maximum length of 99 ft (30 m).



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

**9755**

2-wire shielded 22 AWG (0.5 $mm^2$) cable with 2-pin female connectors at each end. (Connects 9200 or 74712 Seismoprobe Velocity Transducers to Bently Nevada test kits). Minimum length of 1.0 ft (0.3 m), maximum length of 99 ft (30 m).

**83968**

2-wire straight cable with 2-pin female connector at one end and coaxial connector in the other end (used with instruments with BNC connector input jacks). Minimum length of 2.0 ft (0.6 m), maximum length of 99 ft (30 m).

**High-Temperature cables**

**84508**

2-wire shielded 22 AWG (0.5 $mm^2$) cable with terminal lugs at each end. Minimum length of 1.0 ft (0.3 m), maximum length of 99 ft (30 m).

**84509**

2-wire shielded 22 AWG (0.5 $mm^2$) armored cable with terminal lugs at each end. Minimum length of 3.0 ft (0.9 m), maximum length of 70 ft (21 m).

**84660**

2-wire shielded 22 AWG (0.5 $mm^2$) cable with 2-socket female connector at one end, terminal lugs at the other end. Minimum length of 3.0 ft (0.9 m), maximum length of 99 ft (30 m).

**84510**

2-wire shielded 22 AWG (0.5 $mm^2$) armored cable with 2-socket female connector at one end, terminal lugs at the other end. Minimum length of 3.0 ft (0.9 m), maximum length of 70 ft (21 m).

**87143**

2-wire shielded 18 AWG (1.0 $mm^2$) cable with terminal lugs at each end. Withstands 200 °C (392 °F). Minimum length of 3.0 ft (0.9 m), maximum length of 99 ft (30 m).

## Cable

| The following are standard lengths | |
|---|---|
| **Feet** | **Meters (approx.)** |
| 6 | 1.8 |
| 8 | 2.4 |
| 10 | 3.0 |
| 12 | 3.6 |
| 15 | 4.5 |
| 17 | 5.0 |
| 20 | 6.0 |
| 25 | 7.6 |
| 30 | 9.0 |
| 33 | 10.0 |
| 50 | 15.2 |
| 99 | 30.0 |
| **NOTE:** Non-standard/custom lengths can also be ordered at additional cost | |

**Part Number-AXX**

**A:** Cable Length Option in feet

For all of the above cables, order in increments of 1.0 ft (305 mm).

**Example:** **0 9** = 9 ft
**1 2** = 12 ft

# Accessories

**80705-01**

Coiled 2-conductor cable with 2-pin connector at one end and BNC connector at the other end (used with instruments with BNC connector input jacks). Coiled length of 0.5 metre (19.6 inches), stretched length of 2 metres (6.5 feet).



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

**46000-01**

Magnetic Base for portable mounting of **Seismoprobe** Velocity Transducers.

**46122-01**

Quick connect for semi-permanent mounting of **Seismoprobe** Velocity Transducers.

**02173006**

Bulk cable; 2-conductor, twisted, shielded. 18 AWG (1.0 $mm^2$) cable without connectors or terminal lugs. Specify number of feet. Withstands +200°C (+392°F).

**00531061**

Mating connector for 9200 and 74712 **Seismoprobe** Velocity Transducers.

**00530574**

Cable Mounting Clamp



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

## Graphs and Figures

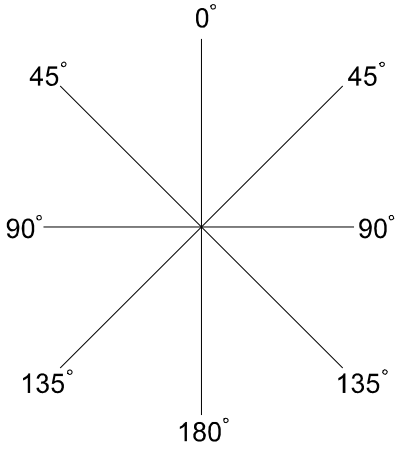



Figure 1: Seismoprobe Orientation
All **Seismoprobe** Velocity Transducers are specified for mounting orientations as shown above: 0° is vertical, as viewed from driver end.

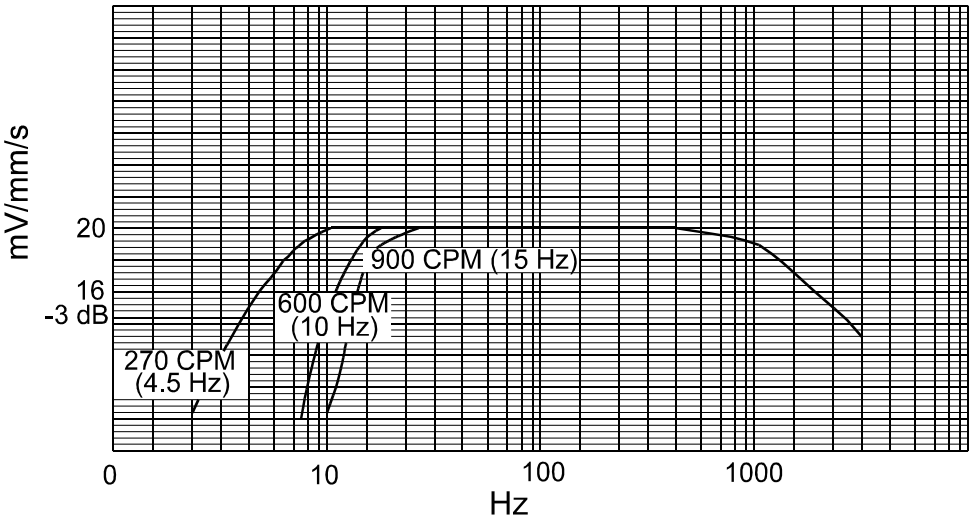



Figure 2: Theoretical Velocity Seismoprobe Frequency Response



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

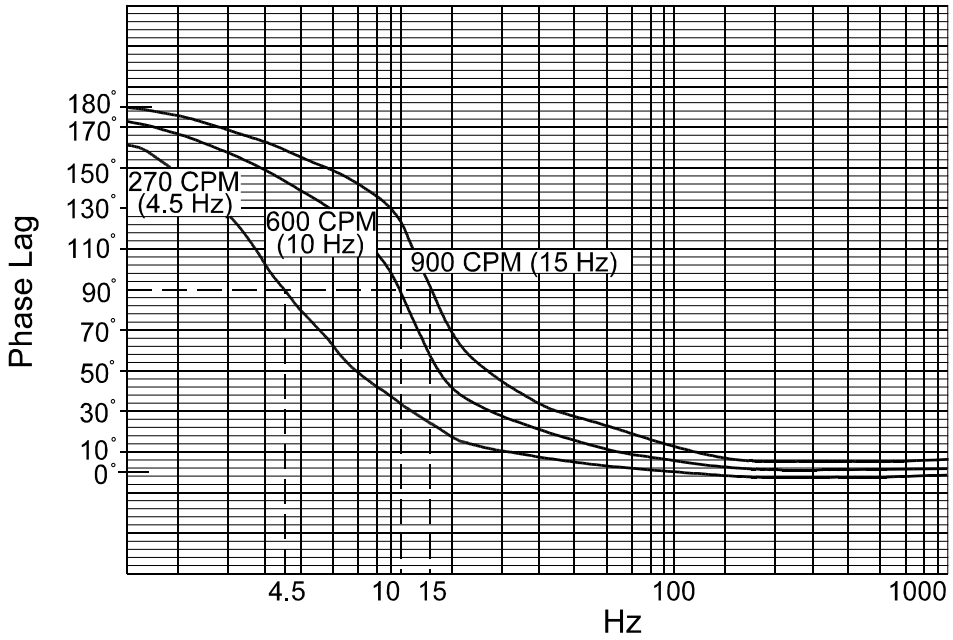



Figure 3: Theoretical Phase Shift between Output and Case Velocity Arial

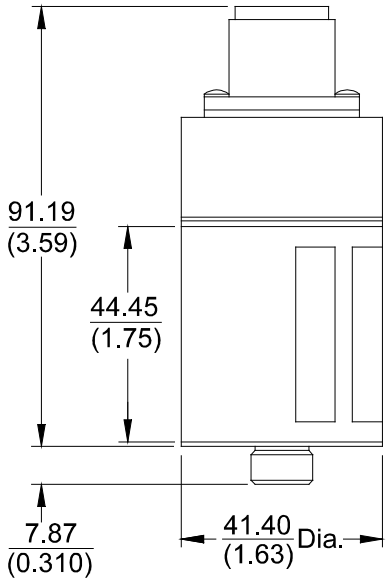



Figure 4: Top Mounted Connector Arial
**9200 Option -01 or 74712 Option-02**



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

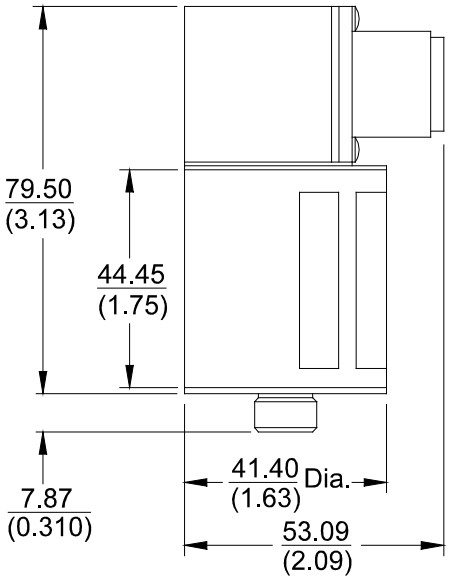



Figure 5: Side Mounted Connector
**9200 Option -02 or 74712 Option –04**

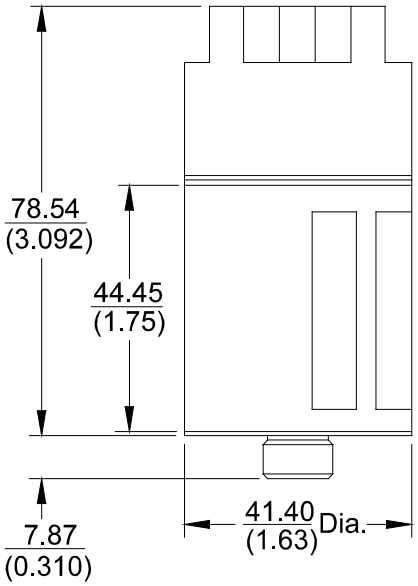



Figure 6: Terminal Block Connector
9200 Option -05 or 74712 Option –03



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

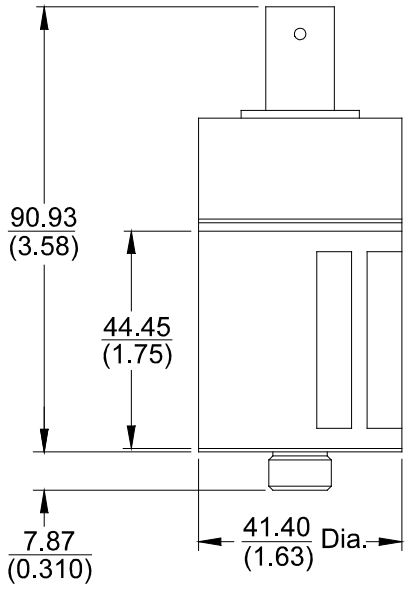



Figure 7: BNC Connector
9200 Option -06 or 74712 Option –01

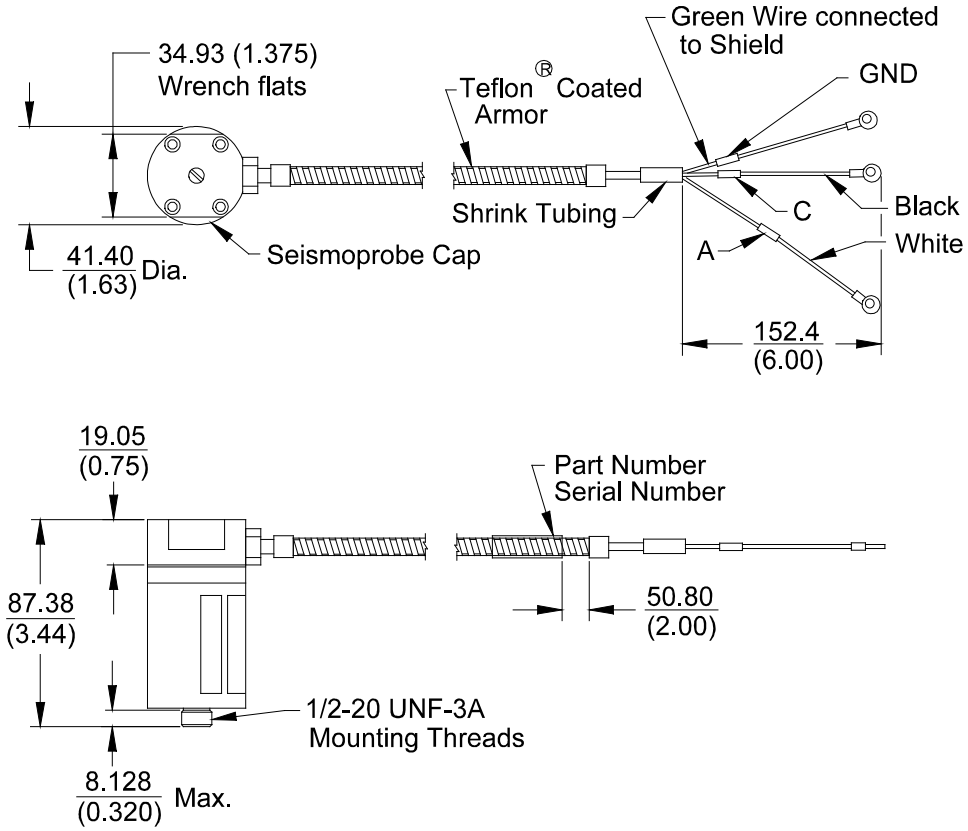



Figure 8: 9200 Connector Options -07 thru –50
All dimensions are in millimeters (inches)



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

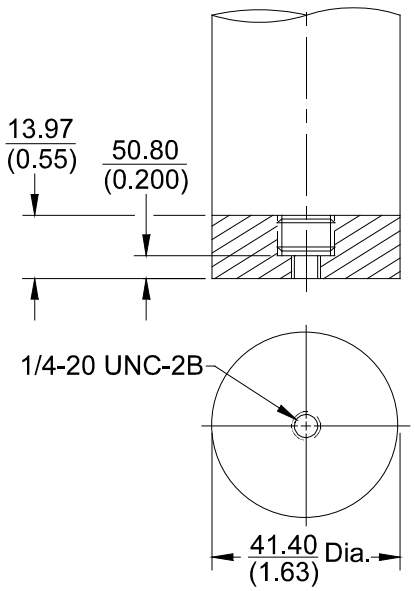



Figure 9: 9200 and 74712 Mounting Base Option -01 or –06
**Option -01 Circular 1/4-20 UNC-2B, or**
**Option -06 Isolated Circular 1/4-20 UNC-2B**

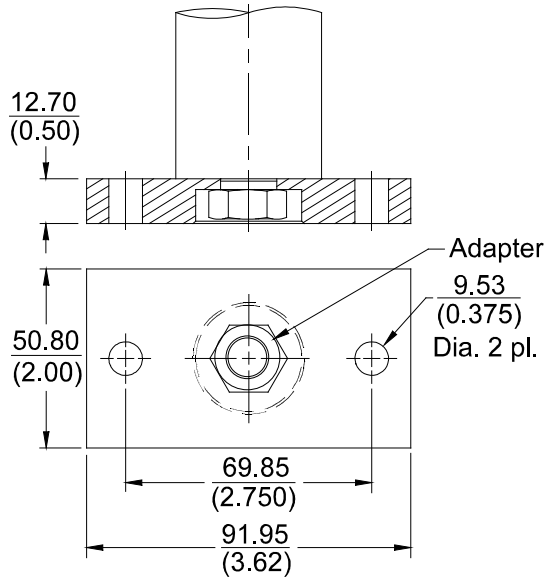



Figure 11: 9200 and 74712 Mounting Base Options -03 or –08
**Option -03 Flanged or Option -08 Isolated Flanged**



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

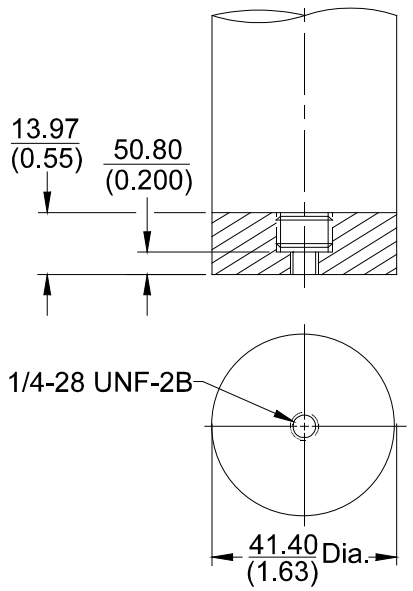



Figure 10: 9200 and 74712 Mounting Base Options -02 or –07
**Option -02 Circular 1/4-28 UNF-2B, or**
**Option -07 Isolated Circular 1/4-28 UNF-2B**

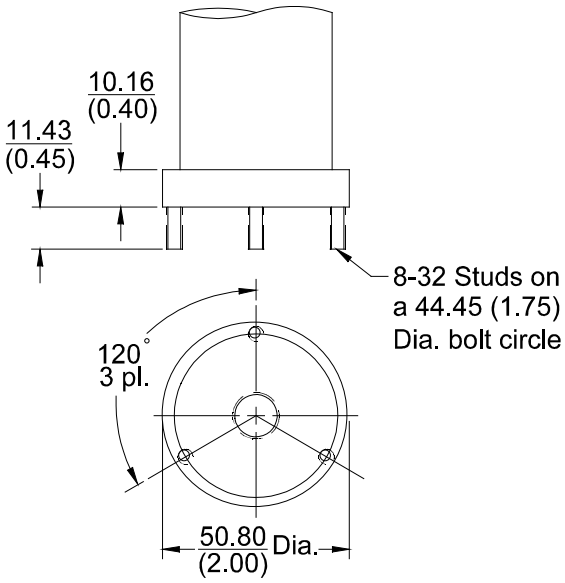



Figure 12: 9200 and 74712 Mounting Base
**Option -04 3 each 8-32 studs**



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

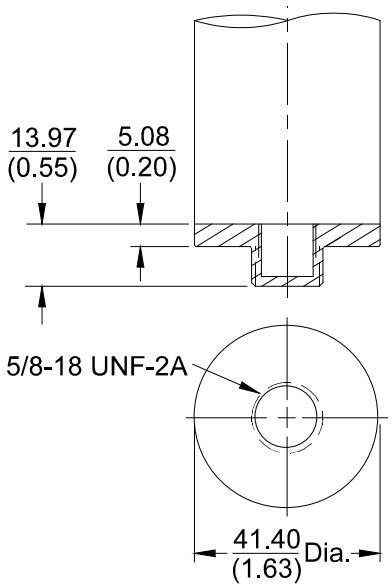



Figure 13: 9200 and 74712 Mounting Base
**Option -09 Isolated Circular 5/8-18 UNF-2A Base**

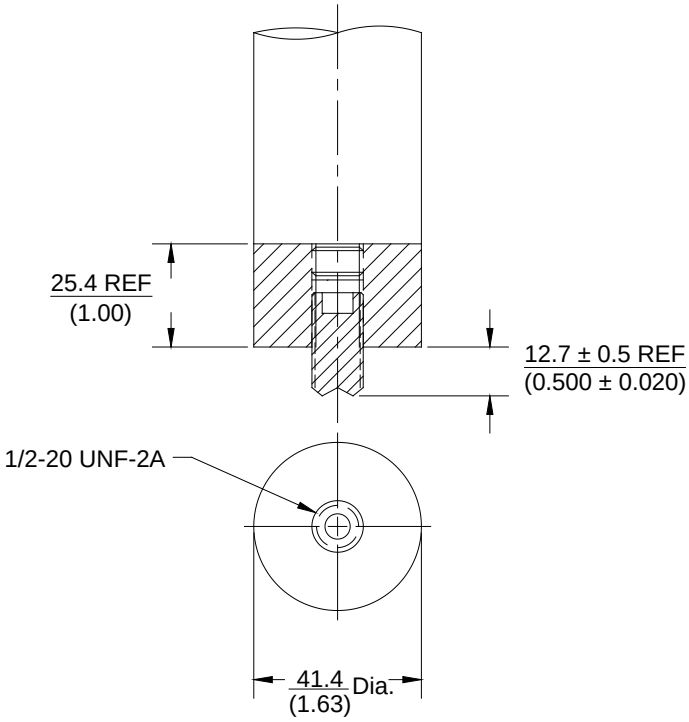



Figure 15: 9200 Mounting Base Option –12
**Isolated Circular ½-20 UNF-2A**



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

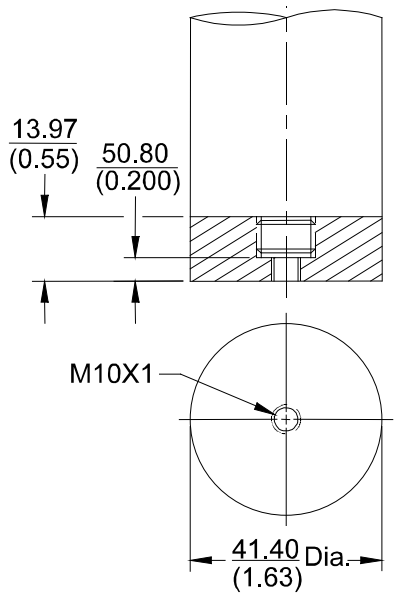



Figure 14: 9200 and 74712 Mounting Base Option -10 or -11 Option -10 Circular M10x1 or **Option-11 Isolated Circular M10X1**

* Denotes a trademark of Bently Nevada, Inc. a wholly owned subsidiary of General Electric Company.

© 2000 – 2014 Bently Nevada, Inc. All rights reserved.

Printed in USA. Uncontrolled when transmitted electronically.

1631 Bently Parkway South, Minden, Nevada USA 89423
Phone: 775.782.3611 Fax: 775.215.2873
www.ge-mcs.com/bently



Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

**Artisan Technology Group** is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP