ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *GE / Bently Nevada 81544-01* at our website: *Click HERE*

Specifications and Ordering Information

3300/45 Dual Differential Expansion Monitor



Description

Differential Expansion is the measurement of the axial position of the rotor with respect to the machine casing at some distance from the thrust bearing. Changes in axial position relative to the casing affect axial clearances and are usually the result of thermal expansion during startup and shutdown. The measurement is typically made with a proximity probe transducer mounted to the machine casing and observing an axial surface (e.g., collar) of the rotor. The measurement is usually incorporated as part of a Turbine Supervisory Instrumentation system.

The 3300/45 Dual Differential Expansion Monitor provides two channels of continuous differential expansion monitoring. Both the magnitude and direction of differential expansion are monitored. Four alarm setpoints (two over and two under alarms) can be set for each channel. Channel B of the monitor can be turned OFF for machines requiring the measurement at only one location.

Specifications

Inputs

Signal:	Accepts two proximity probe transducer signals.
Input Impedance:	10 k Ω.
Signal Scale Factor:	20 mV/mil (0.787 V/mm) or 10 mV/mil (0.392 V/mm), jumper-selectable.
Power:	Nominal consumption of 1.5 watts.

Signal Conditioning

Accuracy:	With ±0.33% of full-scale typical, ±1% maximum. Specified at ambient temperature of +25°C (+77°F).

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Outputs

Recorder: User-programmable for +4 to +20 mA, 0 to -10 Vdc, or +1 to +5 Vdc. Voltage or current outputs are proportional to programmed monitor full-scale. Individual recorder outputs are provided for each channel. Monitor operation is unaffected by short circuits on recorder outputs.

Recorder accuracy (in addition to signal conditioning accuracy): All specified at +25°C (+77°F).

- **+4 to +20 mA:** ±0.7% of signal, ±0.09 mA offset.
- **+1 to +5 Vdc:** ±1.1% of signal, ±10 mV offset.
- **0 to -10 Vdc:** ±1.1% of signal, ±15 mV offset.

Output Impedance (voltage outputs): 100 Ω. Minimum load resistance is 10 k Ω.

Voltage Compliance (current outputs): 0 to +12 Vdc range across load. Resistance is 0 to 600 Ω when using +4 to +20 mA option.

Buffered Transducer Outputs: One coaxial connector per transducer on the front panel and one terminal connection per channel on the rear panel. All are short circuit protected.

Output Impedance: 100 Ω.

Transducer Supply Voltage: - 24 Vdc voltages are current limited per channel on individual monitor circuit board.

Alarms

Alarm setpoints: Both alarms (Alert and Danger) are digitally adjustable from 0 to 100% of full-scale and can be set within LCD resolution (±1.6% of full-scale) to a desired level. Once set, alarms are repeatable within ±0.4% of full-scale.

Relay Modules

Location: One relay module can be installed behind each monitor. At least one alarm relay module must be ordered with each 3300 System.

Display

Meter: Nonmultiplexing vertical bargraph type Liquid Crystal Display (LCD). 63 individual LCD segments per channel. Probe Gap indicated on a third, center scale. LCD also displays error codes and monitor ADJUST mode.

Resolution: Within ±1.6% of monitor full-scale.

Size: 83 mm (3.25 in), vertical dimension.

LED Indicators

OK: One constant ON green LED per channel to indicate OK condition of monitor, transducers, and field wiring. Constant OFF indicates NOT OK condition or channel Bypassed (red Bypass LED will be ON). OK LED flashing at 1 Hz indicates transducer has been NOT OK but is now OK. OK LED flashing at 5Hz indicates error code(s) stored in memory.

Alarm: Two red LEDs per channel indicate alarm status (independent Alert and Danger LEDs for each channel). Flashing alarm LED indicates First Out (independent for Alert and Danger alarms).

Bypass: Two red LEDs indicate status of Danger Bypass and Rack/Channel Bypass functions.

Environmental Limits

Operating Temperature: 0°C to +65°C (+32°F to +150°F).

Storage Temperature: -40°C to +85°C (-40°F to +185°F).

Relative Humidity: To 95%, noncondensing.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

CE Mark Directives

EMC Directive	Certificate of Conformity: 158710
Low Voltage Directive	Certificate of Conformity: 135300

Hazardous Area Approvals

CSA/NRTL/C	Class 1 Division 2 Groups A,B,C,D T4 @ Ta = 65°C

Physical

Rack space requirements:	First and second slot in rack are reserved for Power Supply and System Monitor, respectively. The monitor can be placed in any other available rack position. Rack size will depend on the number of monitors used.
Weight:	1 kg (2.2 lbs.).

Ordering Information

For spares, order the complete catalog number as described below. This includes a front panel assembly, monitor PWAs with sheet metal, and appropriate relay module. This unit is optioned, tested and ready to install in your system. Spare relay modules can be ordered separately.

Dual Differential Expansion Monitor
3300/45-AXX-BXX-CXX-DXX
Option Descriptions

A: Full-scale Range Option	**0 1** 5 - 0 - 5 mm **0 2** 0 - 10 mm **0 3** 0.25 - 0 - 0.25 in **0 4** 0 - 0.5 in **0 5** 10 - 0 - 10 mm **0 6** 0 - 20 mm **0 7** 0.5 - 0 - 0.5 in **0 8** 0 - 1.0 in
B: Transducer Input Option	**0 1** 25 mm **0 2** 35 mm **0 3** 50 mm

NOTE: the 25 mm and 35 mm transducers can not be used with the 05 through 08 Full-scale range options.

C: Alarm Relay Option	**0 0** No Relays **0 1** Epoxy-sealed **0 2** Hermetically-sealed **0 3** Quad Relay (Epoxy-sealed only) **0 4** Spare Monitor-No SIM/SIRM

Notes:
1. At least one relay module must be ordered with each 3300 System. If one common relay module per system has been ordered, all other monitors of this type will be jumper-programmed at the factory to activate relay bus one.
2. AND voting logic is not available with Quad Relays.

D: Agency Approval Option	**0 0** Not required **0 1** CSA/NRTL/C

Note: CSA/NRTL/C option is only available with relays when the monitor is ordered in a system.

Spare Relay Module Assemblies	
81544-01	No Relays
81545-01	Dual Epoxy Relays
81546-01	Dual Hermetic Relays
84152-01	Quad Relays

Field-programmable Options

These options are field-programmable via plug-in jumpers. **Bold text** indicates options as shipped from the factory.


First Out Option	**Enabled** Disabled
Meter Response Time	**Fast** Slow
Alarm Time Delay Option	0.1 second 1 second **3 seconds** 6 seconds
OK Mode Option	**Nonlatching** Latching
Not OK Channel Defeat	**Disabled** Enabled
Alert Reset Option	**Latching** Nonlatching
Danger Reset Option	**Latching** Nonlatching

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Recorder Outputs Option	**+4 to +20 mA** +1 to +5 Vdc 0 to -10 Vdc
Danger Relay Voting Logic	**OR voting for relay drive** AND voting for relay drive **Note:** For Quad Relays, AND voting logic must be done externally by wiring the contacts in series.
Alert Relay Mode Option	**Normally de-energized** Normally energized
Danger Relay Mode Option	**Normally de-energized** Normally energized
Danger Bypass Switch Option	**Disabled** Enabled
Zero Scale Position Option (firmware programmable)	**Standard (0-center/bottom)** Non-standard
Channel B Option	**On** Off
Upscale Direction Option	**Toward Probe** Away from Probe

Field wiring diagram

3300/45 Dual Differential Expansion Monitor

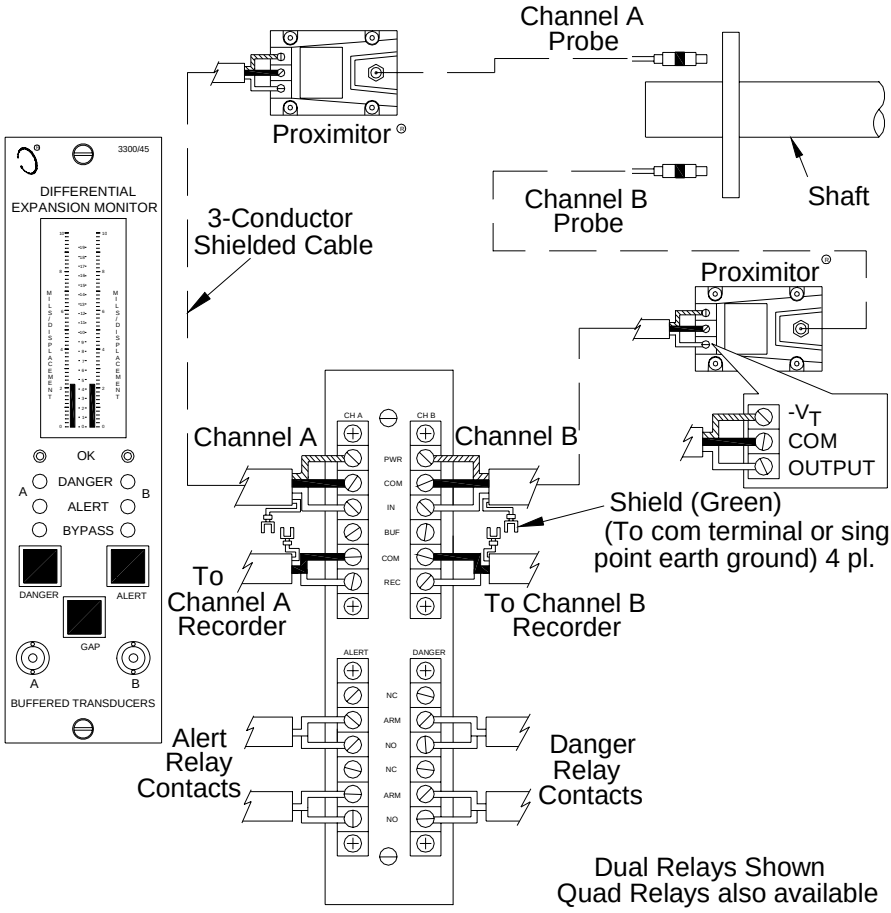

Field wiring diagram for 3300/45 Dual Differential Expansion Monitor

© 1999-2003 Bently Nevada LLC
Proximitor® is a registered trademark of Bently Nevada LLC

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP