ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.


Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Abaco Systems PCIE-5565RC-200000* at our website: ***Click HERE***

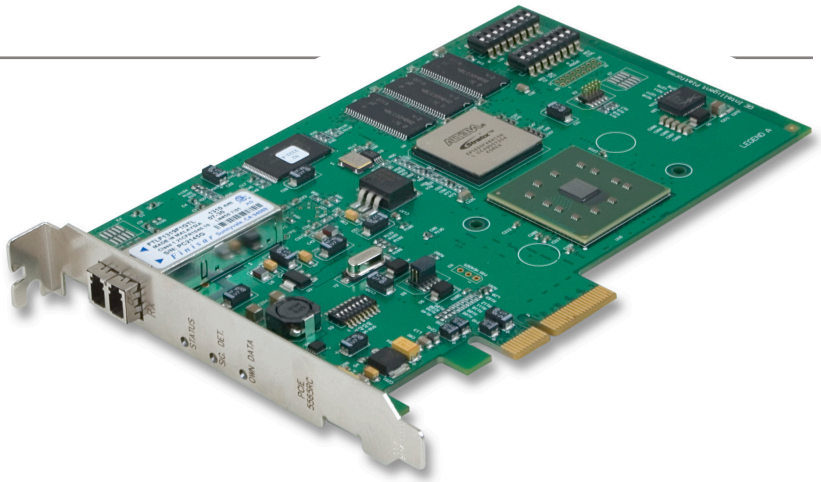

5565 Reflective Memory Node Cards

Ultra High-speed, Fiber Optic Network for Distributed Processing Using Reflective Memory

Benefits

- Highly scalable technology supports up to 256 nodes
- Bus independent design protects investments in your current network infrastructure
- Low latency, deterministic data transfer rate allows for predictable, high-performance application deployment
- Seamless integration with Abaco Systems' SBC solutions and most industry standard offerings
- PIO versions offer improved PIO read performance and field upgradeable firmware

Reflective Memory is an optical ring-based, ultra high-speed shared memory network solution. It allows a distributed network to share real-time data at a deterministic rate, regardless of bus structures and operating systems. With more than 15 years of experience in this field, Abaco Systems is an original pioneer of this technology and our 5565 Reflective Memory family extends our market leadership position.

How do we do it? We keep it simple. Our Reflective Memory technology is centered on an innovative and efficiently designed hardware platform that is easy to use, provides for greater distance between nodes, high noise immunity, optional node bypass, and no software overhead. Just read and write to the onboard memory and the Reflective Memory node controller does the rest.

The 5565 Reflective Memory family is available in multiple form factors, including PCI Express (PCIE-5565RC), low profile PCI Express (PCIE-5565PIORC), PMC (PMC-5565PIORC), PCI (PCI-5565PIORC), and VME (VME-5565). The family allows computers, workstations, PLCs, and other embedded controllers to all share data in real-time. The transfer of data between nodes is software transparent so no processor overhead is required. Data written into the Reflective Memory is broadcast to all nodes on the network without further involvement of the sending or receiving nodes. Abaco Systems' Reflective Memory products are proven, highly reliable, and have been implemented worldwide in applications such as data acquisition, simulation and training, industrial automation, and telecommunications.

Best of all, it comes with the global support and services from a company with the experience, stability, innovation, and commitment you can rely on – Abaco.

FEATURES:

- 2.12 Gbaud serial connection speed
- Supports dynamic packet sizes ranging from 4 to 64 bytes
- Up to 170 Mbyte/s sustained data rate
- Deterministic transfer rate with only 450 to 500 nanoseconds of latency between nodes
- Error management and detection protects against lost data
- Interrupt transfers support for any node
- 128 or 256 Mbytes of onboard SDRAM
- Multimode fiber support up to 300 m, single mode fiber support up to 10 km
- PCI Express, low profile PCI Express, PMC, PCI and VME form factors available
- Designed to meet the European Union (EU) Restriction of Hazardous Substance (RoHS) Directive (2002/95/EC) current revision – except VME-5565
- Star configuration available by using the ACC-5595 managed hub

abaco SYSTEMS

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

5565 Reflective Memory Node Cards

Specifications

SDRAM
- 128 or 256 Mbyte

Transfer Specifications
- 43 Mbyte/s (single longword accesses) to 170 Mbyte/s (64 byte bursts) non-redundant transfer rate
- 20 Mbyte/s (single longword accesses) to 87 Mbyte/s (64 byte bursts) redundant transfer rate

PCI Transfer Rate
- 132 Mbyte/s (33 MHz/32-bit bus), 264 Mbyte/s (33 MHz/64-bit bus or 66 MHz/32-bit bus) or 528 Mbyte/s (66 MHz/64-bit bus) and throttles back to available link data rate as FIFOs begin to fill
- PCI Express transfer rate: 4 lanes at 2.5GHz

Environmental Specifications
- Operating: 0 to +65 °C, with forced air cooling
- Storage: -40 to +85 °C
- Relative humidity: 20% to 80%, noncondensing

Power Requirements
- PMC PIO: 0.7A typical, 1.5A max at +3.3 VDC (±5 percent); 0.7A typical, 1.8A max at 5 VDC (±5 percent)
- PCI PIO: 0.7A typical, 1.5A max at +3.3 VDC (±5 percent); 0.7A typical, 1.8A max at 5 VDC (±5 percent)
- VME: 5.0A max at +5 VDC
- PCIE: 0.6A max at +12 VDC (± 5 percent) and 1.6A max at +3.3 VDC
- PCIE PIO: 0.7A max at +12 VDC (± 5 percent) and 0.6A max at +3.3 VDC


MTBF (Bellcore)
- PMC PIO: 1,307,078 hours
- VME: 163,995 hours
- PCI PIO: 1,225,247 hours
- PCIE: 607,680 hours
- PCIE PIO: 607,680 hours

Cables
- Multimode: small form factor (SFF) 850 nm, 300 m max
- Single mode: small form factor (SFF) 1,310 nm, 10 km max


Operating Systems Support
- Windows XP (PMC, PCI, PCIE), NT, 2000 (VME only)
- Linux (PMC, PCI, VME, PCIE)
- VxWorks (PMC, PCI, VME, PCIE)
- Solaris (PMC, PCI, VME)
- Irix (VME only)
- Compaq Tru64 (VME only)

Application Diagram


Ring Topology

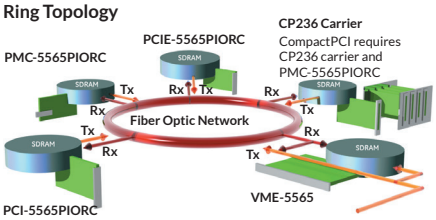

Star Topology

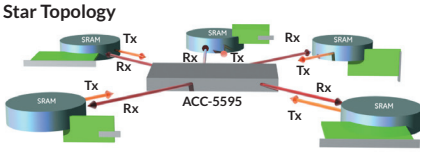

Block diagram

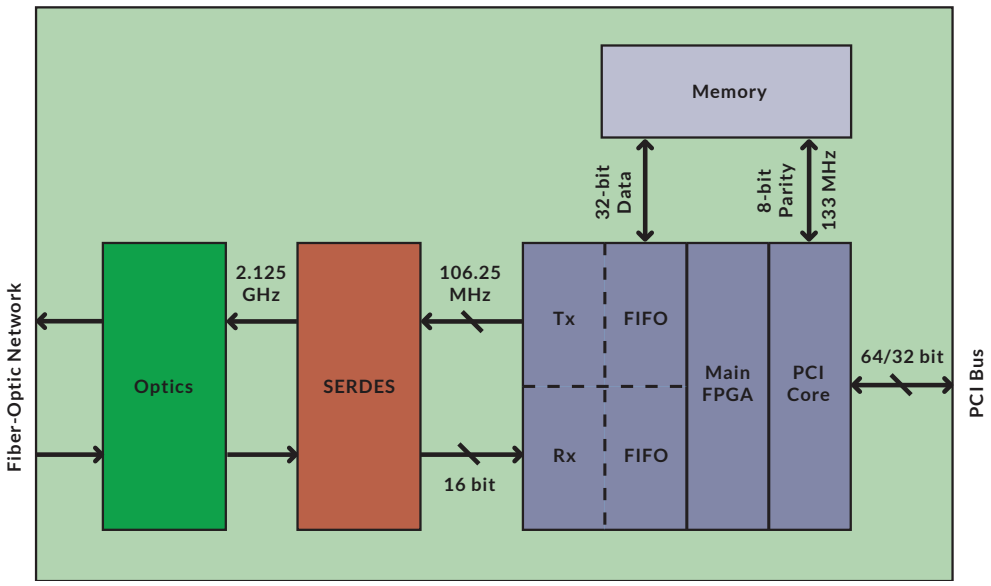

Ordering information

PMC-5565PIORC - A B C D E F

A = Memory Options
- 0 = Reserved
- 1 = 128 Mbyte
- 2 = 256 Mbyte

B = 1 (4k FIFO)

C = Transmission Mode
- 0 = Multimode
- 1 = Single Mode

DEF = 000 (reserved for future use)

PCI-5565PIORC - A B C D E F

A = Memory Options
- 0 = Reserved
- 1 = 128 Mbyte
- 2 = 256 Mbyte

B = 1 (4k FIFO)

C = Transmission Mode
- 0 = Multimode
- 1 = Single Mode

DEF = 000 (reserved for future use)

PCIE-5565RC - A B C D E F

A = Memory Options
- 0 = Reserved
- 1 = 128 Mbyte
- 2 = 256 Mbyte

B = 0 (reserved for future use)

C = Transmission Mode
- 0 = Multimode
- 1 = Single ode

DEF = 000 (reserved for future use)

PCIE-5565PIORC - A B C D E F

A = Memory Options
- 0 = Reserved
- 1 = 128 Mbyte
- 2 = 256 Mbyte

B = 0 (reserved for future use)

C = Transmission Mode
- 0 = Multimode
- 1 = Single Mode

D = Bracket Option
- 0 = High-profile (standard bracket)
- 1 = Low-profile (short bracket)

EF = 00 (reserved for future use)

VME-5565 - A B C D E F

A = Memory Options
- 0 = Reserved
- 1 = 128 Mbyte

B = 1 (4k FIFO)

C = Transmission Mode
- 0 = Multimode
- 1 = Single Mode

DEF = 000 (reserved for future use)

WE INNOVATE. WE DELIVER. YOU SUCCEED.

Americas: 866-OK-ABACO or +1-866-652-2226 **Asia & Oceania:** +81-3-5544-3973

Europe, Africa, & Middle East: +44 (0) 1327-359444

Locate an Abaco Systems Sales Representative visit: abaco.com/products/sales

abaco.com @AbacoSys

©2016 Abaco Systems. All Rights Reserved. All other brands, names or trademarks are property of their respective owners. Specifications are subject to change without notice.

01/11 A-DS-669B

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP