ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Abaco Systems / VMIC VMIPMC-6100-000* at our website: ***Click HERE***

VMIPMC-6100
PMC-Based Gbit Ethernet Adapter

- Standard features
  - — PCI mezzanine card (PMC)-based Gbit Ethernet adapter
  - — 1000SX fiber interface via front panel SC duplex fiber connector
  - — IEEE 802.3/802.3x/802.3z compliant
  - — 64-bit/66 MHz interface for optimum performance
  - — 64 Kbyte packet buffer
  - — PCI revision 2.2 compliant
  - — Universal PMC signaling operation

INTRODUCTION — The VMIPMC-6100 is a PMC-based Gbit Ethernet adapter. This product is ideal for applications requiring 1000SX Ethernet.

The VMIPMC-6100 uses the Intel® 82543GC Gbit Ethernet MAC. The 82543GC provides a 32-/64-bit, 33/66 MHz interface compliant to PCI Rev. 2.2. It also has a 64 Kbyte packet buffer to maintain high performance. A fiber 1000SX interface is provided via the PMC front panel using a duplex fiber connector. Drivers are available for download, making the VMIPMC-6100 easy to integrate with single-board computer (SBC) products such as VMIC's VMEbus and CompactPCI® offerings.

FUNCTIONAL CHARACTERISTICS

PMC: Universal +5 V and + 3.3 V PMC (PCI) signaling is supported

PHYSICAL/ENVIRONMENTAL

Temperature: 10 to 50 °C operating range

Relative Humidity: 10 to 90 percent (noncondensing) recommended operating range

MTBF: 888,940 hours (Bellcore)

ELECTRICAL CHARACTERISTICS

PMC Power: + 5 V, 1.3 A maximum


PMC Signaling: Universal 3.3 or 5 V, 32-/64-bit, 33/66 MHz

SOFTWARE

Windows NT®/Windows® 2000, Linux, and Solaris drivers supported.

NETWORK CONNECTIONS

Fiber-optic (multimode) with SC-type connectors
- — 50 µ multimode fiber (316 m half duplex, 550 m full duplex length)
- — 62.5 µ multimode fiber (275 m length)

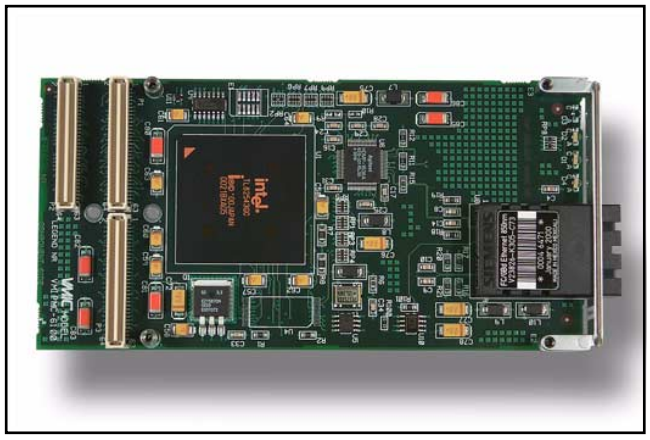

TRADEMARKS

The VMIC logo is a registered trademark of VMIC. Intel is a registered trademark of Intel Corporation. Windows and Windows NT are registered trademarks of Microsoft Corporation. CompactPCI is a registered trademark of PCI Industrial Computer Manufacturers' Group. Other registered trademarks are the property of their respective owners.

Ordering Options

Feb. 6, 2002 800-756100-000 C		A	B	C	–	D	E	F
VMIPMC-6100	–		0		–			

A = Transmission Mode
- 0 = Multimode Fiber Optic (SC-Type Connectors)
- 1 = Single-Mode Fiber Optic (SC-Type Connectors)

B = 0 (Option reserved for future use)

C = Temperature Specifications
- 0 = Standard Product
- 1 = Extended Temperature

Cable Specifications

Fiber-Optic Cable - Multimode; (62.5 Micron core); Single-Mode (9 Micron core).

Fiber-Optic Cable Assemblies		A	B	C	–	D	E	F
VMICBL-000-F4	–	0			–			

ABC = Cable Lengths

000 = .5 ft (0.15 m)	011 = 350 ft (106.68 m)
001 = 1 ft (.31 m)	012 = 500 ft (152.15 m)
002 = 5 ft (1.52 m)	013 = 574 ft (175 m)
003 = 10 ft (3.04 m)	014 = 656 ft (200 m)
004 = 25 ft (7.62 m)	015 = 820 ft (250 m)
005 = 50 ft (15.24 m)	016 = 1,000 ft (304.30 m)
006 = 80 ft (24.40 m)	017 = 1,148 ft (350 m)
007 = 100 ft (30.49 m)	018 = 1,312 ft (400 m)
008 = 150 ft (45.72 m)	019 = 1,500 ft (456.45 m)
009 = 200 ft (60.98 m)	020 = 1,640 ft (500 m)
010 = 250 ft (76.20 m)	

For Ordering Information, Call:
1-800-322-3616 or 1-256-880-0444 • FAX (256) 882-0859
E-mail: info@vmic.com Web Address: www.vmic.com
Copyright © August 2000 by VMIC
Specifications subject to change without notice.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP