



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗


LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com



Embedded Systems

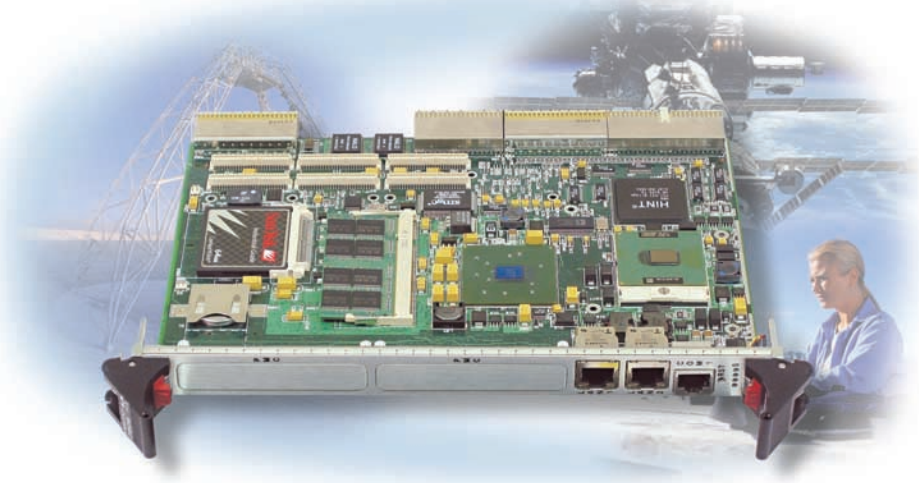

VMICPCI-7806

Intel® Pentium® M/Celeron® M Universal CompactPCI®
Single Board Computer

GE Fanuc's VMICPCI-7806 is a single slot CompactPCI® single board computer (SBC) offering low power consumption without compromising the robustness, reliability and high performance required for demanding embedded computing applications. Available with either Intel®'s Pentium® M or Celeron® M processor technology, the VMICPCI-7806 features a 400 MHz system bus and incorporates Intel's 855GME graphics memory controller with up to 1 Gbyte Dual Data Rate (DDR) SDRAM.

The VMICPCI-7806 is ideal for I/O intensive applications thanks to Intel's new highly integrated, small footprint 6300ESB I/O controller hub which provides dual PMC sites (64-bit/66 MHz PCI-X and 32-bit/33 MHz PCI), parallel and serial ATA, CompactFlash option, dual integrated serial ports, and dual USB ports.

Product Features

Fully compliant with PICMG® 2.16 CompactPCI Packet Switching Backplane (CompactPCI/PSB) specifications, the VMICPCI-7806 features two Gigabit Ethernet ports, two USB 2.0 ports, two high performance 16550-compatible serial ports, two PMC expansion sites, optional CompactFlash, and IDE and floppy drive interfaces. In addition, the VMICPCI-7806 supports the Intelligent Platform Management Interface (IPMI) architecture (PICMG 2.9).

Additional VMICPCI-7806 features:

- 6U single slot universal controller
- PICMG 2.1 Rev. 2.0 hot swap compliant
- Up to 1 Gbyte DDR SDRAM
- Up to 1 Gbyte CompactFlash
- 64-bit/66 MHz CompactPCI bus interface
- Integrated video controller
- VGA and digital LVDS video available via rear I/O
- User programmable watchdog timer
- Passive heat sink
- Operating system support for Windows® 2000, Windows XP, QNX®, Linux®, and VxWorks®



imagination at work

VMICPCI-7806 Specifications:

- **CPU**
 - Intel Pentium M processor with either 1.6 GHz or 1.8 GHz or Intel Celeron M at 1.3 GHz
 - Advanced L2 cache
 - ◊ 2 MByte (1.8 GHz Pentium M)
 - ◊ 1 MByte (1.6 GHz Pentium M)
 - ◊ 512 KByte (1.3 GHz Celeron M)
 - 400 MHz system bus
 - Utilizes the Intel 855GME chipset and Intel 6300ESB I/O controller hub
- **SDRAM**
 - Up to 1 Gbyte DDR SDRAM via one SODIMM
- **CompactFlash**
 - Up to 1 Gbyte of CompactFlash
- **Ethernet**
 - Two 10/100/1000BaseT Ethernet ports
 - ◊ Software selectable front or rear (PICMG 2.16)
 - Intel 82546EB Ethernet controller
- **Graphics**
 - Intel 855GME graphics memory controller
 - Up to 1600 x 1200 resolution
 - VGA and digital LVDS video available via rear I/O
- **PMC Expansion**
 - Two PMC expansion sites
 - ◊ No. 1 PMC site is 64-bit/66 MHz PCI-X PMC
 - ◊ No. 2 PMC site is 32-bit/33 MHz PCI
 - IEEE 1386.1 compliant
- **Serial Interfaces**
 - Two 16550-compatible serial ports
 - ◊ one accessible via RJ45 connector on front panel
 - ◊ both accessible via rear panel
- **Other Interfaces**
 - Parallel and serial ATA via rear panel
 - Two USB 2.0 ports via rear panel
 - One PS/2 port for keyboard and mouse
 - IDE and floppy disk support
 - Hardware reset on front panel
 - Status LEDs on front panel
 - User programmable watchdog timer
- **PICMG Compliance**
 - Supports Intelligent Platform Management Interface (IPMI) architecture (PICMG 2.9 Rev. 1.0)
 - High availability hot swap (PICMG 2.1 Rev. 2.0)
 - Ethernet on the backplane (PICMG 2.16 Rev. 1.0)
 - Universal signaling support (PICMG 2.0 Rev. 3.0)
- **Front Panel Status LEDs**
 - Primary IDE interface activity
 - Board status
 - Power
 - Hot swap
 - LAN activity (located on each RJ45)
- **Operating System Support**
 - Windows 2000
 - Windows XP
 - QNX
 - Linux
 - VxWorks
- **Power Requirements**
 - +5 VDC (+5%, -3%, 4.5 A (typical), 6.75 A maximum)
 - +3.3 VDC (+5%, -3%, 1.5 A (typical), 2.0 A maximum)
 - +12 VDC (+5%, -3%), 50 mA maximum
 - -12 VDC (+5%, -3%), 50 mA maximum
- **Environmental Specifications**
 - Operating: 0 to +50 °C
 - Storage: -40 to +85 °C
 - Relative humidity: 5% to 95%, noncondensing
- **Shock**
 - 10 Gs, 16 ms half sine, 6 axis, 10 pulses each
- **Vibration**
 - 6 Gs RMS (20 – 2000 Hz) random, 0.0185 G² per Hz spectrum
- **Mechanical Specifications**
 - 6U single slot Eurocard form factor
 - Height: 9.2 in. (233.4 mm)
 - Depth: 6.3 in. (160 mm)
 - Thickness: 0.8 in. (20.3 mm)

Ordering Options

October 26, 2004 800-657806-000 B	A	B	C	D	E	F
VMICPCI-7806	-			0	0	0
A = Processor 0 = Reserved 1 = 1.3 GHz Celeron M Processor 2 = 1.6 GHz Pentium M Processor 3 = 1.8 GHz Pentium M Processor B = DDR SDRAM Memory 0 = 256 Mbyte 1 = 512 Mbyte 2 = 1 Gbyte 3 = Reserved C = CompactFlash 0 = No CompactFlash 1 = 128 Mbyte CompactFlash 2 = 256 Mbyte CompactFlash 3 = 512 Mbyte CompactFlash 4 = 1 Gbyte CompactFlash D through F = 0 (Options reserved for future use.)						
CompactPCI Rear Transition Utility Board						
VMIACC-0584						
The VMIACC-0584 installs in the rear transition area of the CompactPCI backplane and provides access to IDE, floppy, COM 2, USB, video and keyboard/mouse functions. The VMIACC-0584 is sold separately.						
For Ordering Information, Call: 1-800-322-3616 or 1-256-880-0444 • FAX (256) 882-0859 Email: info.embeddedsystems@gefanuc.com Web Address: www.gefanuc.com/embedded Copyright © 2004 by GE Fanuc Embedded Systems Specifications subject to change without notice.						



Embedded Systems



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com