

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

Series 801 Mighty Mouse
Double-Start ACME Thread Receptacle
801-009 and 801-010 Ordering Information



Rear Panel Jam Nut Mount
Shell Style 07




Square Flange Mount
Shell Style 02/12/22




In-Line
Shell Style 01

How To Order						
Sample Part Number	**801-010**	**-02**	**Z1**	**16-55**	**S**	**A**
Series (See Table I)	**801-009** = Receptacle with Banding Platform **801-010** = Receptacle with Accessory Thread					
Shell Style (See Table III)	**-01** = In-Line Receptacle for Free-Hanging Cables **-02** = Thru Hole Square Flange Receptacle for Front or Rear Panel Mounting **-12** = Square Flange Receptacle for Rear Panel Mounting with "Non-Locking" Clinch Nuts **-22** = Square Flange Receptacle for Rear Panel Mounting with "Locking" Clinch Nuts **-07** = Jam Nut Receptacle for Rear Panel Mounting					
Material and Finish	**M** = Aluminum / Electroless Nickel RoHS Compliant **MT** = Aluminum / Nickel-PTFE RoHS Compliant **NF** = Aluminum / Cadmium with Olive Drab Chromate **ZNU** = Aluminum / Zinc-Nickel with Black Chromate **Z1** = Stainless Steel / Passivated RoHS Compliant					
Shell Size - Insert Arr	See Insert Arrangements page D-2					
Contact Type	**A** = Pin Connector, Less Contacts **B** = Socket Connector, Less Contacts **P** = Pin, Crimp **S** = Socket, Crimp **G** = #23 Pin with 30 AWG Crimp Barrel **H** = #23 Socket with 30 AWG Crimp Barrel					
Shell Key Positions (See Table II)	**A** = Normal **B** = Pos. B **C** = Pos. C **D** = Pos. D **E** = Pos. F **F** = Pos. F					

Table I: Series




800-009
Banding Platform






801-010
Rear Accessory Thread

Table II: Alternate Keyway Positions



	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°

Table III: Shell Style

		
Style -01 In-line	**Style -02/-12/-22** Square Flange	**Style -07** Jam Nut

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse
Double-Start ACME Thread
Contact Arrangements

Contact Arrangements						
Contact Arr.	No. of Contacts					
	#23	#20	#20HD	#16	#12*	#8**
5-3	3					
6-1				1		
6-23			3			
6-4	4					
6-6	6					
6-7	7					
7-1					1	
7-25			5			
7-10	10					
8-2				2		
8-200	4	2				
8-28			8			
8-13	13					
9-4				4		
9-200	4			2		
9-201	8	2				
9-210			10			
9-19	19					
10-2					2	
10-5				5		
10-26	26					
10-200	12				1	
10-201	4				2	
10-202	8			2		
11-31	31					
13-2					2	
13-3					3	
13-7				7		
13-220			20			
13-37	37					
13-200	6				2	
13-201	10				2	
13-202	20			2		
13-203	12			4		
13-204	12				2	
13-205	4				4	
16-5					5	


*All arrangements with #12 contacts and available with keyed Twinax contacts. Use mode code -688

**Combo inserts using size #8 and #23 contacts order size #23, 857-034 socket or 809-335 pin contacts.


Contact Legend

#23 ○ #20HD ◒ #20 ● #16 ◒ #12 ⊕


Mating Face View of Pin Connector
(socket connector numbers are reversed)

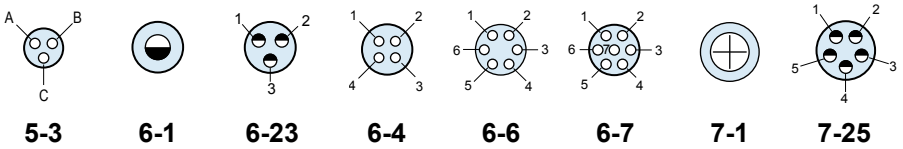


5-3 6-1 6-23 6-4 6-6 6-7 7-1 7-25

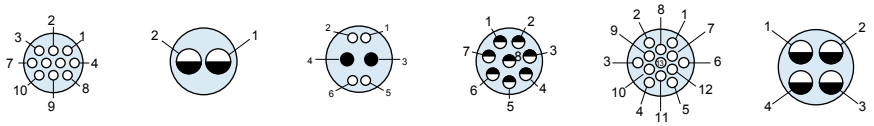


7-10 8-2 8-200 8-28 8-13 9-4

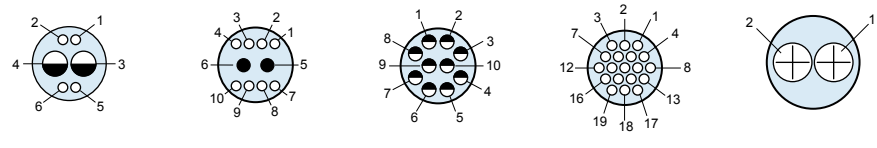


9-200 9-201 9-210 9-19 10-2

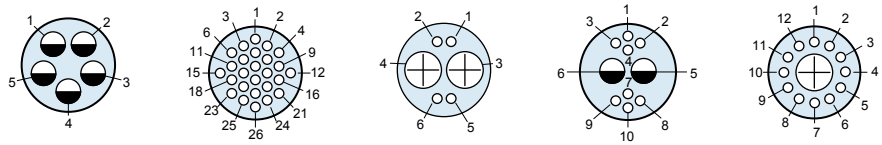


10-5 10-26 10-201 10-202 10-200

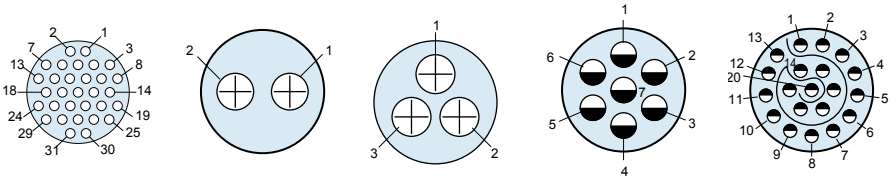

11-31 13-2 13-3 13-7 13-220

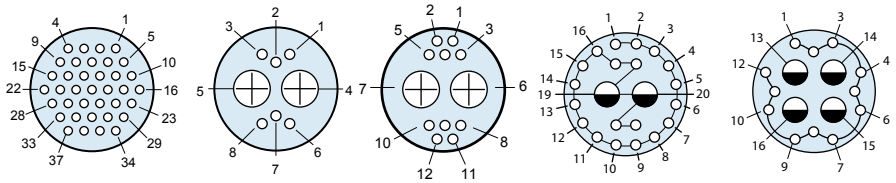

13-37 13-200 13-201 13-202 13-203

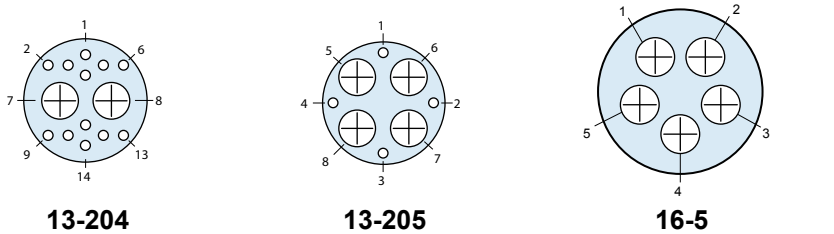

13-204 13-205 16-5

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Contact Arrangements						
Contact Arr.	No. of Contacts					
	#23	#20	#20HD	#16	#12*	#8**
16-12				12		
16-235			35			
16-55	55					
16-204	40			2		
16-205	32			4		
16-206	34				2	
16-207	20				4	
16-208	32					1
17-7					7	
17-14				14		
17-241			41			
17-85	85					
17-203	40			4		
17-204	28				4	
17-205	40					1


*All arrangements with #12 contacts and available with keyed Twinax contacts. Use mode code -688

**Combo inserts using size #8 and #23 contacts order size #23, 857-034 socket or 809-335 pin contacts.


Contact Legend


#23 ◦ #20HD ◓ #20 ● #16 ◒ #12 ⊕


Plug Key Positions		
	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°





Mating Face View of Pin Connector
(socket connector numbers are reversed)



16-12



16-235



16-55



16-204



16-205



16-206



16-207



16-208



17-7



17-14


17-241


17-85


17-203


17-204


17-205

D

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 801 Mighty Mouse
Double-Start ACME Thread
General Information


Contact Arrangements						
Contact Arr.	No. of Contacts					
	#23	#20	#20HD	#16	#12*	#8**
19-19				19		
19-201	44					2
19-202	23					4
19-255			55			
19-100	100					
21-12					12	
21-200	28					4
21-22				22		
21-269			69			
21-130	130					

*All arrangements with #12 contacts and available with keyed Twinax contacts. Use mode code -688


**Combo inserts using size #8 and #23 contacts order size #23, 857-034 socket or 809-335 pin contacts.

Contact Legend


#23 ○ #20HD ◓ #20 ● #16 ◒ #12 ⊕




19-19




19-201




19-202




19-255




19-100




21-12




21-200



21-22




21-269



21-130

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

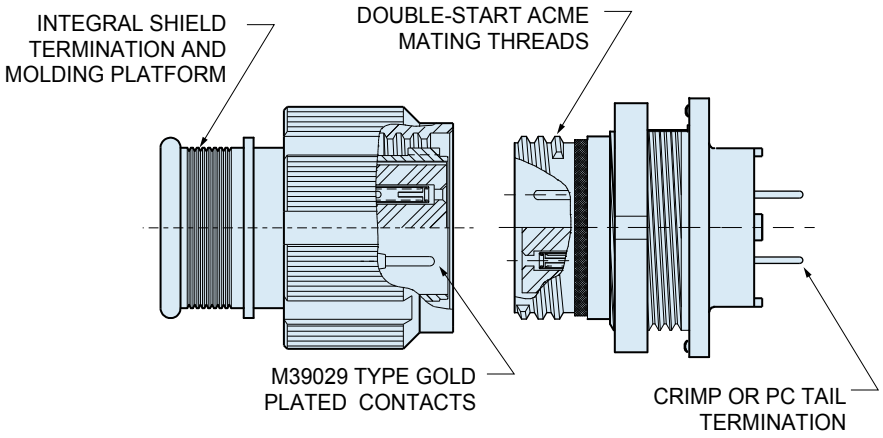

- **Double-Start ACME Thread with anti-decoupling spring or ratchet**
- **Crimp Rear Release Contacts**
- **integral Band Platform**
- **Available with Size #12, #16, #20, #20HD and #23 Contacts**
- **Environmentally Sealed**

D

Glenair's Series 801 Mighty Mouse Offers Mil-Spec Performance in a Lightweight, Ultraminiature Package

The 801 Series Mighty Mouse is ideal for use in high-density packaging applications where traditional military circular connectors are too large or too heavy. The double-start threads provide full mating in 1½ turns, and the plug features an anti-decoupling spring for vibration resistance. The unique integral molding/band platform allows direct shield attachment and cable overmolding. Receptacles are available with printed circuit board contacts. Plugs have anti-decoupling wave spring, or specify ratchet mechanism for added security.



Specifications	
Current Rating	#23–5 A, #20HD–7.5 A, #16–13 A, #12–23 A
Dielectric Withstanding Voltage	#23–750 VAC, #20HD–1000 VAC, #12 and #16–1800 VAC
Insulation Resistance	5000 megohms minimum
Operating Temperature	-65° C. to +175° C.
Shock	300 g.
Vibration	37 g.
Shielding Effectiveness	55 dB minimum from 100MHz to 1000MHz.
Durability	2000 mating cycles
See Series 80 General Information for complete performance specs.	



Materials and Finishes	
Shells, Jam Nuts	Aluminum alloy or stainless steel
Contacts	Copper alloy, 50 µInch gold plated
Insulators	Liquid crystal polymer (LCP)
Contact Retention Clip	Beryllium copper alloy
Interfacial Seal, O-rings, Wire Sealing Grommet	Fluorosilicone rubber
See Series 80 General Information for complete material and finish specs.	

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP