ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Hach / GLI T53A4A1N* at our website: ***Click HERE***

Accu4™ Low-range Turbidimeter System

GLI International
A Hach Company Brand



Hach's GLI Model T53 Analyzer/8320 Sensor (with optional Cal-Cube™) measures 0.000-100.0 NTU with auto-ranging scale.

Features and Benefits

USEPA-approved, Patented Four-beam Measuring Method

This microprocessor-based system uses a technologically advanced measuring concept to provide:

- *Exceptional accuracy*
- *Unparalleled measurement stability*
- *Automatic color compensation*
- *Superior calibration stability**

**After performing initial calibration, only periodic verification of calibration is required using GLI's patented turbid glass Cal-Cube™ assembly.*

Low Maintenance Design

The only required maintenance is an occasional, simple cleaning of the sensor flow chamber. (System diagnostics provide automatic alert to clean flow chamber.)

"Menu-guided" Operation

The large backlit display, simple keypad, and logical menu structure make the system easy to use. Menu screens contain up to six text lines to guide the operator through setup, verification of calibration, operation, and test/maintenance functions.

Advanced System Diagnostics

Built-in diagnostic messages alert operator to system malfunctions requiring immediate attention, and to deteriorating conditions that may restrict performance. A dedicated system alarm relay provides warning if any of these conditions occur.

Long-lasting LED Light Sources

The pulsed LEDs produce light of a single wavelength, providing highly accurate, reliable performance. Additionally, they last several years, virtually eliminating light source replacement.

Built-in Sensor Bubble Trap

A bubble trap built into the Model 8320 sensor flow chamber eliminates stray light and air in the sample to ensure measuring accuracy.

NEMA 4X Protection

NEMA 4X enclosures protect system components from wet environments, providing years of highly reliable, trouble-free operation.

Patented Cal-Cube™ Verification System

Verify calibration quickly and easily using GLI's precision turbid glass cube standard. It is factory-certified to known USEPA approved formazin values, and is 100% reproducible. This extremely stable secondary standard is unaffected by light, heat or aging. (A built-in funnel/ hose assembly is provided for calibration using a traditional primary turbidity standard such as formazin.)

Multiple Language Capability

All screens can be selected for display in English, French, German, or Spanish. (Other available languages can be substituted.)

Passcode-protected Access

For security, use the T53 analyzer passcode capability to restrict access to configuration settings and verification of calibration to only authorized personnel.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specifications*

Model 8320 Low-range Sensor

Operational

Flow Rate
0.05 to 7 GPM (0.19 to 26.5 LPM)

Ambient Conditions
32-140ºF (0-60ºC)

Sample Temperature Range
32-140ºF (0-60ºC)

Pressure Range
Standard Design: 0-50 psig at 68ºF (0-3.4 bar at 20ºC)
High Pressure Design: 0-150 psig at 68ºF (0-10.2 bar at 20ºC)

Pressure Drop
Standard Design: 0.0017 psi at 0.1 GPM (0.0001 bar at 0.36 LPM)
High Pressure Design:0.165 psi at 1.0 GPM (0.012 bar at 3.8 LPM)

Residence Time
9.5 seconds at 1 GPM (3.8 LPM)

Air Venting
Integral bubble trap for 0.05 to 0.5 GPM (0.19 to 1.8 LPM) flows. Installation of restrictor valve on the sensor outlet is recommended for flows above 0.5 GPM (1.8 LPM) with air in sample.

Mechanical

Light Sources
Two near-infrared (860 nanometer wavelength) LEDs

Sensor Flow Configuration
Flow-through design

Process Connections
1/2-inch NPT female standard; adaptable to 3/8-inch or 1/4-inch NPT, barb or tube fittings

Wetted Materials
PVC, polycarbonate, polystyrene, PPO, nitrile, and Buna-N

Cleaning Method
Water rinse, wipe surfaces

Enclosure
Standard Design: NEMA 4X (CSA type 4; IP65), compression-molded and fiberglass reinforced polyester (flame retardant) with four integral tabs for surface mounting; see drawing on next page for dimensions
High Pressure Design: NEMA 4X (CSA type 4; IP65), PPO structural foam (V-0 flammability rating per U.L. 94 test method) with four integral tabs for surface mounting; 17.5 H x 13.8 W x 7.6 in. D (445 H x 351 W x 193 mm D)

Mounting Configurations
Surface or pipe mount

Net Weight
10 lbs. (4.5 kg) approximately

Model T53 Analyzer

Operational

Display
Graphic dot matrix LCD, 128 x 64 pixels with LED backlighting; 1/2 inch (13 mm) main character height; 1/8 inch (3 mm) auxiliary information character height; menu screens contain up to six text lines

Measurement	Auto-ranging Scale
Turbidity	0.000-100.0 NTU with auto-ranging and decimal point shift above 1.000 NTU and above 10.00 NTU
Analog Outputs (1 and 2)	0.00-20.00 mA or 4.00-20.00 mA

Ambient Conditions
Operation: -4 to 140ºF (-20 to 60ºC); 0 to 95% relative humidity, non-condensing
Storage -22 to 158ºF (-30 to 70ºC); 0 to 95% relative humidity, non-condensing

Relays
Types/Outputs: Four electromechanical relays; SPDT (Form C) contacts; U.L. rated 5A 115/230 Vac, 5A @ 30 Vdc resistive
Operational Mode: Each relay (A, B, C, D) can be driven by the measured turbidity or detected system diagnostic conditions
Function Modes:
Control–Settings for high/low phasing, setpoint, deadband, overfeed timer, off delay, and on delay
Alarm–Settings for low alarm pt., low alarm pt. deadband, high alarm pt., high alarm pt. deadband, off delay, and on delay
Status–Setting for FAIL, WARN or ALL system diagnostic conditions to activate relay when specific conditions exist (analyzer, light source 1/2 or detector 1/2 failure, sensor chamber dirty or sensor chamber unknown)
Indicators: Relay annunciators (A, B, C, D) indicate respective relay on/off status

Sensor-to-Analyzer Distance
30 feet (9 m) maximum (consult factory if longer distances are required)

Power Requirements
90-130 Vac, 50/60 Hz. (10 VA max.) or 180-260 Vac, 50/60 Hz. (10 VA max.)

Calibration Methods
Primary: Enter one primary standard value (formazin is recommended).
Sample:Enter one sample value determined by laboratory analysis or calibrated portable meter.

Verification of Calibration (Cube Cal)
Temporarily insert optional GLI Cal-Cube™ assembly into sensor and enter its factory-certified standard value.

Analog Outputs (two)
Isolated 0/4-20 mA; each with 0.004 mA (12-bit) resolution and capability to drive up to 600 ohm loads

NOTE: Each output represents the measured turbidity. Turbidity values can be independently entered for each output to define the endpoints at which the minimum and maximum mA output values are desired. During calibration, both outputs can be selected to hold their present values, transfer to preset values to operate control elements by an amount corresponding to those values, or remain active to respond to the measured value.

Communication
RS-232: Enables configuration and retrieval of measured data for one analyzer using IBM-compatible PC and GLI optional software tool kit
HART Protocol: Enables configuration and retrieval of measured data for up to 15 analyzers over communication link using appropriate hand-held terminal or data system with HART software

Memory Backup (non-volatile)
All user settings are retained indefinitely in memory (EEPROM)

Certifications
European Community EMC: Certified CE compliant for conducted and radiated emissions (EN 50081-2) and immunity (EN 61000-6-2)
General Purpose: CSA/CSANRTL and FM (UL pending)
Class I, Div. 2 (Groups A, B, C, and D): CSA/CSANRTL and FM (UL pending)
Class II, Div. 2 (Groups E, F, and G): CSA/CSANRTL and FM (UL pending)

Mechanical

Enclosure
NEMA 4X; polycarbonate face panel, epoxy-coated high-quality cast aluminum door and case with four 1/2-inch (13 mm) conduit holes, nylon mounting bracket, and stainless steel hardware

Mounting Configurations
Panel, surface, and pipe (horizontal and vertical) mounting

Net Weight
5 lbs. (2.3 kg) approximately

Accu4™ Turbidimeter System Performance (Electrical, Analog Outputs)

System Accuracy
2% of reading, all ranges

Sensitivity
0.001 NTU

Repeatability
0.1% of span or better

Temperature Drift
Zero and Span: 0.01% of span per ºC

**Specifications subject to change without notice.*

Engineering Specifications


1. The system shall consist of a Model T53 analyzer and a Model 8320 sensor, and shall employ a four-beam ratiometric measuring method, approved by EPA as outlined in GLI Method 2, to continuously monitor turbidity.
2. The system shall meet the International Standard for Measurement of Turbidity [ISO 7027-1984(E)] and USEPA-approved GLI Method 2*, and shall auto range from 0.000 to 100.0 NTU with automatic decimal point positioning.
   **Consult GLI for Method 2 technology review.*
3. The sensor shall have a built-in bubble trap to eliminate air in the sample.
4. The analyzer shall have a graphical dot matrix LCD display with 128 x 64 pixels and LED backlighting. The main display character height shall be 1/2-inch (13 mm). Auxiliary information character height shall be 1/8 inch (3 mm). Menu screens shall contain up to six text lines.
5. The system shall have self-diagnostic capability, including preprogrammed diagnostic messages to identify specific causes of deteriorating conditions or system malfunctions.
6. The analyzer shall have two isolated 0/4-20 mA analog outputs, each representing the measured turbidity. Turbidity values can be entered to define the endpoints at which the minimum and maximum milliamp output values are desired. During calibration, both outputs can be selected to hold their present values, transfer to preset values to operate control elements by an amount corresponding to those values, or remain active to respond to the measured value.
7. The analyzer shall have a passcode to restrict access to configuration settings and calibration to authorized personnel only.
8. The analyzer shall have relays that can be selected to function as dedicated system diagnostic alarm relays to alert the operator when abnormal conditions exist.
9. The system shall have automatic color compensation and continuous zero point checking.
10. The system electronics shall be in NEMA 4X enclosures for protection from wet environments.
11. The system shall be configurable using its RS-232 port and GLI's optional software tool kit, or through HART protocol.
12. The system shall be GLI International, Inc. Accu4™ Low-range Turbidimeter System (Model T53/8320).

Optional:

13. The system shall include a turbid glass Cal-Cube™ assembly with a factory-certified calibration value for periodic verification of calibration.


Dimensions

Model T53 Analyzer

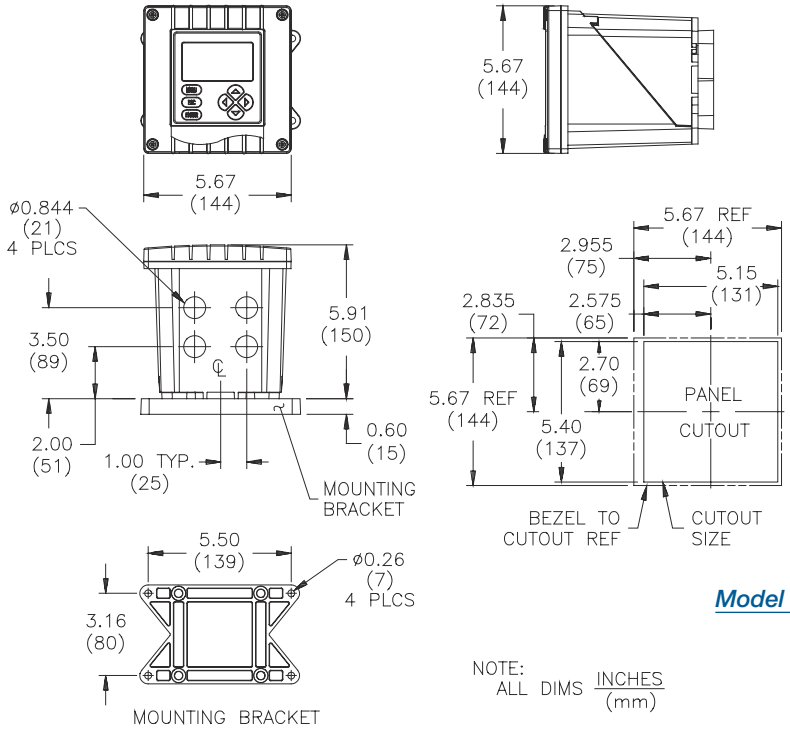

NOTE:
ALL DIMS INCHES
(mm)

Model 8320 Low-range Sensor (standard pressure design)

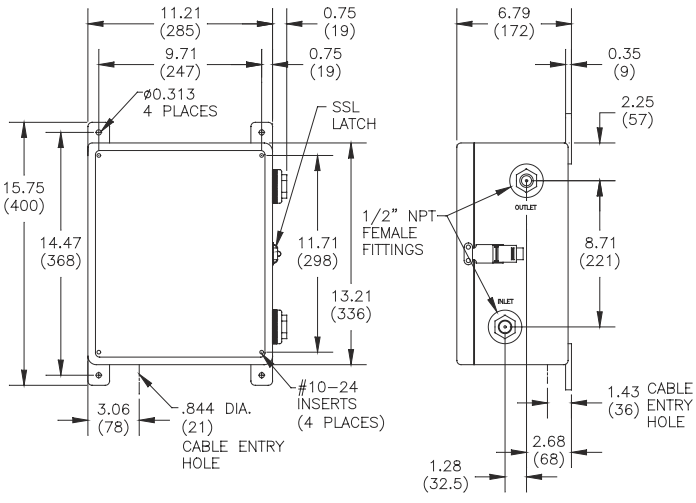

Ordering Information

Model T53 Analyzer

MODEL NUMBER
T53 Turbidity analyzer in 1/2 DIN, NEMA 4X enclosure with hardware for panel, surface or pipe mounting.

COMMUNICATIONS OUTPUT
A None **B** HART Protocol

RESERVED CATEGORIES

LINE FREQUENCY
1 For use with 60 Hz. line power
2 For use with 50 Hz. line power

EQUIPMENT TAGGING (specify tag data)
N None **P** Paper **S** Stainless steel

T53 4A **PRODUCT NUMBER**

Choose one from each category.

Model 8320 Low-range Sensor

MODEL NUMBER
8320T Low-range turbidity sensor in NEMA 4X (CSA type 4) surface mount enclosure to continuously monitor from 0.000 to 100.0 NTU. Sensor includes a 20 ft. (6 m) long 10-conductor (plus two shields) cable.

RESERVED CATEGORIES

OPERATING PRESSURE RANGE
0 Standard (0-50 psig at 68°F) **1** High Pressure (0-150 psig at 68°F)

INSTALLATION CONNECTIONS
C3 PVC, 1/2-inch NPT female

EQUIPMENT TAGGING (specify tag data)
N None **P** Paper **S** Stainless steel

AGENCY CERTIFICATION
N None **C** CSA Certified
E Certified CE Compliant

8320T 1A C3 **PRODUCT NUMBER**

Choose one from each category.

Accessories (order separately)

Standard Pressure Sensor Pipe Mounting Kit **8320A1070-001**
Includes hardware to horizontal or vertical pipe mount only the standard pressure design Model 8320 sensor.

High Pressure Sensor Pipe Mounting Kit **8220G1040**
Includes hardware to horizontal or vertical pipe mount only the high pressure design Model 8320 sensor.

Cal-Cube™ Assembly **8220G1300**
Each assembly is labeled with a factory-certified calibration value.

Interconnect Cable **1W5002**
When a length longer than the integral 20 ft. (6 m) sensor cable is needed, order this identical replacement cable. In this case, the sensor is not supplied with an integral cable. This 1W5002 cable is for direct connection between sensor and analyzer without using a junction box. Specify required length in whole feet up to 30 ft. (9 m) maximum.

Software Tool Kit **1000G3311**
For use with IBM-compatible PC. The software can create and download multiple sets of analyzer configuration values. The kit includes a GLI software CD-ROM and 10 ft. (3 m) cable terminated with an RS-232 connector and stripped/tinned wires for connection to the analyzer.

Sun Shield **1000G3088-001**
Aluminum shield provides additional protection for analyzer from harmful effects of direct sunlight.

Lit. No. G202 (supercedes T5320/402)
XXXX Printed in U.S.A.
©Hach Company, 2003. All rights reserved.
In the interest of improving and updating its equipment, Hach Company reserves the right to alter specifications to equipment at any time.

At Hach, it's about learning from our customers and providing the right answers. It's more than ensuring the quality of water—it's about ensuring the quality of life. When it comes to the things that touch our lives...

Keep it pure.

Make it simple.

Be right.

For current price information, technical support, and ordering assistance, contact the Hach office or distributor serving your area.

In the United States, contact:

HACH COMPANY World Headquarters
P.O. Box 389
Loveland, Colorado 80539-0389
U.S.A.
Telephone: 800-227-4224
Fax: 970-669-2932
E-mail: orders@hach.com
www.hach.com

U.S. exporters and customers in Canada, Latin America, sub-Saharan Africa, Asia, and Australia/New Zealand, contact:

HACH COMPANY World Headquarters
P.O. Box 389
Loveland, Colorado 80539-0389
U.S.A.
Telephone: 970-669-3050
Fax: 970-461-3939
E-mail: intl@hach.com
www.hach.com

In Europe, the Middle East, and Mediterranean Africa, contact:

HACH + LANGE Europe
Dr. Bruno Lange GmbH & Co. KG
Willstätterstraße 11
D-40549 Düsseldorf
GERMANY
Tel: +49 (0) 211 5288-0
Fax: +49 (0) 211 5288-143
E-mail: kundenservice@drlange.de
www.drlange.com

HACH®

Be Right™

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP