ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Hamamatsu H7422P-50* at our website: ***Click HERE***

Metal Package PMT with Cooler

Photosensor Modules H7422 Series



Heatsink with fan (A7423) sold separately

The H7422 series are photosensor modules with an internal high-voltage power supply circuit and a cooler installed to the metal package photomultiplier tube. Efficient cooling was achieved by placing the cooler near the photomultiplier tube to reduce thermal noise emitted from the photocathode and a high S/N ratio can be obtained even at extremely low light levels.
The H7422-40 has high sensitivity in the 300 nm to 720 nm wavelengths. The H7422-50 is sensitive along a wide spectral range from 380 nm to 890 nm. The H7422-01, H7422-02 and H7422-20 have a maximum output current value of 100 µA and so are extremely effective when measurements are needed over a wide dynamic range. The photomultiplier tube is maintained at a constant temperature by monitoring the output from a thermistor installed near the photomultiplier and then regulating the current to the thermoelectric cooler.

Product Variations

Type No.	Spectral Response	Max. Output Signal Current	Features	
H7422-40	300 nm to 720 nm	2 µA	GaAsP photocathode, QE 40 % at peak wavelength, high gain (P type)	
H7422P-40				For photon counting
H7422-50	380 nm to 890 nm		GaAs photocathode, QE 12 % at peak wavelength, high gain (P type)	
H7422P-50				For photon counting
H7422-01	300 nm to 850 nm	100 µA	Multialkali photocathode	
H7422-02	300 nm to 870 nm		Infrared-extended multialkali photocathode	
H7422-20	300 nm to 890 nm		Infrared-extended high-sensitivity multialkali photocathode	

Specifications

Parameter				H7422 Series					Unit
Suffix				-40	-50	-01	-02	-20	—
Input Voltage				+11.5 to +15.5					V
Max. Input Voltage for Main Unit				+18					V
Max. Input Current for Main Unit				62		30			mA
Max. Input Voltage for Thermoelectric Cooler				2.6					V
Max. Input Current for Thermoelectric Cooler				2.2					A
Max. Output Signal Current				2		100			µA
Max. Control Voltage				+0.9 (Input impedance 100 kΩ)					V
Recommended Control Voltage Adjustment Range				+0.5 to +0.8		+0.25 to +0.8			V
Effective Area				φ5		φ7			mm
Sensitivity Adjustment Range				1: 50		1: 10^4			—
Peak Sensitivity Wavelength				580	800	400	500	630	nm
Cathode	Radiant Sensitivity		420 nm	108	15	56	40	40	mA/W
			550 nm	176	50	36	56	72	
			800 nm	—	90	1.2	6.4	46	
Anode	Standard Type	Radiant Sensitivity *1	550 nm	8.8×10^4	2.5×10^4	1.8×10^4	2.8×10^4	3.6×10^4	A/W
		Dark Current *1 *2	Typ.	0.4	0.5	0.03	0.08	0.1	nA
			Max.	1.0	1.3	0.08	0.2	0.25	
	P Type	Radiant Sensitivity *3	550 nm	1.8×10^5	5.0×10^4	—	—	—	A/W
		Dark Count *2 *3	Typ.	100	125	—	—	—	s^{-1}
			Max.	300	375	—	—	—	
Rise Time *1				1.00		0.78			ns
Ripple Noise *1 *4 (peak to peak)			Max.	0.6					mV
Settling Time *5				0.2					s
Operating Ambient Temperature				+5 to +35					°C
Storage Temperature				-20 to +50					°C
Weight				Approx. 400					g

*1: Control voltage = +0.8 V PMT setting temperature 0 °C, used with C8137-02 and A7432 *2: After 30 minute storage in darkness
*3: Plateau voltage, PMT setting temperature 0 °C, used with C8137-02 and A7423
*4: Cable RG-174/U, Cable length 450 mm, Load resistance = 1 MΩ, Load capacitance = 22 pF
*5: The time required for the output to reach a stable level following a change in the control voltage from +1.0 V to +0.5 V.


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Cooling Specifications


Parameter	H7422 Series	Unit
Cooling Method	Thermoelectric cooling	—
Max. Cooling Temperature (ΔT) *6	35	°C
Cooling Time *6	Approx. 5	min

*6: Input current to thermoelectric cooler=2.0 A


Characteristics (Cathode radiant sensitivity, Gain)

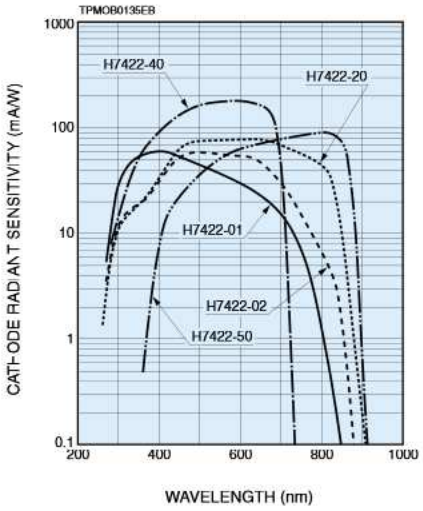

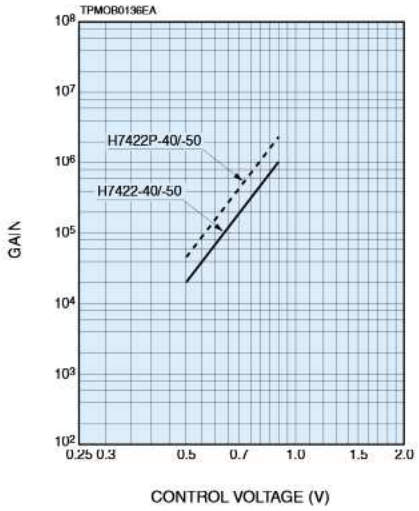


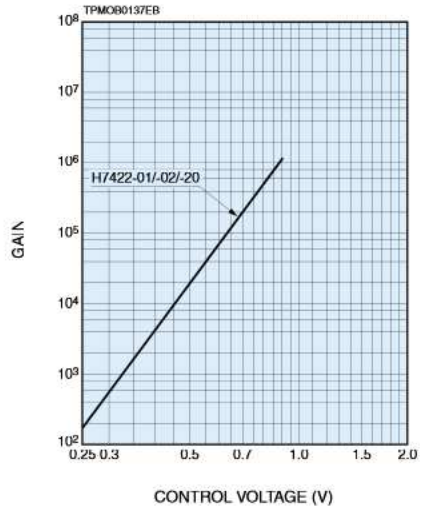

Block Diagram

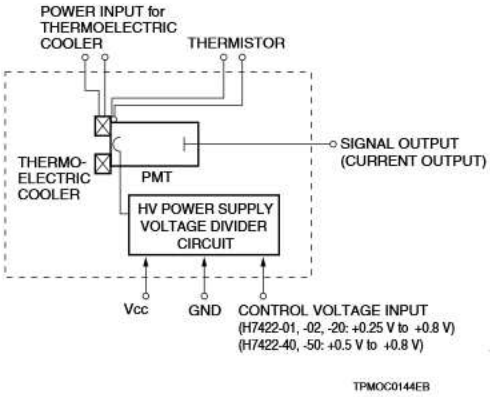


Dimensional Outlines (Unit: mm)

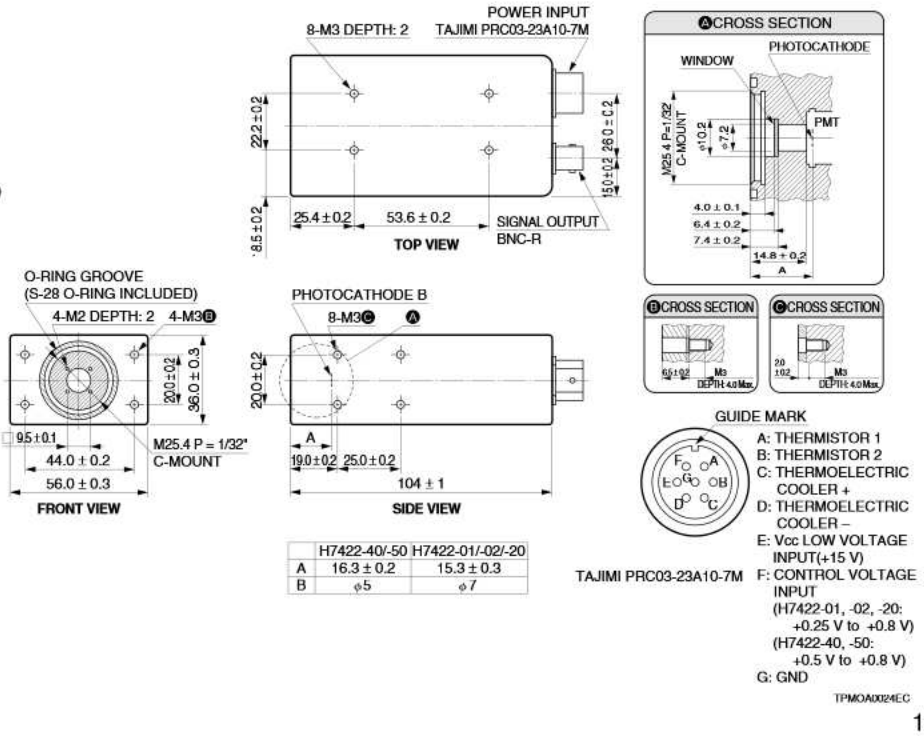

	H7422-40/-50	H7422-01/-02/-20
A	16.3 ± 0.2	15.3 ± 0.3
B	φ5	φ7

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

H7422 Series option

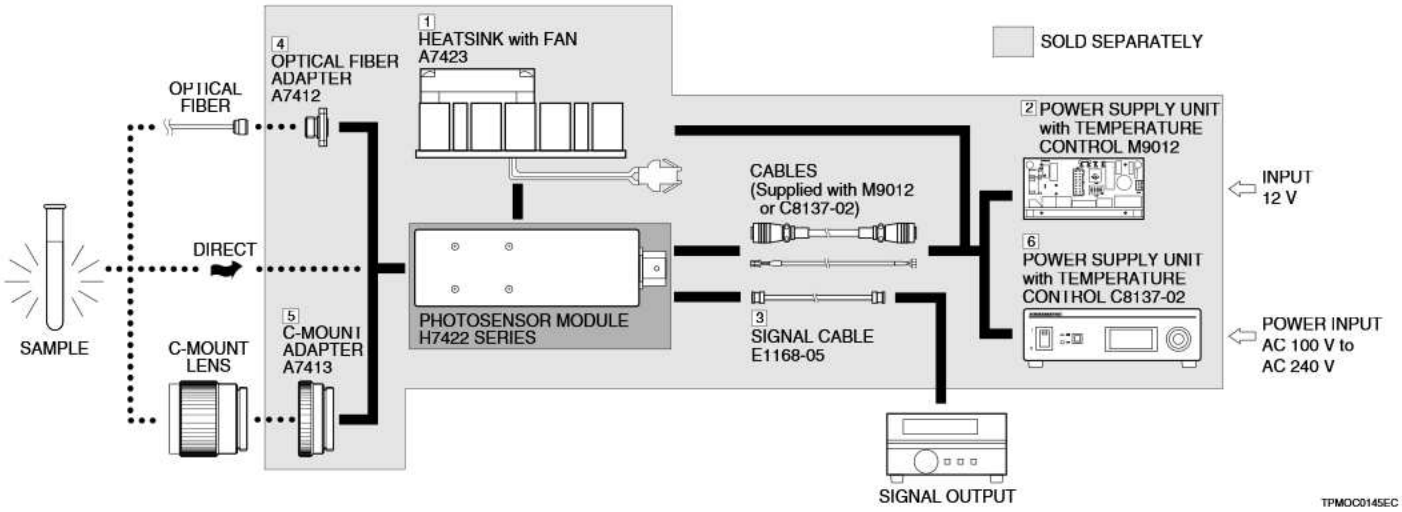

● Heatsink with Fan A7423

The temperature of the H7422 outer case rises due to the thermoelectric cooler housed in the case. The A7423 heatsink efficiently radiates away this heat to prevent a temperature rise in the H7422. The A7423 can be easily installed onto the H7422 with four M3 screws. Apply a heat conductive grease onto the joint surface shared by the H7422 and A7423.

Parameter		Value	Unit
Input Voltage		12	V
Input Current	During Lock	140	mA
	During Operation	90	mA
Operating Voltage		10.2 to 13.8	V
Weight		120	g

● Power Supply Unit with Temperature Control M9012

The M9012 is an on-board type power supply unit.
By just connecting to 12 V supply, the M9012 provides power necessary to operate the H7422 series. The M9012 also controls the thermoelectric cooler in the H7422 series so that the output and noise can be maintained at constant levels even when the ambient temperature changes. The thermoelectric cooler and PMT operation can be controlled from an external device by connecting it to the I/O connector on the M9012.

Parameter		Value	Unit
Max. Cooling Temperature (ΔT)		35	°C
Input Voltage		12	V
Max. Input Current		1.2	A
Max. Power Consumption		15.8	V·A
Main Circuit Output Voltage		12	V
Max. Output Current for Thermoelectric Cooler		2.2	A
Output Voltage for Fan		12	V
Max. Control Output Voltage		1.26	V
Max. Control Input Voltage		0.9	V
Control Signal Input Voltage	Thermoelectric Cooler	Non-insulated TTL level input	—
	PMT	Non-insulated TTL level input	
	Fan	Non-insulated TTL level input	
Error Signal Output Voltage	Thermoelectric Cooler	Non-insulated TTL level output	—
	PMT	Non-insulated TTL level output	
LED Output	PMT	5	V
	Error	5	
Setting Cooling Temperature		0	°C
Weight (excluding cables)		120	g

● Signal Cable E1168-05

This signal cable is terminated with a BNC connector for easily connecting the H7422 to external equipment.

● Optical Fiber Adapter (FC Type) A7412

The A7412 is an FC type optical fiber connector that attaches to the light input window of the H7422. The A7412 can easily be secured in place with four M2 screws.

● C-Mount Adapter A7413

The A7413 mount adapter is used when a C-mount lens protruding 4 mm or more from the flange-back must be installed onto the H7422.

● Power Supply Unit with Temperature Control C8137-02


The C8137-02 is a power supply unit with a temperature control function. Just connecting to an AC source of 100 V to 240 V generates the output voltages for the thermoelectric cooler and the A7423 fan, needed for operating the H7422. The photomultiplier tube temperature can be maintained to 0 °C by monitoring the thermistor and regulating the output current for the thermoelectric cooler. Control voltage can be varied by a knob on the front panel.

Parameter	Value	Unit
Max. Cooling Temperature (ΔT)	35	°C
Setting Cooling Temperature (preset at factory)	0	°C
Input Voltage	AC 100 to AC 240	V
Input Voltage Frequency	50/60	Hz
Power Consumption	30	V·A
Main Circuit Output Voltage	+15	V
Max. Current for Thermoelectric Cooler	2.2	A
Output Voltage for Fan	12	V
Control Voltage Adjustment Range	0 to +0.9	V
Weight	1.1	kg

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com


Options (Unit: mm)

1 Heatsink with Fan A7423

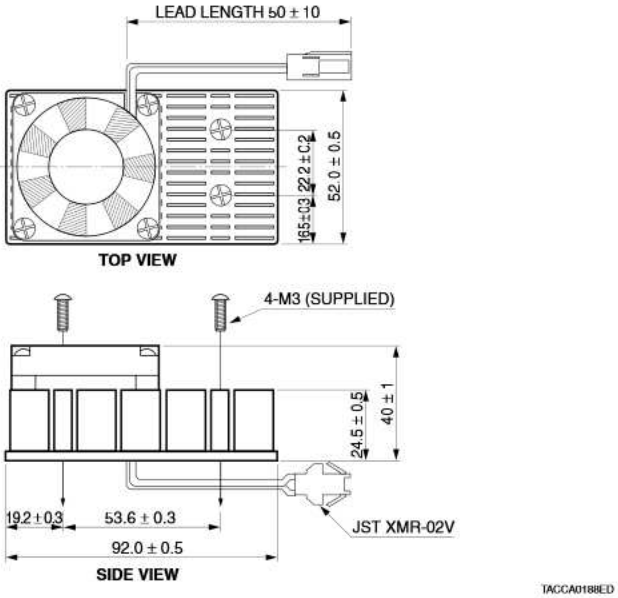


TACCA0188ED

2 Power Supply Unit with Temperature Control M9012

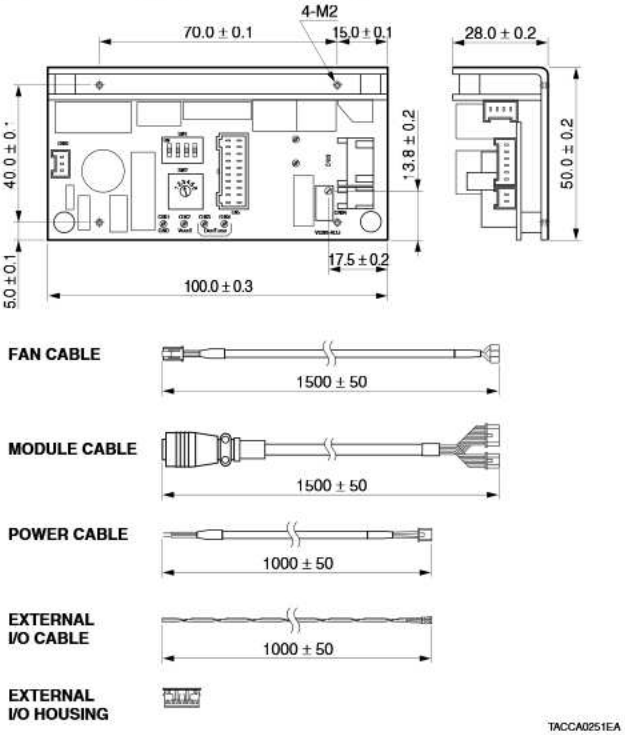


TACCA0251EA

3 Signal Cable E1168-05




TACCA0148EA

4 Optical Fiber Adapter (FC Type) A7412

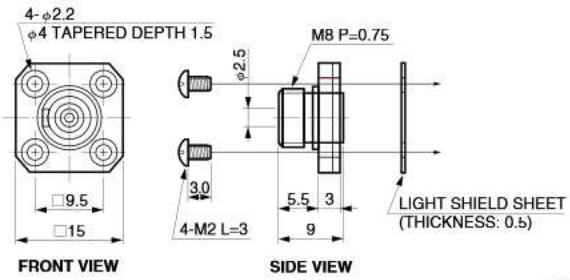


TACCA0190EB

5 C-Mount Adapter A7413



TACCA0191EA

6 Power Supply Unit with Temperature Control C8137-02

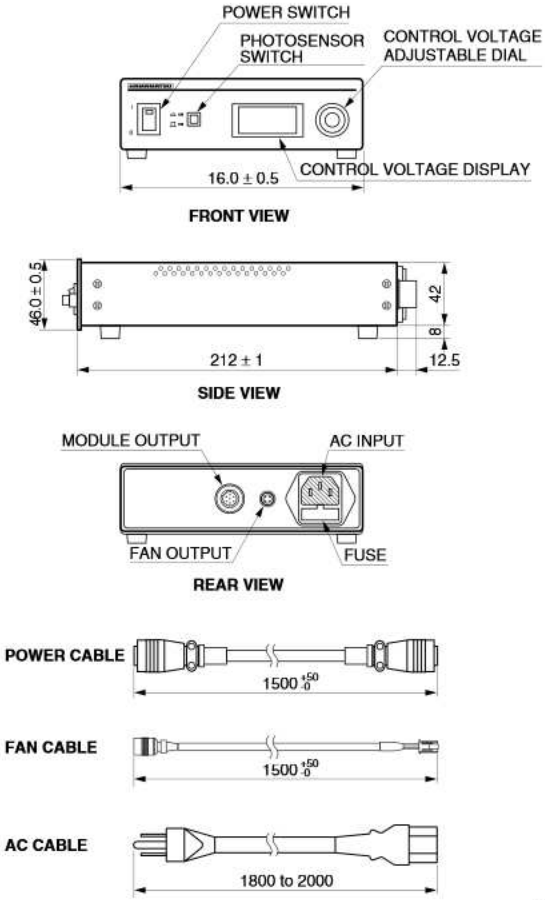

TACCA0238EB

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP