

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

HAMAMATSU
PHOTON IS OUR BUSINESS

Si photodiodes

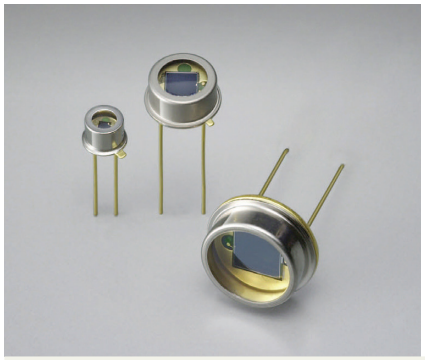

S1226 series

For UV to visible, precision photometry; suppressed near IR sensitivity

These Si photodiodes have suppressed IR sensitivity. They are suitable for low-light-level detection in analysis and the like.

Features

- **Suppressed near IR sensitivity**
- **High sensitivity in UV region (quartz glass type)**
- **Low dark current**
- **High reliability**

Applications

- **Analytical equipment**
- **Optical measurement equipment, etc.**

Structure / Absolute maximum ratings


Type no.	Dimensional outline/ Window material*1	Package	Photosensitive area size (mm)	Absolute maximum ratings		
				Reverse voltage V_R max (V)	Operating temperature*2 Topr (°C)	Storage temperature*2 Tstg (°C)
S1226-18BQ*3	(1)/Q	TO-18	1.1 × 1.1	5	-20 to +60	-55 to +80
S1226-18BK	(2)/K				-40 to +100	-55 to +125
S1226-5BQ*3	(3)/Q	TO-5	2.4 × 2.4		-20 to +60	-55 to +80
S1226-5BK	(4)/K				-40 to +100	-55 to +125
S1226-44BQ*3	(5)/Q		3.6 × 3.6		-20 to +60	-55 to +80
S1226-44BK	(6)/K				-40 to +100	-55 to +125
S1226-8BQ*3	(7)/Q	TO-8	5.8 × 5.8		-20 to +60	-55 to +80
S1226-8BK	(8)/K				-40 to +100	-55 to +125

*1: Window material, K=borosilicate glass, Q=quartz glass
*2: No dew condensation
When there is a temperature difference between a product and the surrounding area in high humidity environments, dew condensation may occur on the product surface. Dew condensation may cause deterioration in characteristics and reliability.
*2: Refer to "Precautions against UV light exposure."
Note: Exceeding the absolute maximum ratings even momentarily may cause a drop in product quality. Always be sure to use the product within the absolute maximum ratings.

Electrical and optical characteristics (Typ. Ta=25 °C, unless otherwise noted)


Type no.	Spectral response range λ (nm)	Peak sensitivity wavelength λp (nm)	Photosensitivity S (A/W)				Short circuit current Isc 100 lx		Dark current I_D V_R=10 mV max. (pA)	Temp. coefficient of I_D T_{CID} (times/°C)	Rise time tr V_R=0 V R_L=1 kΩ (μs)	Terminal capacitance Ct V_R=0 V f=10 kHz (pF)	Shunt resistance Rsh V_R=10 mV		Noise equivalent power NEP (W/Hz$^{1/2}$)
			λp	200 nm		He-Ne laser 633 nm	Min. (μA)	Typ. (μA)					Min. (GΩ)	Typ. (GΩ)	
				Min.	Typ.										
S1226-18BQ	190 to 1000	720	0.36	0.10	0.12	0.34	0.5	0.66	2	1.12	0.15	35	5	50	1.6×10^{-15}
S1226-18BK	320 to 1000			-	-										
S1226-5BQ	190 to 1000			0.10	0.12		2.2	2.9	5		0.5	160	2	20	2.5×10^{-15}
S1226-5BK	320 to 1000			-	-										
S1226-44BQ	190 to 1000			0.10	0.12		4.4	5.9	10		1	500	1	10	3.6×10^{-15}
S1226-44BK	320 to 1000			-	-										
S1226-8BQ	190 to 1000			0.10	0.12		12	16	20		2	1200	0.5	5	5.0×10^{-15}
S1226-8BK	320 to 1000			-	-										

Spectral response

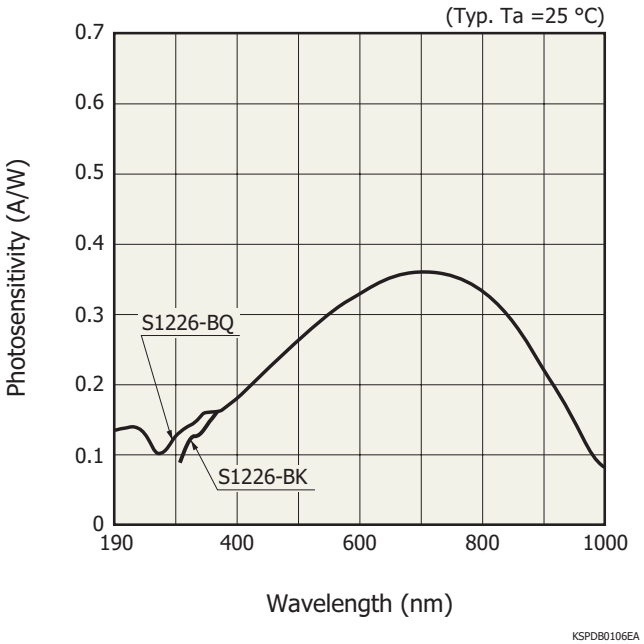


KSPDB0106EA

Photosensitivity temperature characteristic

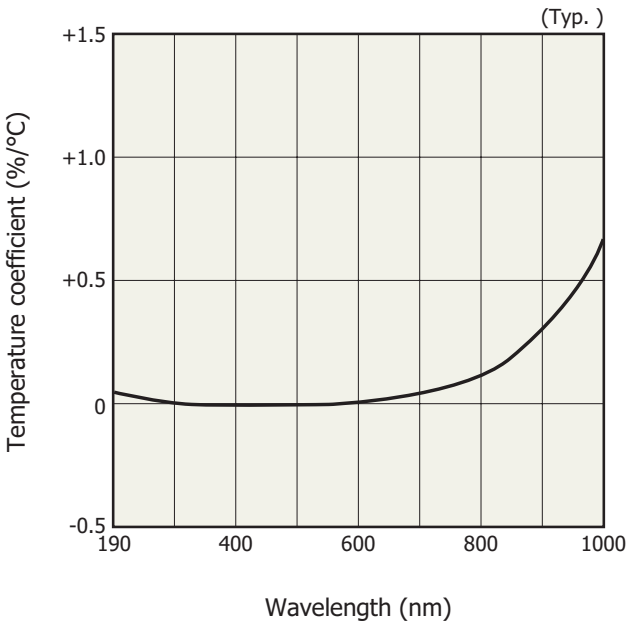

KSPDB0030EA


Dark current vs. reverse voltage

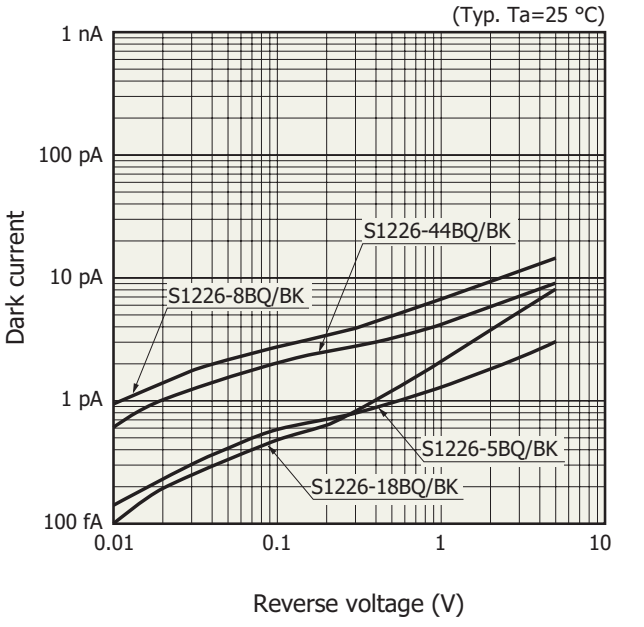

KSPDB0108EC

Dimensional outlines (unit: mm)


(1) S1226-18BQ

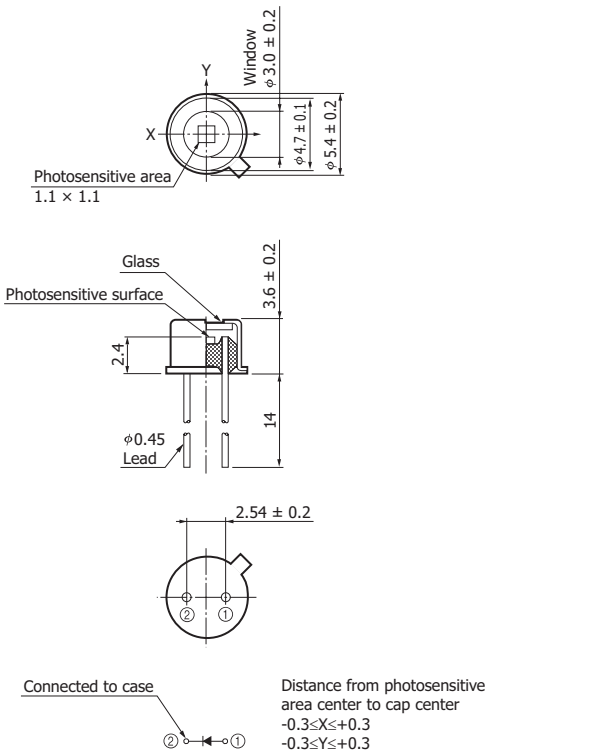

Distance from photosensitive area center to cap center
-0.3≤X≤+0.3
-0.3≤Y≤+0.3

KSPDA0201EC

(2) S1226-18BK

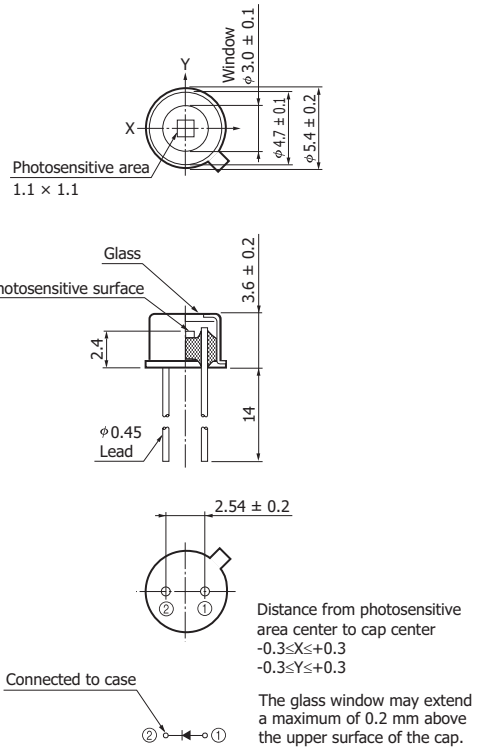


Distance from photosensitive area center to cap center
-0.3≤X≤+0.3
-0.3≤Y≤+0.3

The glass window may extend a maximum of 0.2 mm above the upper surface of the cap.

KSPDA0113EE


(3) S1226-5BQ

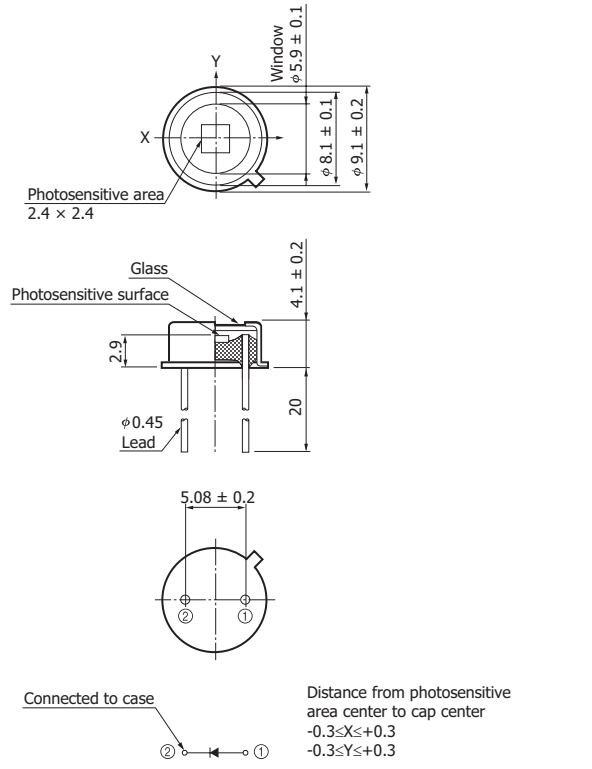

Distance from photosensitive area center to cap center
-0.3≤X≤+0.3
-0.3≤Y≤+0.3

KSPDA0202EB

(4) S1226-5BK

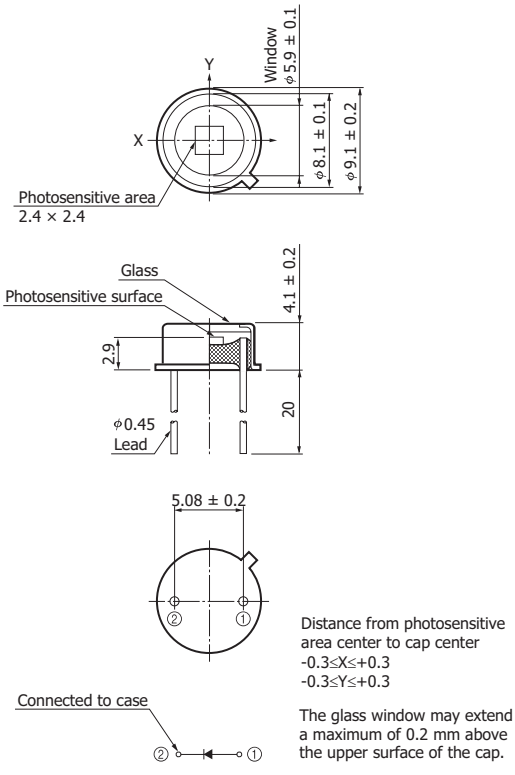


Distance from photosensitive area center to cap center
-0.3≤X≤+0.3
-0.3≤Y≤+0.3

The glass window may extend a maximum of 0.2 mm above the upper surface of the cap.

KSPDA0114ED


(5) S1226-44BQ

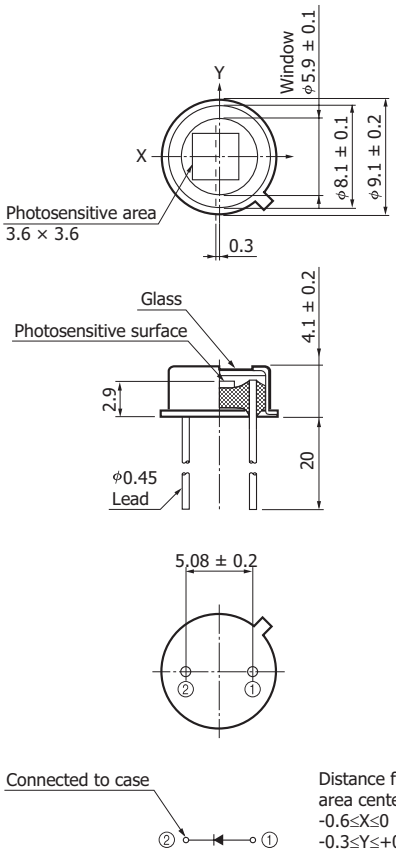

Distance from photosensitive area center to cap center
-0.6≤X≤0
-0.3≤Y≤+0.3

KSPDA0203EB

(6) S1226-44BK

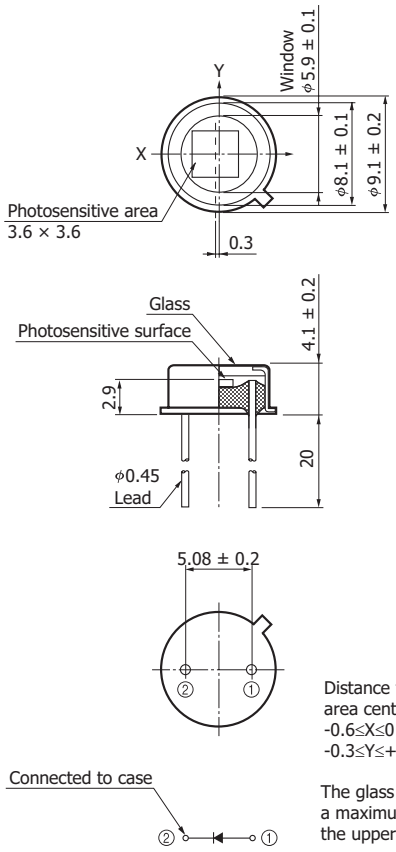


Distance from photosensitive area center to cap center
-0.6≤X≤0
-0.3≤Y≤+0.3

The glass window may extend a maximum of 0.2 mm above the upper surface of the cap.


KSPDA0195EC

(7) S1226-8BQ

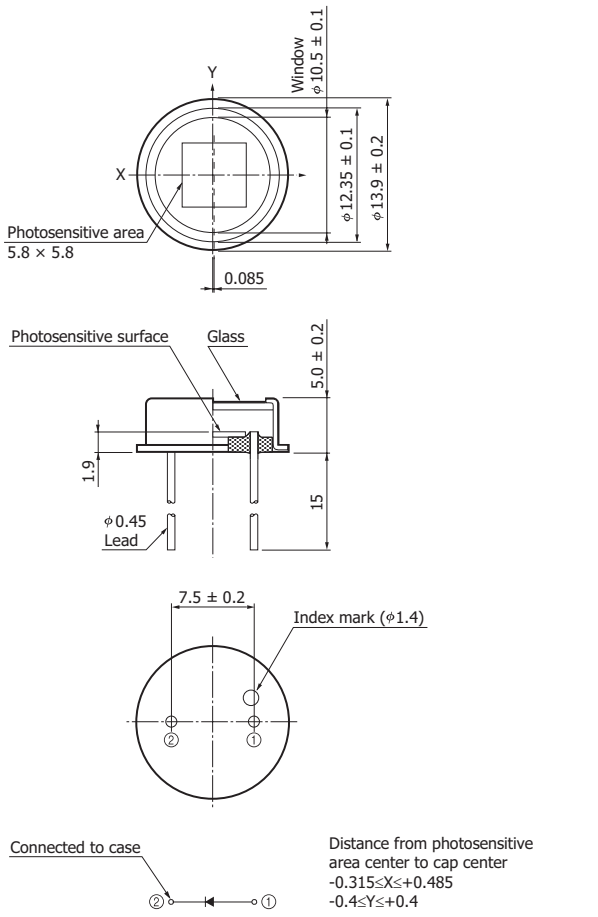

KSPDA0204EB

(8) S1226-8BK

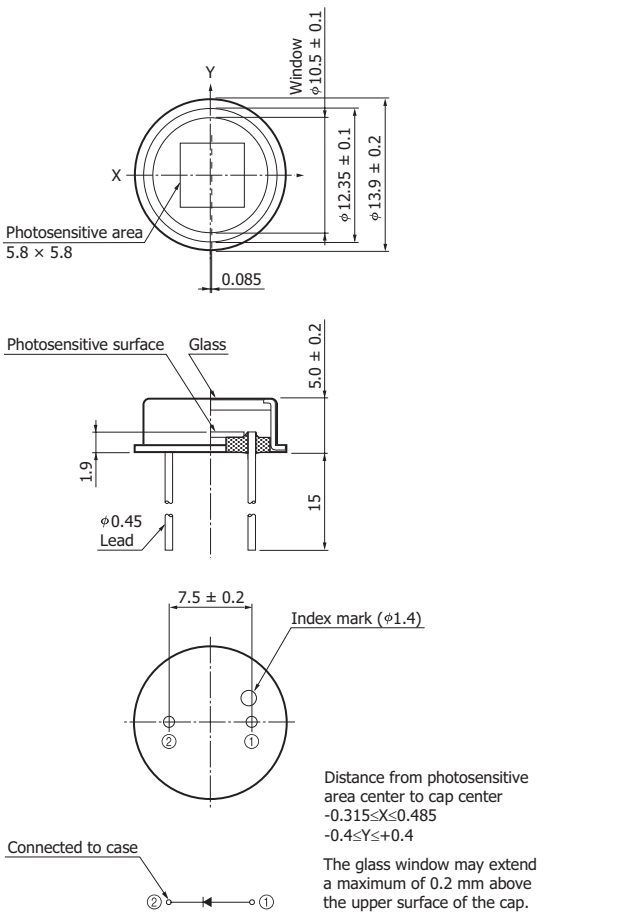

KSPDA0115ED

Precautions against UV light exposure

· When UV light irradiation is applied, the product characteristics may degrade. Such examples include degradation of the product's UV sensitivity and increase in dark current. This phenomenon varies depending on the irradiation level, irradiation intensity, usage time, and ambient environment and also varies depending on the product model. Before employing the product, we recommend that you check the tolerance under the ultraviolet light environment that the product will be used in.

· Exposure to UV light may cause the characteristics to degrade due to gas released from the resin bonding the product's component materials. As such, we recommend that you avoid applying UV light directly on the resin and apply it on only the inside of the photosensitive area by using an aperture or the like.

Related information

www.hamamatsu.com/sp/ssd/doc_en.html

■ Precautions

· Disclaimer
· Metal, ceramic, plastic package products

■ Technical note

· Si photodiodes

Information described in this material is current as of July 2023.
Product specifications are subject to change without prior notice due to improvements or other reasons. This document has been carefully prepared and the information contained is believed to be accurate. In rare cases, however, there may be inaccuracies such as text errors. Before using these products, always contact us for the delivery specification sheet to check the latest specifications.
The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use.
Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.

HAMAMATSU

www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Solid State Division
1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81)53-434-3311, Fax: (81)53-434-5184
U.S.A.: HAMAMATSU CORPORATION: 360 Foothill Road, Bridgewater, NJ 08807, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218
Germany: HAMAMATSU PHOTONICS DEUTSCHLAND GMBH: Arzbergerstr. 10, 82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-265-8 E-mail: info@hamamatsu.de
France: HAMAMATSU PHOTONICS FRANCE S.A.R.L.: 19 Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: infos@hamamatsu.fr
United Kingdom: HAMAMATSU PHOTONICS UK LIMITED: 2 Howard Court,10 Tewin Road, Welwyn Garden City, Hertfordshire, AL7 1BW, UK, Telephone: (44)1707-294888, Fax: (44)1707-325777 E-mail: info@hamamatsu.co.uk
North Europe: HAMAMATSU PHOTONICS NORDEN AB: Torshamnsgatan 35, 16440 Kista, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01 E-mail: info@hamamatsu.se
Italy: HAMAMATSU PHOTONICS ITALIA S.R.L.: Strada della Moia, 1 int. 6 20044 Arese (Milano), Italy, Telephone: (39)02-93 58 17 33, Fax: (39)02-93 58 17 41 E-mail: info@hamamatsu.it
China: HAMAMATSU PHOTONICS (CHINA) CO., LTD.: 1201, Tower B, Jiaming Center, 27 Dongsanhuan Beilu, Chaoyang District, 100020 Beijing, P.R. China, Telephone: (86)10-6586-6006, Fax: (86)10-6586-2866 E-mail: hpc@hamamatsu.com.cn
Taiwan: HAMAMATSU PHOTONICS TAIWAN CO., LTD.: 13F-1, No.101, Section 2, Gongdao 5th Road, East Dist., Hsinchu City, 300046, Taiwan(R.O.C) Telephone: (886)3-659-0080, Fax: (886)3-659-0081 E-mail: info@hamamatsu.com.tw

Cat. No. KSPD1034E10 Jul. 2023 DN

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP