ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Hamlin HE3321A0400* at our website: *Click HERE*

HE3300 S.I.L Relay Features and Benefits



Features

- Miniature single in line package
- Available with 5V, 12V or 24V coil options as standard
- High voltage and power switching versions
- Normally open, normally closed, and change over contact configurations available
- External magnetic shield option

Benefits

- Single in line configuration allows high packing densities, minimising space and cost
- Lower power coil consumption than competing electromechanical devices
- Hermetically sealed switching contact is immune to the effects of its environment
- Transfer moulded package gives maximum component protection

Applications

- Security
- Telecoms
- Instrumentation
- Process Control
- Automatic Test Equipment

DIMENSIONS (in) mm

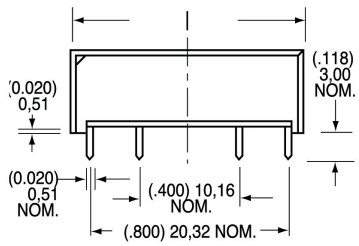


Figure 1 HE3321A, HE3351A, HE3361A, HE3321B

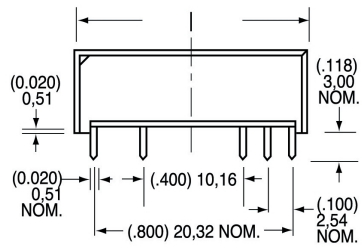


Figure 2 HE3321C

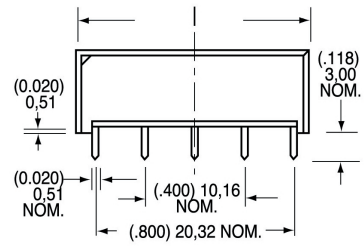


Figure 3 HE3321E


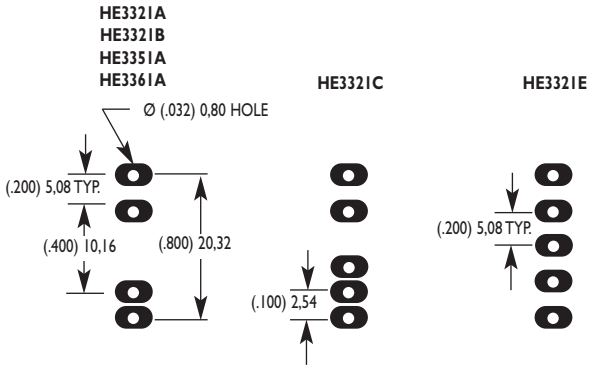


Figure 4 HE3300 (All)

Table 1

Relay Type	Body Type	l	w	h
HE3300	Transfer Molded	(.950) 24,13	(.300) 7,62	(.335) 8,51
	External Shield	(.980) 24,90	(.320) 8,12	(.345) 8,76

HE3300 PCB LAYOUT (Bottom View)



ORDERING INFORMATION

PART NUMBER HE33XX X XX XX

Model Number
HE3321 - Standard
HE3351 - High Voltage
HE3361 - Power Switching

Contact Type
A - Form A (SPST-NO)
B - Form B (SPST-NC)
C - Form C (SPDT-CO)
E - Form C (SPDT-CO) alternate foot print

Standard Coil
05 - 5 Volt
12 - 12 Volt
24 - 24 Volt

General Options
00 - No Options
40 - External Magnetic Shield

EXAMPLE: The HE3321A0540 is a 1 Form relay with a 5 Volt coil and external magnetic shield

See next page for: Electrical and Operating Characteristics Description and Coil Characteristics







Hamlin USA Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com
Hamlin UK Tel: +44 (0)1379 649700 • Fax: +44 (0)1379 649702 • Email: sales.uk@hamlin.com
Hamlin Germany Tel: +49 (0) 6181 953660 • Fax: +49 (0) 6181 9536666 • Email: sales.de@hamlin.com
Hamectrol France Tel: +33 (0) 1 4687 0202 • Fax: +33 (0) 1 4686 6786 • Email: sales.fr@hamlin.com

ISSUE No: 4 DATE: 1/5/3

Table 2 HE3300 Series Recognised File #E47258 Electrical and Operating Characteristics @ 25°C.

Column Number			1	2	3	4	5
Contact Type			**Form A SPST-NO Standard**	**Form A SPST-NO High Voltage**	**Form A SPST-NO Power Switching**	**Form C SPST-CO Standard**	**Form B SPST-NC Standard**
Relay Types			**HE3321A**	**HE3351A**	**HE3361A**	**HE3321C, E**	**HE3321B**
CONTACT RATINGS	Power, Switching	Watt - max.	10	10	50	5	10
Contact Hamlin	Voltage, Switching	Vdc - max.	200	300	200	175	200
for specific	Current, Switching	A - max.	0.5	1.0	1.5	0.25	0.5
load/life details	Current, Carry	A - max.	1.2	1.5	2.0	1.5	1.2
VOLTAGE	Across Open Contacts	Vdc - min.	250	450	300	200	250
HOLD-OFF	Contacts to Coil	Vac - min.	2500	2500	2500	2500	2500
RESISTANCE	Contact, Initial	Ω - max.	0.150	0.150	0.150	0.200	0.150
	Insulation: Across Open Contacts	Ω - min.	10^{10}	10^{10}	10^{10}	10^{9}	10^{10}
	Between Isolated Terminals	Ω - min.	10^{10}	10^{10}	10^{10}	10^{10}	10^{10}
TIMING	Operate Time	ms - max.	1.0	1.0	1.0	3.0	1.0
	Release Time	ms - max.	1.0	1.0	1.0	3.0	1.0
ENVIRONMENTAL	Temperature, Operating	°C	-40 to +85	-20 to +85	-40 to +85	-40 to +85	-40 to +85
	Temperature, Storage	°C	-40 to +105	-40 to +105	-40 to +105	-40 to +105	-40 to+ 105
	Vibration Resistance	G - max. 10-2000 Hz.	20	20	20	20	20
	Shock Resistance	G - max. 11 ms, ½ sine	50	50	50	50	50

Table 3 HE3300 Series Relay Coil Characteristics @ 25°C.

Contact Form & Type	Electrical & Operating Characteristics	Dimensions	Part Number	Nominal Coil Voltage Vdc	Coil Resistance ±10% Ohms	Must Operate Vdc	Must Release Vdc	Maximum Coil Voltage Vdc	Top View 2,54 mm, 0.1 in. Grid Dot on Case: Pin 1 Numbers not printed on case.
1A SPST-NO	See Table 2 Column 1	See Figure 1	HE3321A0400	5	500	3.75	0.5	22	
			HE3321A1200	12	500	9.0	1.0	22	
			HE3321A2400	24	2000	18.0	2.0	44	
1B SPST-NC	See Table 2 Column 5	See Figure 1	HE3321B0400	5	500	3.75	0.5	See Note 1, 2 6.5	
			HE3321B1200	12	500	9.0	1.0	14.0	
			HE3321B2400	24	2000	18.0	2.0	28.0	
1C SPDT-CO	See Table 2 Column 4	See Figure 2	HE3321C0500	5	125	3.75	0.5	11	
			HE3321C1200	12	500	9.0	1.0	22	
			HE3321C2400	24	2000	18.0	2.0	44	
1C SPDT-CO	See Table 2 Column 4	See Figure 3	HE3321E0500	5	125	3.75	0.5	11	
			HE3321E1200	12	500	9.0	1.0	22	
			HE3321E2400	24	2000	18.0	2.0	44	
1A SPST-NO High Voltage	See Table 2 Column 2	See Figure 1	HE3351A0500	5	125	3.75	0.5	11	
			HE3351A1200	12	500	9.0	1.0	22	
			HE3351A2400	24	2000	18.0	2.0	44	
1A SPST-NO Power Switching	See Table 2 Column 3	See Figure 1	HE3361A0500	5	125	3.75	0.5	11	
			HE3361A1200	12	500	9.0	1.0	22	
			HE3361A2400	24	2000	18.0	2.0	44	

Notes: 1) HE3321B - Exceeding recommended voltage may cause contact reclosure.

2) External magnetic shielding not available on 12 and 24 Volt Form B relays.

INFORMATION PROVIDED ON THIS DATA SHEET IS PROVIDED FOR INFORMATION PURPOSES ONLY AND SHOULD NOT BE RELIED UPON AS BEING ACCURATE FOR ANY PARTICULAR PURPOSE. Product performance may be affected by the application to which the product is put. Upon request, HAMLIN will assist purchasers by providing information specific to any particular application. HAMLIN disclaims any and all liability whatsoever for any purchaser's reliance upon the information contained on this data sheet without further consultation with authorised representatives of HAMLIN.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP