

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Find the *Hartmann / Interhart BU 04* at our website: ***Click HERE***

BU 04

Passend zu / matching:

- ST 02
- ST 04
- ST 06
- ST 08
- ST 20
- ST 24
- ST 71
- ST 70



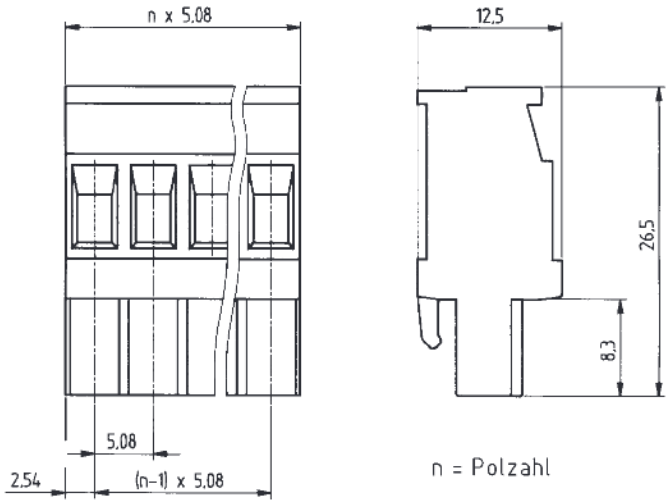

- Rastermaß 5,08mm
- Fahrstuhlklemmprinzip
- 2 - 16 polig
- Blockbauweise
- Leiteranschluss senkrecht zur Steckrichtung
- Leiteranschluss entgegen der Rastarmseite

- 5.08mm pitch
- rising-cage-clamp
- 2 - 16 poles
- single mold
- wire entry vertical to plugging direction
- wire entry opposite to locking tap side

getestet nach DIN EN 61984

Nennspannung	250V
Nennstrom (Umgebungstemperatur)	12A(T60)
Überspannungskategorie	III
Bemessungsstoßspannung	4kV
Verschmutzungsgrad	3
Drehmoment	0,5Nm
Schraubengröße	M3
Leitergröße starr	0,5 - 2,5mm²
Leitergröße flexibel	0,5 - 2,5mm²

getestet nach UL1059, CSA22.2No.158

Use groups	B	C	D
Nennspannung	300V	150V	300V
Nennstrom	15A	15A	10A
Leitergröße starr	AWG 22-10	AWG 22-10	AWG 22-10
Leitergröße flexibel	AWG 22-10	AWG 22-10	AWG 22-10
Drehmoment	0.79Nm	0.79Nm	0.79Nm

Anschlussquerschnitt

Leitergröße starr	0,5 - 2,5mm²
Leitergröße flexibel	0,5 - 2,5mm²
Max. Leitergröße flexibel mit AE	2,5mm²

Maße

Rastermaß	5,08mm
Abisolierlänge	7mm
Anschlussraum	2,7x3,5mm

Material

Isolierstoff	PA 6.6
Brennbarkeitsklasse	UL 94 V-0
Klemmkörper	Messing
Schraube	Stahl
Kontaktfeder	Bronze
Farbe	grün
RAL Farbe	6018

Temperaturen

Betriebstemperatur	-30…+105°C
Lagertemperatur	-40…+105°C

tested according to DIN EN 61984

Rated voltage	250V
Rated current (ambient temperature)	12A(T60)
Overvoltage category	III
Rated impulse voltage	4kV
Pollution degree	3
Torque	0.5Nm
Screw size	M3
Rated cross section solid wire	0.5 - 2.5mm²
Rated cross section stranded wire	0.5 - 2.5mm²

tested according to UL1059, CSA22.2No.158

Use groups	B	C	D
Rated voltage	300V	150V	300V
Rated current	15A	15A	10A
Wire size solid	AWG 22-10	AWG 22-10	AWG 22-10
Wire size stranded	AWG 22-10	AWG 22-10	AWG 22-10
Torque	7lb inch	7lb inch	7lb inch

Cross section

Rated cross section solid wire	0.5 - 2.5mm²
Rated cross section stranded wire	0.5 - 2.5mm²
Max. rated cross section with ferrule	2.5mm²

Maße

Pitch	5.08mm
Stripped length	7mm
Clamp opening	2.7x3.5mm

Material

Insulating material	PA 6.6
Flammability	UL 94 V-0
Clamping body	brass
Screw	steel
Contact spring	bronze
Colour	green
Colour acc. RAL	6018

Temperatures

Operating temperature	-30…+105°C
Storage temperature	-40…+105°C

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP