

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *HI-G 2K-2A-126* at our website: *Click HERE*


HALF SIZE CRYSTAL CAN RELAY
2 AMPERE DPDT

Series 2K

Product Description

The leading relay design in military and commercial application is represented in Hi-G 2K series relay. The products advanced design provides superior performance in the environmental and operational requirements of today's sophisticated equipment.
Volume production coupled ensure product consistency and the highest degree of the reliability.
The following construction features ensure the highest reliability in extreme environments:

- All welded relay construction
- Cleaning and sealing techniques ensures maximum internal cleanliness
- Low level to 2 amperes switching
- 2 form C, DPDT contacts, special metal alloy with gold plating
- Frame, armature designs and force / mass ratio provides exceptional immunity to shock and vibration.

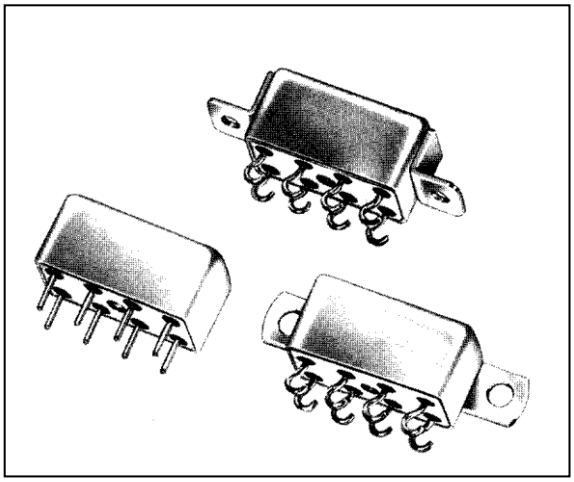

Series Type

- **2K** 2 form C, DPDT


Environmental and Physical Specifications

Temperature (Ambient)	- 65°C to + 125°C
Shock	100 g, 6 ms.
Vibration (sinusoidal)	20 g, 10 to 2000 Hz
Acceleration	50 g
Sealing	All welded, Hermetic
Weight	0,35 oz. (10,0 grams) max.

Electrical Characteristics (over the Temperature range. Unless otherwise noted)

Coil Data	See Typical Characteristics chart		
Contact Rating	**Type Load**	**Contact Load**	**Cycles min.**
(Note: All ratings with grounded case)	Low Level	10 mA / 30 mV	1.000.000
	Resistive	2 A / 28 Vdc	100.000
		1 A / 115Vac, 400 Hz	100.000
		0,3 A / 115 Vac, 60 Hz	100.000
	Overload	4 A / 28 Vdc	100
	Inductive	0,75 A / 28 Vdc (200 mH)	100.000
Contact Resistance	0,05 Ω max. initial		
Operate Time	4,0 ms. max. at 25°C		
Release Time	2,0 ms. max. at 25°C		
Contact Bounce	3,0 ms. max. at 25°C		
Dielectric Strength	1.000 Vrms min., 60 Hz, all points, 500 Vrms min. between open contacts and coil to case, at sea level		
Insulation Resistance	1.000 MΩ min. all points at 500 Vdc		
Intercontact Capacitance	2,5 pF between contacts		
Sensitivity	250 mW at pick-up, 660 mW typical at nominal rated coil voltage, at 25 °C		

Figure 1 - Operate & Release Time curves vs. Applied Voltage

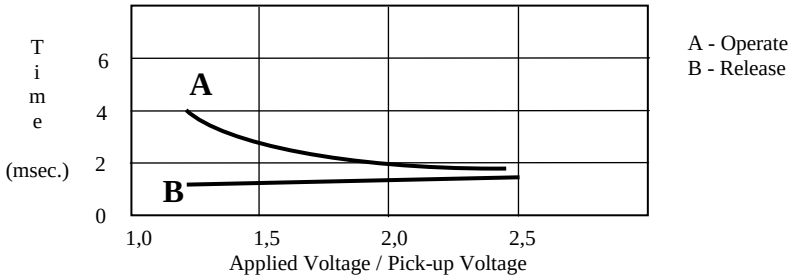

Note:
Typical characteristics are based on factory knowledge. Test to ensure compliance, are not performed.

HALF SIZE CRYSTAL CAN RELAY
2 AMPERE DPDT


Series 2K

Typical Characteristics


Voltage Code	Coil Voltage		Coil Resistance ± 10% at 25°C	Pick-up Vdc Max. at 25°C	Drop-out Vdc Min. at 25°C
	Nominal	Max.			
105	5,0	6,0	39	3,7	0,3
106	6,0	7,2	40	3,3	0,35
109	9,0	10,8	78	4,5	0,45
112	12,0	14,4	160	6,5	0,75
114	14,0	16,8	300	8,5	0,9
118	18,0	21,5	530	11,4	1,2
124	24,0	29,0	870	17,5	1,4
126	26,5	32,0	700	13,5	1,5
136	36,0	43,0	1960	26,0	2,2
148	48,0	57,0	2500	25,0	2,5

Terminal Styles


1
Solder Lug



2
Plug in




4
Wire Lead




Note:
- Dimensions are shown in inches (millimetres)
- Terminal spacing is .200 (5,08). Terminal diameter is .030 (0,76) + .003 (0,08) - .002 (0,05)

Schematic Diagram



Note:
- Schematics are viewed from terminals


Mounting Styles

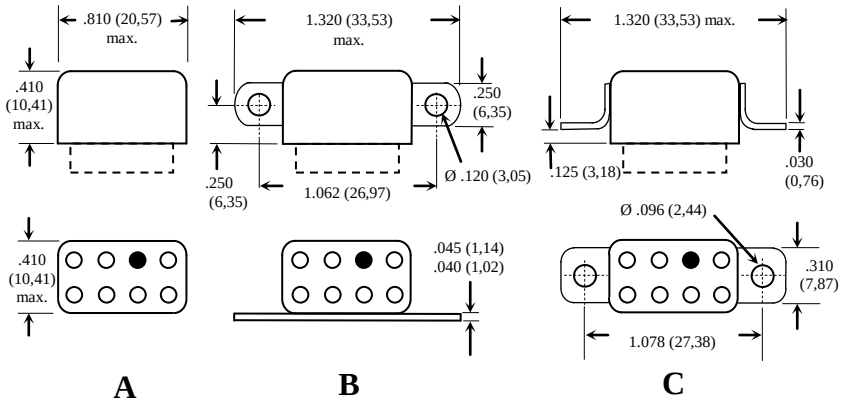

Note:
- Dimensions are shown in inches (millimetres)

Insulating Pad

Relays can be supplied with a insulating pad epoxied to the relay header, to prevent the possible shorting of printed circuit board land lines and to facilitate circuit board cleaning. To order relay with pad add. "**P**" to Part Number. Example: **2K-2A-126 P**

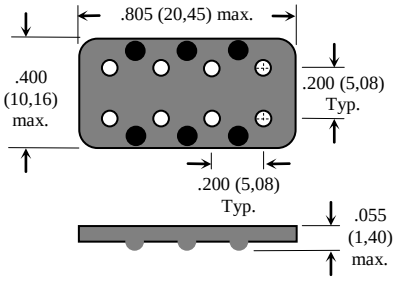

Note:
-Dimensions are shown in inches (millimetres)

How to Order (Part Numbering System)

2K - 2 A - 126 P

- Series
- Terminal Style
- Mounting Style
- Voltage Code
- Insulating Pad (optional)

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP