

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

Honeywell

Model SC1000/SC2000



Transducer Display and Signal Conditioning Unit

DESCRIPTION

The SC series models are self-calibrating microprocessor-based transducer signal conditioners when used with sig mod equipped transducers. Indicators are available with several different types of input channels and output channels. When used with unamplified strain gage transducers that have the signature calibration module installed, these instruments will completely self calibrate zero, span, decimal point, and engineering units automatically.

Input channels are available for a variety of transducers. Each input channel includes an excitation power supply and either an isolated voltage or isolated current analog output.

- Unamplified pressure or load
- Pressure or load with internal voltage amplifiers
- Pressure or load with internal or external two-wire current amplifiers
- ac/ac displacement transducer
- dc/dc displacement transducer
- RTD temperature probes (Pt100)

FEATURES

- One to four channels
- ±6 digit display
- “Sig cal” auto setup
- Up to 800 Hz frequency response, field selectable
- Pressure, load, displacement transducer, voltage, current, strain gage based sensor input
- Alarm outputs
- CE approved

Available output channels for the SC2000 include:

- Contact relays for the four standard limits or additional limits (max. 16 limits/chassis)
- Isolated digital-to-analog voltage (±5 Vdc or 0 Vdc to 10 Vdc) or current (4 mA to 20 mA)

In addition to the physical input and output channels, up to seven virtual channels can be configured to assist in many potential applications.

Four channel chassis

The models SC1000 and SC2000 can hold up to four physical channels in their 3/8 DIN Aluminum bench-top chassis. A bright, dual-line 16-character display can display 5, 6 or 7 numeric digits; simply press a button to select the next channel to be viewed. If configured for split-screen operation, up to four channel values can be displayed at the same time. The SC2000 includes four open collector limit (alarm) outputs plus peak and valley detection.

Model SC1000/SC2000

GENERAL SPECIFICATIONS

Characteristic	Measure
Model	SC1000/SC2000
Number of physical channels	1 to 4
Number of virtual channels	1 to 7
Case material	Aluminum
Form factor	3/8 DIN
Mounting	Bench (standard)
Size (W x H x D)	142,24 mm x 71,12 mm x 222,25 mm [5.6 in x 2.8 in x 8.75 in]
Weight	1,81 kg [4 lb]

DISPLAY SPECIFICATIONS

Characteristic	Measure
Number of displays	1
Number of lines/display	2
Number of characters/line	16
Scaling	Automatic or manual setup
Max. display count	9999999
Decimal point selection	0 to 5
Display type	Vacuum/Fluorescent

ENVIRONMENTAL SPECIFICATIONS

Characteristic	Measure
Temperature, storage	-29 °C to 93 °C [-20 °F to 200 °F]
Temperature, operating	4 °C to 41 °C [40 °F to 105 °F]

SPECIAL FEATURES (SC2000 ONLY) SPECIFICATIONS

Characteristic	Measure
Limits setup	Front panel
Limits output, standard	Open-collector
Limits output, relay output channel	Contact relays
Limits quantity	4 std., 16 max. (contact relays)
Peak/valley hold on input channels	Yes
Digital, isolated control inputs	4
Approvals	CE approved (except vehicle powered unit)
Interfaces	Signature calibration

COMMUNICATIONS SPECIFICATIONS

Characteristic	Measure
Serial setup and output	RS-232/RS-485
Isolation	500 V
Max. baud rate	38400

POWER SPECIFICATIONS

Characteristic	Measure
Standard ac powered	100 Vac to 230 Vac, 47 Hz to 63 Hz
Excitation drive	120 mA max.

Not RoHS compliant

INPUT AMPLIFIER CARDS

All input cards include non-isolated, open collector control inputs that can be field configured for any one of the following functions: 1) track hold, 2) peak/valley hold, 3) tare on, and 4) tare off.

Input	Strain gage millivolts	High level volts/mA	RTD millivolts	ac/ac displacement transducer
Transducer type	Unamplified sensors	Amplified pressure or load, dc/dc displacement transducer	Platinum 100 ohm, alpha = 0.00385	ac/ac displacement transducer
Ranges*	0.5 mV/V to 11 mV/V @ 5 V 0.5 mV/V to 5.5 mV/V @ 10 V	±5 Vdc or ±10 Vdc, 4 mA to 20 mA	-200 °C to 800 °C [-328 °F to 1472 °F]	0.1 VRMS to 15 VRMS
Frequency response	See table below	See table below	See table below	See table below
Resolution	See table below	See table below	See table below	See table below
Calibration type	Shunt; mV/V; 2-, 3-, or 5-point known load	Shunt; 2-, 3-, or 5-point known load	2-, 3-, or 5-point known load	2-, 3-, or 5-point known load
Transducer excitation	5 Vdc or 10 Vdc with sense	±15 Vdc, 28 Vdc, or 12 Vdc	10 Vdc	3 Vac @ 3 kHz
Push button 100 % tare	Yes	Yes	N/A	Yes
Push button shunt test	Yes	Yes	N/A	Yes


* Ranges are field programmable, except for RTD input

OUTPUT

Output	Strain gage millivolts	High level volts/mA	RTD millivolts	ac/ac displacement transducer
Voltage range (field selectable)	5 Vdc, ±5 Vdc, 10 Vdc, ±10 Vdc	5 Vdc, ±5 Vdc, 10 Vdc, ±10 Vdc	5 Vdc, ±5 Vdc, 10 Vdc, ±10 Vdc	5 Vdc, ±5 Vdc, 10 Vdc, ±10 Vdc
Current range	4 mA to 20 mA	4 mA to 20 mA	4 mA to 20 mA	4 mA to 20 mA
Source	Any channel	Any channel	Any channel	Any channel
Isolation	500 V	500 V	500 V	500 V
Resolution	13 bits	13 bits	13 bits	13 bits
Frequency response	Same as input	Same as input	Same as input	Same as input


		Resolution (counts) (not including min. 10 % overrange/underrange capability)		
Frequency response (Hz) field selectable	**Step response (ms) typical**	**Strain gage/RTD**	**High level**	**ac/ac displacement transducer**
2 (fast mode)	40	±50000	±50000	±25000
2	440	±50000	±50000	±25000
8	110	±25000	±25000	±15000
16	55	±20000	±25000	±10000
32	28	±10000	±20000	±10000
50	16	±5000	±15000	±5000
100	8	±5000	±10000	±5000
250	3	±2000	±10000	±2000
500	2	±2000	±4000	±2000
800	2	±2000	±2500	±2000

MOUNTING DIMENSIONS AND CHARACTERISTICS

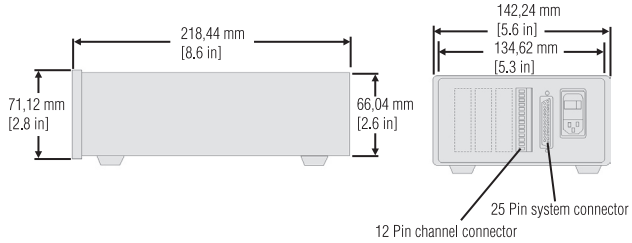


For reference only

TYPICAL SYSTEM DIAGRAM

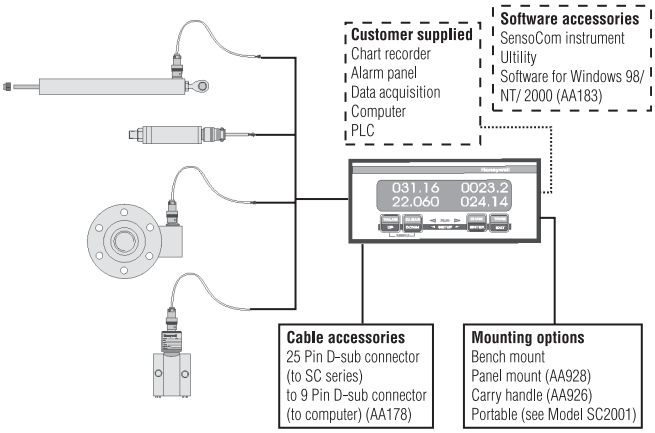


FLEXIBLE AND EXPANDABLE PLATFORM OPTIONS

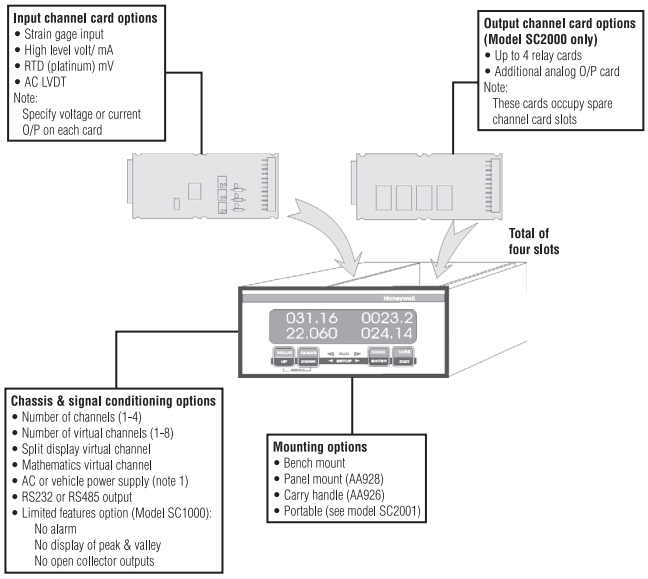

Model SC1000/SC2000


SC2000 CAPABILITIES

Front panel or remote tare

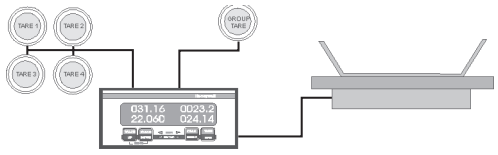


Flexible user setup

Number of channels for display
Calibration data
Serial communications
Number of decimal places

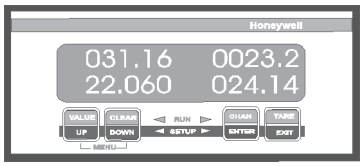


Output voltage
Engineering units
Alarm outputs
Display averaging
Update signature module


mV/V or shunt calibration or five-point calibration

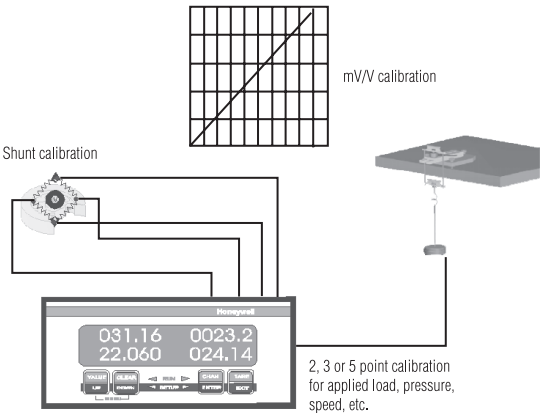

Remote setup

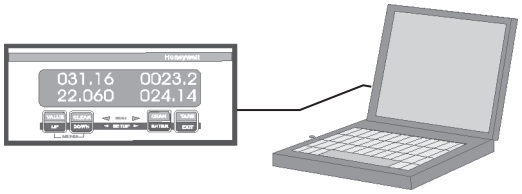


User selectable display options

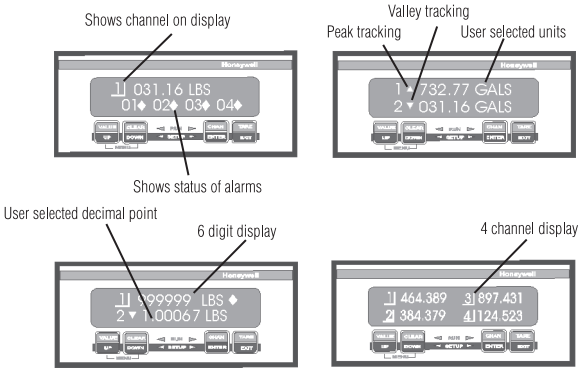


Different alarm configurations

Alarm on when setpoint exceeded and until return point is reached

Alarm on when below setpoint and until return point is reached

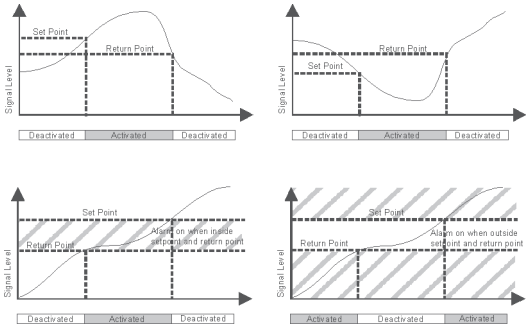

User selectable filtering

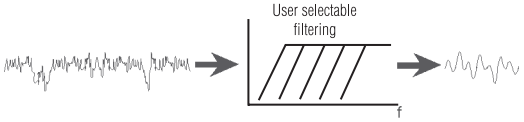


Frequency Response (Hz) (field selectable)	Step Response (ms) (typical)	Resolution (counts) (not including minimum 10% overrange/underrange capability) Strain Gage/RTD	High Level	AC-AC LVDT
2 (fast rate)	40	-50000	-50000	-25000
2	440	-50000	-50000	-25000
8	110	-25000	-25000	-15000
16	55	-20000	-25000	-10000
32	28	-10000	-20000	-10000
50	16	-5000	-15000	-5000
100	8	-5000	-10000	-5000
250	3	-2000	-10000	-2000
500	2	-2000	-4000	-2000
800	2	-2000	-2500	-2000

Group and individual channel remote inputs


System remote
Switch inputs:
- Peak/ valley clear
- Tare on
- Tare off

Channel specific remote commands;
Each channel can have any two:
- Track hold
- Peak/ valley hold
- Peak/ valley clear
- Tare on
- Tare off

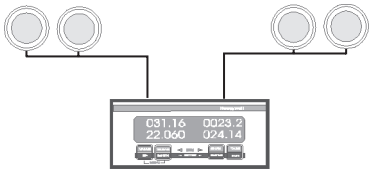


SC2000 CAPABILITIES

Open collector alarms or via optional four-relay cards

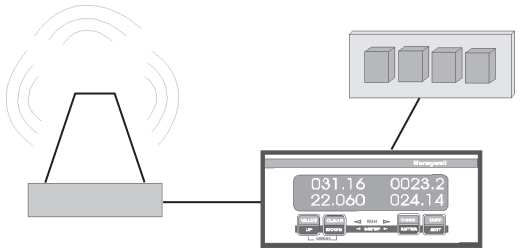


Optional math channel can act like PLC

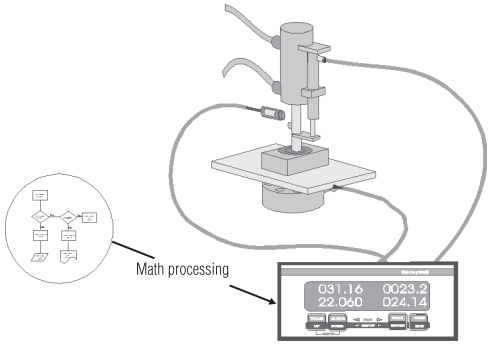


Sig cal auto setup

Auto set up
Retrieves calibration data
Sets up the correct
engineering units
Sets the specific range
Sets up the correct calibration
Scales analog output

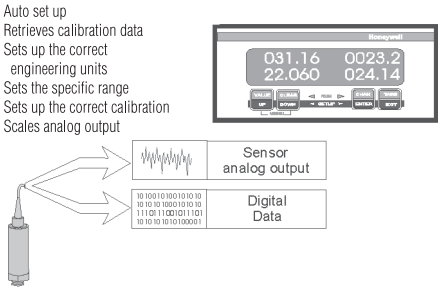

Analog and digital outputs

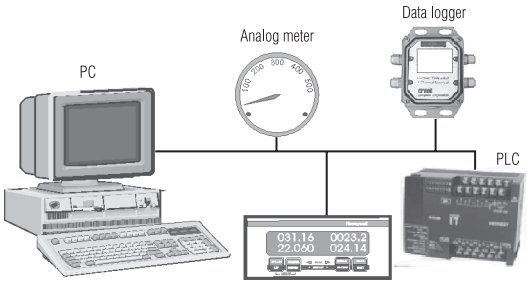

Model SC1000/SC2000 Transducer Display and Signal Conditioning Unit

Warranty. Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

For more information about Sensing and Control products, visit www.honeywell.com/sensing or call +1-815-235-6847
Email inquiries to info.sc@honeywell.com

⚠ WARNING
PERSONAL INJURY

- DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

⚠ WARNING
MISUSE OF DOCUMENTATION

- The information presented in this catalogue is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

Sensing and Control
Automation and Control Solutions
Honeywell
1985 Douglas Drive North
Golden Valley, MN 55422 USA
+1-815-235-6847
www.honeywell.com/sensing

Honeywell

008826-1-EN IL50 GLO
June 2008
Copyright © 2008 Honeywell International Inc. All rights reserved.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP