

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

Honeywell

Model TJE

Precision Gage/Absolute Pressure Transducer



DESCRIPTION

Model TJE pressure transducers are all-welded stainless steel sensors built for rugged industrial applications that require high accuracy and measurement stability. The Model TJE is available with a variety of options for extended temperature operation, electrical terminations and high-level outputs including 5 Vdc or 10 Vdc and 4 mA to 20 mA. Most high-level output models have internal shunt calibration circuits as a standard feature to allow easy set-up of the sensor to the data system. An optional internal signature calibration chip provides calibration information for automatic set up with the Model SC four-or-twelve channel digital indicator.

The gage Model TJE is a strain gage based transducer and features a unique “true gage” design which utilizes a second welded stainless steel diaphragm that hermetically seals the strain gage circuitry from atmospheric contamination. This design references the primary pressure sensing diaphragm to the atmosphere, and provides a stable zero regardless of the transducer environment.

The absolute Model TJE has an all-welded vacuum reference chamber assuring long-term stability.

FEATURES

- 0.1 % accuracy
- 0.0025 % F.S./°F temperature effect
- 1 psig/a to 60000 psig/a range
- mV/V, 4 mA to 20 mA, 0 Vdc to 5 Vdc, or 0 Vdc to 10 Vdc output
- All-welded, stainless steel construction
- Intrinsically safe available (2N option only)[18]
- CE[19]

Model TJE

PERFORMANCE SPECIFICATIONS

Characteristic	Measure
Accuracy[1]	±0.10 % full scale
Linearity	±0.10 % full scale
Hysteresis	±0.05 % full scale
Media	All gases/liquids compatible with wetted parts
Resolution	Infinite
Calibration	5-point calibration: 0 %, 50 %, and 100 % of full scale

ENVIRONMENTAL SPECIFICATIONS

Characteristic	Measure
Temperature compensated	15 °C to 71 °C [60 °F to 160 °F]
Temperature effect, zero	0.0025 % full scale/°F
Temperature effect, span	0.0025 % reading/°F
Sealing	Hermetically sealed IP68/NEMA 6P


ELECTRICAL SPECIFICATIONS


Characteristic	Measure
Strain gage type	Bonded foil
Insulation resistance	5000 mOhm @ 50 Vdc
Bridge resistance	350 ohm
Shunt calibration data	Included
Electrical termination (std)	PTIH-10-6P or equiv. (hermetic stainless)
Mating connector (not incl)	PT06A-10-6S or equiv. (AA111)

MECHANICAL SPECIFICATIONS

Characteristic	Measure
Wetted parts material	number here
< 2000 psig/a	17-4 PH stainless steel
> 2000 psig/a	15-5 PH stainless steel
Weight	10 oz
Case material	304 stainless steel
Marking	Permanent metal name plate MIL-STD130F 4.3; Individual sequential serial number per sensor; Country of origin and date of manufacture


MOUNTING DIAGRAM AND CHARACTERISTICS

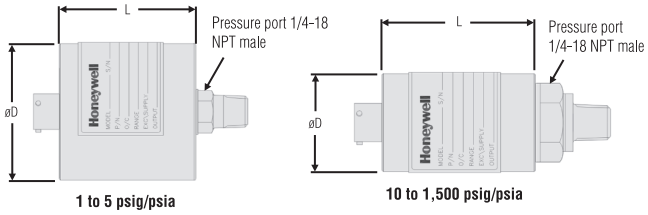

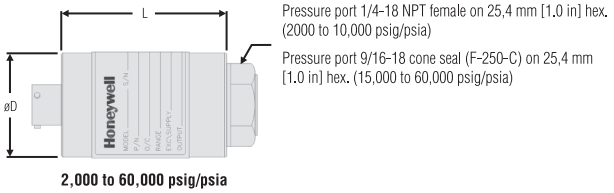

For reference only

TYPICAL SYSTEM DIAGRAM

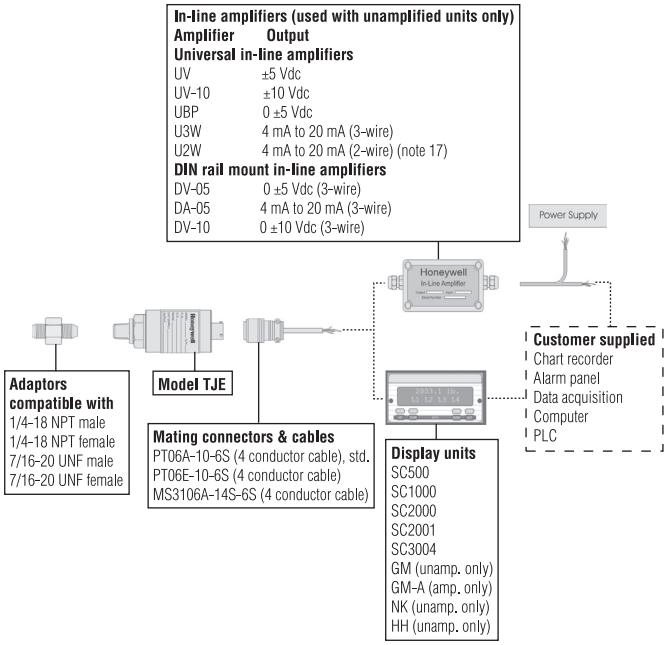

SPECIAL REQUIREMENTS (CONSULT FACTORY)

Have a special requirement? New case pressure, different cable lengths, electrical connectors, or materials? Consult our factory by calling +1 614-850-5000 (800-848-6564). Customization is key to our test and measurement business. Special outputs, wiring codes, and calibrations are all standard to us.

RANGE CODES

Pressure range (psi)	1	2	5	10	15	25	50	75	100	150	200	300	500	750	1000	1500
RANGE CODE	**AP**	**AR**	**AT**	**AV**	**BJ**	**BL**	**BN**	**BP**	**BR**	**CJ**	**CL**	**CP**	**CR**	**CT**	**CV**	**DJ**
D mm [in] psia	57 [2.25]			38 [1.50]												
D mm [in] psig	57 [2.25]			45 [1.75]		38 [1.50]										
L mm [in] psia	65 [2.54]			60 [2.35]												
L* mm [in] psia	96 [3.79]			91 [3.60]												
L mm [in] psig	46 [1.81]			51 [2.00]		51 [2.02]										
L* mm [in] psig	78 [3.06]			83 [3.25]		83 [3.27]										
Over pressure (test) (psi)	150 % full scale			150 % full scale												
Over pressure (burst) (psi)	50			100		200		400		800		2 k		3 k	3.5 k	4 k
Port volume cm³ [in³]	5,2 [0.32]			4,1 [0.25]			2,8 [0.17]									
Natural frequency (Hz)	500	550	1000	1.3 k	2.1 k	2.5 k	2.9 k	3.5 k	4.6 k	6 k	7 k	9 k	9.5 k	12 k	17 k	20 k

Pressure range (psi)	2000	3000	5000	7500	10000	15000	20000	30000	50000	60000
RANGE CODE	**DL**	**DN**	**DR**	**DT**	**DV**	**EJ**	**EL**	**EN**	**EP**	**ES**
D mm [in] psia	38 [1.50]					38 [1.50]				
L mm [in] psia	48 [1.90]					56 [2.21]				
L* mm [in] psia	80 [3.15]					89 [3.46]				
Over pressure (test) (psi)	150 % full scale					Consult factory				
Over pressure (burst) (psi)	8 k	12 k	20 k	25 k	25 k	40 k	45 k	60 k	80 k	80 k
Port volume cm³ [in³]	3,1 [0.12]					1,5 [0.06]				
Natural frequency (Hz)	35 k	40 k	54 k	60 k	80 k	100 k	>100 k	>100 k	>100 k	>100 k

* Length of pressure transducer with amplified option (see option codes)

** 0.5 psi is available for gage only

Model TJE

OPTION CODES

Range Code	Many range/option combinations are available in our quick-ship and fast-track manufacture programs. Please see http://sensing.honeywell.com/TMsensor-ship for updated listings.		
Pressure ranges	1, 2, 5, 10, 15, 25, 50, 75, 100, 150, 200 300, 750, 1500, 2000, 15000, 20000, 30000, 50000, 60000 psig/a 500, 1000, 3000, 5000, 7500, 10000 psia 500, 1000, 3000, 5000, 7500, 10000 psig		
Temperature compensation	1a. 60 °F to 160 °F 1b. 30 °F to 130 °F 1c. 0 °F to 185 °F 1d. -20 °F to 130 °F 1e. -20 °F to 200 °F	1f. 70 °F to 250 °F [11] 1g. 70 °F to 325 °F [11] 1h. 70 °F to 400 °F [11] 1i. -65 °F to 250 °F [11]	
Internal amplifiers [10]	2a. 0 Vdc to 5 Vdc (four wire) output[15] 2c. 0-5 Vdc output[15] 2j. 4 mA to 20 mA (three wire) output 2k. 4 mA to 20 mA (two wire) output[8, 17]	2n. 4 mA to 20 mA (two wire) intrinsically safe[8, 17] 2t. 0 Vdc to 10 Vdc output 2u. Unamp., mV/V output	
Internal amplifier enhancements	3a. Input/output isolation[15] 3d. Remote buffered shunt calibration		
Pressure ports[9]	5a. 1/4-18 NPT female (3000 psig to 10000 psig) 5b. 1/4-18 NPT male (15 psig/a to 10000 psig/a) 5c. 7/16-20 UNF female (per MS33649-4)	5d. 7/16-20 UNF male 5g. G 1/4 male	
Electrical termination	6a. Bendix PTIH-10-6P (or equiv), 6 pin (max 250 °F) 6b. MS type connector to mate with MS3106-14S 6S (max 160 °F)[13] 6e. Integral cable: Teflon (0 °F to 180 °F) 6f. Integral cable: PVC (-20 °F to 160 °F)	6g. Integral cable: Neoprene (0 °F to 180 °F) 6h. Integral cable: Silicone (-65 °F to 300 °F) 6i. Integral underwater cable (max 180 °F) 6j. 1/2-14 conduit fitting with 5 ft of 4 conductor PVC cable	6m. DIN 43650 6q. Molded integral cable: Polyurethane (max 180 °F) 6t. Integral cable with Heyco spring strain relief (5 ft)
Shunt calibration	8a. Precision internal resistor[11]		
Special calibration[9]	9a. 10 point (5 up/5 down) 20 % increments @ 70 °F (gage) 9b. 20 point (10 up/10 down) 10 % increments @ 70 °F (gage)		
Wetted diaphragm[9]	10a. 316 stainless steel[9] 10b. Crucible A-286	10c. Hastelloy-C 10d. Monel K-500	
Bridge resistance[9]	12a. 1000 ohm (foil) (max 400 °F) 12b. 5000 ohm (foil) (max 400 °F)		
Zero and span adjustment	14a. No access to pots 14b. Top access to pots		
Shock and vibration	44a. Shock and vibration resistance		
Interfaces	53e. Signature calibration[11] 53t. TEDS IEEE1451.4 module[16]		

iNTERNAL AMPLIFIERS

Amplifier specifications	mV/V output standard	Voltage output: Option 2a[4]	Vehicle voltage output: Option 2c[4]	Vehicle voltage output: Option 2t[4]	Current three-wire: Option 2j[4]	Current two-wire: Option 2k[4]	Intrinsically safe amp: Option 2N (2n)
Output signal	3 mV/V [2]	0 Vdc to 5 Vdc	0-5 Vdc or ±5 Vdc @ 5 mA	0-10 Vdc or ±10 Vdc @ 5 mA	4 mA to 20 mA	4 mA to 20 mA	4 mA to 20 mA
Input power (voltage)	10 Vdc regulated	±15 Vdc or 26-32 Vdc	11 Vdc to 28 Vdc	15 Vdc to 28 Vdc	22 Vdc to 32 Vdc[3]	9 Vdc to 32 Vdc[3]	9 Vdc to 28 Vdc[3]
Input power (current)	28.5 mA @ 10 Vdc	45 mA	40 mA	40 mA	65 mA	4 mA to 28 mA	4 mA to 24 mA
Freq. resp (amp)	Natural frequency	2000 Hz	3000 Hz	3000 Hz	2500 Hz	2500 Hz	2000 Hz
Power supply rej.	NA	60 db	60 db	60 db	60 db	60 db	60 db
Operating temp.	-73 °C to 121 °C [-100 °F to 250 °F]	-28 °C to 85 °C [-20 °F to 185 °F]	-40 °C to 93 °C [-40 °F to 200 °F]	-40 °C to 85 °C [-40 °F to 185 °F]	-40 °C to 85 °C [-40 °F to 185 °F]	-40 °C to 85 °C [-40 °F to 185 °F]	-28 °C to 85 °C [-20 °F to 185 °F]
Reverse volt. prot.	NA	Yes	Yes	Yes	Yes	Yes	Yes
Short cir. protection	NA	Momentary	Momentary	Momentary	Yes	Yes	Yes
Wiring code: connector (std)[5]	A (+) Excitation B (+) Excitation C (-) Excitation D (-) Excitation E (-) Output F (+) Output	A (+) Supply B Output com. C Supply ret. D (+) Output E Shunt Cal 1 F Shunt Cal 2	A (+) Supply B Output com ** C Supply ret ** D (+) Output E Shunt Cal 1 F Shunt Cal 2	A (+) Supply B Output com ** C Supply ret ** D (+) Output E Shunt Cal 1 F Shunt Cal 2	A (+) Supply B Output com ** C Supply ret ** D (+) Output E Shunt Cal 1 F Shunt Cal 2	A (+) Supply B No conn. C No conn. D (+) Output E Case ground F No conn.	A (+) Supply B No conn. C No conn. D (+) Output E Case ground F No conn.
Wiring code: cable[5,6,7]	R (+) Excitation Bl (-) Excitation G (-) Output W (+) Output	R (+) Supply Bl Output com. G Supply ret. W (+) Output B Shunt Cal 1 Br Shunt Cal 2	R (+) Supply Bl Output com* G Supply ret.* W (+) Output B Shunt Cal 1 Br Shunt Cal 2	R (+) Supply Bl Output com* G Supply ret.* W (+) Output B Shunt Cal 1 Br Shunt Cal 2	R (+) Supply Bl Output com* G Supply ret.* W (+) Output B Shunt Cal 1 Br Shunt Cal 2	R (+) Supply Bl (+) Output W Case ground	R (+) Supply Bl (+) Output W Case ground
For current information		Reference application sheet #008-0356-00	Reference application sheet #008-0357-00	Reference application sheet #008-0360-00	Reference application sheet #008-0361-00	Reference application sheet #008-0361-60	See Honeywell Web site for info on intrinsically safe approvals. #008-0547-00

* Black and green wires are internally connected. • ** Pins B and C are internally connected.

Model TJE

Precision Gage/Absolute Pressure Transducer

NOTES

1. Accuracies stated are expected for best fit straight line for all errors including linearity, hysteresis & non-repeatability thru zero.
2. Output for 0.5 psig/a, 1 psig/a, 2 psig/a units is 1 mV/V to 2 mV/V.
3. Input power (voltage) for internal amplifier options 2j, 2k, 2n(2N) depends on load resistance.
4. CE mark requires options 6a & 3d.
5. Interconnecting shunt cal. 1 with shunt cal. 2 terminal provides 50 % (unamplified units), 75% (4 mA to 20 mA three-wire units), or 80 % (voltage amp. units) of full scale output for quick calibration. Shunt calibration comes standard with internal amplifier options 2a, 2b, 2c, 2t and 2j.
6. G=Green; B=Blue; W=White; Bl=Black; Br=Brown; Y=Yellow; R=Red; O=Orange. Color specifying cable and number or letter specifying connector.
7. No mating connector necessary with cable option.
8. Options 2k, 2n(2N) only available with option 12b.
9. Availability varies according to range.
10. Not available with temperatures below -29 °C [-20 °F] or above 85 °C [185 °F].
11. Cannot be used with amplified option.
12. Gage pressure units greater than 500 psi are sealed at atmospheric pressure.
13. No pot access available with MS type connector.
14. Temperature 82 °C [180 °F] max., non-shielded standard, shielded available.
15. Input/output isolation only available with voltage output (options 2a, 2b, 2c).
16. Consult factory for TEDS availability with amplified models.
17. 5000 ohm bridge required.
18. Range dependent; consult factory. Termination dependent; consult factory.
19. Internal amp and termination dependent; consult factory.

Warranty. Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

For more information about Sensing and Control products, visit www.honeywell.com/sensing or call +1-815-235-6847
Email inquiries to info.sc@honeywell.com

⚠ WARNING

PERSONAL INJURY

- DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

⚠ WARNING

MISUSE OF DOCUMENTATION

- The information presented in this catalogue is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

Sensing and Control
Automation and Control Solutions
Honeywell
1985 Douglas Drive North
Golden Valley, MN 55422 USA
+1-815-235-6847
www.honeywell.com/sensing

Honeywell

008606-1-EN IL50 GLO
May 2008
Copyright © 2008 Honeywell International Inc. All rights reserved.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP