

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Find the *Keysight / Agilent 3562A* at our website: ***Click HERE***

SIGNAL ANALYZERS

Dual-channel, Control Systems Analyzer 64μHz to 100 kHz

HP 3562A

- Network, spectrum, waveform, transient analysis
- Linear, logarithmic, swept sine modes
- 80 dB dynamic range with full alias protection
- High accuracy (±0.15 dB)

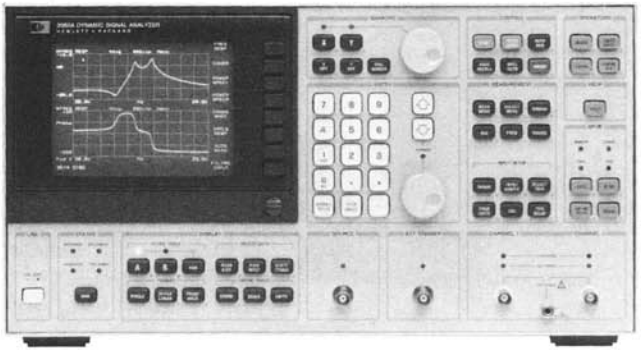

DESIGNED FOR HP-IB SYSTEMS

HP 3562A

HP 3562A Dynamic Signal Analyzer

The HP 3562A dynamic signal analyzer is well suited for design test and analysis of electronics, mechanical systems, and electromechanical control systems. Two input channels, 26.5 μHz-to-100 kHz frequency range, 150 dB measurement range, and 80 dB dynamic range on this FFT-based analyzer offer versatility and performance for even the most difficult network, spectrum, and waveform measurements, in both time and frequency domains.

The two high-performance input channels and a built-in signal source (noise and sine signals) address network analysis needs on the bench or in a test system. Vector averaging, waveform math, 40-pole/40-zero curve fitter, and frequency response synthesis enhance network measurements with a full range of analysis and modeling capabilities. Zoom analysis with frequency resolution to 26.5 μHz plus a powerful AM, FM, and PM demodulation function make the HP 3562A a versatile spectrum analyzer. For transient or waveform analysis, signals can be sampled, digitized, then stored in internal memory, or sent via HP-IB to an external disk drive (without a computer). Stored waveforms can be recalled and analyzed in the time, frequency and amplitude domains (baseband and zoom analysis).

Frequency Response Measurements

You can make accurate, high-resolution frequency response measurements of electronic and mechanical systems with linear resolution FFT, logarithmic resolution and swept sine analysis. A built-in signal source provides a variety of random noise and sine wave signals to meet the requirements of the system under test.

Linear resolution is the measurement technique common to all dynamic signal analyzers. In the HP 3562A, 2048-point time records are Fourier-transformed into 801-line frequency spectra. For network analysis, frequency response magnitude and phase, as well as input and output power spectra, can be measured with 801 lines of resolution. Accuracy for the frequency response magnitude and phase is ±0.1 dB and ±0.5°.

The swept sine mode configures the HP 3562A as a powerful swept sine frequency response analyzer. The source can generate linear or logarithmic sweeps with increasing or decreasing frequency; user-selectable sweep rate and resolution are also standard source functions. Input channel functions include user-selectable averaging and integration time; automatic input ranging can be activated to provide over 140 dB of dynamic range for measurements of high performance systems.

Spectrum Analysis

On-line analysis of distortion, drift, modulation, and phase noise can benefit from the speed and accuracy of the HP 3562A. High resolution measurements are typically 100 times faster than tuned spectrum analyzers. Because the HP 3562A is an FFT-based analyzer, you can see transient events a tuned analyzer would probably miss.

The HP 3562A is essentially a dual-channel spectrum analyzer that provides resolution to 26.5 Hz anywhere within the 64 μHz-to-100 kHz measurement range. Single-channel accuracy is ±0.15 dB with 80 dB of dynamic range. Modulation analysis can be performed on either or both channels with harmonic and sideband markers as well as with the built-in demodulation capability: zoom measurement can be AM, FM, or PM demodulated with carrier frequencies up to 99.9 kHz.

Waveform and Transient Analysis

Perform complete analysis of waveforms and transients in the time and frequency domains. Store sampled and digitized waveforms in internal memory (single-channel time capture) or on disk in an external disk drive (single-or dual-channel time throughput). Recall data for time domain analysis as single time records or as a compressed display of up to 10 time records (time capture mode). Data can also be recalled for baseband and zoom analysis in the frequency domain, with vector averaging if needed.

The array of triggering capabilities enhances both waveform recording modes. Pre- and post-trigger delays can be specified to capture the rising edge of a transient or to compensate for delays in the system under test.

Hardcopy and Mass Storage

When access to prototypes is limited, make your test time more efficient with the time throughput capability; through direct control of external disk drives, the HP 3562A stores time data directly to disk without a computer.

HP-IB is a standard feature to speed and simplify documentation of results with direct control of plotters and disk drives. Anything displayed on the analyzer screen can be plotted or saved on disk: measurement results, setup state table, synthesis tables, curve fit tables, and auto sequence or auto math program listing.

Automation for Improved Productivity

As a stand-alone solution, the analyzer can "learn" a series of keystrokes and then perform them on command (auto sequence programming). Up to five auto sequence programs can be stored internally, with additional programs stored on an external disk drive. For networked HP-IB systems, the HP 3562A provides complete HP-IB programmability. Custom display graphics messages can be created with direct programming of the display, and user-defined softkey menus can be created to simplify interactive testing.

Specifications (HP 3562A, 3563A)

Contact your local HP sales office for more information, including a data sheet with complete specifications.

Frequency

Measurement range: 64 μHz to 100 kHz. Both channels, single- or dual-channel operation.

Resolution: span/800. Both channels, single- or dual-channel operation, linear resolution mode.

Spans	Baseband	Zoom
# of spans	66	64
min span	10.24 mHz	20.48 mHz
max span	100 kHz	100 kHz
time record (sec)	800/span	800/span

Window functions: flat top, hann, uniform, force, exponential, user-defined

Typical real-time bandwidths:

Single-channel, fast averaging 10 kHz

Throughput to CS/80 disk

Single-channel	12.5 kHz
Dual-channel	6.25 kHz

Amplitude

Accuracy: defined as full scale accuracy at any of the calculated frequency points. Overall accuracy for the linear or logarithmic resolution modes is the sum of the absolute accuracy, window flatness and noise level. Overall accuracy for swept sine mode is the sum of absolute accuracy and noise level.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Absolute accuracy: single channel (channel 1 or 2)
±0.15 dB ±0.015% of input range (+27 dBV to −40 dBV)
±0.25 dB ±0.025% of input range (−41 dBV to −51 dBV)
Window flatness:
Flat top +0, −0.01 dB
Hann +0, −1.5 dB
Noise floor: with flat top window, 50Ω source impedance and input set to −51 dBV range
20 Hz to 1 kHz (1 kHz span) < −126 dBV (−134 dBV/ΩHz)
1 kHz to 100 kHz (100 kHz span) < −115 dBV (−144 dBV/ΩHz)
Frequency response channel match:
Analog/analog: input signals at full scale on any pair of ranges, accuracy is ±0.1 dB, ±0.5 degree.
Digital/digital: for simultaneous sampling on channels 1 and 2, accuracy is ±0.1 dB, ±0.5 degree. If sampling is not simultaneous, the HP 3563A can partially correct for skew in the system under test. With skew correction activated, nominal accuracy is ±0.1 dB, ±1.0 degree from 320 mHz to 10 kHz and ±0.1 dB, ±4.0 degrees from 10 kHz to 100kHz.
Mixed analog/digital: With full-scale inputs on both channels, no skew between the analog and digital inputs, 1:1 sampling ratio, and 8 averages, nominal accuracy is ±0.2 dB, ±2.0 degrees from 320 mHz to 20 kHz and ±0.4 dB, ±6.0 degrees from 20 kHz to 100 kHz
Dynamic range: All distortion (intermodulation and harmonic), spurious, and alias products are ≥ 80 dB below full scale input range (16 averages)

Analog input (HP 3563A and 3562A)

Input impedance: 1MΩ ±5% shunted by < 100 pF
Input coupling: inputs can be ac or dc coupled — ac rolloff in <3 dB at 1 Hz
Crosstalk: −140 dB (50Ω source, 50Ω input termination, input connectors shielded)
Common mode rejection:
0 Hz to 66 Hz 80 dB
66 Hz to 500 Hz 65 dB
External sampling input: TTL compatible input for signals ≤ 256 kHz (nominal maximum sampling rate)

Digital input (HP 3563A)

Measurement data signals can be up to 16 bits wide and must be parallel data in two's complement or offset-binary format. (User selects truncation of unused upper bits or rounding of the three lowest bits for data more than 13 bits wide.) The data qualifier input accepts 8 qualifier lines, a trigger, and 1 clock signal.

Trigger

Trigger modes: free run, input channel 1, input channel 2, source and external trigger. Free run applies to all measurement modes. Input channel 1, input channel 2, source and external trigger apply to the linear resolution, time capture, and time throughput measurement modes.
Trigger delay: pre- and post-trigger delay resolution is 1 sample (1/2048 of a time record)
Pre-trigger: a measurement can be based on data that starts from 1 to 4096 samples (1/2048 to 2 time records) before trigger conditions are met
Post-trigger: a measurement is initiated from 1 to 65,536 samples (1/2048 to 32 time records) after the trigger conditions are met

Analog source (HP 3563A and 3562A)

Random noise, burst random, sine chirp, burst chirp, fixed sine, and swept sine are available from the front panel source of the HP 3562A and HP 3563A. The HP 3563A also provides step, pulse, ramp and arbitrary signals from the same front panel source output. Users can select dc offset.
Output impedance: 50Ω (nominal)
Output level: between +10 and −10 Vpeak (ac + dc) into a ≥ 10 kΩ, < 1000 pF load. Maximum current is 20 mA.
ac level: ±5 Vpeak (≥ 10kΩ, < 1000 pF load)
dc offset: ±10 Vpeak in 100 mV steps. Residual offset at 0V offset ≤ 10 mV
Distortion: including subharmonics
26.5 μHz to 10 kHz −55 dB
10 kHz to 100 kHz −40 dB
Pulse: nominally 1 sample wide and bandlimited
Digital source (HP 3563A)
All analog signal types can be output from the digital source connector. Data format is 16-bit parallel in either two's complement or offset binary. Output level is TTL compatible.
Maximum load: 8 LSTTL
Maximum output rate: 256 kHz

General

Specifications apply when AUTO CAL is enabled or within 5°C and 2 hours of last internal calibration
Ambient temperature: 0 to 55C
Relative humidity: ≤ 95% at 40C
Altitude: ≤ 4570 m (15,000 ft)
Storage:
Temperature: −40 to +75C
Altitude: ≤ 15240 m (50,000 ft)
Power: 90-132 V ac, 48 to 66 Hz
198-264 V ac, 48 to 66 Hz
450 VA maximum
Weight: net, 27kg (58lb); shipping, 36kg (79lb)
Size: 222H x 426W x 578mmD (8.75″ x 16.75″ x 22.75″)

Accessories Included

HP 3563A: HP 01650-61607 16-bit probe cable: 3 each
HP 03563-61605 16-bit probe pod: 3 each
HP 03563-61604 8-bit probe cable: 3 each
HP 10347A pattern generator probe lead set: 3 each
HP 5959-0288 grabber (package of 20): 80 each (4 packages)
Pouch for cables and probes
HP 3563A/HP 3562A: getting started guide, operating manual, programming reference

Accessories Available

HP 3563A: HP 10346A 8-Channel TTL tristate buffer pod
HP 01650-63201 termination adapter
HP 3563A/HP 3562A: transit case for one HP 3563A: HP p/n 9211-2663

Ordering Information

	Price
HP 3563A Control Systems Analyzer	$24,900
Opt 907 Front Handle kit	+$77
Opt 908 Rack Mount kit	+$41
Opt 909 Rack Mount and Front Handle kit	+$102
Opt 910 extra Getting Started, Operating, Programming manuals	+$179
Option 915 add Service manual and kit	+$100
Opt 921 PC File Utilities	+$150
Opt 922 delete cables, pods, and pouch	−$1,400
Opt W30 Extended Repair Service. See page 725.	625
HP 3562A Dynamic Signal Analyzer	$19,900
Opt 907 Front Handle kit	+$77
Opt 908 Rack Mount kit	+$41
Opt 909 Rack Mount add Front Handle kit	+$102
Opt 910 Extra Operating manuals	+$179
Opt 914 Delete Service manuals	−$100
Opt W30 Extended Repair Service. See page 725.	+$500

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP