

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Keysight / Agilent 3580A* at our website: ***Click HERE***

SIGNAL ANALYZERS

5 Hz to 50 kHz spectrum analyzer

Model 3580A

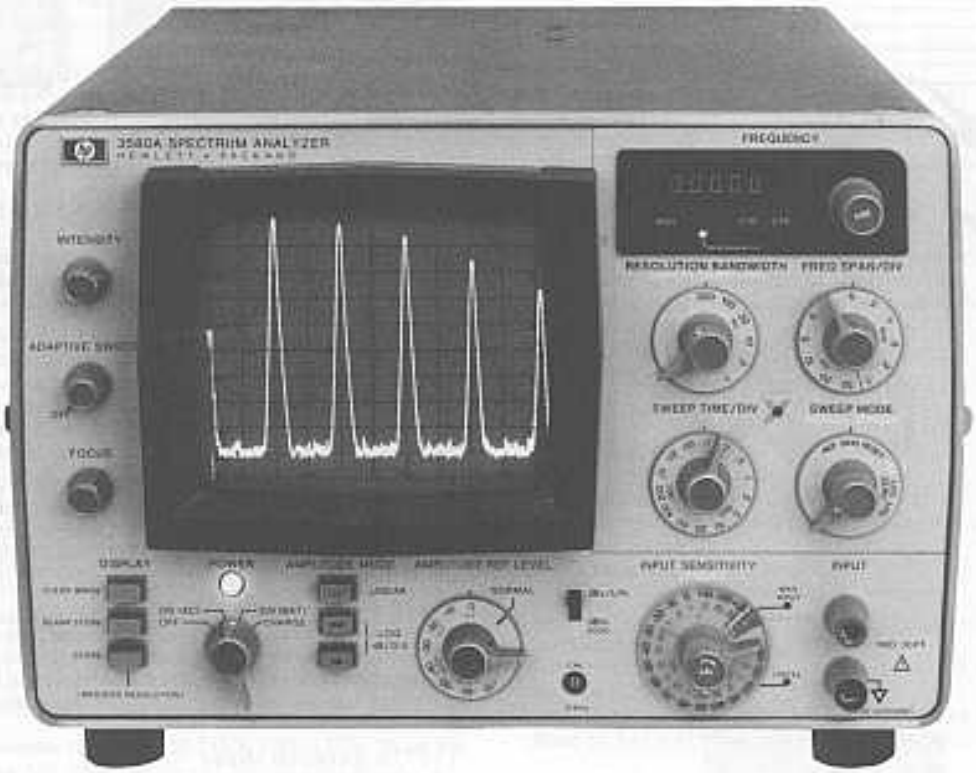

Description


Hewlett Packard's 3580A Spectrum Analyzer is a low frequency high performance analyzer. Its 1 Hz bandwidth allows the user to examine noise and extraneous signal content close in to a signal of interest.

For low frequency applications where sweep speeds can be slow and time-consuming, a special feature, adaptive sweep, allows the user to set a threshold above which only the spectra of interest are observed. In this mode, the CRT is rapidly swept. When a signal is encountered, the sweep slows down to reproduce full response. A factor of ten speed gain is possible.

Digital storage is another important feature which enhances the display for slowly swept low frequency signals. The analyzed signals are digitized and stored in memory. Trace information is then read from memory at a rate appropriate for obtaining an analog-like display.


Digital Storage for Spectra Comparison

Digital storage makes it possible to store one or two traces. When two are stored, both may be simultaneously displayed for easy comparison as shown below.




Adaptive Sweep

A tremendous savings in sweep time can be achieved by using adaptive sweep. In the left trace below, over 80 dB of dynamic range is used to look at low level signals and noise. Two hundred seconds were required to make the sweep. In the right trace, the baseline is raised to give 50 dB of dynamic range. Noise and other responses are not analyzed so the sweep now takes only 14 seconds.

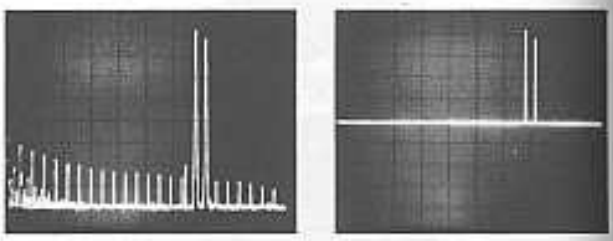

1 Hz Bandwidth

When using a 1 Hz bandwidth 60 Hz line related spectra are clearly exposed as shown in the left trace. An analysis of the same signal with a 10 Hz bandwidth will not resolve the line related spectra as shown on the right.

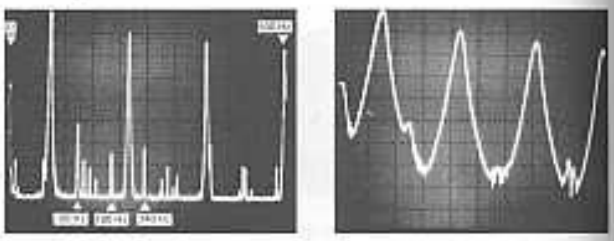

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com




Digital Frequency Display

This display provides 1 Hz resolution for setting analysis range and for determining tuned frequency. In the automatic sweep modes, the sweep start or center frequency is displayed. In the manual sweep mode, actual tuned frequency is indicated. This mode effectively provides a cursor function for easy and accurate determination of the frequency at any point on the screen.

Internal Calibration Signal

A 10 kHz pulse derived from a crystal can be used to compensate for internal errors. A 10 kHz calibration potentiometer is provided so the 10 kHz fundamental can be adjusted to fall on the top line of the display. With this feature, operation and calibration can be verified for most of the instrument.



Specifications

Frequency Characteristics

Range: 5 Hz to 50 kHz.
Digital Frequency Display:
Resolution: 1 Hz
Accuracy: ±3.5 Hz, 0 to 55°C.
Typical stability: ±10 Hz/hr after 1 hour; ±5Hz/°C.

Bandwidths (accuracy ±15%)	1 Hz (25°C±5°C)	3 Hz	10 Hz	30 Hz	100 Hz	300Hz
Shape factor:	10					8

Out of range blank: if controls are set so portions of displayed signal lie below 0 Hz or above 50 kHz, the baseline is displayed.

Amplitude Characteristics

Overall instrument range:
Linear: 20 V –100 nV full scale
Log: +30 dBm or dB V;
–150 dBm or dB V

Amplitude accuracy:	Log	Linear
Frequency response:		
20 Hz–20 kHz	±.3 dB	±3%
5 Hz–50 kHz	±.5 dB	±5%
Switching between bandwidths (25°C):		
3 Hz–300 Hz	±.5 dB	±5%
1 Hz–300 Hz	±1 dB	±10%
Amplitude display	±2 dB	±2%
Input attenuator	±.3 dB	±3%
Amplitude reference level: (IF attenuator)		
Most sensitive range	±1 dB	±10%
All other ranges	±1 dB	±3%

Dynamic range: 80 dB
IF feedthru: input level >10V, –60 dB; <10V, –70 dB.
Spurious responses: >80 dB below input reference level.
Smoothing: 3 positions, rolloff is a function of bandwidth.
Overload indicator: this LED indicator warns of possible input amplifier overloading. Without this indication it would be possible to introduce spurious responses without knowing it.

Sweep Characteristics

Scan width: 50 Hz to 50 kHz.
Log sweep: 20 Hz to 43 kHz ±20% after 3 sweeps.
Sweep times: .1 sec to 2000 sec.
Rep: Repetitive sweeps over the specified band.
Reset: Resets to the beginning of the sweep–used to adjust start or center frequency.
Manual: in combination with the concentric knob, manual sweep fully duplicates the span of the electronic sweep.
Adaptive sweep: when in adaptive sweep below the threshold level, scan speed is 20 to 25 times faster. Threshold is adjustable to cover 0–60% of screen. Signals greater than about 6 dB above threshold are detected and swept slowly.
Sweep error light: this LED indicates a sweep that is too fast to capture full response. When the light is on, response can be >5% lower than it should.
Zero scan: to look at the time varying signal at the center or start frequency within the bandwidth selected, the zero scan is used.

Output Characteristics

Tracking generator output: (also known as BFO or tracking oscillator output).
Range: 0 to 1 V rms into 600Ω.
Frequency response: ±3%, 5 Hz to 50 kHz.
Impedance: 600Ω.
Total harmonic and spurious content: 40 dB below 1 volt signal level.
X-Y recorder analog outputs
Vertical: 0 to +5 V ±2.5%.
Horizontal: 0 to +5 V ±2.5%.
Impedance: 1 kΩ.
Pen lift: contact closure to ground during sweep.
Size: 203.2 mm H x 412.8 mm W x 285.8 mm D (8" x 16¼" x 11¼").
Weight: net, 12.25 kg (27 lb); 3580A Opt 001: net, 15.88 kg (35 lb).
Temperature range: 0°C to 55°C.
Power: 100 V, 120 V, 220 V, or 240 V +5% –10%, 48 to 440 Hz, 35 VA max.
Opt 001 battery: 5 hours from full charge. 14 hours to fully recharge. The internal battery is protected from deep discharge by an automatic turn off. Useful life of batteries is over 100 cycles.

Ordering Information

	Price
Opt 001: internal rechargeable battery	add $450
Opt 002: balanced input	add $135
3580A Spectrum Analyzer	$5300

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP