



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation


**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)



# LOW VOLTAGE RACK SUPPLIES

## LVR Series

### Models 6256B - 6274A

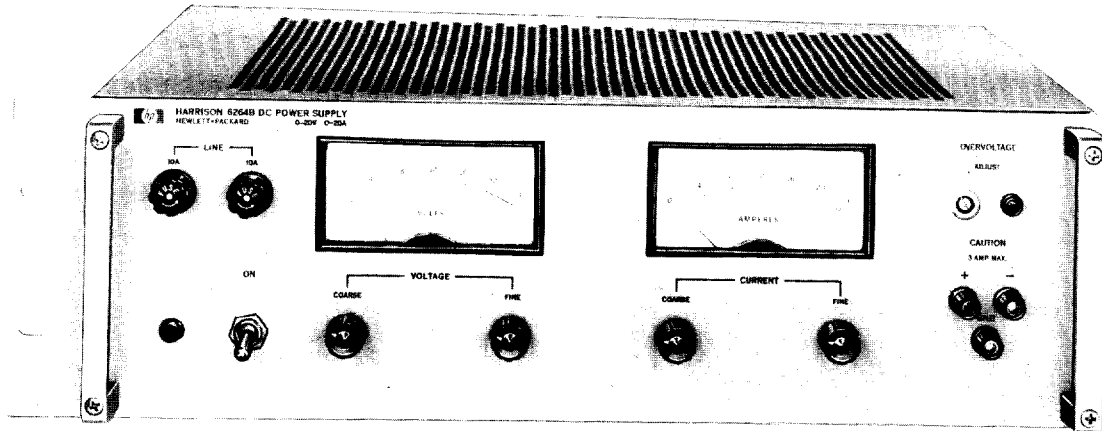

Model 6264B

NOTE: Chief difference in "A" model appearance is absence of crowbar adjust; crowbars are optional on "A" models.

Model	6256B	6259B	6260A	6263B	6264B
DC output	0-10 volts @ 0-20 amps	0-10 volts @ 0-50 amps	0-10 volts @ 0-100 amps	0-20 volts @ 0-10 amps	0-20 volts @ 0-20 amps
AC input	115 ±10% V ac 57-63 Hz 5 A, 375 W	115 ±10% V ac 57-63 Hz	230 ±10% V ac 57-63 Hz 11 A, 1700 W	115 V ac ±10% 57-63 Hz 4 A, 350 W	115 V ac ±10% 57-63 Hz 8 A, 600 W
Load regulation: the constant voltage load current change equal to the current rating of the supply. The constant current load regulation specification is given for the load voltage change equal to the voltage rating of the supply	CV	0.01% plus 200 μV	0.01% + 200 μV	0.01% plus 200 μV	0.01% plus 200 μV
	CC	0.02% plus 500 μA	0.02% + 1 mA	0.03% plus 2 mA	0.02% plus 500 μA
Line regulation: for a change in line voltage from 100 to 130 or 200 to 260 at any output voltage and current within rating.	CV	0.01% plus 200 μV	0.01% plus 200 μV	0.01% plus 200 μV	0.01% plus 200 μV
	CC	0.02% plus 500 μA	0.02% plus 1 mA	0.03% plus 2 mA	0.02% plus 500 μA
Ripple and noise: at any line voltage and under any load condition within rating.	CV	200 μV rms/10 mV p-p	500 μV rms/10 mV p-p	1 mV rms/50 V p-p	200 μV rms/10 mV p-p
	CC	5 μA rms	25 μA rms	50 mA rms	3 mA rms
Temperature coefficient: output change per degree centigrade change in ambient following 30 minutes warmup	CV	0.01% plus 200 μV	0.01% plus 200 μV	0.01% plus 200 μV	0.01% plus 200 μV
	CC	0.01% plus 2 mA	0.01% plus 4 mA	0.01% plus 8 mA	0.01% plus 2 mA
Remote programming: all programming terminals are located on rear barrier strips	CV	200 ohms/volts	200 ohms/volts	200 ohms/volt	200 ohms/volt
	CC	10 ohms/amp	4 ohms/amp	2 ohms/amp	100 ohms/amp
Meters accuracy: 2%	0-12 V and 0-24 A	0-12 V and 0-60 A	0-12 V and 0-120 A	0-24 V and 0-12 A	0-24 V and 0-25 A
Input power connections	3-wire, 5-foot cord	Barrier strip	Barrier strip	3-wire, 5-foot cord	3-wire, 5-foot cord
Size: height x depth x width	inches	5¼ H x 17½ D x 19 W	7 H x 17½ D x 19 W	7 H x 17½ D x 19 W	3½ H x 17½ D x 19 W
	centimeters	14 H x 44,4 D x 48,3 W	17,8 H x 44,4 D x 48,3 W	17,8 H x 44,4 D x 48,3 W	8,9 H x 44,4 D x 48,3 W
Weight: (lbs) (net/shipping)	42 (19,1 kg)/57 (25,9 kg)	—	90 (44,8 kg)/115 (52,2 kg)	34 (15,4 kg)/48 (12,7 kg)	42 (19,1 kg)/51 (25,9 kg)
Price	\$450	\$650	\$775	\$435	\$525
Options: refer to page 561 for descriptions	05-\$10, 07-\$25, 08-\$25, 09-\$45, 10-\$50,		05-\$90, 06-\$175, 10-\$125,	05-\$10, 07-\$25, 08-\$25, 09-\$45, 10-\$50,	
	13-\$60, 14-\$60, 27-\$10, 28-\$10		13-\$35, 14-\$35, 16-\$50, 27-\$15, 55-\$20	13-\$60, 14-\$60, 27-\$10, 28-\$10	

CV = constant voltage    CC = constant current

### Advantages

- Overvoltage Protection Crowbar\*
- Low peak-to-peak ripple
- Continuously variable output voltage and current—no range switching
- Auto-series, auto-parallel and auto-tracking operation
- Remote programming—voltage and current can be controlled by external resistance or control voltage

- Remote error sensing
- Low output impedance
- Constant voltage constant current operation with automatic crossover
- Fully rated for any overload condition including continuous short circuit operation
- Front panel voltmeter and ammeter
- RFI conformance to MIL-I-6181D

\*Internal and standard on "B" models, external and optional on "A" models.

### Specifications

**Radio frequency interference:** all models are free from conducted and radiated RFI to the extent that they meet all the requirements of MIL-I-6181D.

**Maximum operating temperature:** 0 to 55°C. Storage: -20 to +71°C.

**Internal impedance as a constant voltage source:** 0.1 mΩ in series with 1 μH.

**Transient recovery time:** less than 50 microseconds is required for output voltage recovery (in constant voltage operation) to within

10 millivolts of the nominal output voltage following a 5 amp change in output current.

**Output terminals:** an output terminal strip is located on the rear of the chassis. All power supply terminals are isolated from the chassis and either the positive or negative terminal may be connected to the chassis through a separate ground terminal located adjacent to the output terminals. All models include front panel output terminals. They are banana jack type and limited to 3 amps maximum current output.

**Finish:** light gray front panel with dark gray case.

6265B	6266B	6267B	6268A	6269A	6271B	6274A
0-40 volts @ 0-3 amps	0-40 volts @ 0-5 amps	0-40 volts @ 0-10 amps	0-40 volts @ 0-30 amps	0-40 volts @ 0-50 amps	0-60 volts @ 0-3 amps	0-60 volts @ 0-15 amps
115 V ac, ±10% 57-63 Hz, 3 A, 180 W	115 V ac, ±10% 57-63 Hz, 4 A, 325 W	115 V ac, ±10% 57-63 Hz, 8 A, 550 W	230 ±10% V ac 57-63 Hz, 11 A, 1600 W	230 ±10% V ac 57-63 Hz, 18 A, 2600 W	115 V ac ±10% 57-63 Hz, 4 A, 300 W	115 V ac, ±10% 57-63 Hz, 16 A, 1700 W
0.01% plus 200 μV	0.01% plus 200 μV	0.01% plus 200 μV	0.01% plus 200 μV	0.01% plus 200 μV	0.01% plus 200 μV	0.01% plus 200 μV
0.02% plus 500 μA	0.02% plus 500 μA	0.02% plus 500 μA	0.02% plus 3 mA	0.02% plus 3 mA	0.02% plus 500 μA	0.02% plus 2 mA
0.01% plus 200 μV	0.01% plus 200 μV	0.01% plus 200 μV	0.01% plus 200 μV	0.01% plus 200 μV	0.01% plus 200 μV	0.01% plus 200 μV
0.02% plus 500 μA	0.02% plus 500 μA	0.02% plus 500 μV	0.02% plus 3 mA	0.02% plus 3 mA	0.02% plus 500 μA	0.02% plus 2 mA
200 μV rms/10 mV p-p	200 μV rms/10 mV p-p	200 μV rms/10 mV p-p	1 μV rms	1 μV rms/20 mV p-p	200 μV rms/10 mV p-p	500 μV rms
3 mA rms	3 mA rms	3 mA rms	20 mA rms	30 mA rms	3 mA rms	10 mA rms
0.01% plus 200 μV	0.01% plus 200 μV	0.01% plus 200 μV	0.01% plus 500 μV	0.01% plus 200 μV	0.01% plus 200 μV	0.01% plus 200 μV
0.01% plus 1 mA	0.01% plus 1 mA	0.01% plus 1 mA	0.01% plus 2 mA	0.01% plus 4 mA	0.01% plus 1 mA	0.01% plus 2 mA
200 ohms/volt	200 ohms/volt	200 ohms/volt	200 ohms/volt	200 ohms/volt	300 ohms/volt	300 ohms/volt
300 ohms/amp	200 ohms/amp	100 ohms/amp	6 ohms/amp	4 ohms/amp	300 ohms/amp	62 ohms/amp
0-50 V and 0-4A	0-50 V and 0-6 A	0-50 V and 0-12 A	0-50 V and 0-40 A	0-50 V and 0-60 A	0-70 V and 0-4 A	0-70 V and 0-18 A
3-wire, 5-foot cord	3-wire, 5-foot cord	3-wire, 5-foot cord	Barrier strip	Barrier strip	3-wire, 5-foot cord	Barrier strip
3½ H x 17½ D x 19 W	3½ H x 17½ D x 19 W	5¼ H x 17½ D x 19 W	7 H x 16¾ D x 19 W	7 H x 17½ D x 19 W	3½ H x 17½ D x 19 W	5¼ H x 17½ D x 19 W
8,9 H x 44,4 D x 48,3 W	8,9 H x 44,4 D x 48,3 W	14 H x 44,4 D x 48,3 W	17,8 H x 42,7 D x 48,3 W	17,8 H x 44,4 D x 48,3 W	8,9 H x 44,4 D x 48,3 W	14 H x 44,4 D x 48,3 W
34 (15,4 kg)/48 (21,7 kg)	34 (15,4 kg)/48 (21,7 kg)	42 (19,1 kg)/57 (25,9 kg)	93 (42,2 kg)/120 (54,5 kg)	93 (42,4 kg)/120 (54,5 kg)	34 (15,4 kg)/48 (21,7 kg)	75 (34 kg)/95 (43,1 kg)
\$350	\$435	\$525	\$695	\$875	\$435	\$695
05-\$10, 07-\$25, 08-\$25, 09-\$45, 10-\$50,			05-\$10, 06-\$175, 10-\$125, 13-\$35,		05-\$10, 07-\$25, 09-\$45,	
13-\$60, 14-\$60, 27-\$10, 28-\$10			14-\$35, 27-\$15		05-\$10, 06-\$175, 10-\$125,	
					10-\$50, 13-\$60, 14-\$60,	
					27-\$10, 28-\$10	
					13-\$35, 14-\$35, 17-\$50,	
					18-\$50	



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)