ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Newport / ILX Lightwave FPM-8210 Series* at our website: *Click HERE*

Determining the Polarization Dependent Response of the FPM-8210 Power Meter

TECH NOTE

PURPOSE

This ILX Lightwave Technical Note describes the method used to determine the polarization dependent response (PDR) of the FPM-8210 Power Meter.

MEASUREMENT SETUP

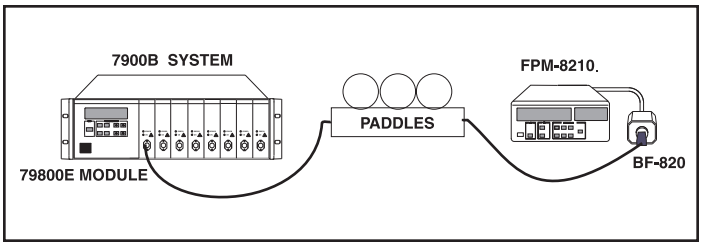


Figure 1. Experimental set-up

PROCEDURE

Connect the equipment as shown in Fig. 1. The light from the narrowband source passes through the polarization paddles. The output fiber of the paddles is cleaved at zero degrees, and is then inserted into the detection head of the FPM-8210 Power Meter, using the Bare Fiber Adapter BF-820.

With the paddles set in an arbitrary state, measure the power (in dBM) using the FPM-8210. Select the SET REF feature on the power meter, which will capture any power changes from that measured reference. Then, either manually or by using a computer, record the power readings as the polarization paddles are rotated. By combining a random rotation pattern and a systematic pattern, higher degrees of coverage of the various polarization states will be insured. Ideally, the paddles will generate a high percentage of every polarization state while making the power measurements.

To best understand the states of polarization being covered a polarimeter can be used. The most useful polarimeter for this purpose would provide a graphical representation of the Poincaré sphere on its screen. Replace the FPM-8210 in the experimental setup with the polarimeter, then vary the paddle positions as before. The polarimeter will display the various states of polarization, and demonstrate how many of the possible states are being achieved by the various paddle positions.

SUMMARY

The test procedure above was repeated several times. Typically, power only varied by ± 0.001 dB when measured with the FPM-8210. Further, the power never varied by more than ± 0.002 dB when using the polarimeter to ensure coverage of nearly all states of polarization. The tests were conducted in a typical laboratory with nominal temperature and humidity regulation.

It is important to note that the ±0.002 dB is a upper limit for PDR on the FPM-8210. Instability in source power, attenuation variations insider the polarization paddles and temperature changes are effectively being measured at the same time, indicating that the PDR specification could be even lower under tightly controlled test conditions.

U.S. and Canada call our toll free number: 800-459-9459 International inquiries call: 406-586-1244

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP