

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

Power Semiconductors » Short Form Catalog » 2004

A Wide Range In Short Words.

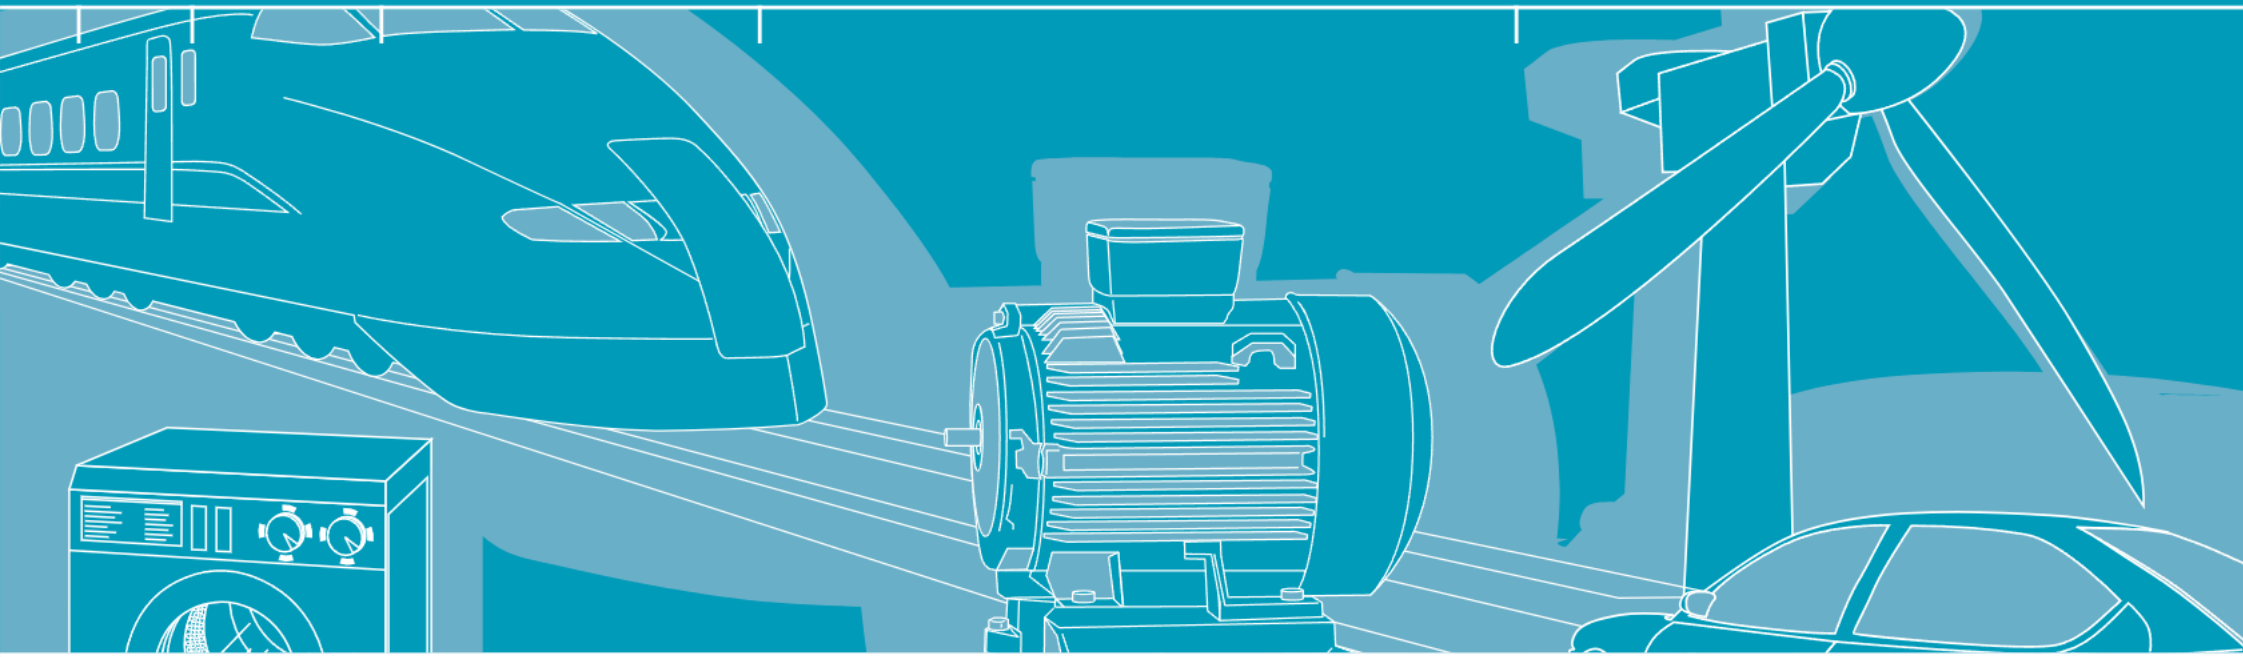

power electronics in motion
eupec

An Infineon Technologies Company

eupec

European Power Semiconductors and Electronics Company – is situated in Warstein and is one of the world's leading manufacturers of Power Semiconductors in Module- and Disc-design. eupec was founded in January 1990, when the Power Semiconductor areas of Siemens and AEG merged. Since April, 1999 eupec has been a 100 % subsidiary of Infineon Technologies with production sites in Warstein and Cegléd (Hungary), with sales companies in the USA and France, and with agencies in all important industrial regions worldwide.

eupec has set worldwide industrial standards by its product innovations. In this connection, eupec all the time focuses its attention on customer benefit and customer satisfaction, two important aspects and company guidelines.

eupec power semiconductors are used for applications in the power range of 0,5 kW up to more than 1 giga watt; typical application areas are:

Drives: Rolling mills, presses, machine tools, household appliances of 0,5 kW up to more than 1 MW.
Traction: Railway drives, power supplies, battery vehicles.
Metal processing: Welding, inductive heating, laser applications.
Energy networks: High voltage d.c. transmission systems, high voltage power compensation.
Power supply: Medical equipment, de-centralised power supply units, static power supplies, and UPS.

An important extension of our product portfolio is the family of IGBT-drivers, called *EiceDRIVER*™. The *EiceDRIVER*™ family is divided into two main product categories, ICs (as Coreless Transformer) and Boards. The ICs are defined by eupec and produced by Infineon Technologies AG. For more information, please look into www.eicedriver.com.

Based on its strong market position, eupec is able to invest in research and development to a high extent. Important synergy effects, which are to everybody's benefit, are obtained by the close co-operation with the research and development area of Infineon Technologies and by the collaboration with worldwide leading waferfabs.

More than 1100 motivated, dedicated, and flexible employees are the basis for new ideas which will lead to new products and to further improved solutions for our customers. This is what our slogan "power electronics in motion" wants to say.

eupec

Die European Power Semiconductors and Electronics Company, eupec – mit Firmensitz in Warstein gehört zu den weltweit führenden Herstellern für Leistungshalbleiter in Modul- und Scheibenbauform. Im Januar 1990 wurde eupec durch die Zusammenlegung der Leistungshalbleiter-Aktivitäten von Siemens und AEG gegründet. Seit April 1999 ist eupec zu 100 % eine Tochtergesellschaft von Infineon Technologies mit Produktionsstätten in Warstein und Cegléd (Ungarn) sowie Vertriebs-Niederlassungen in den USA und Frankreich sowie Vertretungen in den wichtigsten Industrieregionen weltweit.

eupec hat mit seinen Produktinnovationen weltweit industrielle Standards gesetzt. Dabei stehen Kundennutzen und Kundenzufriedenheit stets im Focus und sind Bestandteil des Unternehmensleitbildes.

Die Leistungshalbleiter der eupec werden in leistungselektronischen Anwendungen von etwa 0,5 kW bis über 1 Gigawatt eingesetzt; typischerweise in folgenden Anwendungsgebieten:

Antriebe: Walzwerke, Druckmaschinen, Werkzeugmaschinen, Haushaltsanwendungen von 0,5 kW bis über 1 MW.
Traktion: Bahnantriebe, Bord-Stromversorgungen, Batteriefahrzeuge.
Metallbearbeitung: Schweißtechnik, Induktive Erwärmung, Laseranwendungen.
Energienetze: Hochspannungs-Gleichstrom-Übertragungs-Systeme, Hochspannungs-Leistungs-Kompensation.
Stromversorgung: Medizinische Geräte, dezentrale Energieversorgungssysteme, statische Stromversorgungen und unterbrechungsfreie Stromversorgungen.

Eine wichtige Erweiterung des Produktportfolios, sind IGBT-Treiber, die unter dem Markennamen *EiceDRIVER*™ angeboten werden. *EiceDRIVER*™ ist unterteilt in 2 wesentliche Produktkategorien, ICs (als Coreless Transformer) und Boards. Die ICs werden von eupec definiert und von Infineon Technologies AG hergestellt. Weitere Informationen erhalten Sie unter www.eicedriver.com.

Dank der starken Position auf dem Markt ist es eupec möglich, erheblich in Forschung und Entwicklung zu investieren. Darüber hinaus erbringen die enge Zusammenarbeit mit dem Fachbereich Forschung und Entwicklung von Infineon Technologies und weltweit führenden Fabriken zur Chipherstellung Synergieeffekte, die sich für alle Beteiligten zum Vorteil auswirken.

Risikobereitschaft, Experimentierfreude und unkonventionelles Denken der über 1100 Mitarbeiter sind die Basis für die Ideen zu neuen Produkten und immer besseren Lösungen für unsere Kunden. Das drückt sich auch in unserem Slogan „power electronics in motion" aus.



Content Page

eupec Presentation ... 3

IGBT Modules ... 7
Overview IGBT ... 7
Low Power ... 8
EasyPIM™ Power Integrated Modules ... 8
EasyPACK ... 10
EasyBRIDGE ... 12
EasyDUAL ... 12
Medium Power ... 13
EconoPIM™ Power Integrated Modules ... 13
EconoPACK™ ... 15
34 mm and 62 mm Modules ... 17
EconoPACK™+ ... 20
High Power ... 21
IGBT Modules IHM ... 21
IGBT Modules IHV ... 23
Diode Modules ... 24
Drivers ... 25
EiceDRIVER™ ... 25
IGBT Driver ... 26

SCR/Diode Modules ... 27
IsoPACK™ Bridge Rectifier & AC-Switches ... 27
EconoBRIDGE™ Rectifier ... 28
Overview PowerBLOCK Thyristor Modules for Phase Control ... 29
PowerBLOCK Thyristor Modules for Phase Control ... 30
PowerBLOCK Single Thyristor Modules for Phase Control ... 31
Overview PowerBLOCK Thyristor/Diodes Modules for Phase Control ... 32
PowerBLOCK Thyristor/Diode Modules for Phase Control ... 33
Overview PowerBLOCK Diodes/Thyristor Modules for Phase Control ... 34
PowerBLOCK Diode/Thyristor Modules for Phase Control ... 35
Overview PowerBLOCK Diode Modules for Phase Control ... 36
PowerBLOCK Rectifier Diode Modules for Phase Control ... 37
PowerBLOCK Fast Thyristor Modules ... 38
PowerBLOCK Fast Asymmetric Thyristor Modules ... 39
PowerBLOCK Fast Diode Modules ... 40

Presspacks ... 41
Overview Phase Control Thyristors in Disc Housings ... 41
Pulsed Power Applications ... 42

Content Page

Traction Crow Bar ... 42
Phase Control Thyristors ... 43
Fast Thyristors ... 49
Fast Asymmetric Thyristors ... 51
Overview Rectifier in Disc Housings ... 52
Rectifier Diodes ... 53
Freewheeling Diodes ... 56
Snubber Diodes ... 57
Fast Rectifier Diodes ... 58
Avalanche Rectifier Diodes ... 60
Welding Diodes ... 60
Insulated Cells ... 60

Stacks ... 61
Possible Combinations of Presspacks and Heatsinks ... 61
ModSTACK™ ... 62

Outlines ... 64
Heatsinks ... 64
ModSTACK™ ... 73
IGBT Modules ... 77
IsoPACK™ Bridge Rectifier and AC-Switches ... 89
EconoBRIDGE™ Rectifier ... 90
PowerBLOCKs ... 91
Presspacks ... 94
EiceDRIVER™ ... 107
IGBT Drivers ... 108

Accessories ... 109
Mounting Hardware for EasyPIM™, EasyPACK, EasyBRIDGE, EasyDUAL Modules 109
Gate Leads for Thyristor Modules ... 110
Standard Gate Leads for Disc Type Devices ... 111

Explanations ... 112
Clamping Force and Disc Diameter ... 112
Letter Symbols ... 114
Type Designations ... 116
Certificates ... 118

eupec Contact Worldwide ... 119

Further data sheets are available on request:
IGBT-Modules
PIM Modules
Thyristor-/Diode-Modules
Fast Thyristors
Thyristors for Phase Control
Power Rectifier Diodes
Snubber and Freewheeling Diodes

Actual, extensive data can be obtained in PDF-format from our internetaddress: www.eupec.com

Dear customers,

the product data contained in this brochure is exclusively intended for technically trained staff. You and your technical departments will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to such application.

This brochure like the relevant product data sheet is describing the specifications of our products for which a warranty is granted. Any such warranty is granted exclusively pursuant the terms and conditions of the supply agreement. There will be no guarantee of any kind for the product and its specifications.

Should you require product information in excess of the data given in this brochure or which concerns the specific application of our product, please contact the sales office, which is responsible for you. For those that are specifically interested we may provide application notes.

Due to technical requirements our products may contain dangerous substances. For information on the types in question please contact the sales office, which is responsible for you.

Should you intend to use the Product in health or live endangering or life support applications, please notify. Please note, that for any such applications we urgently recommend

- to perform joint Risk and Quality Assessments;
- the conclusion of Quality Agreements;
- to establish joint measures of an ongoing product survey, and that we may make delivery depended on the realization of any such measures.

If and to the extent necessary, please forward equivalent notices to your customers.

Changes of this brochure are reserved.

Sehr geehrte Kunden,

die in diesem Katalog enthaltenen Produktdaten sind ausschließlich für technisch geschultes Fachpersonal bestimmt. Die Beurteilung der Geeignetheit eines unserer Produkte für die von Ihnen anvisierte Anwendung sowie die Beurteilung der Vollständigkeit der bereitgestellten Produktdaten für diese Anwendung obliegt Ihnen bzw. Ihren technischen Abteilungen.

In diesem Katalog werden ebenso wie auf den einschlägigen Produktdatenblättern diejenigen Merkmale unserer Produkte beschrieben, für die wir eine liefervertragliche Gewährleistung übernehmen. Eine solche Gewährleistung richtet sich ausschließlich nach Maßgabe der im jeweiligen Liefervertrag enthaltenen Bestimmungen. Garantien jeglicher Art werden für die in diesem Katalog aufgeführten Produkte und deren Eigenschaften keinesfalls übernommen.

Sollten Sie von uns Produktinformationen benötigen, die über den Inhalt dieses Katalogs oder des Produktdatenblatts hinausgehen und insbesondere eine spezifische Verwendung und den Einsatz unseres Produktes betreffen, setzen Sie sich bitte mit dem für Sie zuständigen Vertriebsbüro in Verbindung. Für Interessenten halten wir Application Notes bereit.

Aufgrund der technischen Anforderungen könnten unsere Produkte gesundheitsgefährdende Substanzen enthalten. Bei Rückfragen zu den in den Produkten jeweils enthaltenen Substanzen, setzen Sie sich bitte ebenfalls mit dem für Sie zuständigen Vertriebsbüro in Verbindung.


Sollten Sie beabsichtigen, das Produkt in gesundheits- oder lebensgefährdenden oder lebenserhaltenden Anwendungsbereichen einzusetzen, bitten wir um Mitteilung. Wir weisen darauf hin, dass wir für diese Fälle

- die gemeinsame Durchführung eines Risiko- und Qualitätsassessments;
- den Abschluss von speziellen Qualitätssicherungsvereinbarungen;
- die gemeinsame Einführung von Maßnahmen einer laufenden Produktbeobachtung dringend empfehlen und gegebenenfalls die Belieferung von der Umsetzung solcher Maßnahmen abhängig machen.

Soweit erforderlich, bitten wir Sie, entsprechende Hinweise an Ihre Kunden zu geben.

Inhaltliche Änderungen des Katalogs bleiben vorbehalten.

Overview IGBT's

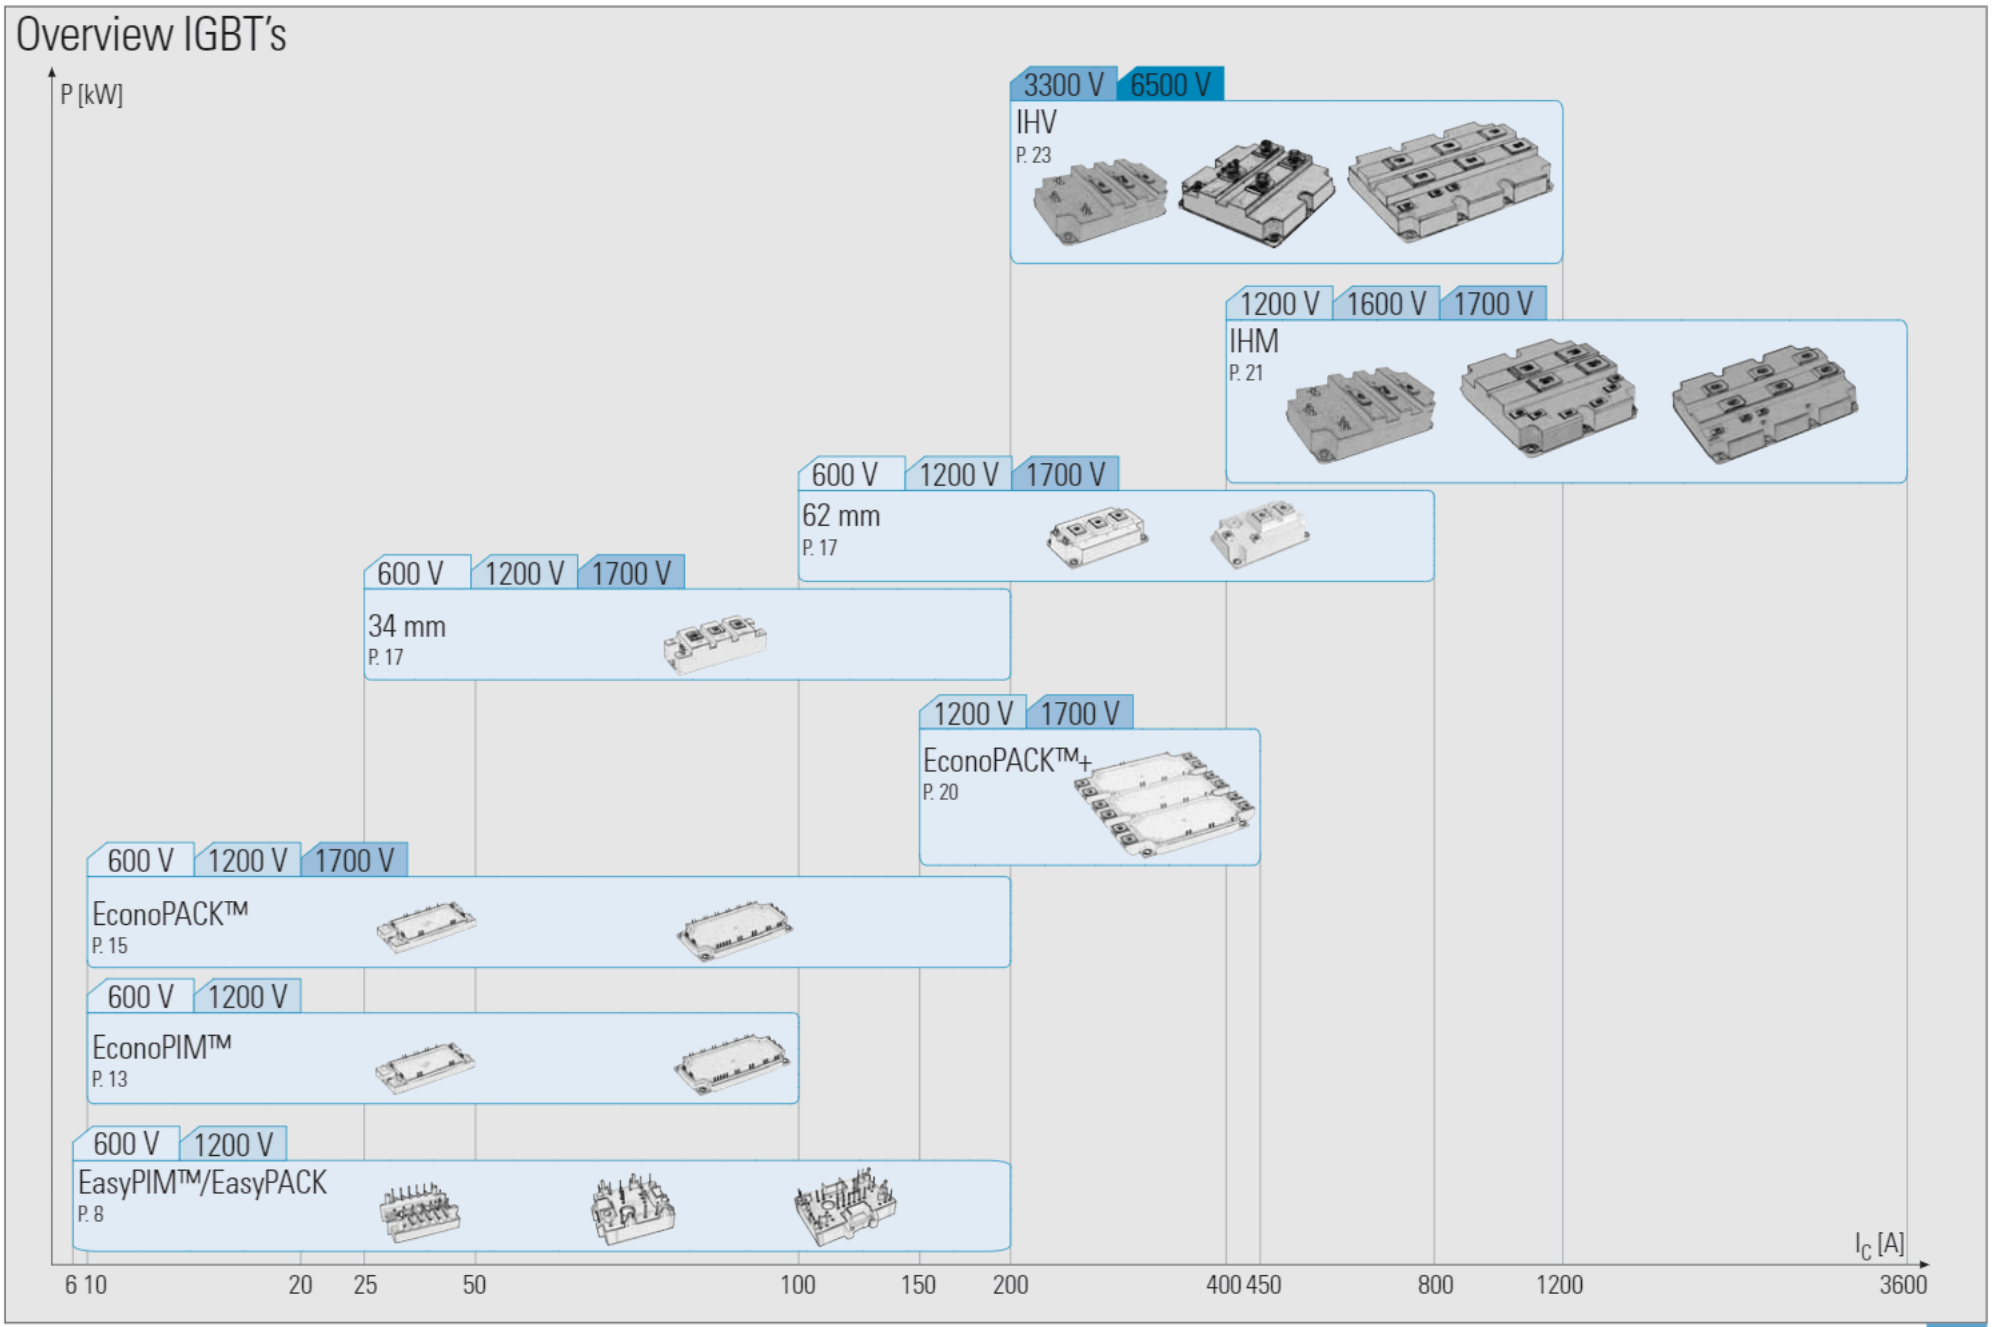

IGBT Low Power Modules
EasyPIM™ Power Integrated Modules

Single Phase 600 V_{CES}

Type	IGBT Inverter						Rectifier Diodes					Brake Chopper			Outline / page
	V_{CE} V	I_C* A	V_{CEsat} V I_{vj} = 25 °C	R_{thJC} K/W typ.	R_{thJC} K/W max.	Eon + Eoff mJ I_{vj} = 125 °C	V_{RRM} V	I_d A	R_{thJC} K/W max.	V_{to} V T_{vj} = 150 °C	r_T mΩ	V_{CES} V	$I_{C, IGBT}$* A	R_{thJC} K/W max.	
IGBT³															
◆ FB6R06VE3	600	6	Data on request Production release in 2004				800	6	Data on request Production release in 2004						L_750a/77
◆ FB10R06VE3	600	10					800	10							L_750a/77
◆ FB15R06VE3	600	15					800	15							L_750a/77
2. Generation															
FB10R06KL4	600	10	1,95	2,60	2,20	0,80	800	10	2,40	0,67	21				L_1a/78
IGBT³															
◆ FB10R06XE3	600	10	Data on request Production release in 2004				800	10	Data on request Production release in 2004						L_1a/78
◆ FB15R06XE3	600	15					800	15							L_1a/78
◆ FB20R06XE3	600	20					800	20							L_1a/78
2. Generation															
FB10R06KL4G	600	10	1,95	2,60	2,40	0,80	800	10	2,40	0,67	21				L_2a/79
FB15R06KL4	600	15	1,95	2,40	2,00	1,00	800	15	1,00	0,61	11				L_2b/79
FB20R06KL4	600	20	1,95	1,80	1,60	1,29	800	20	1,00	0,63	10				L_2b/79
IGBT³															
◆ FB10R06YE3	600	10	Data on request Production release in 2004				800	10	Data on request Production release in 2004						L_2a/79
◆ FB15R06YE3	600	15					800	15							L_2b/79
◆ FB20R06YE3	600	20					800	20							L_2b/79
2.Generation															
FB10R06KL4G_B1	600	10	1,95	2,80	2,20	0,80	800	10	2,40	0,67	21	600	10	2,20	L_2c/80
FB15R06KL4_B1	600	15	1,95	2,40	2,00	1,00	800	15	1,00	0,61	11	600	15	2,00	L_2d/80
FB20R06KL4_B1	600	20	1,95	1,80	1,60	1,30	800	20	1,00	0,63	10	600	20	1,60	L_2d/80
IGBT³															
◆ FB10R06YE3_B1	600	10	Data on request Production release in 2004				800	10	Data on request Production release in 2004						L_2c/80
◆ FB15R06YE3_B1	600	15					800	15							L_2d/80
◆ FB20R06YE3_B1	600	20					800	20							L_2d/80



* as specified in data sheet

◆ New type


Mounting Hardware see page 109.

IGBT Low Power Modules
EasyPIM™ Power Integrated Modules

Three Phase 600 V_{CES}

Type		IGBT Inverter						Rectifier Diodes					Brake Chopper			Outline / page
		V_{CE} V	I_C* A	V_{CEsat} V I_{vj} = 25 °C	R_{thJC} K/W typ.	R_{thJC} K/W max.	Eon + Eoff mJ I_{vj} = 125 °C	V_{RRM} V	I_d A	R_{thJC} K/W max.	V_{to} V T_{vj} = 150 °C	r_T mΩ	V_{CES} V	$I_{C, IGBT}$* A	R_{thJC} K/W max.	
	2. Generation															
	FP10R06KL4	600	10	1,95	2,80	2,20	0,80	800	10	2,4	0,67	21	600	10	2,20	L_2e/80
	FP15R06KL4	600	15	1,95	2,40	2,00	1,00	800	15	2,4	0,71	18	600	15	2,00	L_2e/80
	FP20R06KL4	600	20	1,95	1,80	1,60	1,30	800	20	2,0	0,71	12	600	20	1,60	L_2e/80
	IGBT[3]															
	◆ FP10R06YE3	600	10													L_2e/80
	◆ FP15R06YE3	600	15				Data on request · Production release in 2004									L_2e/80
	◆ FP20R06YE3	600	20													L_2e/80
	◆ FP30R06YE3	600	30													L_2e/80
	2. Generation															
	FP10R06KL4_B3	600	10	1,95	2,80	2,20	0,80	800	10	2,4	0,67	21				L_2f/80
	IGBT[3]						Data on request · Production release in 2004									
	◆ FP10R06YE3_B3	600	10													L_2f/80

Three Phase 1200 V_{CES}

Type		IGBT Inverter						Rectifier Diodes					Brake Chopper			Outline / page
		V_{CE} V	I_C* A	V_{CEsat} V I_{vj} = 25 °C	R_{thJC} K/W typ.	R_{thJC} K/W max.	Eon + Eoff mJ I_{vj} = 125 °C	V_{RRM} V	I_d A	R_{thJC} K/W max.	V_{to} V T_{vj} = 150 °C	r_T mΩ	V_{CES} V	$I_{C, IGBT}$* A	R_{thJC} K/W max.	
	IGBT[3]															
	FP10R12KE3	1200	10	1,90	2,60	2,20	2,64	1600	10	1,90	0,78	17	1200	10	2,20	L_2e/80
	FP15R12KE3	1200	15	1,70	1,60	1,40	3,80	1600	15	1,90	0,80	17	1200	15	1,40	L_2e/80
	FP10R12YT3	1200	10	1,90	2,15	1,80	1,62	1600	10	1,90	0,78	17	1200	10	2,20	L_2e/80
	FP15R12YT3	1200	15	1,70	1,70	1,30	2,50	1600	15	1,90	0,80	10,5	1200	15	1,40	L_2e/80




* as specified in data sheet

◆ New type

Mounting Hardware see page 109.

IGBT Low Power Modules
EasyPACK

600 V_{CES}



Type		IGBT Inverter						Outline / page
		V_{CE} V	I_C* A T_{vj} = 25 °C	V_{CEsat} V typ.	R_{thJC} K/W max.	R_{thJC} K/W T_{vj} = 125 °C	Eon + Eoff mJ T_{vj} = 125 °C	
	IGBT[3]							
	◆ FS6R06VE3	600	6	Data on request Production release in 2004				L_750b/77
	◆ FS10R06VE3	600	10					L_750b/77
	◆ FS15R06VE3	600	15					L_750b/77
	◆ FS20R06VE3	600	20					L_750b/77
	◆ FS30R06VE3	600	30					L_750b/77
	2. Generation							
	FS10R06VL4_B2	600	10	1,95	2,20	1,80	0,52	L_750c/77
	FS10R06XL4	600	10	1,95	2,20	1,80	0,55	L_1b/78
	FS15R06VL4_B2	600	15	1,95	2,20	1,70	0,48	L_750c/77
	FS15R06XL4	600	15	1,95	1,90	1,55	0,75	L_1b/78
	FS20R06XL4	600	20	1,95	1,65	1,40	1,10	L_1b/78
	FS30R06XL4	600	30	1,95	1,35	1,05	1,60	L_1b/78
	IGBT[3]							
	◆ FS6R06VE3_B2	600	6	Data on request Production release in 2004				L_750c/77
	◆ FS10R06VE3_B2	600	10					L_750c/77
	◆ FS10R06XE3	600	10					L_1b/78
	◆ FS15R06VE3_B2	600	15					L_750c/77
	◆ FS15R06XE3	600	15					L_1b/78
	◆ FS20R06VE3_B2	600	20					L_750c/77
	◆ FS20R06XE3	600	20					L_1b/78
	◆ FS30R06XE3	600	30					L_1b/78
	2. Generation							
	FS50R06YL4	600	50	1,95	0,95	0,62	1,85	L_2h/81
	IGBT[3]			Data on request				
	◆ FS50R06YE3	600	50	Production release in 2004				L_2h/81

* as specified in data sheet

◆ New type

Mounting Hardware see page 109.

IGBT Low Power Modules
EasyPACK

1200 V_{CES}	Type	IGBT Inverter						Outline / page
		V_{CE} V	I_C* A T_{vj} = 25 °C	V_{CEsat} V typ.	R_{thJC} K/W max.	R_{thJC} K/W T_{vj} = 125 °C	Eon + Eoff mJ T_{vj} = 125 °C	
	IGBT3							
	FS10R12YT3	1200	10	1,90	2,05	1,80	1,50	L_2g/81
	FS15R12YT3	1200	15	1,70	1,70	1,30	2,30	L_2g/81
	FS25R12YT3	1200	25	1,70	1,15	0,85	3,80	L_2g/81
	FS35R12YT3	1200	35	1,70	0,95	0,62	5,30	L_2g/81
	IGBT3				Data on request Production release in 2004			
	◆ FS10R12VT3	1200	10					
	◆ FS15R12VT3	1200	15					

* as specified in data sheet


◆ New type

Mounting Hardware see page 109.


IGBT low Power Modules

EasyBRIDGE

800 V

Type	Rectifier Diodes V_{RRM} V	Brake Chopper V_{CES} V
 single phase		
◆ DDB2U30N08VR	800	600
three phase		
◆ DDB6U30N08VR	800	600
◆ DDB6U50N08XR	800	600
◆ DDB6U50N08XR_B4	800	600
◆ DDB6U75N08YR	800	600

1600 V

Type	Rectifier Diodes V_{RRM} V	Brake Chopper V_{CES} V
 ◆ DDB6U25N16VR	1600	1200
◆ DDB6U40N16XR	1600	1200
◆ DDB6U40N16XR_B4	1600	1200
◆ DDB6U75N16YR	1600	1200

* as specified in data sheet

◆ New type

EasyDUAL

600 V_{CES}


Type	IGBT Inverter V_{CE} V	IGBT Inverter I_C* A
 IGBT[3]		
◆ FF50R06XE3	600	50
◆ FF75R06XE3	600	75
◆ FF100R06XE3	600	100
◆ FF100R06YE3	600	100
◆ FF150R06YE3	600	150
◆ FF200R06YE3	600	200

1200 V_{CES}

Type	IGBT Inverter V_{CE} V	IGBT Inverter I_C* A
 IGBT[3]		
◆ FF50R12XT3	1200	75
◆ FF75R12XT3	1200	75
◆ FF75R12YT3	1200	75
◆ FF100R12YT3	1200	100
◆ FF150R12YT3	1200	150


IGBT Medium Power Modules
EconoPIM™ Power Integrated Modules

600 V_{CES}

Type		IGBT Inverter				Rectifier Diodes				Brake Chopper			Outline / page
		V_{CES} V	I_C A	R_{thJC} K/W	V_{CEsat} V T_{vj} = 25°C	V_{RRM} V	I_d A T_C = 80°C	R_{thJC} K/W	V_f V T_{vj} = 150°C	V_{CES} V	$I_{C,IGBT}$ A T_c = 80°C	R_{thJC} K/W	
	BSM10GP60	600	10	1,5	1,95	1600	10	1,00	0,9	600	10	1,5	M_E2a/82
	BSM15GP60	600	15	1,3	1,95	1600	15	1,00	0,95	600	10	1,5	M_E2a/82
	BSM20GP60	600	20	1,0	1,95	1600	20	1,00	1,0	600	10	1,5	M_E2a/82
	BSM30GP60	600	30	0,7	1,95	1600	30	1,00	1,1	600	15	1,3	M_E2a/82
	BSM50GP60	600	50	0,5	1,95	1600	50	1,00	1,3	600	25	1,0	M_E2a/82
	BSM50GP60G	600	50	0,5	1,95	1600	50	1,00	1,3	600	25	1,0	M_E3a/82
	BSM75GP60	600	75	0,4	1,95	1600	75	0,65	1,15	600	37,5	0,7	M_E3a/82
	BSM100GP60	600	100	0,3	1,95	1600	100	0,50	1,16	600	50	0,5	M_E3a/82

IGBT Medium Power Modules
EconoPIM™ Power Integrated Modules




1200 V_{CES}

Type		IGBT Inverter				Rectifier Diodes				Brake Chopper			Outline / page
		V_{CES} V	I_C A	R_{thJC} K/W	V_{CEsat} V T_{vj} = 25°C	V_{RRM} V	I_d A T_C = 80°C	R_{thJC} K/W	V_f V T_{vj} = 150°C	V_{CES} V	I_{CJGBT} A T_c = 80°C	R_{thJC} K/W	
	BSM10GP120	1200	10	1,20	2,40	1600	10	1,00	0,9	1200	10,0	1,2	IM_E2a/82
	BSM15GP120	1200	15	0,70	2,20	1600	15	1,00	0,95	1200	10,0	1,2	M_E2a/82
	BSM25GP120	1200	25	0,55	2,10	1600	25	1,00	1,05	1200	12,5	1,2	M_E2a/82
	BSM35GP120	1200	35	0,55	2,40	1600	35	1,00	1,15	1200	17,5	0,7	M_E2a/82
	BSM35GP120G	1200	35	0,55	2,40	1600	35	1,00	1,15	1200	17,5	0,7	M_E3a/82
	BSM50GP120	1200	50	0,35	2,20	1600	50	0,65	1,05	1200	25,0	0,55	M_E3a/82
	Short Tail												
	FP15R12KS4C	1200	15	0,70	3,20	1600	15	1,00	0,95	1200	10,0	1,2	M_E2a/82
	FP25R12KS4C	1200	25	0,55	3,20	1600	25	1,00	1,05	1200	12,5	1,2	M_E2a/82
	FP35R12KS4CG	1200	35	0,55	3,75	1600	35	1,00	1,15	1200	17,5	0,7	M_E3a/82
	FP50R12KS4C	1200	50	0,35	3,20	1600	50	0,65	1,05	1200	25,0	0,55	M_E3a/82
	IGBT³												
	FP15R12KE3G	1200	15	1,20	1,70	1600	15	1,00	0,95	1200	10,0	1,5	M_E2a/82
	FP25R12KE3	1200	25	0,80	1,70	1600	25	1,00	1,05	1200	15,0	1,2	M_E2a/82
	FP40R12KE3	1200	40	0,60	1,80	1600	40	1,00	1,2	1200	15,0	1,2	M_E2a/82
	FP40R12KE3G	1200	40	0,60	1,80	1600	40	1,00	1,2	1200	40,0	0,6	M_E3a/82
	FP50R12KE3	1200	50	0,45	1,70	1600	50	0,65	1,0	1200	40,0	0,6	M_E3a/82
	FP75R12KE3	1200	75	0,35	1,70	1600	75	0,65	1,15	1200	40,0	0,6	M_E3a/82
	IGBT³ thin chip												
	◆ FP15R12KT3	1200	15	1,20	1,70	1600	15	1,00	0,9	1200	10,0	1,5	M_E2a/82
	◆ FP25R12KT3	1200	25	0,80	1,70	1600	25	1,00	1,05	1200	15,0	1,2	M_E2a/82
	◆ FP40R12KT3	1200	40	0,60	1,80	1600	40	1,00	1,2	1200	15,0	1,2	M_E2a/82
	◆ FP40R12KT3G	1200	40	0,60	1,80	1600	40	1,00	1,2	1200	40,0	0,60	M_E3a/82
	◆ FP50R12KT3	1200	50	0,45	1,70	1600	50	0,65	1,0	1200	40,0	0,60	M_E3a/82
	◆ FP75R12KT3	1200	75	0,35	1,70	1600	75	0,65	1,1	1200	40,0	0,60	M_E3a/82

◆ New type



IGBT Medium Power Modules
EconoPACK™

600 V – Type

	Type	V_{CES} V	I_C A	V_{CEsat} V T_{vj}=25°C typ.	P_{tot} W	R_{thJC} K/W ≤ per arm	Outline / page
	Standard						
	BSM20GD60DLC	600	20	1,95	125	1,0	M_E2d/82
	BSM20GD60DLCE3224	600	20	1,95	125	1,0	M_E2c/82
	BSM30GD60DLC	600	30	1,95	135	0,9	M_E2d/82
	BSM30GD60DLCE3224	600	30	1,95	135	0,9	M_E2c/82
	BSM50GD60DLC	600	50	1,95	250	0,5	M_E2c/82
	BSM50GD60DLCE3226	600	50	1,95	250	0,5	M_E2d/82
	BSM75GD60DLC	600	75	1,95	330	0,37	M_E2c/82
	BSM100GD60DLC	600	100	1,95	430	0,29	M_E3c/82
	BSM150GD60DLC	600	150	1,95	570	0,22	M_E3c/82
	BSM200GD60DLC	600	200	1,95	700	0,18	M_E3c/82
	◆ FS75R06KL4	600	75	1,95	340	0,37	M_E2b/82
	◆ FS100R06KL4	600	100	1,95	430	0,29	M_E3b/82
	◆ FS150R06KL4	600	150	1,95	570	0,22	M_E3b/82
3-Phase-Full-Bridges	◆ FS200R06KL4	600	200	1,95	695	0,18	M_E3b/82
	Standard						
	◆ F4-100R06KL4	600	100	1,95	430	0,29	M_E2e/83
	◆ F4-150R06KL4	600	150	1,95	570	0,22	M_E2e/83
	◆ F4-200R06KL4	600	200	1,95	700	0,18	M_E3d/83
FourPACK							





◆ New type

1200 V – Type

	Type	V_{CES} V	I_C A	V_{CEsat} V T_{vj}=25°C typ.	P_{tot} W	R_{thJC} K/W ≤ per arm	Outline / page
	Standard 2. Generation						
	BSM10GD120DN2	1200	10	2,7	80	1,52	M_E2d/82
	BSM10GD120DN2E3224	1200	10	2,7	80	1,52	M_E2c/82
	BSM15GD120DN2	1200	15	2,5	145	0,86	M_E2d/82
	BSM15GD120DN2E3224	1200	15	2,5	145	0,86	M_E2c/82
	BSM25GD120DN2	1200	25	2,5	200	0,6	M_E2d/82
	BSM25GD120DN2E3224	1200	25	2,5	200	0,6	M_E2c/82
	BSM35GD120DN2	1200	35	2,7	280	0,44	M_E2d/82
	BSM35GD120DN2E3224	1200	35	2,7	280	0,44	M_E2c/82
	BSM50GD120DN2	1200	50	2,5	350	0,35	M_E2c/82
	BSM50GD120DN2E3226	1200	50	2,5	350	0,35	M_E2d/82
	BSM50GD120DN2G	1200	50	2,5	400	0,35	M_E3c/82
	BSM75GD120DN2	1200	75	2,5	520	0,235	M_E3c/82
	BSM100GD120DN2	1200	100	2,5	680	0,182	M_E3c/82
	Low Loss 2. Generation						
	BSM15GD120DLCE3224	1200	15	2,1	145	0,86	M_E2c/82
	BSM25GD120DLCE3224	1200	25	2,1	200	0,6	M_E2c/82
	BSM35GD120DLCE3224	1200	35	2,1	280	0,44	M_E2c/82
	BSM50GD120DLC	1200	50	2,1	350	0,35	M_E2c/82
	BSM75GD120DLC	1200	75	2,1	500	0,25	M_E3c/82
3-Phase-Full-Bridges	BSM100GD120DLC	1200	100	2,1	650	0,19	M_E3c/82
	IGBT[3]						
	FS25R12KE3G	1200	25	1,7	145	0,86	M_E2c/82
	FS35R12KE3G	1200	35	1,7	200	0,60	M_E2c/82
	FS50R12KE3	1200	50	1,7	270	0,45	M_E2c/82
	FS75R12KE3	1200	75	1,7	350	0,35	M_E2c/82
	FS75R12KE3G	1200	75	1,7	350	0,35	M_E3c/82
	FS100R12KE3	1200	100	1,7	480	0,26	M_E3c/82
3-Phase-Full-Bridges	FS150R12KE3	1200	150	1,7	700	0,18	M_E3c/82



IGBT Medium Power Modules
EconoPACK™

1200 V – Type

Type		V_{CES} V	I_C A	V_{CEsat} V T_{vj}=25°C typ.	P_{tot} W	R_{thJC} K/W ≤	Outline / page
	IGBT³ thin chip						
	◆FS25R12KT3	1200	25	1,7	145	0,86	M_E2b/82
	◆FS35R12KT3	1200	35	1,7	210	0,60	M_E2b/82
	◆FS50R12KT3	1200	50	1,7	280	0,45	M_E2b/82
	◆FS75R12KT3	1200	75	1,7	355	0,35	M_E2b/82
	◆FS75R12KT3G	1200	75	1,7	355	0,35	M_E3b/82
	◆FS100R12KT3	1200	100	1,7	480	0,26	M_E3b/82
3-Phase-Full-Bridges	◆FS150R12KT3	1200	150	1,7	700	0,18	M_E3b/82
	IGBT³						
	◆FS75R12KE3_B3	1200	75	1,7	355	0,35	M_E3g/83
Full Bridges with Shunts	◆FS100R12KE3_B3	1200	100	1,7	480	0,26	M_E3g/83
	IGBT³						
	◆FT150R12KE3_B4	1200	150	1,7	700	0,18	M_E3h/83
TriPACK High with Shunts							
	◆FT150R12KE3_B5	1200	150	1,7	700	0,18	M_E2f/83
 TriPACK Low							
	Short Tail						
	◆FS25R12KS4	1200	25	on request	on request	on request	M_E2b/82
	◆FS50R12KS4	1200	50	on request	on request	on request	M_E2b/82
	FS75R12KS4	1200	75	3,2	500	0,25	M_E3b/82
	FS100R12KS4	1200	100	3,2	660	0,19	M_E3b/82
3-Phase-Full-Bridges							


◆ New type

1200 V – Type

Type		V_{CES} V	I_C A	V_{CEsat} V T_{vj}=25°C typ.	P_{tot} W	R_{thJC} K/W ≤ per arm	Outline / page
	Short Tail						
	◆F4-50R12KS4	1200	50	3,2	355	0,35	M_E2e/83
	◆F4-75R12KS4	1200	75	3,2	500	0,25	M_E2e/83
	◆F4-100R12KS4	1200	100	3,2	660	0,19	M_E3d/83
	◆F4-150R12KS4	1200	150	3,2	960	0,13	M_E3d/83
FourPACK							
	Standard 2. Generation						
	BSM150GXR120DN2	1200	150	2,5	1050	0,12	M_E3e/83
	BSM150GXL120DN2	1200	150	2,5	1050	0,12	M_E3e/83
 SR-Modules							
	Standard 2. Generation						
	BSM100GT120DN2	1200	100	2,5	680	0,182	M_E3f/83
	BSM150GT120DN2	1200	150	2,5	1250	0,12	M_E3f/83
	BSM200GT120DN2	1200	200	2,5	1400	0,09	M_E3f/83
	Low Loss 2. Generation						
	BSM150GT120DLC	1200	150	2,1	1000	0,125	M_E3f/83
Tripack	BSM200GT120DLC	1200	200	2,1	1300	0,095	M_E3f/83


IGBT Medium Power Modules
EconoPACK™

1700 V – Type

	Type	V_{CES} V	I_C A	V_{CEsat} V T_{vj}=25°C typ.	P_{tot} W	R_{thJC} K/W ≤ per arm	Outline / page
 3-Phase-Full-Bridges	Low Loss						
	■ BSM50GD170DL	1700	50	2,7	480	0,26	M_E3c/82
	■ BSM75GD170DL	1700	75	2,7	625	0,20	M_E3c/82
	IGBT³						
	◆ FS75R17KE3	1200	75	2,0	465	0,27	M_E3b/82
	◆ FS100R17KE3	1200	100	2,0	555	0,225	M_E3b/82
 Tripack	Low Loss						
	■ BSM100GT170DL	1700	100	2,7	960	0,13	M_E3f/83
	■ BSM150GT170DL	1700	150	2,7	1250	0,10	M_E3f/83

34 mm and 62 mm Modules


600 V – Type

	Type	V_{CES} V	I_C A	V_{CEsat} V T_{vj}=25°C typ.	P_{tot} W	R_{thJC} K/W ≤ per arm	Outline / page
 Half-Bridges	Standard						
	BSM50GB60DLC	600	50	1,95	280	0,44	M_34a/84
	BSM75GB60DLC	600	75	1,95	355	0,35	M_34a/84
	BSM100GB60DLC	600	100	1,95	445	0,28	M_34a/84
	BSM150GB60DLC	600	150	1,95	595	0,21	M_34a/84
	BSM200GB60DLC	600	200	1,95	730	0,17	M_34a/84
	BSM300GB60DLC	600	300	1,95	1250	0,10	M_62a/84

◆ New type
■ Not for new design

34 mm and 62 mm Modules

1200 V – Type

	Type	V_{CES} V	I_C A	V_{CEsat} V T_{vj}=25°C typ.	P_{tot} W	R_{thJC} K/W ≤ per arm	Outline / page
 Half-Bridges	Standard 2. Generation						
	BSM25GB120DN2	1200	25	2,5	200	0,6	M_34a/84
	BSM35GB120DN2	1200	35	2,7	280	0,44	M_34a/84
	BSM50GB120DN2	1200	50	2,5	400	0,3	M_34a/84
	BSM75GB120DN2	1200	75	2,5	625	0,2	M_34a/84
	BSM100GB120DN2K	1200	100	2,5	700	0,18	M_34a/84
	BSM100GB120DN2	1200	100	2,5	800	0,16	M_62a/84
	BSM150GB120DN2	1200	150	2,5	1250	0,1	M_62a/84
	BSM200GB120DN2	1200	200	2,5	1400	0,09	M_62a/84
	Low Loss 2. Generation						
	BSM35GB120DLC	1200	35	2,1	340	0,40	M_34a/84
	BSM50GB120DLC	1200	50	2,1	460	0,27	M_34a/84
	BSM75GB120DLC	1200	75	2,1	690	0,18	M_34a/84
	BSM100GB120DLCK	1200	100	2,1	830	0,15	M_34a/84
	BSM100GB120DLC	1200	100	2,1	780	0,16	M_62a/84
	BSM150GB120DLC	1200	150	2,1	1200	0,1	M_62a/84
	BSM200GB120DLC	1200	200	2,1	1300	0,08	M_62a/84
	BSM300GB120DLC	1200	300	2,1	2500	0,05	M_62a/84
 Half-Bridges	IGBT³						
	FF150R12KE3G	1200	150	1,7	780	0,16	M_62a/84
	FF200R12KE3	1200	200	1,7	1040	0,12	M_62a/84
	FF300R12KE3	1200	300	1,7	1470	0,085	M_62a/84
	FF400R12KE3	1200	400	1,7	2000	0,062	M_62a/84
	Short Tail						
	FF100R12KS4	1200	100	3,2	780	0,16	M_62a/84
	FF150R12KS4	1200	150	3,2	1200	0,1	M_62a/84
	FF200R12KS4	1200	200	3,2	1400	0,09	M_62a/84
	FF300R12KS4	1200	300	3,2	1950	0,06	M_62a/84

IGBT Medium Power Modules

34 mm and 62 mm Modules

1200 V – Type

	Type	V_{CES} V	I_C A	V_{CEsat} V T_{vj}=25°C typ.	P_{tot} W	R_{thJC} K/W ≤ per arm	Outline / page
	Standard 2. Generation						
	BSM25GAL120DN2	1200	25	2,5	200	0,6	M_34a/84
	BSM50GAL120DN2	1200	50	2,5	400	0,3	M_34a/84
	BSM75GAL120DN2	1200	75	2,5	625	0,2	M_34a/84
	BSM100GAL120DN2	1200	100	2,5	800	0,16	M_62a/84
	BSM150GAL120DN2	1200	150	2,5	1250	0,1	M_62a/84
	BSM200GAL120DN2	1200	200	2,5	1400	0,09	M_62a/84
	Low Loss 2. Generation						
	BSM100GAL120DLCK	1200	100	2,1	830	0,15	M_34a/84
	BSM150GAL120DLC	1200	150	2,1	1200	0,1	M_62a/84
	BSM200GAL120DLC	1200	200	2,1	1300	0,09	M_62a/84
	BSM300GAL120DLC	1200	300	2,1	2500	0,05	M_62a/84
	IGBT[3]						
	FD200R12KE3	1200	200	1,7	1040	0,12	M_62a/84
GAL Chopper	FD300R12KE3	1200	300	1,7	1470	0,085	M_62a/84
	Standard 2. Generation						
	BSM75GAR120DN2	1200	75	2,5	625	0,2	M_34a/84
	BSM100GAR120DN2	1200	100	2,5	800	0,16	M_62a/84
	BSM150GAR120DN2	1200	150	2,5	1250	0,1	M_62a/84
	BSM200GAR120DN2	1200	200	2,5	1400	0,09	M_62a/84
	Low Loss 2. Generation						
	BSM300GAR120DLC	1200	300	2,1	2500	0,05	M_62a/84
	IGBT[3]						
	DF200R12KE3	1200	200	1,7	1040	0,12	M_62a/84
GAR Chopper	DF300R12KE3	1200	300	1,7	1470	0,085	M_62a/84

34 mm and 62 mm Modules



1200 V – Type

	Type	V_{CES} V	I_C A	V_{CEsat} V T_{vj}=25°C typ.	P_{tot} W	R_{thJC} K/W ≤	Outline / page
	Standard 2. Generation						
	BSM200GA120DN2	1200	200	2,5	1550	0,08	M_62b/84
	BSM200GA120DN2S	1200	200	2,5	1550	0,08	M_62c/84
	BSM300GA120DN2	1200	300	2,5	2500	0,05	M_62b/84
	BSM300GA120DN2S	1200	300	2,5	2500	0,05	M_62c/84
	BSM300GA120DN2E3166	1200	300	2,5	2500	0,05	M_62b/84
	BSM400GA120DN2	1200	400	2,5	2700	0,045	M_62b/84
	BSM400GA120DN2S	1200	400	2,5	2700	0,045	M_62c/84
	Low Loss 2. Generation						
	BSM200GA120DLC	1200	200	2,1	1470	0,09	M_62b/84
	BSM200GA120DLCS	1200	200	2,1	1470	0,09	M_62c/84
	BSM300GA120DLC	1200	300	2,1	2270	0,055	M_62b/84
	BSM300GA120DLCS	1200	300	2,1	2270	0,055	M_62c/84
	BSM400GA120DLC	1200	400	2,1	2500	0,05	M_62b/84
	BSM400GA120DLCS	1200	400	2,1	2500	0,05	M_62c/84
	BSM600GA120DLC	1200	600	2,1	3900	0,032	M_62b/84
	BSM600GA120DLCS	1200	600	2,1	3900	0,03	M_62c/84
	IGBT[3]						
	FZ300R12KE3G	1200	300	1,7	1470	0,085	M_62b/84
	FZ300R12KE3_B1G	1200	300	1,7	1470	0,085	M_62c/84
	FZ400R12KE3	1200	400	1,7	2250	0,055	M_62b/84
	FZ400R12KE3_B1	1200	400	1,7	2250	0,055	M_62c/84
	FZ600R12KE3	1200	600	1,7	2750	0,045	M_62b/84
	FZ600R12KE3_B1	1200	600	1,7	2750	0,045	M_62c/84
	◆ FZ800R12KE3	1200	800	on request	on request	on request	M_62b/84
	Short Tail						
	FZ400R12KS4	1200	400	3,2	2500	0,05	M_62b/84
Single Switches	FZ600R12KS4	1200	600	3,2	3900	0,03	M_62b/84

◆ New type

IGBT Medium Power Modules
34 mm and 62 mm Modules

1700 V – Type


	Type	V_{CES} V	I_C A	V_{CEsat} V T_{vj}=25°C typ.	P_{tot} W	R_{thJC} K/W ≤ per arm	Outline / page
 Half-Bridges	Standard						
	BSM50GB170DN2	1700	50	3,4	500	0,25	M_34a/84
	BSM75GB170DN2	1700	75	3,4	625	0,20	M_34a/84
	BSM100GB170DN2	1700	100	3,4	1000	0,13	M_62a/84
	BSM150GB170DN2	1700	150	3,4	1250	0,10	M_62a/84
	Low Loss						
	BSM100GB170DLC	1700	100	2,6	960	0,13	M_62a/84
	BSM150GB170DLC	1700	150	2,6	1250	0,10	M_62a/84
	BSM200GB170DLC	1700	200	2,6	1660	0,075	M_62a/84
	IGBT[3]						
	FF200R17KE3	1700	200	2,0	1250	0,100	M_62a/84
	FF300R17KE3	1700	300	2,0	1470	0,085	M_62a/84
 Single Switches	Standard						
	BSM200GA170DN2	1700	200	3,4	1750	0,070	M_62b/84
	BSM200GA170DN2S	1700	200	3,4	1750	0,070	M_62c/84
	BSM300GA170DN2	1700	300	3,4	2500	0,050	M_62b/84
	BSM300GA170DN2S	1700	300	3,4	2500	0,050	M_62c/84
	Low Loss						
	BSM200GA170DLC	1700	200	2,6	1920	0,065	M_62b/84
	BSM300GA170DLC	1700	300	2,6	2500	0,050	M_62b/84
	BSM400GA170DLC	1700	400	2,6	3120	0,040	M_62b/84
	IGBT[3]						
	FZ400R17KE3	1700	400	2,0	2270	0,055	M_62b/84
	FZ600R17KE3	1700	600	2,0	3120	0,040	M_62b/84

Diode Modules


	Type	V_{CES} V	I_F A	V_F V	Q_R µAs typ	R_{thJC} K/W ≤	Outline / page
 Single Diodes	BYM300A120DN2	1200	300	2,3	40	0,125	M_62d/84
	BYM300A170DN2	1700	250	2,3	70	0,170	M_62d/84
	BYM600A170DN2	1700	400	2,0	100	0,090	M_62d/84
 Dual Diodes	BYM200B170DN2	1700	200	2,2	50	0,150	M_62e/84
	BYM300B170DN2	1700	300	2,2	75	0,120	M_62e/84

IGBT Medium Power Modules
EconoPACK™+




1200 V_{CES}




	Type	V_{CES} V	I_C A	V_{CEsat} V T_{vj}=25 °C typ.	E_{on}/E_{off} mWs T_{vj}=125 °C typ.	R_{thJC} K/W	Outline / page
	IGBT³						
	FS150R12KE3G	1200	150	1,7	11/24	0,18	M_E+a/85
	FS225R12KE3	1200	225	1,7	15/36	0,11	M_E+a/85
	FS300R12KE3	1200	300	1,7	22/43	0,085	M_E+a/85
	FS450R12KE3	1200	450	1,7	33/65	0,06	M_E+a/85

1700 V_{CES}

	Type	V_{CES} V	I_C A	V_{CEsat} V T_{vj}=25 °C typ.	E_{on}/E_{off} mWs T_{vj}=125 °C typ.	R_{thJC} K/W	Outline / page
	IGBT³						
	FS150R17KE3G	1700	150	2,0	60/50	0,12	M_E+a/85
	FS225R17KE3	1700	225	2,0	90/75	0,09	M_E+a/85
	FS300R17KE3	1700	300	2,0	120/100	0,075	M_E+a/85
	FS450R17KE3	1700	450	2,0	150/150	0,055	M_E+a/85

IGBT High Power Modules IHM






1200 V_{CES}	Type *)	V_{CES} V	Ic A	V_{CEsat} V V T_{vj}=25°C typ.	E_{on}/E_{off} mWs T_{vj}=125°C typ.	R_{thJC} °K/W per arm	Outline / page
 Dual modules	Standard 2. Generation						
	FF400R12KF4	1200	400	2,7	70/60	0,046	H_IH2/86
	FF600R12KF4	1200	600	2,7	90/90	0,032	H_IH2/86
	FF800R12KF4	1200	800	2,7	130/120	0,025	H_IH2/86
	Low Loss 2. Generation						
	FF400R12KL4C	1200	400	2,1	72/58	0,044	H_IH2/86
	FF600R12KL4C	1200	600	2,1	100/90	0,032	H_IH2/86
	FF800R12KL4C	1200	800	2,1	120/130	0,025	H_IH2/86
	IGBT[3]						
	FF600R12KE3	1200	600	1,7	100/95	0,044	H_IH2/86
	FF800R12KE3	1200	800	1,7	135/130	0,032	H_IH2/86
	FF1200R12KE3	1200	1200	1,7	200/190	0,025	H_IH2/86
IH1/4 	Short Tail						
	FZ800R12KS4	1200	800	3,2	76/58	0,018	H_IH4/86
	Standard 2. Generation						
	FZ800R12KF4	1200	800	2,7	130/120	0,023	H_IH1/86
	FZ1050R12KF4	1200	1050	2,7	150/170	0,018	H_IH1/86
	FZ1200R12KF4	1200	1200	2,7	170/190	0,016	H_IH1/86
	FZ1600R12KF4	1200	1600	2,7	220/290	0,0125	H_IH1/86
	FZ1800R12KF4	1200	1800	2,7	250/330	0,011	H_IH7/87
	FZ2400R12KF4	1200	2400	2,7	310/410	0,0084	H_IH7/87
IH7 	Low Loss 2. Generation						
	FZ800R12KL4C	1200	800	2,1	121/127	0,022	H_IH1/86
	FZ1200R12KL4C	1200	1200	2,1	165/195	0,016	H_IH1/86
	FZ1600R12KL4C	1200	1600	2,1	210/260	0,0125	H_IH1/86
	FZ1800R12KL4C	1200	1800	2,1	230/295	0,0110	H_IH7/87
	FZ2400R12KL4C	1200	2400	2,1	320/400	0,0084	H_IH7/87
	IGBT[3]						
	FZ1200R12KE3	1200	1200	1,7	245/190	0,022	H_IH4/86
	FZ1600R12KE3	1200	1600	1,7	325/250	0,016	H_IH4/86
	FZ2400R12KE3	1200	2400	1,7	490/380	0,0125	H_IH4/86
	FZ2400R12KE3_B9	1200	2400	1,7	490/380	0,0011	H_IH7/87
Single modules	FZ3600R12KE3	1200	3600	1,7	735/570	0,008	H_IH7/87

1200 V_{CES}	Type *)	V_{CES} V	Ic A	V_{CEsat} V V T_{vj}=25°C typ.	E_{on}/E_{off} mWs T_{vj}=125°C typ.	R_{thJC} K/W per arm	Outline / Page
 Sixpack modules	Standard 2. Generation						
	FS300R12KF4	1200	300	2,7	80/45	0,064	H_IH8/87
	FS400R12KF4	1200	400	2,7	100/55	0,048	H_IH8/87
 Chopper modules	Standard 2. Generation						
	FD400R12KF4	1200	400	2,7	70/60	0,046	H_IH2/86
	FD600R12KF4	1200	600	2,7	90/90	0,032	H_IH2/86
 4-pack modules	Short Tail						
	F4-400R12KS4_B2	1200	400	3,2	38/29	0,042	H_IH5/86




All modules are UL recognized

IGBT High Power Modules IHM

1600 + 1700 V_{CES}

	Type *)	V_{CES} V	Ic A	V_{CEsat} V T_{vj}=25°C typ.	E_{on}/E_{off} mWs T_{vj}=125°C typ.	R_{thJC} K/W per arm	Outline / page
	Standard 2. Generation						
	FF400R16KF4	1600	400	3,3	170/90	0,04	H_IH2/86
	FF600R16KF4	1600	600	3,5	240/140	0,032	H_IH2/86
	IGBT[3]						
	FF600R17KE3	1700	600	2,4	185/210	0,024	H_IH2/86
	FF800R17KE3	1700	800	2,4	240/280	0,028	H_IH2/86
Dual modules	FF1200R17KE3	1700	1200	2,4	345/430	0,021	H_IH2/86
	Standard 2. Generation						
	FZ800R16KF4	1600	800	3,3	340/180	0,02	H_IH1/86
	FZ1200R16KF4	1600	1200	3,5	490/290	0,016	H_IH1/86
IH1 	FZ1800R16KF4	1600	1800	3,5	750/450	0,011	H_IH7/87
	IGBT[3]						
IH7 	FZ1200R17KE3	1700	1200	2,4	345/430	0,017	H_IH4/86
	FZ1600R17KE3	1700	1600	2,4	440/585	0,014	H_IH4/86
	FZ2400R17KE3	1700	2400	2,4	590/910	0,010	H_IH4/86
	FZ2400R17KE3_B9	1700	2400	2,4	590/910	0,009	H_IH7/87
Single modules	FZ3600R17KE3	1700	3600	2,4	745/1430	0,007	H_IH7/87
	Standard 2. Generation						
	FS300R16KF4	1600	300	3,5	120/70	0,064	H_IH8/87
Six pack modules							
	Standard 2. Generation						
	FD400R16KF4	1600	400	3,3	170/90	0,04	H_IH2/86
	FD600R16KF4	1600	600	3,5	240/140	0,032	H_IH2/86
	IGBT[3]						
Chopper modules	FD1200R17KE3-K	1700	1200	2,4	345/430	0,021	H_IH4/86

1700 V_{CES}

	Type *)	V_{CES} V	Ic A	V_{CEsat} V T_{vj}=25°C typ.	E_{on}/E_{off} mWs T_{vj}=125°C typ.	R_{thJC} K/W per arm	Outline / page
	Low Loss						
	FF400R17KF6C_B2	1700	400	2,7	180/150	0,016	H_IH2/86
	FF401R17KF6C_B2	1700	400	2,7	200/150	0,04	H_IH9/87
	FF600R17KF6C_B2	1700	600	2,7	270/220	0,026	H_IH2/86
	FF800R17KF6C_B2	1700	800	2,7	290/335	0,02	H_IH2/86
	IGBT[3]						
	◆ FF400R17KE3_B2	1700	400	2,4	125/145	0,049	H_IH9/87
	◆ FF600R17KE3_B2	1700	600	2,4	185/220	0,029	H_IH2/86
Dual modules	◆ FF800R17KE3_B2	1700	800	2,4	240/295	0,024	H_IH2/86
	Low Loss						
	FZ800R17KF6C_B2	1700	800	2,7	300/325	0,02	H_IH1/86
	FZ1200R17KF6C_B2	1700	1200	2,7	330/480	0,013	H_IH1/86
	FZ1600R17KF6C_B2	1700	1600	2,7	430/670	0,01	H_IH1/86
IH1	FZ1800R17KF6C_B2	1700	1800	2,7	570/725	0,009	H_IH7/87
	FZ2400R17KF6C_B2	1700	2400	2,7	750/1060	0,007	H_IH7/87
IH7 	IGBT[3]						
	◆ FZ1200R17KE3_B2	1700	1200	2,4	350/445	0,014	H_IH4/86
	◆ FZ1600R17KE3_B2	1700	1600	2,4	445/600	0,012	H_IH4/86
	◆ FZ1800R17KE3_B2	1700	1800	2,4	490/680	0,010	H_IH7/87
Single modules	◆ FZ2400R17KE3_B2	1700	2400	2,4	610/920	0,008	H_IH7/87
	Low Loss						
	FD401R17KF6C_B2	1700	400	2,7	200/150	0,04	H_IH9/87
	FD600/1200R17KF6_B2	1700	600	2,7	270/220	0,026	H_IH2/86
	FD600R17KF6C_B2	1700	600	2,7	270/220	0,016	H_IH2/86
	FD800R17KF6C_B2	1700	800	2,7	290/335	0,02	H_IH2/86
Chopper modules	FD1600/1200R17KF6C_B2	1700	1600	2,7	430/670	0,01	H_IH7/87





◆ New type

..._B2: Traction Module (AlSiC)


*) valid for all part-no:
T_{vj} = 125°C, I_{CRM} = 2xI_C

IGBT High Power Modules IHV

3300 V_{CES}

	Type *)	V_{CES} V	Ic A	V_{CEsat} V T_{vj}=25°C typ.	E_{on}/E_{off} mWs T_{vj}=125°C typ.	R_{thJC} K/W per arm	Outline / page
 Dual modules	Standard						
	FF200R33KF2C	3300	200	3,4	480/255	0,057	H_IH9/87
	FF400R33KF2C	3300	400	3,4	960/510	0,026	H_IH6/87
IH4  IH7  Single modules	Standard						
	FZ800R33KF2C	3300	800	3,4	1920/1020	0,013	H_IH4/86
	FZ1200R33KF2C	3300	1200	3,4	2880/1530	0,0085	H_IH7/87
	High Insulation						
	◆ FZ400R33KL2C_B5	3300	400	3,4	960/530	0,026	H_IH10/88
	◆ FZ800R33KL2C_B5	3300	800	3,4	1920/1080	0,013	H_IH11/88
	◆ FZ1200R33KL2C_B5	3300	1200	3,4	2900/1600	0,0085	H_IH12/88
FD… 	Standard						
	FD400R33KF2C	3300	400	3,4	960/510	0,026	H_IH4/86
	FD800R33KF2C	3300	800	3,4	1920/1020	0,013	H_IH7/87
	High Insulation						
	◆ FD800R33KL2C_B5	3300	800	3,4	1920/1080	0,013	H_IH12/88
FD…-K 	Standard						
	FD400R33K2C-K	3300	400	3,4			H_IH4/86
Chopper modules							

Diodes Modules

	Type *)	V_{RRM} V	I_F A	I_R mA typ.	Q_r µAs typ.	R_{thJC} K/W per arm	Outline / page
 Diode Modules	DD400S16K4	1600	400	15	40	0,1	H_IH1/86
	DD600S16K4	1600	600	40	60	0,08	H_IH1/86
	DD400S17K6C_B2	1700	400	5	145	0,016	H_IH1/86
	DD401S17K6C_B2	1700	400	10	160	0,07	H_IH9/87
	DD800S17K6C_B2	1700	800	10	265	0,034	H_IH1/86
	Standard						
	DD200S33K2C	3300	200	1	220	0,108	H_IH9/87
	DD400S33K2C	3300	400	2	440	0,051	H_IH4/86
	DD800S33K2C	3300	800	4	900	0,025	H_IH4/86
	DD1200S33K2C	3300	1200	6	1320	0,017	H_IH4/86
	High Insulation						
	◆ DD1200S33KL2C_B5	3300	1200	6	1320	0,017	H_IH11/88



◆ New type

..._B5: 6.5kV housing / 10.2kV insulation

*) valid for all part-no:
T_{vj} = 125°C, I_{CRM} = 2xI_C

IGBT High Power Modules IHV

6500 V_{CES}



	Type *)	V_{CES} V	Ic A	V_{CEsat} V T_{vj}=25°C typ.	E_{on}/E_{off} mWs T_{vj}=125°C typ.	R_{thJC} K/W per arm	Outline / page
 Single modules	Standard						
	FZ200R65KF1	6500	200	4,3	1900/1200	0,033	H_IH10/88
	FZ400R65KF1	6500	400	4,3	4000/2300	0,017	H_IH11/88
	FZ600R65KF1	6500	600	4,3	5900/3500	0,011	H_IH12/88
 Chopper modules	Standard						
	FD200R65KF1-K	6500	200	4,3	1900/1200	0,033	H_IH11/88
	FD400R65KF1-K	6500	400	4,3	4000/2300	0,017	H_IH12/88

Diodes Modules

	Type *)	V_{RRM} V	I_F A	I_R mA typ.	Q_r µAs typ.	R_{thJC} K/W per arm	Outline / page
 Diode Modules	DD200S65K1	6500	200	15	350	0,063	H_IH11/88
	DD400S65K1	6500	400	15	700	0,032	H_IH11/88
	DD600S65K1	6500	600	20	1050	0,021	H_IH11/88

*) valid for all part-no:
T_{vj} = 125°C, I_{CRM} = 2xI_C

EiceDRIVER™ (eupec IGBT controlled efficiency DRIVER)

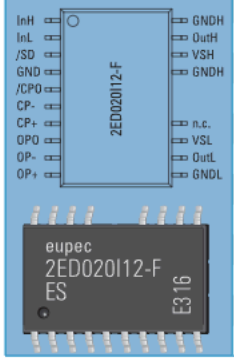	Type	Channels	Control Interface	V_{DC} average/Peak	V_{ISO} V	I_{GM} A	P_{OUT} W	size mm·mm	mounting by	for modules	Outline / page
	2ED300C17-S	2	E	1200/1700	*	±30	7	60,5 - 72	soldering	EconoPACK™+, 62 mm, IHM	107
	2ED300C17-ST	2	E	1200/1700	*	±30	7	60,5 - 72	soldering	EconoPACK™+, 62 mm, IHM	107
	2ED020I12-F	2	E	1200	*	+1/-2		12,8 - 10,3	soldering	EasyPIM™, EasyPACK, EconoPACK™, EconoPIM™, 34 mm	107 P-DSO-18-1

* Datasheets available under **www.eicedriver.com**

Technical features 2ED300C17-S / 2ED300C17-ST

- Failure output
- Half-bridge – or direct mode can be adjusted
- Interlocking against each other and dead time generation
- In half-bridge mode
- Low-resistance and therefore noise-immune 15 V PWM signal input
- + 15 V signal processing (15 V logic)
- Minimum pulse suppression 400 ns
- Reset input and PWM reset
- Dynamic over-current detection (DOCD) by
- Monitoring the saturation voltage
- "Soft shut down" in case of failure shutdown
- External detected failure analysis (EDFA)
- 15V logic (high noise immunity)
- Additional ± 16 V supply outputs

Technical features 2ED020I12-F

- Half-bridge IGBT/MOSFET Driver IC
- Fully operational to ± 1200 V
- High speed transfer rate
- High dV/dt immunity
- Matched propagation delay for both channels
- Under-voltage lock-out for both channels
- Dedicated shutdown input
- 3.3 V and 5 V TTL compatible inputs
- General purpose operational amplifier integrated
- General purpose comparator integrated

IGBT Driver




Type	No. of Channels	Gate Voltage V	IGBT max. V_{CE} V	V_{ISO} V	I_{peak} A	Power Out/Channel W	outline/page	remarks
2SD 106 AI	2	+/- 15	1200	2500	6	1	SD1/108	adaption to various modules
2SD 106 AI-17	2	+/- 15	1700	4000	6	1	SD1/108	adaption to various modules
6SD 106 EI	6	+/- 15	1200	2500	6	1	SD3/108	adaption to various modules
6SD 106 EI-17	6	+/- 15	1700	4000	6	1	SD3/108	adaption to various modules
2SD 315 AI	2	+/- 15	1700	4000	15	3	SD2/108	adaption to various modules
2SD 315 AI-25	2	+/- 15	2500	5000	15	3	SD2/108	adaption to various modules
2SD 315 AI-33	2	+/- 15	3300	6000	15	3	SD2/108	adaption to various modules
1SD 418 FI-FZ2400R17KF6-B2	1	+/- 15	1700	4000	18	4	na	dedicated to FZ2400R17KF6-B2
1SD418FI-FX800R33KF2	1	+/- 15	3300	6000	18	4	na	dedicated to FZ800R33KF2
1SD 418 FI-FZ1200R33KF2	1	+/- 15	3300	6000	18	4	na	dedicated to FZ1200R33KF2
1SD210F2+ISO3116-FZ600R65KF1	1	+/- 15	6500	10200	10	2	na	dedicated to FZ600R65KF1

"IGBT Module & Driver Selection" Excel sheet for appropriate dimensioning of SCALE drivers on request.


Technical Features:

Short circuit and overcurrent protection of the IGBT
Direct half-bridge mode with locking & dead-time generation (selectable)
Switching frequency DC to > 100 kHz (driver chip set)
Input Signals +5V … +15V (programmable)
Electrical separation of addressing and error acknowledgment (via transformers)
High dv/dt immunity
Under-voltage monitoring
Complete with DC/DC converter
Operating temperature - 40°C … + 85°C

IsoPACK™ Bridge Rectifier

		Type	V_{DRM}, V_{RRM} V $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{RRM} + 100V$	I_{FRMSM} (I_{TRMSM}) A	I_{FSM} (I_{TSM}) A 10 ms, $T_{vj\,max}$	I_d/T_c A/°C	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	R_{thJC} °C/W per arm 120° el Square wave	$T_{vj\,max}$ °C	Outline / page
3 phase bridge rectifier, uncontrolled		DD B6U 85 N [1]	1200, 1600	60	550	85/100	0,75	5,5	1,45	150	M_1Pa/89
		DD B6U 145 N [1]	1200, 1600	100	1000	145/100	0,75	3,1	0,89	150	M_1Pa/89
		DD B6U 205 N [1]	1200, 1600	120	1375	205/100	0,75	2,2	0,59	150	M_1Pa/89
		DD B6U 215 N [2]	1200, 1600	125	1950	215/110	0,75	1,6	0,49	150	M_1Pa/89
3 phase bridge rectifier, half controlled		TD B6HK 95 N [2]	1200, 1600	75	620	95/85	0,95	5,5	0,82	125	M_1Pb/89
		TD B6HK 135 N [2]	1200, 1600	100	870	135/85	0,95	4,3	0,59	125	M_1Pb/89
		TD B6HK 165 N [2]	1200, 1600	120	1050	165/85	0,95	3,2	0,49	125	M_1Pb/89
		TD B6HK 205 N [2]	1200, 1600	120	1300	205/85	0,95	2,2	0,41	125	M_1Pb/89
3 phase bridge rectifier, fully controlled		TT B6C 95 N [2]	1200, 1600	75	620	95/85	0,95	5,5	0,82	125	M_1Pb/89
		TT B6C 135 N [2]	1200, 1600	100	870	135/85	0,95	4,3	0,59	125	M_1Pb/89
		TT B6C 165 N [2]	1200, 1600	120	1050	165/85	0,95	3,2	0,49	125	M_1Pb/89

IsoPACK™ AC-Switches

		Type	V_{DRM}, V_{RRM} V $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{RRM} + 100V$	I_{FRMSM} (I_{TRMSM}) A	I_{FSM} (I_{TSM}) A 10 ms, $T_{vj\,max}$	I_{RMS}/T_c A/°C	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	R_{thJC} °C/W per arm 180° el Sinus	$T_{vj\,max}$ °C	Outline / page
3 phase AC-Switches, fully controlled		TT W3C 85 N [2]	1200, 1600	75	620	85/85	0,95	5,5	0,70	125	M_1Pb/89
		TT W3C 115 N [2]	1200, 1600	100	870	115/85	0,95	4,3	0,50	125	M_1Pb/89
		TT W3C 145 N [2]	1200, 1600	120	1050	145/85	0,95	3,2	0,42	125	M_1Pb/89
3 phase AC-Switches, half controlled		TD W3H 115 N [2]	1200, 1600	100	900	115/85	0,95	4,3	0,50	125	M_1Pb/89





IsoPACK™ modules are UL recognized

Sets of srews will be included at customer's request at no cost. Requests must be made at time of order.

[1] IsoPACK 42: 30 pcs. M 5 x 11 for 5 modules – see page 110


[2] IsoPACK 54: 30 pcs. M 6 x15 for 5 modules – see page 110

EconoBRIDGE™ Rectifier

		Type	V_{DRM}, V_{RRM} V $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{RRM} + 100V$	I_{FRMSM} (I_{TRMSM}) A	I_{FSM} (I_{TSM}) A 10 ms, $T_{vj\,max}$	I_d/T_c A/°C	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	R_{thJC} °C/W per arm 120° el. Square wave	$T_{vj\,max}$ °C	Brake IGBT V_{CES} V	Brake IGBT I_C A	Outline / page
3 phase bridge rectifier, uncontrolled		DD B6U 84N..R	1200, 1600	60	550	85/100	0,75	5,5	1,45	150			M_E2g/90
		DD B6U 100 N..R	1200, 1600	60	550	100/100	0,75	5,5	1,15	150			M_E2g/90
		DD B6U 144 N..R	1200, 1600	100	1000	145/100	0,75	3,1	0,89	150			M_E2g/90
3 phase bridge rectifier, uncontrolled with brake chopper		DD B6U 84N..RR	1200, 1600	60	550	85/100	0,75	5,5	1,45	150	1200	50	M_E2h/90
		DD B6U 100N..RR	1200, 1600	60	550	100/100	0,75	5,5	1,15	150	1200	50	M_E2h/90
3 phase bridge rectifier, uncontrolled with brake chopper and NTC		DD B6U 104 N 16 RR	1600	60	550	105/100	0,75	5,5	1,08	150	1200	50	M_E2j/90
		DD B6U 134 N 16 RR	1600	80	550	134/100	0,75	6,3	0,70	150	1200	70	M_E2j/90
3 phase bridge rectifier, halfcontrolled with brake chopper and NTC		TD B6HK 74 N 16 RR	1600	45	400	75/85	0,75	9,1	1,10	125	1200	50	M_E2i/90
		TD B6HK 104 N 16 RR	1600	60	550	104/85	0,80	7,0	0,75	125	1200	50	M_E2i/90
		TD B6HK 124 N 16 RR	1600	70	550	125/85	0,75	6,3	0,63	125	1200	70	M_E2i/90


EconoBRIDGE™ Rectifiers are UL recognized

Overview PowerBLOCK Thyristor Modules for Phase Control

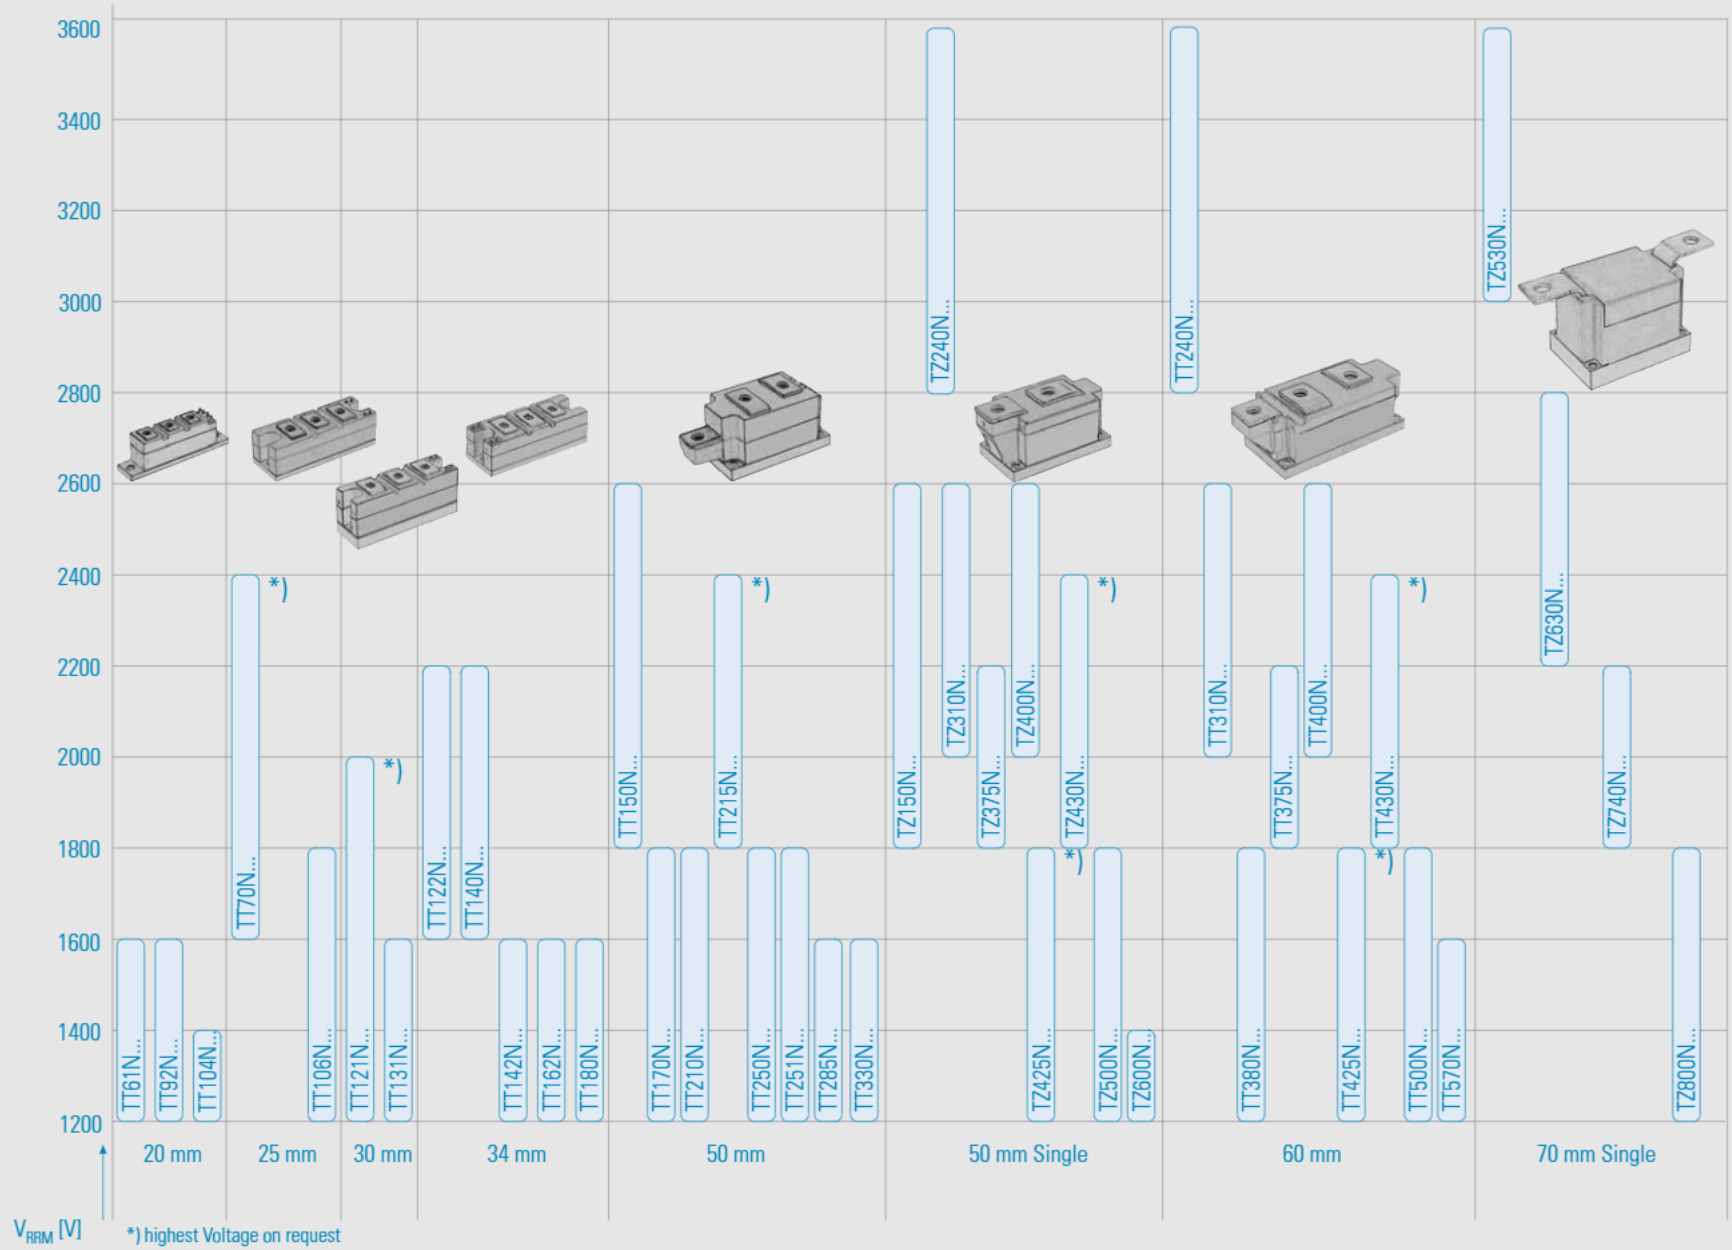


*) highest Voltage on request

PowerBLOCK Thyristor Modules for Phase Control

	Type	V_{DRM} V_{RRM} V $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{RRM} + 100$ V	I_{TRMSM} A	I_{TSM} A 10 ms, $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms, $T_{vj\,max}$	I_{TAVM}/T_c A/°C 180° el sin	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	$(di/dt)_{cr}$ A/µs DIN IEC 747 - 6	t_q µs typ.	$(dv/dt)_{cr}$ V/µs DIN IEC 747 - 6	R_{thJC} °C/W 180° el sin	R_{thCK} °C/W	$T_{vj\,max}$ °C	Outline / page
Baseplate = 20 mm	TT 61 N	1200 … 1600	120	1400	9,8	60/85	0,80	3,40	150	120	F = 1000	0,52	0,16	125	TP20/91
	TT 92 N	1200 … 1600	160	1800	16,2	92/85	0,85	2,15	150	150	F = 1000	0,37	0,10	130	TP20/91
	TT 104 N	1200 … 1400	160	1800	16,2	104/85	0,85	2,15	150	150	F = 1000	0,37	0,10	140	TP20/91
Baseplate = 25 mm	TT 70 N	1600 … 2400*	150	1450	10,5	70/85	1,00	3,80	100	300	F = 1000	0,35	0,08	125	TP25/91
	TT 106 N	1200 … 1800	180	2000	20,0	106/85	0,90	2,60	150	150	F = 1000	0,33	0,08	140	TP25/91
Baseplate = 30 mm	TT 121 N	1200 … 2000*	200	2350	27,6	121/85	0,85	2,00	150	180	F = 1000	0,23	0,06	125	TP30/91
	TT 131 N	1200 … 1600	220	3200	51,2	131/85	0,85	1,50	150	180	F = 1000	0,23	0,06	125	TP30/91
Baseplate = 34 mm	TT 122 N	1600 … 2200	220	2950	43,5	122/85	1,00	2,15	100	300	F = 1000	0,2	0,06	125	TP34/91
	TT 140 N	1600 … 2200	250	3200	51,2	140/85	0,90	1,75	150	300	F = 1000	0,19	0,06	125	TP34/91
	TT 142 N	1200 … 1600	230	4100	84	142/85	0,90	1,10	150	200	F = 1000	0,22	0,06	125	TP34/91
	TT 162 N	1200 … 1600	260	4400	97	162/85	0,85	0,95	150	200	F = 1000	0,20	0,06	125	TP34/91
	TT 180 N	1200 … 1600	285	4100	84	180/85	0,85	0,90	150	200	F = 1000	0,20	0,06	130	TP34/91
Baseplate = 50 mm	TT 150 N	1800 … 2600	350	4000	80	150/85	1,20	2,30	60	300	F = 1000	0,13	0,04	125	TP50/91
	TT 170 N	1200 … 1800	350	4600	106	170/85	0,95	1,00	150	250	F = 1000	0,17	0,04	125	TP50/91
	TT 210 N	1200 … 1800	410	5800	168	210/85	1,00	0,85	150	200	F = 1000	0,13	0,04	125	TP50/91
	TT 215 N	1800 … 2400*	410	6300	198	215/85	0,95	0,92	100	300	F = 1000	0,13	0,04	125	TP50/91
	TT 250 N	1200 … 1800	410	7000	245	250/85	0,80	0,70	150	250	F = 1000	0,13	0,04	125	TP50/91
	TT 251 N	1200 … 1800	410	8000	320	250/85	0,80	0,70	250	250	F = 1000	0,13	0,04	125	TP50/91
	TT 285 N	1200 … 1600	450	8000	320	285/92	0,80	0,70	250	250	F = 1000	0,117	0,04	135	TP50/91
	TT 330 N	1200 … 1600	520	8000	320	330/85	0,80	0,60	250	250	F = 1000	0,117	0,04	135	TP50/91
Baseplate = 60 mm	TT 240 N	2800 … 3600	700	5500	151	240/85	1,17	1,70	100	350	F = 1000	0,078	0,02	125	TP60/91
	TT 310 N	2000 … 2600	700	9000	405	310/85	1,00	0,86	120	300	F = 1000	0,078	0,02	125	TP60/91
	TT 380 N	1200 … 1800*	800	11000	605	380/85	1,00	0,38	120	250	F = 1000	0,078	0,02	125	TP60/91
	TT 375 N	1800 … 2200	900	10600	561	375/85	0,85	0,56	120	300	F = 1000	0,078	0,02	125	TP60/91
	TT 400 N	2000 … 2600	800	11000	605	400/85	1,00	0,50	150	300	F = 1000	0,065	0,02	125	TP60/91
	TT 425 N	1200 … 1800*	800	12500	781	425/85	0,90	0,30	120	250	F = 1000	0,078	0,02	125	TP60/91
	TT 430 N	1800 … 2200*	800	12000	720	430/85	0,95	0,45	150	300	F = 1000	0,065	0,02	125	TP60/91
	TT 500 N	1200 … 1800	900	14500	1051	500/85	0,90	0,27	200	250	F= 1000	0,065	0,02	125	TP60/91
	TT 570 N	1200 … 1600	900	14000	980	570/87	0,90	0,27	200	250	F = 1000	0,065	0,02	135	TP60/91

PowerBLOCK modules are UL recognized Common anode or cathode on request * Highest voltage on request


PowerBLOCK Single Thyristor Modules for Phase Control

	Type	V_{DRM} V_{RRM} V $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{RRM} + 100$ V	I_{TRMSM} A	I_{TSM} A 10 ms, $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms, $T_{vj\,max}$	I_{TAVM}/T_c A/°C 180° el sin	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	$(di/dt)_{cr}$ A/µs DIN IEC 747 - 6	t_q µs typ.	$(dv/dt)_{cr}$ V/µs DIN IEC 747 - 6	R_{thJC} °C/W 180° el sin	R_{thCK} °C/W	$T_{vj\,max}$ °C	Outline / page
Baseplate = 50 mm	TZ 150 N	1800 … 2600	350	4000	80	150/85	1,20	2,30	60	300	F = 1000	0,13	0,04	125	TP50.1/91
	TZ 240 N	2800 … 3600	700	5500	151	240/85	1,17	1,70	100	350	F = 1000	0,078	0,02	125	TP50.1/91
	TZ 310 N	2000 … 2600	700	8000	320	310/85	1,00	0,86	120	300	F = 1000	0,078	0,02	125	TP50.1/91
	TZ 375 N	1800 … 2200	1050	10600	561	375/85	0,85	0,56	120	300	F = 1000	0,078	0,02	125	TP50.1/91
	TZ 400 N	2000 … 2600	1050	11000	605	400/85	1,00	0,50	150	300	F = 1000	0,065	0,02	125	TP50.1/91
	TZ 425 N	1200 … 1800*	800	12500	781	425/85	0,90	0,30	120	250	F = 1000	0,078	0,02	125	TP50.1/91
	TZ 430 N	1800 … 2200*	1050	12000	720	430/85	0,95	0,45	150	300	F = 1000	0,065	0,02	125	TP50.1/91
	TZ 500 N	1200 … 1800	1050	14500	1051	500/85	0,90	0,27	200	250	F = 1000	0,065	0,02	125	TP50.1/91
	TZ 600 N	1200 … 1400	1050	14000	980	600/85	0,90	0,27	200	250	F = 1000	0,065	0,02	135	TP50.1/91
Baseplate = 70 mm	TZ 530 N	3000 … 3600	1500	20000	2000	530/85	1,05	0,49	80	400	F = 1000	0,045	0,01	125	TP70/92
	TZ 630 N	2200 … 2800	1500	23000	2650	630/85	0,95	0,37	150	400	F = 1000	0,042	0,01	125	TP70/92
	TZ 740 N	1800 … 2200	1500	26500	3500	740/85	0,90	0,21	200	350	F = 1000	0,042	0,01	125	TP70/92
	TZ 800 N	1200 … 1800	1500	30000	4500	800/85	0,85	0,17	200	240	F = 1000	0,042	0,01	125	TP70/92


PowerBLOCK modules are UL recognized

* Highest voltage on request

Overview PowerBLOCK Thyristor/Diode Modules for Phase Control

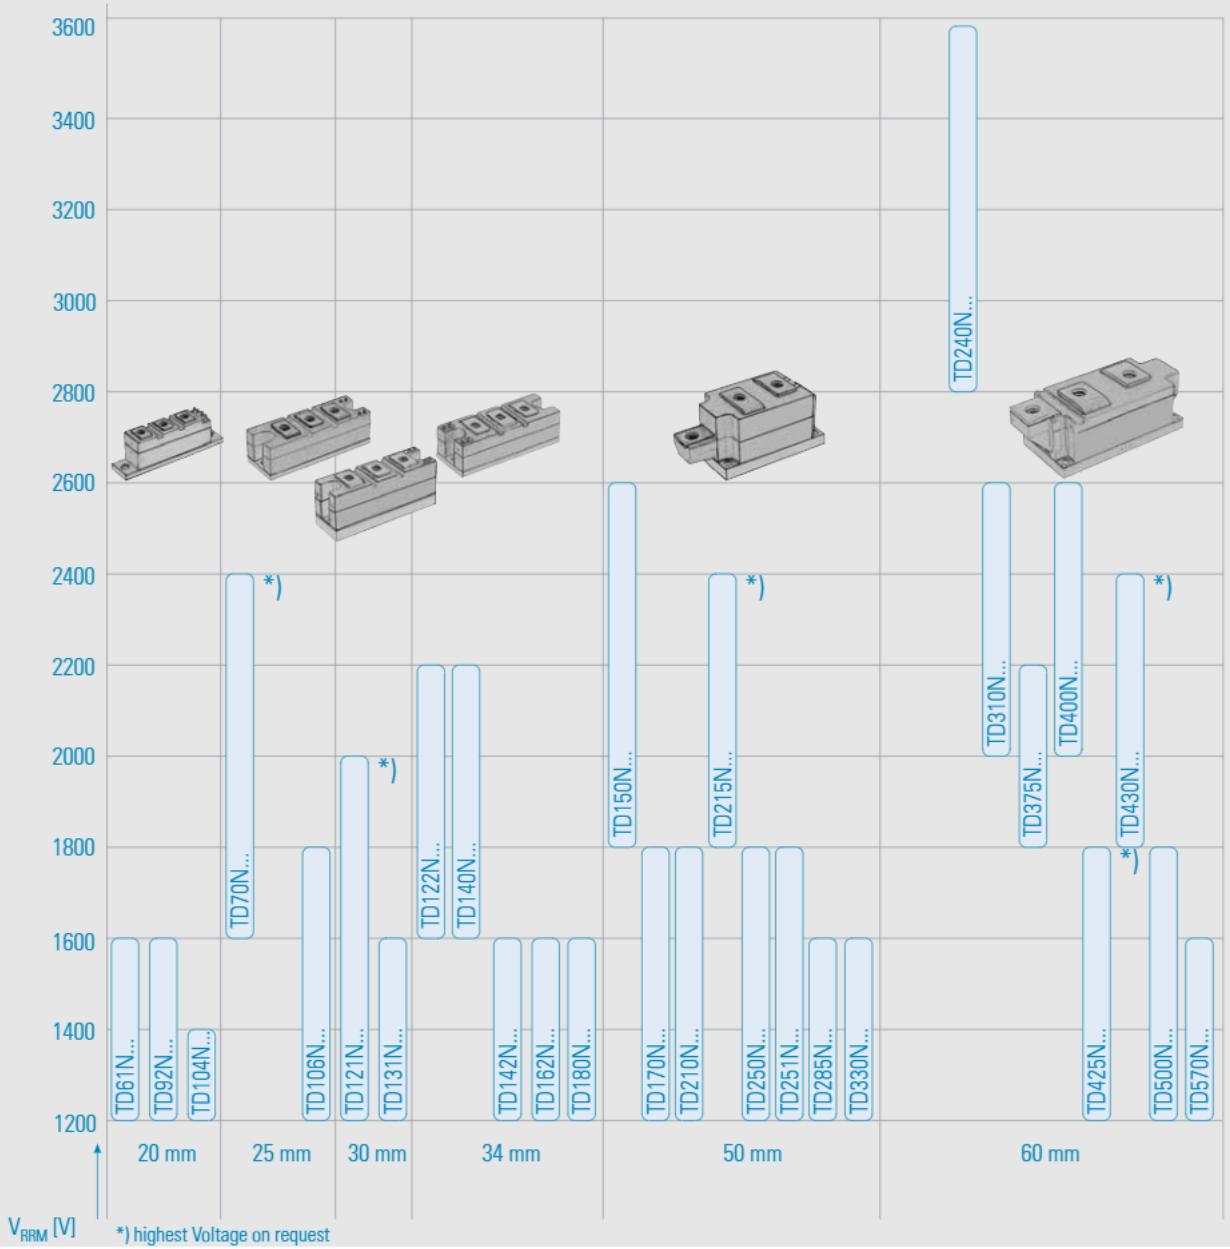


PowerBLOCK Thyristor/Diode Modules for Phase Control


	Type	V_{DRM} V_{RRM} V $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{RRM} + 100$ V	I_{TRMSM} A	I_{TSM} A 10 ms, $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms, $T_{vj\,max}$	I_{TAVM}/T_c A/°C 180° el sin	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	$(di/dt)_{cr}$ A/µs DIN IEC 747 - 6	t_q µs typ.	$(dv/dt)_{cr}$ V/µs DIN IEC 747 - 6	R_{thJC} °C/W 180° el sin	R_{thCK} °C/W	$T_{vj\,max}$ °C	Outline / page
Baseplate = 20 mm	TD61N	1200 … 1600	120	1400	9,8	60/85	0,80	3,40	150	120	F = 1000	0,52	0,16	125	TP20/91
	TD92N	1200 … 1600	160	1800	16,2	92/85	0,85	2,15	150	150	F = 1000	0,37	0,10	130	TP20/91
	TD104N	1200 … 1400	160	1800	16,2	104/85	0,85	2,15	150	150	F = 1000	0,37	0,10	140	TP20/91
Baseplate = 25 mm	TD70N	1600 … 2400*	150	1450	10,5	70/85	1,00	3,80	100	300	F = 1000	0,35	0,08	125	TP25/91
	TD106N	1200 … 1800	180	2000	20,0	106/85	0,90	2,60	150	150	F = 1000	0,33	0,08	140	TP25/91
Baseplate = 30 mm	TD121N	1200 … 2000*	200	2350	27,6	121/85	0,85	2,00	150	180	F = 1000	0,23	0,06	125	TP30/91
	TD131N	1200 … 1600	220	3200	51,2	131/85	0,85	1,50	150	180	F = 1000	0,23	0,06	125	TP30/91
Baseplate = 34 mm	TD122N	1600 … 2200	220	2950	43,5	122/85	1,00	2,15	100	300	F = 1000	0,20	0,06	125	TP34/91
	TD140N	1600 … 2200	250	3200	51,2	140/85	0,90	1,75	150	300	F = 1000	0,19	0,06	125	TP34/91
	TD142N	1200 … 1600	230	4100	84	142/85	0,90	1,10	150	200	F = 1000	0,22	0,06	125	TP34/91
	TD162N	1200 … 1600	260	4400	97	162/85	0,85	0,95	150	200	F = 1000	0,20	0,06	125	TP34/91
	TD180N	1200 … 1600	285	4100	84	180/85	0,85	0,90	150	200	F = 1000	0,20	0,06	130	TP34/91
Baseplate = 50 mm	TD150N	1800 … 2600	350	4000	80	150/85	1,20	2,30	60	300	F = 1000	0,13	0,04	125	TP50/91
	TD170N	1200 … 1800	350	4600	106	170/85	0,95	1,00	150	250	F = 1000	0,17	0,04	125	TP50/91
	TD210N	1200 … 1800	410	5800	168	210/85	1,00	0,85	150	200	F = 1000	0,13	0,04	125	TP50/91
	TD215N	1800 … 2400*	410	6300	198	215/85	0,95	0,92	100	300	F = 1000	0,13	0,04	125	TP50/91
	TD250N	1200 … 1800	410	7000	245	250/85	0,80	0,70	150	250	F = 1000	0,13	0,04	125	TP50/91
	TD251N	1200 … 1800	410	8000	320	250/85	0,80	0,70	250	250	F = 1000	0,13	0,04	125	TP50/91
	TD285N	1200 … 1600	450	8000	320	285/92	0,80	0,70	250	250	F = 1000	0,117	0,04	135	TP50/91
	TD330N	1200 … 1600	520	8000	320	330/85	0,80	0,60	250	250	F = 1000	0,117	0,04	135	TP50/91
Baseplate = 60 mm	TD240N	2800 … 3600	700	5500	151	240/85	1,17	1,70	100	350	F = 1000	0,078	0,02	125	TP60/91
	TD310N	2000 … 2600	700	9000	405	310/85	1,00	0,86	120	300	F = 1000	0,078	0,02	125	TP60/91
	TD375N	1800 … 2200	908	10600	561	375/85	0,85	0,56	120	300	F = 1000	0,078	0,02	125	TP60/91
	TD400N	2000 … 2600	800	11000	605	400/85	1,00	0,50	150	300	F = 1000	0,065	0,02	125	TP60/91
	TD425N	1200 … 1800*	800	12500	781	425/85	0,90	0,30	120	250	F = 1000	0,078	0,02	125	TP60/91
	TD430N	1800 … 2200	800	12000	720	430/85	0,95	0,45	150	300	F = 1000	0,065	0,02	125	TP60/91
	TD500N	1000 … 1800	900	14500	1051	500/85	0,90	0,27	200	250	F = 1000	0,065	0,02	125	TP60/91
	TD570 N	1200 … 1600	900	14000	980	570/87	0,90	0,27	200	250	F = 1000	0,065	0,02	135	TP60/91

PowerBLOCK modules are UL recognized Common anode or cathode on request * Highest voltage on request Modules for current source inverter with higher blocking Diodes on request

Overview PowerBLOCK Diode/Thyristor Modules for Phase Control

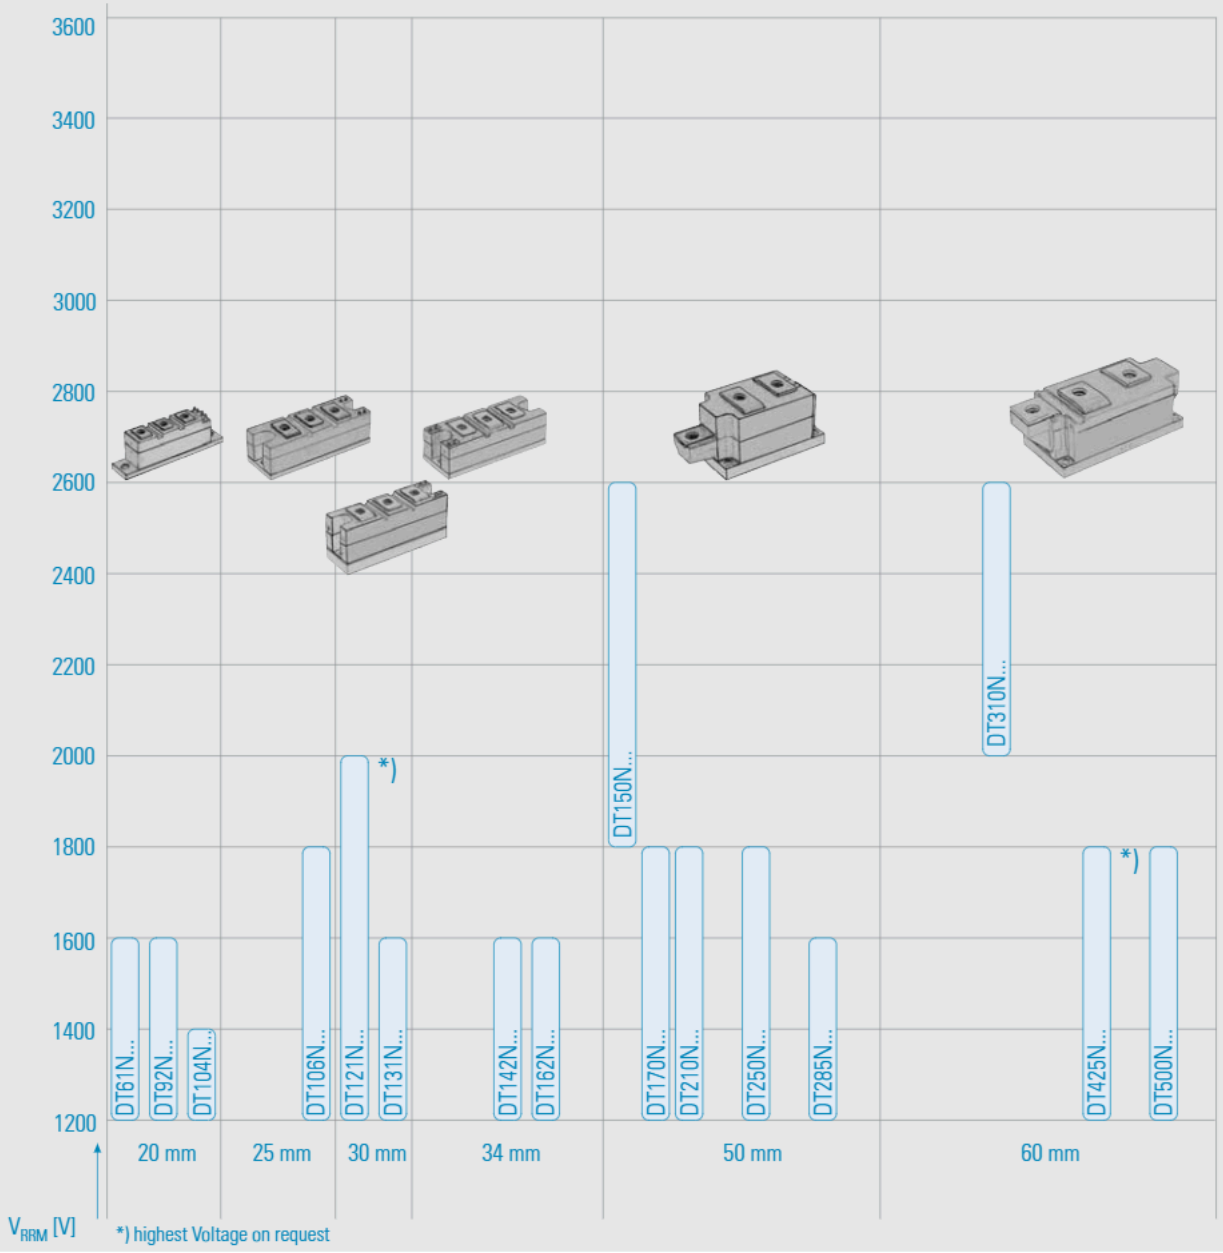


PowerBLOCK Diode/Thyristor Modules for Phase Control


	Type	V_{DRM} V_{RRM} V $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{RRM} + 100$ V	I_{TRMSM} A	I_{TSM} A 10 ms, $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms, $T_{vj\,max}$	I_{TAVM}/T_c A/°C 180° el sin	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	$(di/dt)_{cr}$ A/µs DIN IEC 747 - 6	t_q µs typ.	$(dv/dt)_{cr}$ V/µs DIN IEC 747 - 6	R_{thJC} °C/W 180° el sin	R_{thCK} °C/W	$T_{vj\,max}$ °C	Outline / page
Baseplate = 20 mm	DT61N	1200 … 1600	120	1400	9,8	60/85	0,80	3,40	150	120	F = 1000	0,52	0,16	125	TP20/91
	DT92N	1200 … 1600	160	1800	16,2	92/85	0,85	2,15	150	150	F = 1000	0,37	0,10	130	TP20/91
	DT104N	1200 … 1400	160	1800	16,2	104/85	0,85	2,15	150	150	F = 1000	0,37	0,10	140	TP20/91
Baseplate = 25 mm	DT106N	1200 … 1800	180	2000	20,0	106/85	0,90	2,60	150	150	F = 1000	0,33	0,08	140	TP25/91
Baseplate = 30 mm	DT121N	1200 … 2000*	200	2350	27,6	121/85	0,85	2,00	150	180	F = 1000	0,23	0,06	125	TP30/91
	DT131N	1200 … 1600	220	3200	51,2	131/85	0,85	1,50	150	180	F = 1000	0,23	0,06	125	TP30/91
Baseplate = 34 mm	DT142N	1200 … 1600	230	4100	84	142/85	0,90	1,10	150	200	F = 1000	0,22	0,06	125	TP34/91
	DT162N	1200 … 1600	260	4400	97	162/85	0,85	0,95	150	200	F = 1000	0,20	0,06	125	TP34/91
Baseplate = 50 mm	DT150N	1800 … 2600	350	4000	80	150/85	1,20	2,30	60	300	F = 1000	0,13	0,04	125	TP50/91
	DT170N	1200 … 1800	350	4600	106	170/85	0,95	1,00	150	250	F = 1000	0,17	0,04	125	TP50/91
	DT210N	1200 … 1800	410	5800	168	210/85	1,00	0,85	150	200	F = 1000	0,13	0,04	125	TP50/91
	DT250N	1200 … 1800	410	7000	245	250/85	0,80	0,70	150	250	F = 1000	0,13	0,04	125	TP50/91
	DT285N	1200 … 1600	450	8000	320	285/92	0,80	0,70	250	250	F = 1000	0,13	0,04	135	TP50/91
Baseplate = 60 mm	DT310N	2000 … 2600	700	9000	405	310/85	1,00	0,86	120	300	F = 1000	0,078	0,02	125	TP60/91
	DT425N	1200 … 1800*	800	12500	781	425/85	0,90	0,30	120	250	F = 1000	0,078	0,02	125	TP60/91
	DT500N	1200 … 1800	900	14500	1051	500/85	0,90	0,27	200	250	F = 1000	0,065	0,02	125	TP60/91

PowerBLOCK modules are UL recognized Common anode or cathode on request * Highest voltage on request Modules for current source inverter with higher blocking Diodes on request

Overview PowerBLOCK Diode Modules for Phase Control

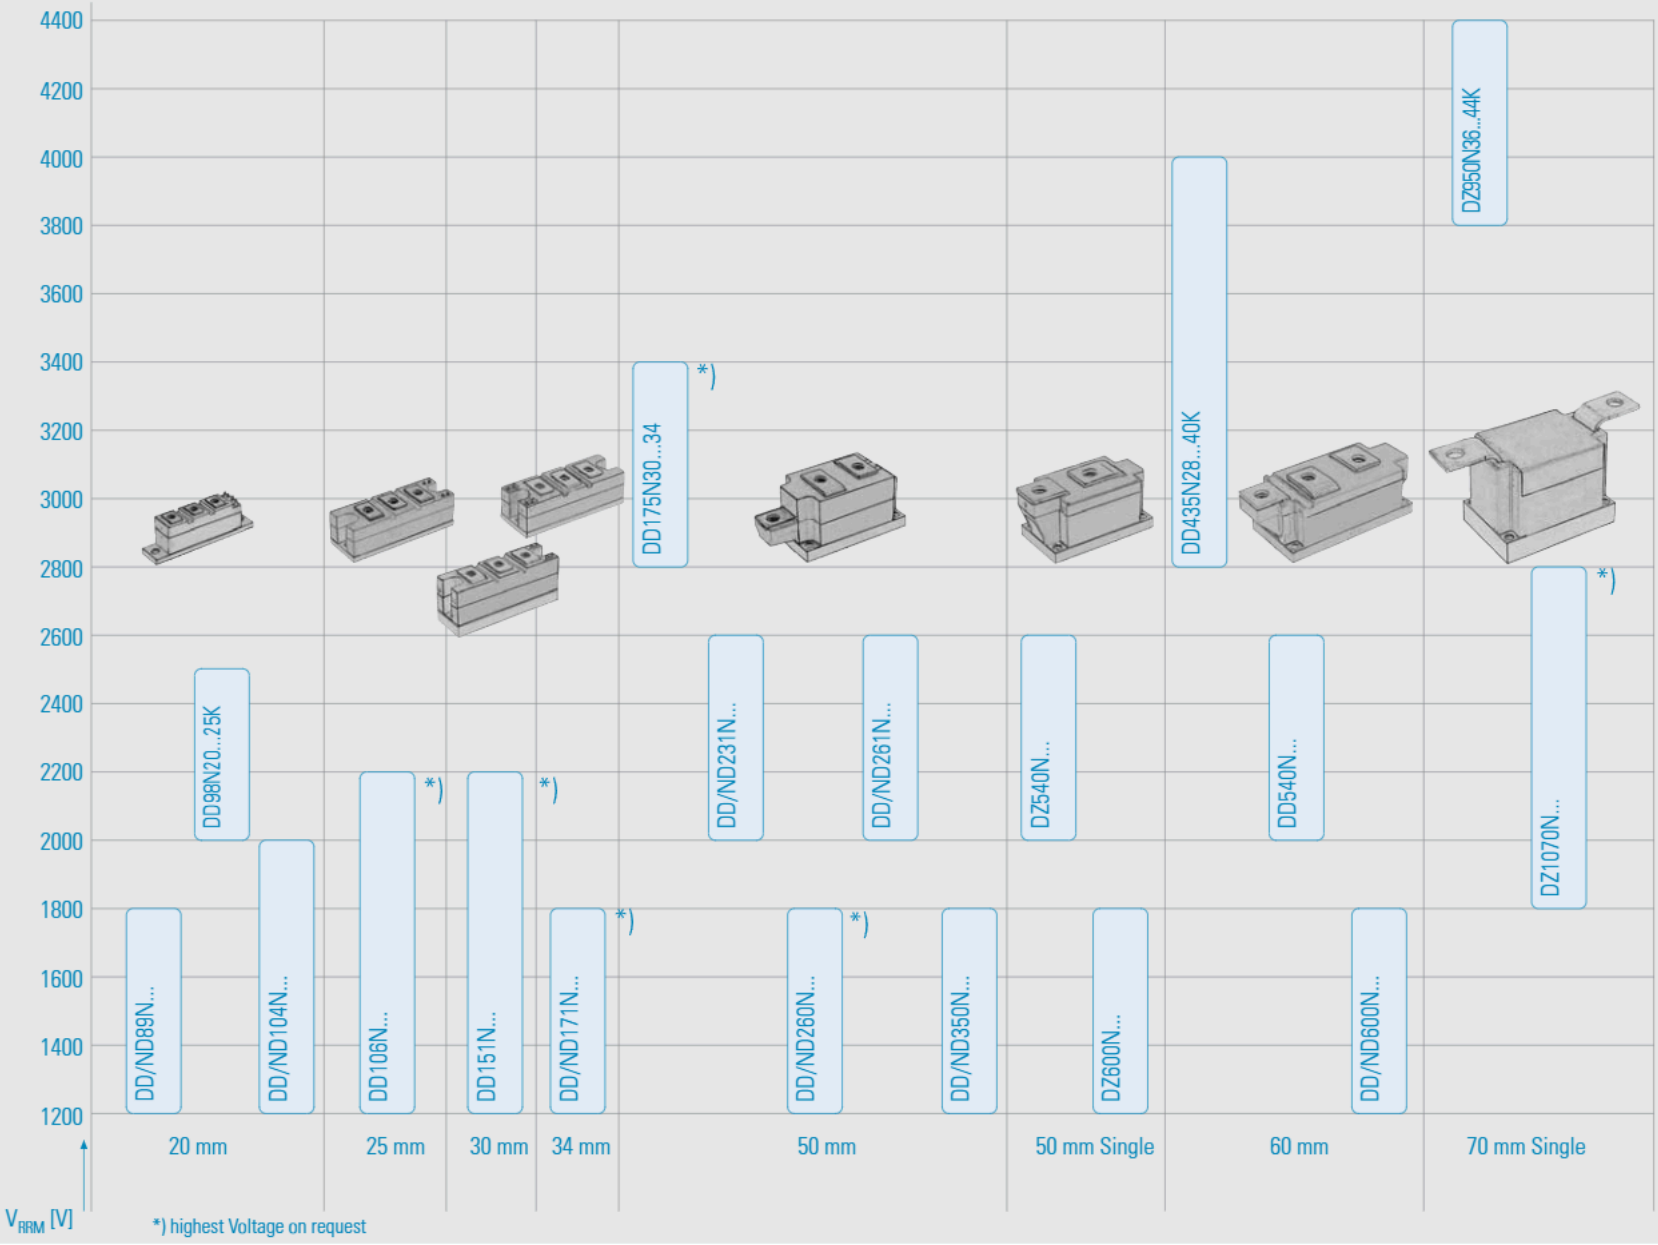


PowerBLOCK Rectifier Diode Modules for Phase Control

	Type	V_{RRM} V $V_{RSM} = V_{RRM} + 100V$	I_{FRMSM} A	I_{FSM} A 10 ms, $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms, $T_{vj\,max}$	I_{FAVM}/T_c A/°C	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	R_{thJC} °C/W 180° el sin	R_{thCK} °C/W	$T_{vj\,max}$ °C	Outline / page
Baseplate = 20 mm	DD 89 N	1200 … 1800	140	2400	28,8	89/100	0,75	2,3	0,45	0,1	150	DP20/92
	ND 89 N	1200 … 1800	140	2400	28,8	89/100	0,75	2,3	0,45	0,1	150	DP20/92
	DD 98 N	2000 … 2500	160	2000	20	98/100	0,82	2	0,39	0,1	150	DP20/92
	DD 104 N	1200 … 1800	160	2500	31,25	104/100	0,70	2,1	0,39	0,1	150	DP20/92
	ND 104 N	1200 … 1800	160	2500	31,25	104/100	0,70	2,1	0,39	0,1	150	DP20/92
Baseplate = 25 mm	DD 106 N	1200 … 2200*	180	2600	33,8	106/100	0,70	2	0,39	0,08	150	DP25/92
Baseplate = 30 mm	DD 151 N	1200 … 2200*	240	4600	105,8	151/100	0,75	0,9	0,3	0,06	150	DP30/92
Baseplate = 34 mm	DD 171 N	1200 … 1800*	270	5600	157	170/100	0,75	0,8	0,26	0,06	150	DP34/93
	ND 171 N	1200 … 1800*	270	5600	157	170/100	0,75	0,8	0,26	0,06	150	DP34/93
Baseplate = 50 mm	DD 175N	3000 … 3400*	350	4000	80	175/100	0,90	1,8	0,17	0,04	150	DP50/93
	DD 231 N	2000 … 2600	410	6400	205	231/100	0,80	0,84	0,17	0,04	150	DP50/93
	ND 231 N	2000 … 2600	410	6400	205	231/100	0,80	0,84	0,17	0,04	150	DP50ND/93
	DD 260 N	1200 … 1800*	410	8300	344	260/100	0,70	0,68	0,17	0,04	150	DP50/93
	ND 260 N	1200 … 1800*	410	8300	344	260/100	0,70	0,68	0,17	0,04	150	DP50ND/93
	DD 261 N	2000 … 2600	410	8300	344	260/100	0,70	0,68	0,17	0,04	150	DP50/93
	ND 261 N	2000 … 2600	410	8300	344	260/100	0,70	0,68	0,17	0,04	150	DP50ND/93
	DD 285 N	400 … 800	450	8300	344	285/100	0,75	0,4	0,17	0,04	150	DP50/93
	DD 350 N	1200 … 1800	550	11000	605	350/100	0,75	0,4	0,13	0,04	150	DP50/93
	◆ ND 350 N	1200 … 1800	550	11000	605	350/100	0,75	0,4	0,13	0,04	150	DP50ND/93
	DZ 540 N	2000 … 2600	1150	14000	980	540/100	0,78	0,31	0,078	0,02	150	DP50.1/93
	DZ 600 N	1200 … 1800	1150	19000	1805	600/100	0,75	0,215	0,078	0,02	150	DP50.1/93
Baseplate = 60 mm	DD 435 N	2800 … 4000	900	12000	720	435/100	0,84	0,6	0,078	0,02	150	DP60/93
	DD 540 N	2000 … 2600	900	14000	980	540/100	0,78	0,31	0,078	0,02	150	DP60/93
	DD 600 N	1200 … 1800	950	19000	1800	600/100	0,75	0,215	0,078	0,02	150	DP60/93
	ND 600 N	1200 … 1800	950	19000	1800	600/100	0,75	0,215	0,078	0,02	150	DP60/93
Baseplate = 70 mm	DZ 950 N	3600 … 4400	1500	29000	4205	950/100	0,85	0,28	0,042	0,01	150	DP70/93
	DZ 1070 N	1800 … 2800*	1700	35000	6125	1070/100	0,80	0,17	0,045	0,01	160	DP70/93

PowerBLOCK modules are UL recognized Common anode or cathode on request * Highest voltage on request

◆ New type


PowerBLOCK Fast Thyristor Modules

	Type	V_{DRM} V_{RRM} V $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{RRM} + 100$ V	I_{TRMSM} A	I_{TSM} A 10 ms, $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms, $T_{vj\,max}$	I_{TAVM}/T_c A/°C 180° el sin	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	$(di/dt)_{cr}$ A/µs DIN IEC 747 - 6	t_q µs typ.	$(dv/dt)_{cr}$ V/µs DIN IEC 747 - 6	R_{thJC} °C/W 180° el sin	R_{thCK} °C/W	$T_{vj\,max}$ °C	Outline / page
Baseplate = 20 mm	TT 46 F	800 … 1200	120	1150	6,60	45/85	1,30	3,4	120	F ≤ 25	C = 500	0,52	0,16	125	TP20/91
	TD 46 F														
Baseplate = 25 mm	TT 60 F	800 … 1300*	150	1300	8,45	60/85	1,30	4	200	F ≤ 25	C = 500	0,35	0,08	125	TP25/91
										E ≤ 20					
Baseplate = 30 mm	TT 71 F	1000 … 1300	180	2100	22,00	71/85	1,30	3,1	160	F ≤ 25	C = 500	0,3	0,06	125	TP30/91
	TD 71 F									E ≤ 20					
	DT 71 F														
	TT 81 F [1]	400 … 800	180	2200	24,20	81/85	1,25	2	160	E ≤ 20	C = 500	0,3	0,06	125	TP30/91
	TD 81 F [1]									F ≤ 25					
	DT 81 F [1]														
	TT 101 F	1000 … 1300	200	2400	28,80	101/85	1,20	2,1	160	F ≤ 25	C = 500	0,23	0,06	125	TP30/91
	TD 101 F														
	DT 101 F														
	TT 111 F [1]	800 … 1000	200	2600	33,80	111/85	1,20	1,4	200	E ≤ 20	C = 500	0,23	0,06	125	TP30/91
	TD 111 F [1]									F ≤ 25					
	DT 111 F [1]														
Baseplate = 50 mm	TT 180 F	1000 … 1300*	350	6000	180,00	180/85	1,30	0,9	200	F ≤ 25	C = 500	0,13	0,04	125	TP50/91
	TD 180 F									E ≤ 20					
	DT 180 F									S ≤ 18					
	TT 200 F	1000 … 1300*	410	6400	205,00	200/85	1,20	0,75	200	F ≤ 25	C = 500	0,13	0,04	125	TP50/91
	TD 200 F									E ≤ 20					
	DT 200 F									S ≤ 18					
	TZ 335 F	1000 … 1200*	700	10000	500,00	335/85	1,15	0,42	200	G ≤ 30	C = 500	0,08	0,02	125	TP50/91
										F ≤ 25					

PowerBLOCK modules are UL recognized Common anode or cathode on request * Highest voltage on request

[1] $V_{RRM} \leq 1000$ V : $V_{RSM} = V_{RRM} + 50$ V


PowerBLOCK Fast Asymmetric Thyristor Modules

	Type	V_{DRM} V_{RRM} V $V_{DSM} = V_{DRM}$	V_{RRM} V_{RRM} [($V_{RRM(CI)}$) $t_p = 1\mu s$]	I_{TRMSM} A	I_{TSM} A 10 ms, $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms, $T_{vj\,max}$	I_{TAVM}/T_c A/°C 180° el sin	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	$(di/dt)_{cr}$ A/µs DIN IEC 747 - 6	t_q µs typ.	$(dv/dt)_{cr}$ V/µs DIN IEC 747 - 6	R_{thJC} °C/W 180° el sin	R_{thCK} °C/W	$T_{vj\,max}$ °C	Outline / page
Baseplate = 20 mm	AD 50 F	1000 … 1200*	15 [50]	120	1300	8,45	50/85	1,30	3,75	120	D ≤ 15	C = 500	0,45	0,16	125	TP20/91
											C ≤ 12	F = 1000				
											B ≤ 10					
	AD 60 F	1000 … 1200*	15 [50]	150	1450	10,5	60/85	1,20	208	120	D ≤ 15	C = 500	0,39	0,16	125	TP20/91
											C ≤ 12	F = 1000				
											B ≤ 10					
Baseplate = 34 mm	AD 96 S	800 … 1200*	15 [50]	200	2350	27,60	95/85	1,30	2,15	400	D ≤ 15	C = 500	0,23	0,06	125	TP34/91
											C ≤ 12	F = 1000				
											B ≤ 10					
											A ≤ 8					
	AD 116 S	800 … 1200	15 [50]	220	2600	33,80	115/85	1,10	1,45	400	E ≤ 20	C = 500	0,23	0,06	125	TP34/91
											D ≤ 15	F = 1000				
Baseplate = 50 mm	AD 180 S	800 … 1300*	15 [50]	350	4800	115,00	180/85	1,30	0,9	500	D ≤ 15	C = 500	0,13	0,04	125	TP50/91
											C ≤ 12	F = 1000				
											B ≤ 10					
											A ≤ 8					
	AD 220 S	800 … 1300*	15 [50]	410	5200	135,00	220/85	1,10	0,6	500	F ≤ 25	C = 500	0,13	0,04	125	TP50/91
											E ≤ 20	F = 1000				
											D ≤ 15					

PowerBLOCK modules are UL recognized

* Highest voltage on request

PowerBLOCK Fast Diode Modules

	Type	V_{RRM} V V_{RSM} = V_{RRM} + 100V (50 Hz)	I_{FRMSM} A	I_{FSM} A 10 ms, $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms, $T_{vj\,max}$	I_{FAVM}/T_c A/°C	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	I_{RM} A $T_{vj} = T_{vj\,max}$ -di/dt = 100 A/µs	R_{thJC} °C/W 180° el sin	R_{thCK} °C/W	$T_{vj\,max}$ °C	Outline / page
Baseplate = 20 mm	DD 46 S	800 … 1200 [1]	100	850	3,60	45/85	0,90	3,9		0,68	0,16	125	DP20/92
	DD 61 S	1000 … 1400 [1]	120	1600	12,80	61/100	1,00	2,2	82	0,62	0,16	150	DP20/92
	DD 62 S	400 … 1000 [1]	120	1600	12,80	61/100	1,00	2,2	62	0,62	0,16	150	DP20/92
	DD 81 S	1000 … 1400	150	1900	18,05	81/100	0,95	1,7	87	0,48	0,16	150	DP20/92
	DD 82 S	400 … 1000 [1]	150	1900	18,05	81/100	0,95	1,7	65	0,48	0,16	150	DP20/92
Baseplate = 30 mm	DD 121S	1000 … 1400	200	2000	20,00	121/100	0,95	1,7	95	0,28	0,06	150	DP30/92
	DD122S	400 … 1000 [1]	200	2000	20,00	121/100	0,95	1,7	70	0,28	0,06	150	DP30/92
Baseplate = 50 mm	DD 230 S	1800 … 2600	410	7500	281,00	230/100	1,00	0,8		0,15	0,04	150	DP50/93
	ND 230 S	1800 … 2600	410	7500	281,00	230/100	1,00	0,8		0,15	0,04	150	DP50ND/93
	DD 241 S	1000 … 1400	410	7500	281,00	240/100	1,10	0,5	135	0,15	0,04	150	DP50/93
	ND 241 S	1000 … 1400	410	7500	281,00	240/100	1,10	0,5	135	0,15	0,04	150	DP50ND/93
	DD 242 S	600 … 1000 [1]	410	7500	281,00	240/100	1,10	0,5	98	0,15	0,04	150	DP50/93
	ND 242 S	600 … 1000 [1]	410	7500	281,00	240/100	1,10	0,5	98	0,15	0,04	150	DP50ND/93


PowerBLOCK modules are UL recognized

Common anode or cathode on request

[1] $V_{RRM} \leq 1000$ V : $V_{RSM} = V_{RRM} + 50$ V

Overview Phase Control Thyristors in Disc Housings


V_{DRM} - Concept

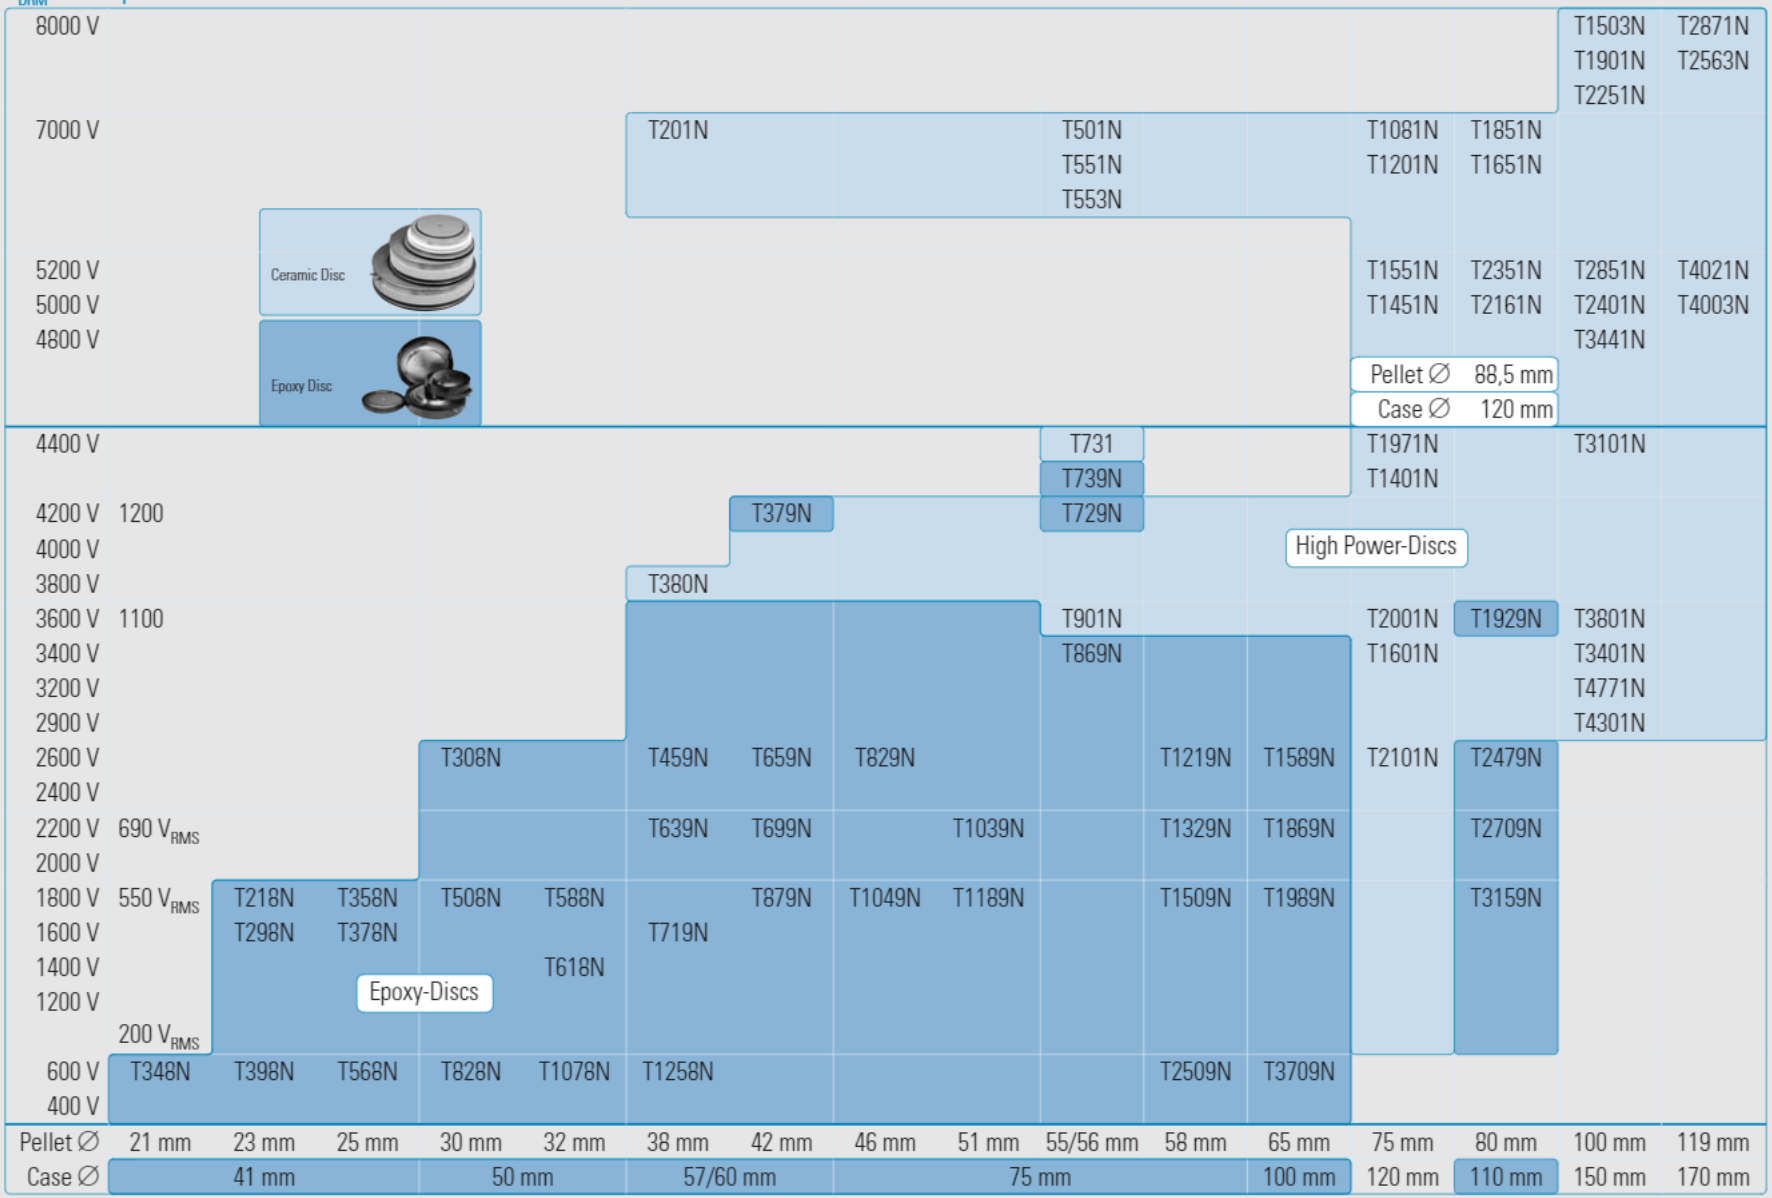

Pulsed Power Applications

Type 	V_{BO} kV	V_{RRM} kV	V_{TM}/I_{TM} V/kA	I_{TSM} kA	$di/dt_{cr(on)}$ A/µs single pulse	$di/dt_{cr(off)}$ A/µs single pulse	R_{thJC} °C/W	$T_{vj\,max}$ °C	Outline / page
T 4003 NH	5,2	5,4	1,8/6	100	5000		0,0043	120	T172.40L/98
T 1503 NH	7,5	7,7 … 8,2	3,0/4	40	5000		0,006	120	T150.40L/98
T 2563 NH	7,5	7,7 … 8,2	2,95/6	56	5000		0,0043	120	T172.40L/98
D 2601 NH		9	5,5/4	22		7500	0,0075	140	D120.26K/102

Traction Crow Bar

Type 	V_{DRM} kV	V_{RRM} kV	$V_{D\,DC}$ kV	V_{TM}/I_{TM} V/kA	I_{TSM} kA	$di/dt_{cr(on)}$ A/µs single pulse	R_{thJC} °C/W	$T_{vj\,max}$ °C	Outline / page
T 1101 N	3	3	typ 1,5	2,0/4	29	1000	0,012	125	T100.26K/97
D 2201 N		4,5	typ 2,5	1,2/2,5	35		0,01	140	D100.26K/102

Phase Control Thyristors

up to 600 V

Type 	V_{DRM} [2] V_{RRM} V $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{RRM}$ + 50 V	I_{TRMSM} A	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms, $T_{vj\,max}$	I_{TSM} kA 10 ms, $T_{vj\,max}$	V_T/I_T V/kA $T_{vj\,max}$	I_{TAVM} A/°C 180 ° el sin T_c = 85 °C	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	$(di/dt)_{cr}$ A/µs DIN IEC 747 - 6	t_q µs typ.	$(dv/dt)_{cr}$ V/µs DIN IEC 747 - 6	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
T 210 N	200 … 600	330	151	5,5	1,33/0,6	210	0,80	0,850	200	200	F = 1000	0,1500	140	TSW27/94
T 348 N	200 … 600	600	80	4,0	1,92/1,1	348	1,00	0,700	200	200	F = 1000	0,1000	140	T41.14/95
T 398 N	200 … 600	800	151	5,5	1,63/1,5	398	1,00	0,400	200	200	F = 1000	0,1000	140	T41.14/95
T 568 N	200 … 600	900	225	6,7	1,76/2,0	568	0,80	0,440	200	200	F = 1000	0,0680	140	T41.14/95
T 828 N	200 … 600	1500	720	12,0	1,65/2,5	828	1,00	0,230	300	150	F = 1000	0,0450	140	T50.14/95
T 1078 N	200 … 600	2000	1050	14,5	1,81/3,5	1078	1,02	0,200	200	150	F = 1000	0,0330	140	T50.14/95
T 1258 N	200 … 600	2500	2000	20,0	1,5/4,5	1258	1,00	0,100	120	200	F = 1000	0,0330	140	T60.14/95
T 2509 N	200 … 600*	4900	8820	42,0 [1]	1,22/6	2509	0,75	0,072	200	200	F = 1000	0,0184	140	T75.26/95
T 3709 N	200 … 600*	7000	18000	60,0 [2]	1,50/15	3710	0,75	0,0475	200	200	F = 1000	0,0125	140	T100.26/95

up to 1800 V

Type 	V_{DRM} V_{RRM} V $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{RRM}$ + 100 V	I_{TRMSM} A	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms, $T_{vj\,max}$	I_{TSM} kA 10 ms, $T_{vj\,max}$	V_T/I_T V/kA $T_{vj\,max}$	I_{TAVM} A 180 ° el sin T_c = 85 °C	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	$(di/dt)_{cr}$ A/µs DIN IEC 747 - 6	t_q µs typ.	$(dv/dt)_{cr}$ V/µs DIN IEC 747 - 6	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
T 86 N	1200 … 1800*	200	20	2,00	1,99/0,4	86	1,00	2,60	150	200	F = 1000	0,3000	125	TSW27/94
T 130 N	1200 … 1800	300	45	3,00	1,96/0,6	130	1,08	1,53	150	180	F = 1000	0,2000	125	TSW27/94
														TFL36/94
T 160 N	1200 … 1800	300	58	3,40	1,96/0,6	160	1,08	1,53	150	200	F = 1000	0,1500	125	TSW27/94
														TFL36/94
T 178 N	1200 … 1800	300	34	2,60	1,9/0,6	178	0,92	1,50	150	180	F = 1000	0,1400	125	T41.14/95
T 218 N	1200 … 1800	400	58	3,40	2,2/0,8	218	0,90	1,35	150	200	F = 1000	0,1100	125	T41.14/95
T 221 N	1200 … 1800	450	163	5,70	1,74/0,8	221	1,10	0,75	150	200	F = 1000	0,1200	125	TSW41/94
														TFL54/94
T 298 N	600 … 1600*	600	90,6	4,25	2,0/1,1	298	0,85	0,90	150	200	F = 1000	0,0880	125	T41.14/95
T 345 N	1200 … 1800*	550	238	6,90	1,56/1,0	345	0,80	0,70	150	250	F = 1000	0,0800	125	TFL54/94
T 358 N	1200 … 1800*	700	106	4,60	2,07/1,2	358	0,85	0,90	150	250	F = 1000	0,0680	125	T41.14/95
T 370 N	1200 … 1800	650	320	8,00	1,65/1,2	370	0,80	0,50	200	250	F = 1000	0,0850	125	TSW41/94
T 378 N	1200 … 1600*	800	202	6,35	1,85/1,2	378	0,80	0,75	150	250	F = 1000	0,0680	125	T41.14/95
T 388 N	1200 … 1800*	730	205	6,40	2,1/1,5	388	0,90	0,75	120	220	F = 1000	0,0680	125	T50.14/95
T 508 N	1200 … 1800*	800	238	6,90	1,92/1,6	510	0,80	0,60	120	250	F = 1000	0,0530	125	T50.14/95
T 509 N	1200 … 1800*	800	238	6,90	1,92/1,6	510	0,80	0,60	120	250	F = 1000	0,0530	125	T57.26/95

* Highest voltage on request

[1] Case rapture current 32 kA (sinusoidal half wave 50 Hz)

[2] Case rapture current 36 kA

Phase Control Thyristors

up to 1800 V

Type 	V_{DRM} V_{RRM} V $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{RRM}$ + 100V	I_{TRMSM} A	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms $T_{vj\,max}$	I_{TSM} kA 10 ms $T_{vj\,max}$	V_T/I_T V/kA $T_{vj\,max}$	I_{TAVM} A 180 ° el sin T_c = 85 °C	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	$(di/dt)_{cr}$ A/µs DIN IEC 747 - 6	t_q µs typ.	$(dv/dt)_{cr}$ V/µs DIN IEC 747 - 6	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
T 588 N	1200 … 1800*	1250	320	8,0	2,15/2,4	588	0,800	0,5000	200	250	F = 1000	0,0450	125	T50.14/95
T 589 N	1200 … 1800*	1250	320	8,0	2,15/2,4	588	0,800	0,5000	200	250	F = 1000	0,0450	125	T57.26/95
T 618 N	1200 … 1400	1250	451	9,5	1,75/2,0	618	0,800	0,4200	200	250	F = 1000	0,0450	125	T50.14/95
T 619 N	1200 … 1400	1250	451	9,5	1,75/2,0	618	0,800	0,4200	200	250	F = 1000	0,0450	125	T57.26/95
T 648 N	1200 … 1600	1300	605	11,0	2,1/2,5	649	1,000	0,3800	120	250	F = 1000	0,0380	125	T60.14/95
T 649 N	1200 … 1600	1300	605	11,0	2,1/2,5	649	1,000	0,3800	120	250	F = 1000	0,0380	125	T57.26/95
T 718 N	1200 … 1600*	1500	781	12,5	1,94/3,0	718	0,850	0,3500	120	250	F = 1000	0,0380	125	T60.14/95
T 719 N	1200 … 1600*	1500	781	12,5	1,94/3,0	718	0,850	0,3500	120	250	F = 1000	0,0380	125	T57.26/95
T 878 N	1200 … 1800	1750	1200	15,5	1,95/3,6	879	0,850	0,2700	200	250	F = 1000	0,0320	125	T60.14/95
T 879 N	1200 … 1800	1750	1200	15,5	1,95/3,6	879	0,850	0,2700	200	250	F = 1000	0,0320	125	T57.26/95
T 1049 N	1200 … 1800	1870	1280	16,0	1,34/1,8	1050	0,850	0,2250	200	250	F = 1000	0,0265	125	T75.26/95
T 1189 N	1200 … 1800	2800	2530	22,5	2,05/5,4	1190	0,900	0,1900	200	240	F = 1000	0,0230	125	T75.26/95
T 1500 N	1200 … 1800	3500	5611	33,5 [2]	2,1/7,0	1500	0,900	0,1500	200	240	F = 1000	0,0184	125	T75.26K/96
T 1509 N	1200 … 1800	3500	5611	33,5 [2]	2,1/7,0	1500	0,900	0,1500	200	240	F = 1000	0,0184	125	T75.26/95
T 1986 N	1200 … 1800	4200	6480	36,0	2,05/8,0	1990	0,900	0,1200	200	250	F = 1000	0,0133	125	T100.35/96
T 1989 N	1200 … 1800	4200	6480	36,0	2,05/8,0	1990	0,900	0,1200	200	250	F = 1000	0,0133	125	T100.26/96
T 3159 N	1200 … 1800	7000	16245	57,0 [1]	1,37/6,0	3160	0,850	0,0820	200	250	F = 1000	0,0850	125	T110.26/96

* Highest voltage on request

[1] Case rapture current 32 kA (sinusoidal half wave 50 Hz)

[2] Case rapture current 36 kA

Phase Control Thyristors

up to 3000 V

Type 	V_{DRM} V_{RRM} V $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{RRM}$ + 100V	I_{TRMSM} A	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms $T_{vj\,max}$	I_{TSM} kA 10 ms $T_{vj\,max}$	V_T/I_T V/kA $T_{vj\,max}$	I_{TAVM} A 180 ° el sin T_c = 85 °C	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	$(di/dt)_{cr}$ A/µs DIN IEC 747 - 6	t_q µs typ.	$(dv/dt)_{cr}$ V/µs DIN IEC 747 - 6	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
■ T 271 N	2000 … 2500	650	245	7,0	2.35/1,2	270	1,070	0,870	60	300	C = 500	0,0910	125	TSW41/94
											F = 1000			
T 308 N	2000 … 2600*	550	101	4,5	2,88/1,1	308	1,100	1,600	60	350	C = 500	0,0560	125	T50.14/95
											F = 1000			
T 458 N	2000 … 2600	1000	405	9,0	2,75/2,0	459	1,000	0,840	120	300	C = 500	0,0455	125	T60.14/95
T 459 N											F = 1000			T57.26/95
T 639 N	1800 … 2200	1250	562	10,6	1,88/1,8	640	0,850	0,510	120	400	F = 1000	0,0377	125	T57.26/95
T 658 N	2200 … 2600	1500	660	11,5	2,53/2,85	659	1,000	0,500	150	300	F = 1000	0,0330	125	T60.14/95
T 659 N	2200 … 2600	1500	660	11,5	2,53/2,85	659	1,000	0,500	150	300	F = 1000	0,0330	125	T57.26/95
T 699 N	1800 … 2200	1500	744	12,2	2,32/2,85	699	0,950	0,450	200	300	F = 1000	0,0320	125	T57.26/95
T 708 N	1800 … 2200	1500	744	12,2	2,32/2,85	699	0,950	0,450	200	300	F = 1000	0,0320	125	T60.14/95
T 709 N	2000 … 2600	1500	845	13,0	2,84/3,0	700	1,050	0,530	50	300	C = 500	0,0290	125	T75.26/95
											F = 1000			
T 829 N	2000 … 2600	1800	1201	15,5	1,78/1,8	829	0,950	0,425	50	350	F = 1000	0,0265	125	T75.26/95
T 1039 N	1800 … 2200	2200	1711	18,5	1,53/2	1039	0,90	0,300	200	300	F = 1000	0,0231	125	T75.26/95
T 1218 N	2000 … 2800	2625	2531	22,5	1,52/1,0	1220	1,11	0,41	150	350	F = 1000	0,014	125	T75.14/95
T 1219 N	2000 … 2800	2625	2531	22,5	1,38/1,0	1220	1,000	0,275	150	350	F = 1000	0,0184	125	T75.26/95
T 1329 N	1800 … 2200	2600	2645	23,0	1,13/1,0	1329	0,900	0,234	200	300	F = 1000	0,0184	125	T75.26/95
T 1589 N	2000 … 2800*	3200	3920	28,0	2,45/5,0	1589	1,100	0,237	150	400	C = 500	0,0124	125	T100.26/95
T 1866 N	1800 … 2200	4100	6125	35,0	2,2/8,0	1869	0,900	0,155	200	300	F = 1000	0,0133	125	T100.35/95
T 1869 N	1800 … 2200	4100	6125	35,0	2,2/8,0	1869	0,900	0,155	200	300	F = 1000	0,0133	125	T100.26/95
■ T 2101 N	2000 … 2600	5000	10100	45,0	1,2/2,0	2200	0,920	0,139	150	250	F = 1000	0,0107	125	T120.35K.2/97
T 2156 N	2000 … 2800	4600	8000	40,0 [1]	2,65/8,8	2159	1,050	0,154	150	400	C = 500	0,0099	125	T110.35/96
T 2159 N	2000 … 2800	4600	8000	40,0 [1]	2,65/8,8	2159	1,050	0,154	150	400	F = 1000	0,0099	125	T110.26/96
T 2160 N	2200 … 2800	4600	8000	40,0	2,65/8,8	2159	1,050	0,154	150		F = 1000	0,0099	125	T120.26K/97
											C = 500			
T 2476 N	2200 … 2800	5100	9460	43,5 [1]	1,43/3,0	2480	0,950	0,154	200	400	F = 1000	0,0085	125	T110.35/96
T 2479 N	2200 … 2800	5100	9460	43,5 [1]	1,43/3,0	2480	0,950	0,154	200	400	F = 1000	0,0085	125	T110.26/96
T 2480 N	2200 … 2800	5100	9460	43,5	1,43/3,0	2480	0,950	0,154	200	400	F = 1000	0,0085	125	T120.26K/97
T 2709 N	1600 … 2200	5800	12500	50,0 [1]	2,35/11	2709	0,900	0,125	200	300	F = 1000	0,0085	125	T110.26/96
T 2710 N	1600 … 2200	5800	12500	50,0	2,35/11	2709	0,900	0,125	200	300	F = 1000	0,0085	125	T120.26K.1/97
T 4301 N	2200 … 2900	9600	40500	90,0	1,20/4	4460	0,770	0,107	300	250	F = 1000	0,0054	125	T150.35K/97
T 4771 N	2200 … 2900	10200	40500	90,0	1,20/4	4470	0,770	0,107	300	250	F = 1000	0,0048	125	T150.26K/97

■ Not for new design

* Highest voltage on request

[1] Case non rapture current 38 kA (sinusoidal half wave 50 Hz)

Phase Control Thyristors

up to 4500 V

Type 	V_{DRM} V_{RRM} V $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{RRM}$ + 100 V	I_{TRMSM} A	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms $T_{vj\,max}$	I_{TSM} kA 10 ms $T_{vj\,max}$	V_T/I_T V/kA $T_{vj\,max}$	I_{TAVM} A 180 ° el sin T_c = 85 °C	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	$(di/dt)_{cr}$ A/µs DIN IEC 747 - 6	t_q µs typ.	$(dv/dt)_{cr}$ V/µs DIN IEC 747 - 6	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
T 379 N	3600 … 4200	800	205	6,4	3,26/1,2	422	1,20	1,600	100	500	F = 1000	0,033	125	T57.26/95
											C = 500			
T 380 N	3200 … 3800	750	211	6,5	2,8/1,2	380	1,20	1,200	100	350	F = 1000	0,045	125	T57.26K/96
T 729 N	3600 … 4200	1840	1250	15,8	3,4/3,5	730	1,20	0,570	80	400	F = 1000	0,0215	120	T75.26/95
T 730 N	3600 … 4200	1840	1250	15,8	3,4/3,5	730	1,20	0,570	80	400	F = 1000	0,0215	120	T75.26K/96
T 731 N	3600 … 4400	1980	1280	16,0	1,75/1,2	925	1,10	0,542	300	450	H = 2000	0,0185	125	T76.26K/96
T 739 N														T75.26/95
T 869 N	3000 … 3600	2000	1445	17,0	3,18/3,8	860	1,08	0,500	80	400	F = 1000	0,0210	125	T75.26/95
T 901 N	2800 … 3600	2090	1445	17,0	1,70/1,2	970	1,14	0,475	150	350	F = 1000	0,0180	125	T76.26K/96
T 909 N														T75.26/95
T 929 N	3000 … 3600	2200	1530	17,5	2,7/3,6	930	1,00	0,430	80	500	C = 500	0,0215	125	T75.26/95
T 1401 N	3600 … 4400	3450	5100	32,0	1,95/2,0	1600	1,29	0,330	300	350	H = 2000	0,0096	125	T120.35K/97
T 1971 N	3600 … 4400	3700	5100	32,0	1,95/2,0	1730	1,29	0,330	300	350	H = 2000	0,0086	125	T120.26K/97
											F = 1000			
T 1601 N	2800 … 3600	4050	7400	38,5	1,5/2,0	1900	1,00	0,250	300	300	F = 1000	0,0097	125	T120.35K.2/97
T 1929 N	3000 … 3800	4200	6850	37,0	2,9/8,0	1930	1,08	0,200	150	450	C = 500	0,0099	125	T110.26/96
											F = 1000			
T 2001 N	2800 … 3600	4350	7400	38,5	1,5/2,0	2050	1,00	0,250	300	300	F = 1000	0,0087	125	T120.26K/97
T 2009 N														T110.26/96
T 3401 N	3100 … 3600	7500	28000	75,0	1,4/4	3550	0,82	0,145	300	300	F = 1000	0,0054	125	T150.35K/97
T3801 N	3100 … 3600	8000	28000	75,0	1,4/4	3810	0,82	0,145	300	300	F = 1000	0,0048	125	T150.26K/97
◆ T 3101 N	4000 … 4400	6500	21000	65,0	1,75/4	3080	1,01	0,185	300	400	H = 2000	0,0054	125	T150.35K/97

◆ New type

Phase Control Thyristors

up to 5500 V

Type 	V_{DRM} V_{RRM} V $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{RRM}$ + 100 V	I_{TRMSM} A	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms $T_{vj\,max}$	I_{TSM} kA 10 ms $T_{vj\,max}$	V_T/I_T V/kA $T_{vj\,max}$	I_{TAVM} A 180 ° el sin T_c = 85 °C	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	$(di/dt)_{cr}$ A/µs DIN IEC 747 - 6	t_q µs typ.	$(dv/dt)_{cr}$ V/µs DIN IEC 747 - 6	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
T 1451 N	4800 … 5200	3550	9250	43,0	1,70/2,0	1680	0,92	0,370	300	450	H = 2000	0,0097	125	T120.35K/97
T 1551 N	4800 … 5200	3800	9250	43,0	1,70/2,0	1810	0,92	0,370	300	450	H = 2000	0,0086	125	T120.26K.1/97
◆ T 2161 N	4800 … 5200	4700	14600	54,0	1,85/3,0	2160	0,81	0,360	300	450	H = 2000	0,0075	125	T120.35K/97
◆ T 2351 N	4800 … 5200	5000	14600	54,0	1,85/3,0	2350	0,81	0,360	300	450	H = 2000	0,0064	125	T120.26K/97
T 2401 N	4800 … 5200	5600	12500	50,0	2,10/4,0	2670	1,02	0,270	300	300	H = 2000	0,0054	125	T150.35K/97
T 2851 N	4800 … 5200	6660	21000	65,0	1,70/4,0	3150	0,98	0,180	300	600	H = 2000	0,0054	125	T150.35K/97
◆ T3441N	4800 … 5200	7100	21000	65,0	1,7/4	3360	0,98	0,180	300	600	H = 2000	0,0048	125	T150.26K/97
◆ T 4021 N	4800 … 5350	8500	50000	100,0	1,80/6,0	4015	0,92	0,142	300	550	H = 2000	0,00425	125	T172.35K/98

up to 10 000 V

Type 	V_{DRM} V_{RRM} V $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{RRM}$ + 100 V	I_{TRMSM} A	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms $T_{vj\,max}$	I_{TSM} kA 10 ms $T_{vj\,max}$	V_T/I_T V/kA $T_{vj\,max}$	I_{TAVM} A 180 ° el sin T_c = 85 °C	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	$(di/dt)_{cr}$ A/µs DIN IEC 747 - 6	t_q µs typ.	$(dv/dt)_{cr}$ V/µs DIN IEC 747 - 6	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
T 201 N	6000 … 7000	510	88,2	4,2	3,40/0,5	245	1,29	4,180	300	650	H = 2000	0,0430	125	T58.26K/96
T 501 N	6000 … 7000	1350	845	13,0	2,65/1,0	640	1,30	1,350	300	650	H = 2000	0,0185	125	T76.26K/96
T 551 N	6000 … 7000	1260	845	13,0	2,65/1,0	600	1,30	1,350	300	650	H = 2000	0,0200	125	T76.35K/97
T 1081 N	6000 … 7000	2700	5780	34,0	2,7/2,0	1300	1,18	0,759	300	650	H = 2000	0,0086	125	T120.26K.1/97
T 1201 N	6000 … 7000	2520	5780	34,0	2,7/2,0	1200	1,18	0,759	300	650	H = 2000	0,0096	125	T120.35K/97
◆ T 1651N	6000 … 7000	3500	11500	48,0	2,65/3	1650	1,22	0,490	300	650	H = 2000	0,0075	125	T120.35K/97
T 1851 N	6000 … 7000	4000	11500	48,0	2,65/3	1850	1,22	0,490	300	650	H = 2000	0,0064	125	T120.26K/97
T 1901 N	7000 … 8000	4400	8000	40,0	3,0/4,0	2100	1,24	0,440	300	550	H = 2000	0,0054	125	T150.35K/97
◆ T2251N	7000 … 8000	4710	8000	40,0	3,0/4,0	2250	1,24	0,440	300	550	H=2000	0,0048	125	T150.26K/97
◆ T 2871 N	7500 … 8000	6060	15700	56,0	2,95/6,0	2870	1,425	0,310	300	550	H = 2000	0,00425	125	T172.35K/98

◆ New type

Phase Control Thyristors

Light Triggered Thyristors

Type 	V_{BO} V	V_{RRM} V	I_{TRMSM} A	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms $T_{vj\,max}$	I_{TSM} kA 10 ms $T_{vj\,max}$	V_T/I_T V/kA $T_{vj\,max}$	I_{TAVM} A 180 ° el sin T_c = 85 °C	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	$(di/dt)_{cr}$ A/µs DIN IEC 747 - 6	t_q µs typ.	$(dv/dt)_{cr}$ V/µs DIN IEC 747 - 6	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
T 553 N	6500	7200	1200	684	11,7	2,65/1,0	550	1,30	1,35	300	650	H = 2000	0,0200	120	T76.35L/98
T 1503 N	7500	7700 … 8200	3800	8000	40,0	3,0/4,0	1760	1,24	0,44	300	550	H = 2000	0,0063	120	T150.40L/98
T 2563 N	7500	7700 … 8200	5600	15700	56,0	2,95/6,0	2560	1,28	0,278	300	550	H = 2000	0,0046	120	T172.40L/98
T 4003 N	5200	5400	8130	50000	100,0	1,8/6,0	3845	0,92	0,142	300	500	H = 2000	0,0046	120	T172.40L/98

Fast Thyristors

up to 600 V

Type 	V_{DRM}, V_{RRM} $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{RRM}$+50 V V	I_{TRMSM} A	I_{TSM} kA 10 ms, $T_{vj\,max}$	V_T/I_T V/kA $T_{vj\,max}$	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	$(di/dt)_{cr}$ A/µs DIN IEC 747 - 6	t_q µs typ.	$(dv/dt)_{cr}$ V/µs DIN IEC 747 - 6	V_{GT} V T_{vj} = 25 °C	I_{GT} mA T_{vj} = 25 °C	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
■ T 72 F	400 … 600	200	2,05	2,1/0,4	1,25	1,8	200	S ≤ 18	B = 50	2,0	150	0,350	125	TSW27/94
								D ≤ 15	C = 500					
									L = 500					
									M = 1000					
■ T 102 F	200 … 600	220	2,75	1,95/0,5	1,20	1,4	200	D ≤ 15	B = 50	2,0	150	0,260	125	TSW27/94
									C = 500					
									L = 500					
									M = 1000					
T 178 F	200 … 600	300	1,90	1,85/0,5	1,02	1,55	300	E ≤ 20	B = 50	2,0	200	0,180	140	T41.14/95
								D ≤ 15	C = 500					
T 308 F	200 … 600	600	4,00	1,9/1,0	1	0,7	300	E ≤ 20	C = 500	2,0	200	0,108	140	T41.14/95
								D ≤ 15 [1]	M = 1000					

■ Not for new design

[1] Only in connection with $(dv/dt)_{cr}$ = B or C

Fast Thyristors

up to 600 V

Type 	V_{DRM}, V_{RRM} $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{RRM+50\ V}$ V	I_{TRMSM} A	I_{TSM} kA 10 ms, $T_{vj\ max}$	V_T/I_T V/kA $T_{vj\ max}$	$V_{(TO)}$ V $T_{vj} = T_{vj\ max}$	r_T mΩ $T_{vj} = T_{vj\ max}$	$(di/dt)_{cr}$ A/µs DIN IEC 747 - 6	t_q µs typ.	$(dv/dt)_{cr}$ V/µs DIN IEC 747 - 6	V_{GT} V $T_{vj} = 25\ °C$	I_{GT} mA $T_{vj} = 25\ °C$	R_{thJC} °C/W 180 ° el sin	$T_{vj\ max}$ °C	Outline / page
T 698 F	200 … 600	1100	11,00	1,65/2,0	1,02	0,32	300	E ≤ 20	C = 500	2,0	200	0,0500	140	T50.14/95
								D ≤ 15	M = 1000					
T 1078 F	200 … 400	2000	14,50	1,81/3,5	1,02	0,2	200	S ≤ 18	C = 500	2,0	250	0,0330	140	T50.14/95
								D ≤ 15	M = 1000					

up to 1400 V

Type 	V_{DRM}, V_{RRM} $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{RRM+50\ V}$ V	I_{TRMSM} A	I_{TSM} kA 10 ms, $T_{vj\ max}$	V_T/I_T V/kA $T_{vj\ max}$	$V_{(TO)}$ V $T_{vj} = T_{vj\ max}$	r_T mΩ $T_{vj} = T_{vj\ max}$	$(di/dt)_{cr}$ A/µs DIN IEC 747 - 6	t_q µs typ.	$(dv/dt)_{cr}$ V/µs DIN IEC 747 - 6	V_{GT} V $T_{vj} = 25\ °C$	I_{GT} mA $T_{vj} = 25\ °C$	R_{thJC} °C/W 180 ° el sin	$T_{vj\ max}$ °C	Outline / page
■ T 80 F	1200 … 1300*	200	2,45	2,4/0,4	1,30	2,40	160	F ≤ 25	B = 50	2,0	150	0,280	125	TSW27/94
								E ≤ 20	C = 500					
								S ≤ 18	L = 500					
									M = 1000					
■ T 120 F	1200 … 1300*	240	2,90	2,2/0,5	1,20	1,60	160	F ≤ 25	B = 50	2,0	150	0,200	125	TSW27/94
								E ≤ 20	C = 500					
								S ≤ 18 [1)]	L = 500					
									M = 1000					
T 128 F	1200 … 1300*	300	2,45	2,6/0,6	1,28	2,15	160	F ≤ 25	B = 50	2,0	150	0,163	125	T41.14/95
								E ≤ 20	C = 500					
								S ≤ 18 [1)]	L = 500					
									M = 1000					
T 188 F	1000 … 1300*	400	2,90	2,44/0,8	1,20	1,35	160	F ≤ 25	B = 50	2,0	150	0,117	125	T41.14/95
								E ≤ 20	C = 500					
								S ≤ 18 [1)]	L = 500					
									M = 1000					

■ Not for new design

* Highest voltage on request

[1)] Only in connection with $(dv/dt)_{cr}$ = B or C

Fast Thyristors

up to 1400 V

Type 	V_{DRM}, V_{RRM} $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{RRM}+50$ V V	I_{TRMSM} A	I_{TSM} kA 10 ms, $T_{vj\,max}$	V_T/I_T V/kA $T_{vj\,max}$	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	$(di/dt)_{cr}$ A/µs DIN IEC 747 - 6	t_q µs typ.	$(dv/dt)_{cr}$ V/µs DIN IEC 747 - 6	V_{GT} V T_{vj} = 25 °C	I_{GT} mA T_{vj} = 25 °C	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
■ T 290 F	1000 … 1300	550	6,40	2,1/1,0	1,20	0,75	200	F ≤ 25	C = 500	2,2	250	0,080	125	TFL54/94
								E ≤ 20	M = 1000					
								S ≤ 18 [1]						
T 318 F	1000 … 1200*	700	6,00	2,25/1,2	1,30	0,70	200	F ≤ 25	B = 50	2,2	250	0,068	125	T50.14/95
								E ≤ 20	C = 500					
								S ≤ 18 [1]	L = 500					
									M = 1000					
■ T 320 F	1000 … 1300*	600	9,15	1,95/1,2	1,15	0,42	200	F ≤ 25	B = 50	2,2	250	0,085	125	TSW41/94
								G ≤ 30	C = 500					
									L = 500					
									M = 1000					
T 340 F	1000 … 1400	600	6,40	1,65/1,0	0,90	0,70	200	N ≤ 60	C = 500	2,2	250	0,080	125	TFL54/94
									L = 500					
									M = 1000					
T 408 F	1000 … 1200*	750	6,40	2,20/1,4	1,20	0,63	200	F ≤ 25	C = 500	2,2	250	0,0530	125	T50.14/95
								E ≤ 20	L = 500					
								S ≤ 18 [1]	M = 1000					
■ T 599 F	1200 … 1300*	1500	10,00	1,66/1,0	1,15	0,42	200	G ≤ 30	B = 50	2,2	250	0,0380	125	T57.26/95
								F ≤ 25	C = 500					
■ T 600 F	1200 … 1300*	1500	10,00	1,66/1,0	1,15	0,42	200	E ≤ 20 [1]	L = 500	2,2	250	0,0380	125	T57.26K/96
									M = 1000					
■ T 1052 S	1000 … 1200	2200	20,00	2,70/4,0	1,45	0,3	400	F ≤ 25	B = 50	2,2	300	0,0180	125	T75.26K/96
								E ≤ 20	C = 500					
								D ≤ 15	L = 500					
									M = 1000					

■ Not for new design

* Highest voltage on request

[1] Only in connection with $(dv/dt)_{cr}$ = B or C

Fast Thyristors

up to 2000 V

Type 	V_{DRM}, V_{RRM} $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{RRM+50\ V}$ V	I_{TRMSM} A	I_{TSM} kA 10 ms, $T_{vj\ max}$	V_T/I_T V/kA $T_{vj\ max}$	$V_{(TO)}$ V $T_{vj} = T_{vj\ max}$	r_T mΩ $T_{vj} = T_{vj\ max}$	$(di/dt)_{cr}$ A/µs DIN IEC 747 - 6	t_q µs typ.	$(dv/dt)_{cr}$ V/µs DIN IEC 747 - 6	V_{GT} V $T_{vj} = 25\ °C$	I_{GT} mA $T_{vj} = 25\ °C$	R_{thJC} °C/W 180 ° el sin	$T_{vj\ max}$ °C	Outline / page
T 930 S	1600 … 2000*	2000	18,00	2,70/3,5	1,35	0,33	250	N ≤ 60	B = 50	2,2	250	0,0210	125	T75.26K/96
								M ≤ 50	C = 500					
								L ≤ 45	L = 500					
								K ≤ 40 [1)]	M = 1000					

* Highest voltage on request
[1)] Only in connection with $(dv/dt)_{cr}$ = B or C

Fast Asymmetric Thyristors

Type 	V_{DRM} V $V_{DSM} = V_{DRM}$	V_{RRM} V $(V_{RRM(C)})$ tp = 1 µs	I_{TRMSM} A	I_{TSM} kA 10 ms $T_{vj\ max}$	V_T/I_T V/kA $T_{vj\ max}$	$V_{(TO)}/r_T$ V/mΩ $T_{vj} = T_{vj\ max}$	$(di/dt)_{cr}$ A/µs DIN IEC 747 - 6	t_q µs typ.	$(dv/dt)_{cr}$ V/µs DIN IEC 747 - 6	V_{GT} V $T_{vj} = 25\ °C$	I_{GT} mA $T_{vj} = 25\ °C$	R_{thJC} °C/W 180 ° el sin	$T_{vj\ max}$ °C	Outline / page
A 158 S	1000 … 1300*	15 (50)	400	2,45	2,60/0,6	1,3/2	400	D ≤ 15	C = 500	2,7	300	0,117	125	T41.14/95
								C ≤ 12	F = 1000					
								B ≤ 10						
								A ≤ 8 [1)]						
A 198 S	1000 … 1300*	15 (50)	400	2,70	2,0/0,25	1,1/1,3	400	E ≤ 20	C = 500	2,7	300	0,117	125	T41.14/95
								D ≤ 15	F = 1000					
A 358 S	1000 … 1300*	15 (50)	800	5,00	2,75/1,5	1,3/0,9	500	D ≤ 15	C = 500	2,7	300	0,053	125	T50.14/95
								C ≤ 12	F = 1000					
								B ≤ 10						
								A ≤ 8 [1)]						
A 438 S	1000 … 1300*	15 (50)	900	5,50	2,1/1,5	1,1/0,6	500	F ≤ 25	C = 500	2,7	300	0,053	125	T50.14/95
								E ≤ 20	F = 1000					
								D ≤ 15						

* Highest voltage on request
[1)] $V_{DRM} \leq 1000\ V$

Overview Rectifier in Disc Housings

V_{RRM} – Concept

9000 V				D471N				D2601NH D2601N	
6500 V 5800 V				D711N		D1481N		D3001N D3041N	
4800 V 4600 V 4500 V 4400 V 4000 V	1500 V_{RMS}			D749N D849N	D1069N	D1800N D1809N	D2201N	D3501N	D6001N
3600 V 3400 V 3200 V	1000 V_{RMS}			D269N			High Power-Discs		
2800 V 2600 V 2400 V 2200 V	690 V_{RMS}	D660N	D748N	D1029N	D1709N	D2209N D2200N D2659N		D4709N D4201N	
2000 V 1800 V 1600 V 1400 V 1200 V	500 V_{RMS}	D428N Epoxy-Discs	D798N	D1049N					
800 V 400 V	D448N	D758N		D2228N	D4457N	D5807N D5809N	D8019N		
Pellet ∅	17 mm	21 mm	30 mm	30 mm	38 mm	46 mm	56 mm	65 mm	75/80 mm	101 mm
Case ∅	41 mm			50 mm	57/60 mm	75 mm		100 mm	120 mm	150 mm

Rectifier Diodes

up to 800 V

Type 	V_{RRM} V $V_{RSM} = V_{RRM} + 50$ V	I_{FRMSM} A	I_{FSM} kA 10 ms, $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms $T_{vj\,max}$	I_{FAVM}/T_c A/°C 180° sinus	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
D 255 N	200 … 800*	400	4,6	105,8	255/110	0,65	0,850	0,2300	180	DSW27/99
■ D 255 K	200 … 800*	400	4,0	80,0	255/75	0,65	0,850	0,3450	180	DSW27/99
D 448 N	200 … 800*	710	5,1	130,0	450/122	0,70	0,510	0,1020	180	D41.14/100
D 758 N	400 … 800*	1195	8,8	387,2	760/115	0,70	0,310	0,0670	180	D41.14/100
D 2228 N	200 … 600*	4000	28,5	4061,0	2230/110	0,70	0,0975	0,0254	180	D60.14/100
D 4457 N	400 … 600	7000	52,0	13500,0	4460/111	0,70	0,047	0,0128	180	D60.8/100
D 5807 N	400 … 600	9100	70,0	24500,0	5800/108	0,70	0,040	0,0098	180	D73.8/100
D 5809 N	400 … 600	9100	70,0	24500,0	5800/58	0,70	0,040	0,0166	180	D75.26/100
D 8019 N	200 … 600	13300	95,0	45000,0	8020/56	0,70	0,027	0,0125	180	D100.26/101

up to 1800 V

Type 	V_{RRM} V $V_{RSM} = V_{RRM} + 100$ V	I_{FRMSM} A	I_{FSM} kA 10 ms, $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms $T_{vj\,max}$	I_{FAVM}/T_c A/°C 180° sinus	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
D 798 N	1200 … 1800*	1650	11,8	696,0	800/130	0,81	0,28	0,046	180	D50.14/100
D 1049 N	1200 … 1800	2590	18,5	1710,0	1050/130	0,81	0,17	0,038	180	D57.26/100
D 452 N	1200 … 1800	710	10,8	583,2	450/130	0,77	0,48	0,0855	180	DFL54/99
D 452 K	1200 … 1800	710	10,8	583,2	450/130	0,77	0,48	0,0855	180	DFL54/99

■ Not for new design

* Highest voltage on request

Rectifier Diodes

up to 3000 V

Type 	V_{RRM} V $V_{RSM} = V_{RRM} + 100$ V	I_{FRMSM} A	I_{FSM} kA 10 ms, $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms $T_{vj\,max}$	I_{FAVM}/T_c A/°C 180° sinus	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
D 121 N	1200 … 2000	360	2,60	33,8	120/130	0,72	1,90	0,324	180	DSW27/99
D 121 K	1200 … 2000	330	2,40	28,8	120/130	0,72	1,90	0,434	180	DSW27/99
D 251 N	1200 … 2000	400	5,30	140,5	250/130	0,80	0,85	0,151	180	DSW27/99
										DFL36/99
D 251 K	1200 … 2000	400	4,70	110,5	250/102	0,80	0,85	0,236	180	DSW27/99
										DFL36/99
D 400 N	1600 … 2200	710	9,80	480,2	400/130	0,70	0,62	0,095	180	DSW41/99
■ D 400 K	1600 … 2200	710	9,80	480,2	400/130	0,70	0,62	0,095	180	DSW41/99
D 428 N	1200 … 2000	840	6,00	180	430/139	0,81	0,54	0,069	180	D41.14/100
D 660 N	1200 … 2200	1435	10,25	525	660/130	0,70	0,50	0,050	180	D41.14K/101
D 748 N	2000 … 2800	1260	9,00	405	750/100	0,83	0,52	0,045	160	D50.14/100
D 1029 N	1800 … 2600	2040	14,50	1051	1030/100	0,82	0,28	0,038	160	D57.26/100
D 1030 N	1800 … 2600	2040	14,50	1051	1030/100	0,82	0,28	0,038	160	D57.26K/101
D 1709 N	2000 … 2400	2700	18,00	1620	1700/90	0,83	0,20	0,0245	160	D75.26/100
D 2209 N	2000 … 2800	4900	35,00	6125	2200/100	0,83	0,145	0,017	160	D75.26/100
D 2200 N	2000 … 2800	4900	35,00	6125	2200/100	0,83	0,145	0,017	160	D75.26K/101
D 2650 N	2000 … 2400	4710	33,50	5611	2650/100	0,82	0,148	0,0169	180	D75.26K/101
D 2659 N	2000 … 2400	4710	33,50	5611	2650/100	0,82	0,148	0,0169	180	D75.26/100
D 4201 N	1600 … 2200	9290	73,50	27000	4300/100	0,668	0,081	0,0093	160	D120.35K/102
D 4709 N	2000 … 2800	8400	60,00	18000	4700/100	0,83	0,07	0,008	160	D110.26/101

■ Not for new design

Rectifier Diodes

up to 5000 V

Type	V_{RRM} V $V_{RSM} = V_{RRM} + 100$ V	I_{FRMSM} A	I_{FSM} kA 10 ms, $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms $T_{vj\,max}$	I_{FAVM}/T_c A/°C 180° sinus	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
■ D 269 N	3200 … 3600	550	4,0	80	270/100	0,86	1,540	0,098	150	D57.26/100
D 475 N	3200 … 4000	745	10,9	594	475/100	0,765	0,612	0,085	160	DSW41.1/99
■ D 475 K	3200 … 4000	745	10,9	594	475/100	0,765	0,612	0,085	160	DSW41.1/99
D 749 N	3600 … 4800*	1540	11,0	605	750/100	0,85	0,650	0,039	160	D57.26/100
D 849 N	2800 … 4000*	1790	12,8	819	850/100	0,84	0,485	0,038	160	D57.26/100
D 850 N	2800 … 4000*	1790	12,8	819	850/100	0,84	0,485	0,038	160	D57.26K/101
■ D 1069 N	3600 … 4400	2200	15,5	1201	1070/100	0,85	0,460	0,027	160	D75.26/100
D 1809 N	3200 … 4800	3850	27,5	3781	1800/100	0,85	0,253	0,0169	160	D75.26/100
D 1800 N	3200 … 4800	3850	27,5	3781	1800/100	0,85	0,253	0,0169	160	D75.26K/101
D 3501 N	3200 … 4200	7480	56	15680	3500/100	0,734	0,133	0,0093	160	D120.26K/102
◆ D 6001 N	4500 … 5000	13000	110	60500	6070/100	0,80	0,090	0,0046	160	D150.26K/102

up to 10000 V

Type	V_{RRM} V $V_{RSM} = V_{RRM} + 100$ V	I_{FRMSM} A	I_{FSM} kA 10 ms, $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms $T_{vj\,max}$	I_{FAVM}/T_c A/°C 180° sinus	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
D 711 N	5800 … 6800	1670	10,5	550	790/100	0,84	0,87	0,0315	160	D58.26K/101
D 1481 N	5800 … 6800	3460	24,5	3000	1630/100	0,750	0,42	0,0157	160	D76.26K/102
D 3001 N	5800 … 6800	6000	53,0	14040	2810/100	0,840	0,216	0,0093	160	D120.35K/102
D3041N	5800 … 6800	6440	53,0	14040	3030/100	0,840	0,22	0,00827	160	D120.26K/102
D 471 N	8000 … 9000	1200	10,0	500	565/100	1,040	1,78	0,0315	160	D58.26K/101
D 2601 N	8500 … 9000	4710	50,0	12500	2230/100	0,944	0,412	0,00827	160	D120.26K/102

■ Not for new design ◆ New type * Highest voltage on request

GCT – Freewheeling Diodes

Type 	$V_{(DRM)}$ V	$V_{(D)D}$ *) kV Tc = 25 typ.	$I_{(FSM)}$ kA sin, 10 ms $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ sin, 10 ms $T_{vj\,max}$	$V_{(F)}/I_{(FM)}$ V/2,5 kA $T_{vj} = T_{vj\,max}$ sin	$I_{(RM)}$ A di/dt = 1000 A/µs $I_{(FM)}$ = 2,5 kA $T_{vj} = T_{vj\,max}$	$Q_{(rr)}$ mAs di/dt = 1000 A/µs $I_{(FM)}$ = 2,5 kA $T_{vj} = T_{vj\,max}$	R_{thJC} °C/W DC	$T_{vj\,max}$ °C	Outline / page
D 911 SH	4500	2,8	17	1445	6,0	1200**)	2,8**)	0,0100	140	D100.26K/102
D1121SH	4500	2,8	27,5	1530	5,6	1200**)	3,5**)	0,0075	140	D120.26K/102
D 931 SH	6500	3,2	16	1280	5,6	1300**)	3,5**)	0,0100	140	D100.26K/102
D 1951 SH	6500	3,2	44	9680	4,0	1800**)	5,0**)	0,0045	140	D150.26K/102

*) Estimate failure rate λ ~ 100 fit **) Clamp circuit L = 0,25 µH

GTO – Freewheeling Diodes

Type 	$V_{(DRM)}$ V	$V_{(D)D}$ *) kV Tc = 25 typ.	$I_{(FSM)}$ kA sin, 10 ms $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ sin, 10 ms $T_{vj\,max}$	$V_{(F)}/I_{(FM)}$ V/2,5 kA $T_{vj} = T_{vj\,max}$ sin	$I_{(RM)}$**) A di/dt = 250 A/µs $I_{(FM)}$ = 1 kA $T_{vj} = T_{vj\,max}$	$Q_{(rr)}$**) mAs di/dt = 250 A/µs $I_{(FM)}$ = 1 kA $T_{vj} = T_{vj\,max}$	$(-di/dt)_{com}$ a/µs	R_{thJC} °C/W DC	$T_{vj\,max}$ °C	Outline / page
D 1170 S	2000, 2500	1,25	24,0	2880	2,62/6,4	580	1,7		0,0184	120	D75.26K/101
D 721 S	3500 … 4500	2,00	15,0	1130	3,5/2,5	600	1,7	500	0,0180	125	D76.26K/102
D 1461 S	3500 … 4500	2,00	32,0	5120	2,5/2,5	840	2,8	500	0,0125	140	D100.26K/102
D 1251 S	4500	2,5	18,0	1620	2,5/2,5	800	3,0	500	0,0100	140	D76.14K/102
D 921 S	4500	2,5	32,0	5120	2,6/2,5	700	2,8	500	0,0125	140	D100.26K/102
D 1381 S	4500	3,00	32,0	5120	2,6/2,5	700	2,8	500	0,0125	140	D100.26K/102

*) Estimate failure rate λ ~ 100 fit GTO-Snubber **) $V_{(R)} = 0,5\ V_{(RRM)}$, $V_{(RM)} = 0,8\ V_{(RRM)}$

GTO Snubber Diodes and general use

Type 	$V_{(RRM)}$ V	$V_{R(cr)}$ V [1]	$I_{(FSM)}$ kA sin, 10 ms $T_{vj} = T_{vj\,max}$	$V_{(F)}/I_{(FM)}$ V/kA sin, 10 ms $T_{vj} = T_{vj\,max}$	V_{FRM} typ. V di/dt = 1000 A/µs $T_{vj} = T_{vj\,max}$	$R_{(th)JC}$ °C/W DC	$T_{vj\,max}$ °C	Outline / page
D 170 S	2500	1500	3,70	2,3/0,8		0,1800	140	DSW27.1/99
D 170 U	2500	1500	3,15	2,15/0,65		0,2500	140	DSW27.1/99
D 228 S	2500	1500	3,20	2,12/0,5		0,0750	125	D60.14/100
D 56 S	4500	3000	1,35	4,5/0,32	145	0,2450	125	DSW27.2/99
D 56 U	4500	3000	1,20	4,15/0,28	75	0,3250	125	DSW27.2/99
D 291 S	3500 … 4500	3200	4,50	4,15/1,2	145	0,0400	125	D58.26K/101
D 841 S	4500	3200	15,00	3,5/2,5	75	0,0100	125	D76.14K/102
snubberless:								
D 371 S	4500	3200	6,00	3,9/1,2	150	0,0350	125	D58.26K/101
D 801 S	4500	3200	14,00	3,7/2,5	85	0,0100	125	D76.14K/102
D 901 S	3500 … 4500	2500	21,50	3,5/2,5	70	0,0125	125	D100.26K/102

[1] Maximum permissible link voltage, GTO snubber diode

Fast Rectifier Diodes

up to 1000 V

Type 	V_{RRM} V $V_{RSM} = V_{RRM}$ + 100 V	I_{FRMSM} A	I_{FSM} kA 10 ms $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms $T_{vj} = T_{vj\,max}$	I_{FAVM}/T_c A/°C 180° sinus	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	I_{RM} A $T_{vj\,max}$ $i_F = I_{FAVM}$, $di_F/dt = 50$ A/µs	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
D 138 S	900 … 1000	230	1,60	12,80	138/85	1,32	2,20	47 [1]	0,140	125	D41.14/100
■ D 358 S	600 … 1000	730	5,20	135,20	358/100	1,05	0,80	70	0,079	150	D41.14/100
D 648 S	800 … 1000	1400	10,10	510,05	648/100	1,05	0,43	82	0,044	150	D50.14/100
D 649 S	800 … 1000	1400	10,10	510,05	650/96	1,05	0,43	82	0,048	150	D57.26/100

[1] $i_{FM} = 225$ A, $-di_F/dt = 100$ A/µs

up to 1400 V

Type 	V_{RRM} V $V_{RSM} = V_{RRM}$ + 100 V	I_{FRMSM} A	I_{FSM} kA 10 ms $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms $T_{vj} = T_{vj\,max}$	I_{FAVM}/T_c A/°C 180° sinus	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	I_{RM} A $T_{vj\,max}$ $i_F = I_{FAVM}$, $di_F/dt = 50$ A/µs	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
D 188 S	1000 … 1400	290	1,90	18,05	185/100	1,00	1,80	80	0,150	150	D41.14/100
■ D 211 S	1000 … 1400	400	4,30	92,45	211/100	1,00	1,00	100	0,155	150	DSW27/99
■ D 211 U	1000 … 1400	400	3,90	76,05	150/100	1,00	1,00	100	0,245	150	DSW27/99
D 238 S	1200	455	3,20	51,20	238/85	1,45	1,10	45	0,080	125	D41.14/100
D 368 S	1000 … 1400	730	5,20	135,20	368/100	1,00	0,80	102	0,080	150	D41.14/100
D 658 S	1000 … 1400	1400	10,10	510,05	658/100	1,00	0,45	122	0,044	150	D50.14/100
D 659 S	1000 … 1400	1400	10,10	510,05	660/95	1,00	0,45	122	0,048	150	D57.26/100

■ Not for new design

Fast Rectifier Diodes

up to 2600 V

Type	V_{RRM} V $V_{RSM} = V_{RRM}$ + 100 V	I_{FRMSM} A	I_{FSM} kA 10 ms $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms $T_{vj} = T_{vj\,max}$	I_{FAVM}/T_c A/°C 180° sinus	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	I_{RM} A $T_{vj\,max}$ $i_F = I_{FAVM}$, $di_F/dt = 50$ A/µs	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
D 170 S	2500	400	3,70	68,45	170/85	1,10	1,400	340 [2]	0,190	140	DSW27.1/99
D 170 U	2500	330	3,15	49,60	170/64	1,10	1,500	340 [2]	0,260	140	DSW27.1/99
D 228 S	2200, 2500	450	3,20	51,20	228/85	1,18	1,800	280	0,080	125	D41.14/100
D 348 S	1600 … 2000	645	4,60	105,80	348/100	1,00	0,900	160	0,080	150	D41.14/100
D 438 S	1600 … 2000	740	5,30	140,50	440/100	1,14	0,725	770 [3]	0,059	150	D41.14/100
D 440 S	1600 … 2000	740	5,30	140,50	440/100	1,14	0,725	770 [3]	0,059	150	D57.26K/101
■ D 509 S	2400 … 2600	1050	7,50	281,25	509/100	1,00	0,800	205	0,049	150	D57.26/100
D 675 S	2000, 2500	1200	8,50	361,00	675/85	1,25	0,500	860 [4]	0,039	140	D57.26K/101
D 689 S	2000 … 2600	1600	11,50	661,25	690/100	1,00	0,500	230	0,039	150	D57.26/100
D 690 S											D57.26K/101
D 1169 S	2000, 2500	3360	24,00	2880,00	1170/85	1,16	0,210	580 [5]	0,0194	125	D75.26/100
D 1170 S	2000, 2500	3360	24,00	2880,00	1170/85	1,16	0,210	580 [5]	0,0194	125	D75.26K/101
D 1408 S	2000, 2500	3360	24,00	2880,00	1410/85	1,16	0,210	580 [5]	0,0150	125	D75.14/100

up to 6000 V

Type	V_{RRM} V $V_{RSM} = V_{RRM}$ + 100 V	I_{FRMSM} A	I_{FSM} kA 10 ms $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms $T_{vj} = T_{vj\,max}$	I_{FAVM}/T_c A/°C 180° sinus	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	I_{RM} A $T_{vj\,max}$ $i_F = I_{FAVM}$, $di_F/dt = 50$ A/µs	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
D 56 S	4000, 4500	160	1,35	9,1	56/85	1,64	8,00	230 [1]	0,2600	125	DSW27.2/99
D 56 U	4000, 4500	140	1,20	7,2	56/73	1,64	8,00	230 [1]	0,3400	125	DSW27.2/99

[1] $i_{FM} = 150$ A, $-di_F/dt = 200$ A/µs
[2] $i_{FM} = 500$ A, $-di_F/dt = 200$ A/µs
[3] $i_{FM} = 500$ A, $-di_F/dt = 250$ A/µs
[4] $i_{FM} = 1600$ A, $-di_F/dt = 600$ A/µs
[5] $i_{FM} = 1000$ A, $-di_F/dt = 250$ A/µs
■ Not for new design

Avalanche Rectifier Diodes

Type 	V_{RRM} V $V_{RSM} = V_{RRM}$ + 100 V	I_{FRMSM} A	I_{FSM} kA 10 ms, $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms, $T_{vj} = T_{vj\,max}$	I_{FAVM}/T_c A/°C 180° sinus	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	$V_{(BR)}$ A min.	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
D 126 A 45	4500	315	2,30	26,45	126/100 200/35	0,86	3,2	4800	0,257	160	DSW27.2/99
D 126 B 45	4500	300	2,10	22,00	126/80 190/9	0,86	3,2	4800	0,337	160	DSW27.2/99
DD 126 A 45 K-B9*	4500	220	2,30	26,45	128/100	0,86	3,2	4800	0,060	160	DP30.1/93

* Non isolated module

Welding Diodes

up to 600 V

Type 	V_{RRM} V $V_{RSM} = V_{RRM}$ + 50 V	I_{FRMSM} A	I_{FSM} kA 10 ms, $T_{vj\,max}$	$\int i^2dt$ $A^2s \cdot 10^3$ 10 ms $T_{vj\,max}$	I_{FAVM}/T_c A/°C 180° sinus	$V_{(TO)}$ V $T_{vj} = T_{vj\,max}$	r_T mΩ $T_{vj} = T_{vj\,max}$	R_{thJC} °C/W 180 ° el sin	$T_{vj\,max}$ °C	Outline / page
25 DN 06	600	1800	12,75	813	1145/155	0,7	0,188	0,0174	180	25DN06/103
38 DN 06	600	4520	32,30	5200	2880/141	0,66	0,060	0,011	180	38DN06/103
46 DN 06	600	8000	52,00	13500	5100/118	0,7	0,047	0,00935	180	46DN06/103
56 DN 06	600	10050	70,00	24500	6400/116	0,7	0,040	0,0062	180	56DN06/103
65 DN 06	600	13300	95,00	45000	8470/98	0,7	0,027	0,0047	180	65DN06/103

Insulated Cells

Type	V_M V	V_{RMS} V_{DC}	CTI - Value	Iso-Class	$T_{c\,(max)}$ °C	R_{thCK} °C/W	$R_{thC\text{-}C\,(typ)}$ °C/W	at clamp. force	F_{max} kN	Weight g	Outline / page
ISO 57/26	6400	2520	250	III a	150	0,010	0,088	at 12kN	30	260	I57.26/104
ISO 72/8	2250	700	250	III a	150	0,005	0,028	at 20kN	45	130	I72.8/104
ISO 75/14	3500	1250	250	III a	150	0,005	0,0435	at 20kN	45	245	I75.14/104
ISO 75/26	5900	2250	250	III a	150	0,005	0,048	at 20kN	45	460	I75.26/104
ISO 65/35	10600	4180	250	III a	150	0,010	0,136	at 12kN	30	350	I65.35/104
ISO 120/35	11700	4400	250	III a	150	0,002	0,0275	at 30kN	70	1650	I120.35/104

* On request Insulating disc with water cooling Insulating material: Al N0

Possible Combinations of Presspacks and Heatsinks

for air cooling
for water cooling

applicable up to V_{RRM}	BE/KK = Elements per Heatsink											
7000 V	1	K0.05.8F	K0.05.8F	K0.05.8F		K0.05.8F		K0.05.8F				
	1							KE01	KE01	KE01	KE01	KE01	KE01
	2							KE02	KE02	KE02	KE02	KE02	
		K0.08.8F	K0.08.8F	K0.08.8F		K0.08.8F		K0.08.8F					
6000 V	1	K0.05.7F	K0.05.7F	K0.05.7F		K0.05.7F		K0.05.7F	K0.048.7F	K0.048.7F		K0.048.7F	
	2	K0.08.7F	K0.08.7F	K0.08.7F		K0.08.7F		K0.08.7F	K0.08.7F	K0.08.7F		K0.08.7F	
2600 V	1	K0.05F	K0.05F	K0.05F		K0.05F		K0.05F	K0.048F	K0.048F		K0.048F	
	2	K0.08F K0.92S	K0.08F K0.92S	K0.08F K0.92S		K0.08F K0.92S		K0.08F K0.92S					
	3	K0.11F	K0.11F	K0.11F		K0.11F		K0.11F					
	2	K0.024W	K0.024W	K0.024W	K0.024W	K0.024W	K0.024W	K0.024W					
	2, 4, 6							K53 K63	K53 K63	K53 K63	K53 K63	K53 K63	K63
2200 V	1	KK32	KK32										
	2	KK34	KK34										
	1	K0.12F K0.36S	K0.12F K0.36S			K0.12F K0.36S							
	2	K0.17F K0.22F	K0.17F K0.22F			K0.17F K0.22F							
	2	K0.65S	K0.65S			K0.65S							
	2, 4, 6	KA20;KC20;KD20	KA20;KC20;KD20	KA20;KC20;KD20	KA20;KC20;KD20	KA20;KC20;KD20							
Outline		D41.14 T41.14	D50.14 T50.14	D57.26 T57.26	D60.8	D60.14 T60.14	D73.8	D75.26 T75.26	D100.26 T100.26	D110.26 T110.26	D120.35 T120.35	T120.26 T110.35	T150.35

Possible Combinations of ModSTACK™

for air cooling
for water cooling


Up to 500 Vac	Irms [A]	at fsw [Hz]	Remarks	Size Outline/Page
B6I 500/800-220-G	220	2500	inverter	MS1/73
B6I 500/800-250-W	250	2500	inverter	MS2/74
2B6I 500/800 -240-W	2x240	5000	2 inverters parallel	MS3/75
2B6I 500/800-330-G	2x330	3300	2 inverters parallel	MS3/75
2B6I 500/800 -350-W	2x350	3000	2inverters parallel	MS3/75
2B6I 500/800-400-G	2x400	3000	2 inverters parallel	MS3/75
2B6I 500/800 -450-W	2x450	3000	2 inverters parallel	MS3/75
2B6I 500/800-600-W	2x600	3000	2 inverters parallel	MS4/76

Other topologies available.

Up to 500 Vac	Irms [A]	at fsw [Hz]	Remarks	Size Outline/Page
B6I 690/1100-100-G	100	2250	inverter	MS1/73
B6I 690/1100-250-G	250	2250	inverter	MS2/74
B6I 690/1100-375-G	375	1250	inverter	MS2/74
B6I 690/1100-460-W	460	2500	inverter	MS2/74
B6I+B6I 690/1100-300-G	300	2250	AC/AC converter	MS3/75
2B6I 690/1100-400-W	2x400	2250	2 inverters parallel	MS3/75
B6I+B6I 690/1100-650-G	650	2250	AC/AC converter	MS4/76

Other topologies available.






Mod STACK™ Type Designation System:





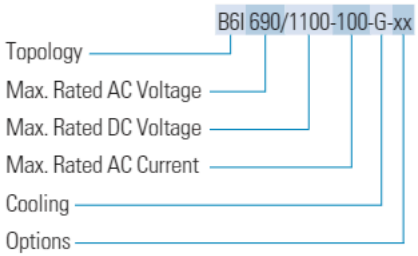


Descriptors
G = forced air cooling
W = water cooling
F = fan included


Options
M = Master
S = slave, single use
O = fiber optic interface
X = voltage signal interface

General Information:
Nominal AC current is rated for a certain switching frequency and at T_{amb} = 45 °C for air cooled IGBT stacks and 40 °C for water cooled stacks. Starting from nominal current a maximum current of 1,2 xI_{nom} is possible. Higher switching frequencies result in a derating of the nominal output current.


IGBT Stack Topology	Acronym
	1/2B2IHA
	1/2B2IHK
	1/2B2I
	B2IH
	B2I

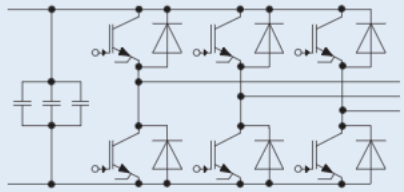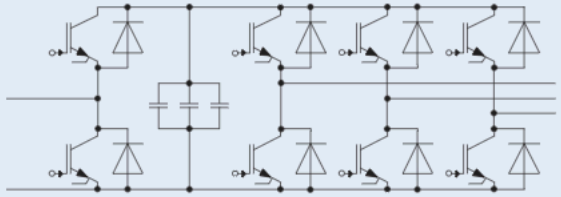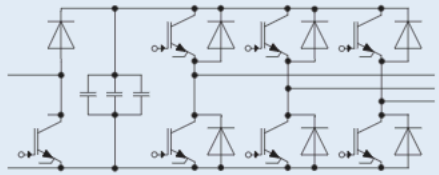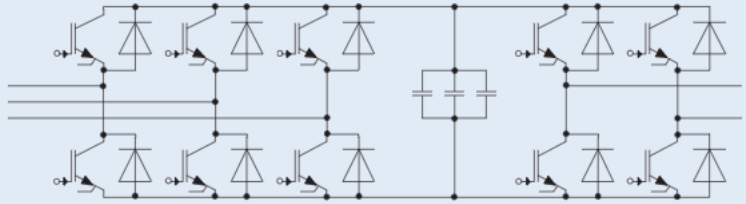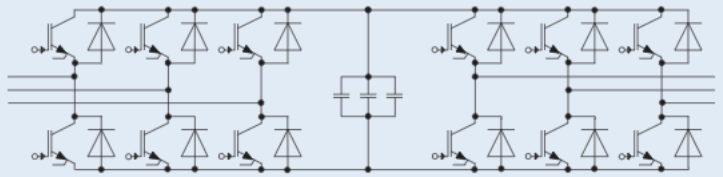IGBT Stack Topology	Acronym
	B6I
	1/2B2I + B6I
	1/2B2IHK + B6I
	B6I + B2I
	B6I + B6I or 2B6I for parallel operation


K 1.1 - M 12 — G = 0,635 kg

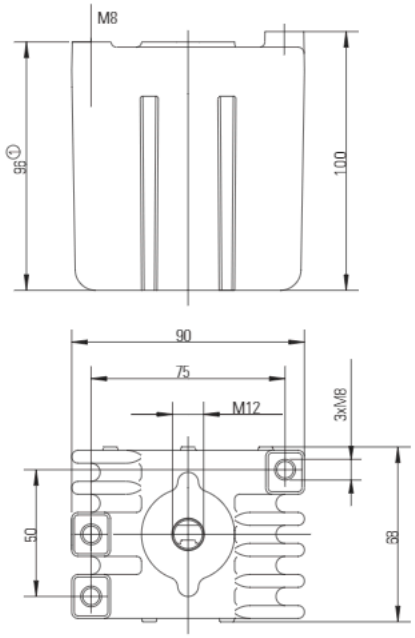


K 0.55 - FB 54 - A — G = 1,760 kg

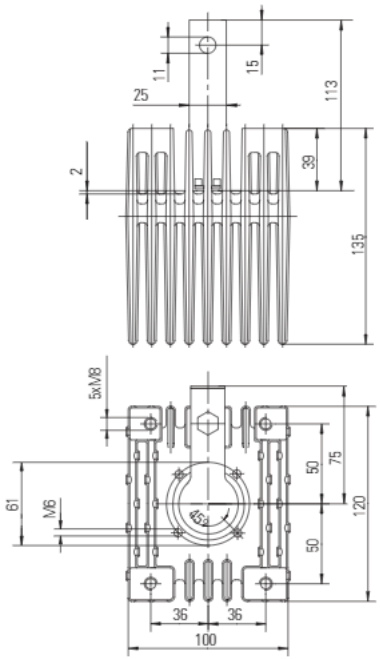


K0.55 - M 12 — G = 1,760 kg
K0.55 - M 24 x 1,5 — G = 1,760 kg

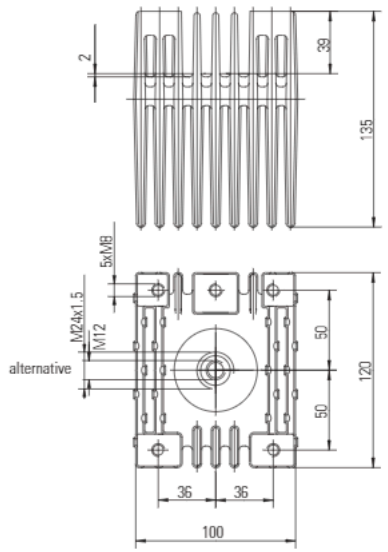


KM 10

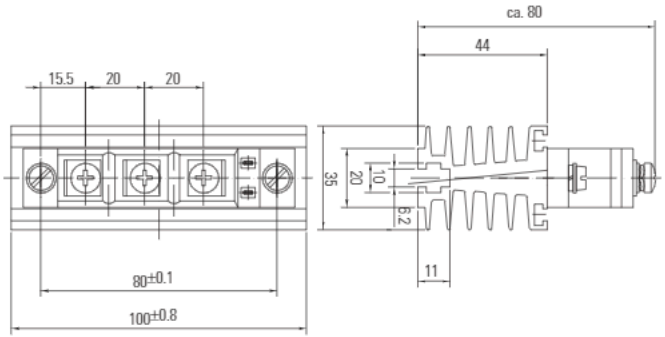


KM 11 G = 2,1 kg
KM 14 G = 3,1 kg
KM 17 G = 5,3 kg
KM 18 G = 8,8 kg

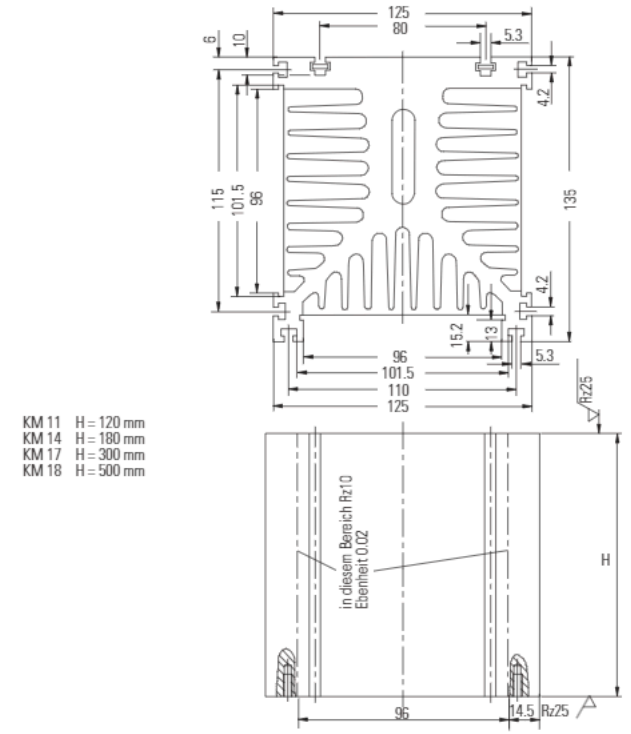


KA 20.X-V

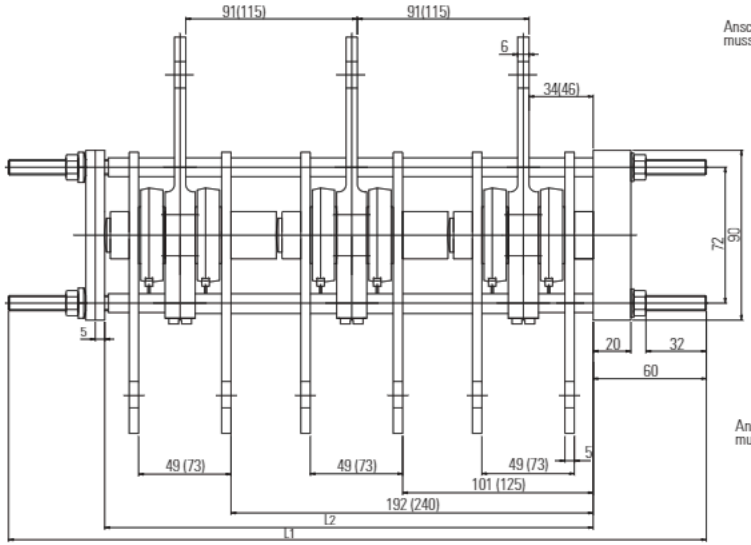

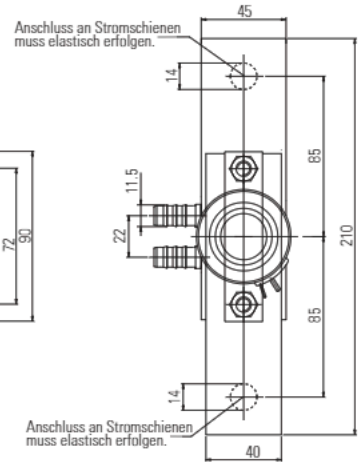



(...) für Bauelemente s=26

Anzahl d. Thy./Di.	Typ	L1	L2
6 (s=14mm)	-KA20.6-..	370	259
4 (s=14mm)	-KA20.4-..	280	168
2 (s=14mm)	-KA20.2-..	190	77
6 (s=26mm)	-KA20.62-..	445	331
4 (s=26mm)	-KA20.42-..	325	216
2 (s=26mm)	-KA20.22-..	210	101

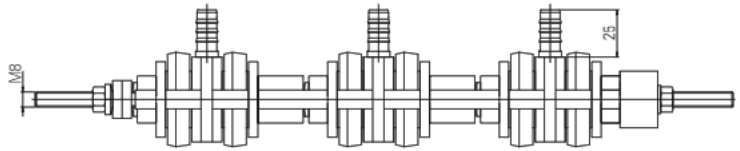


KC 20-XE

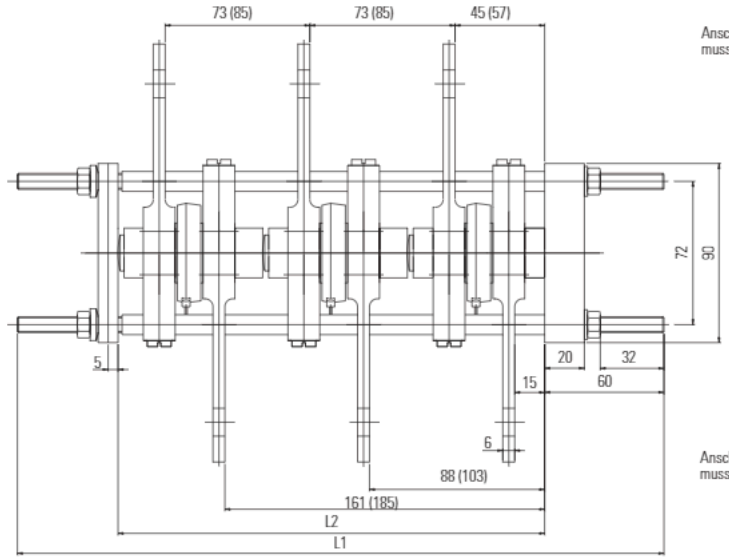

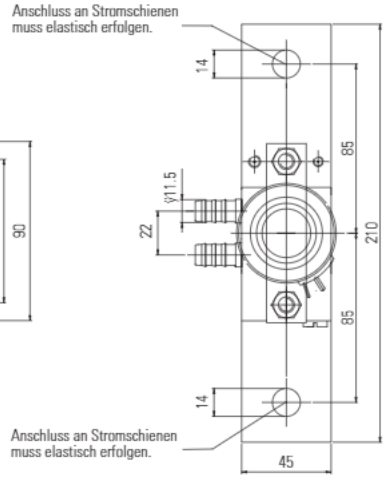

(...) für Bauelemente s=26


Anzahl d. Thy./Di.	Typ	L1	L2
3 (s=14mm)	-KC20-3E	325	215
2 (s=14mm)	-KC20-2E	250	142
1 (s=14mm)	-KC20-1E	175	69
3 (s=26mm)	-KC20-3E	360	251
2 (s=26mm)	-KC20-2E	275	166
1 (s=26mm)	-KC20-1E	190	81

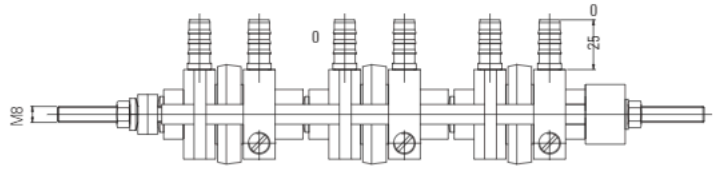


Zellenlage bei KC20.*-E




KD 20.X-V

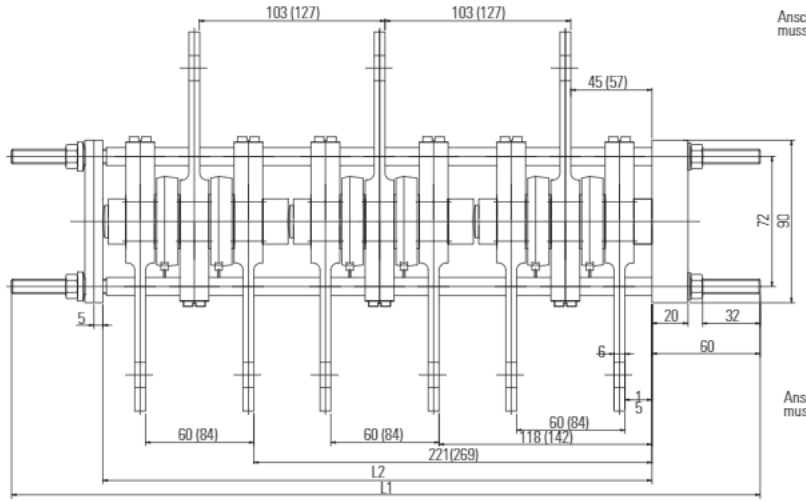

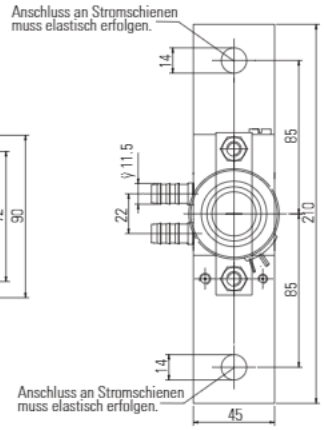


(...) für Bauelemente s=26

Anzahl d. Thy./Di.	Typ	L1	L2
6 (s=14mm)	-KD20.6-..	415	305
4 (s=14mm)	-KD20.4-..	310	202
2 (s=14mm)	-KD20.2-..	205	99
6 (s=26mm)	-KD20.62-..	490	377
4 (s=26mm)	-KD20.42-..	360	250
2 (s=26mm)	-KD20.22-..	230	123

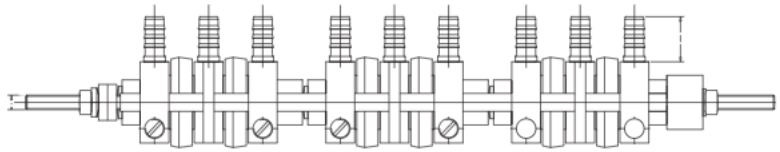

K 0.024 W — G = 3 kg


for W1C-circuits

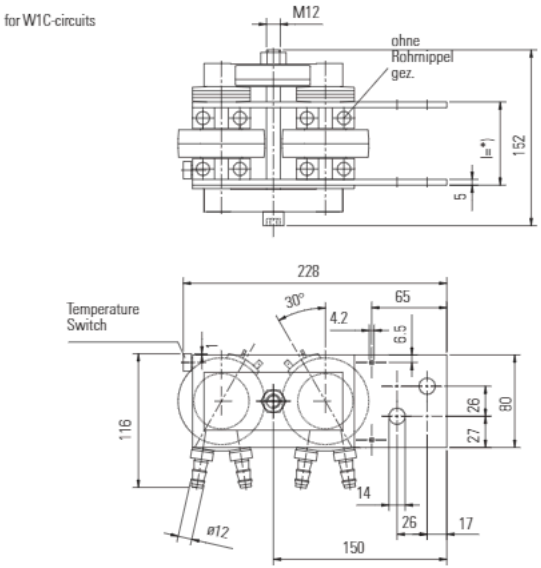


*) Bauelementhöhe 14 mm: l=60mm
Bauelementhöhe 26 mm: l=72mm

K 0.024 W — G = 3 kg


for B- and M-circuits

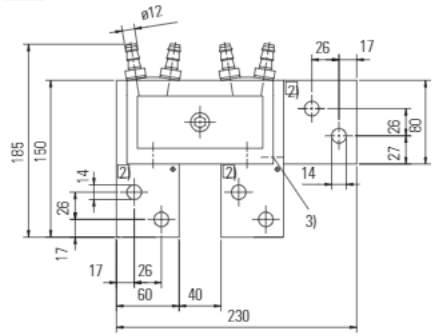


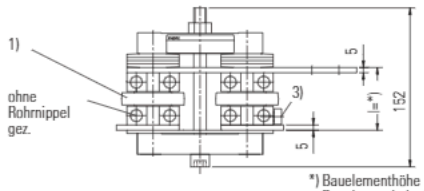

*) Bauelementhöhe 14 mm: l=60mm
Bauelementhöhe 26 mm: l=72mm


K 53 V — G = 17 kg

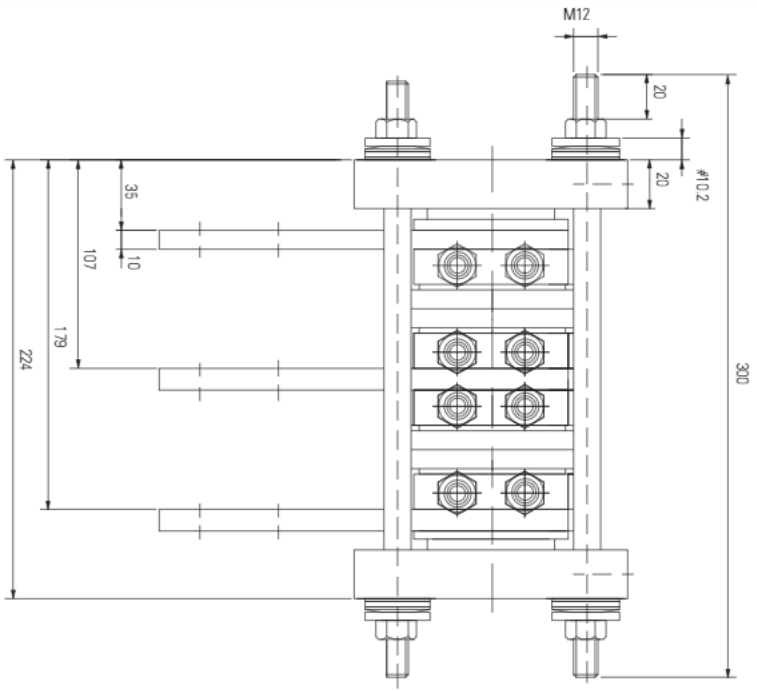


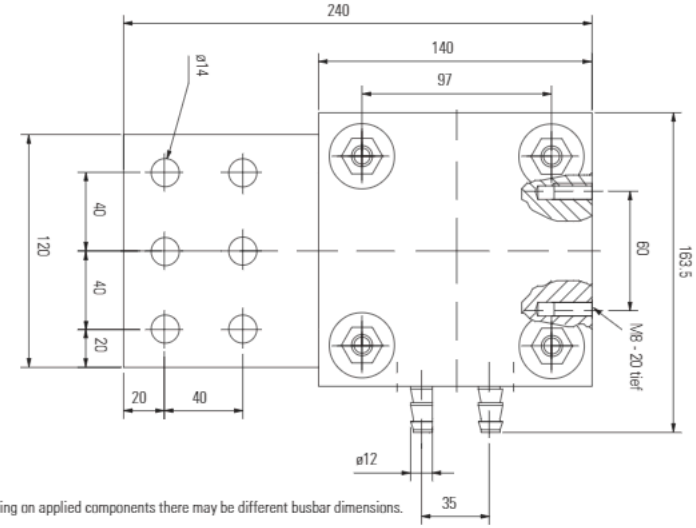

Example: Depending on applied components there may be different busbar dimensions.


K 63 V — G = 30 kg

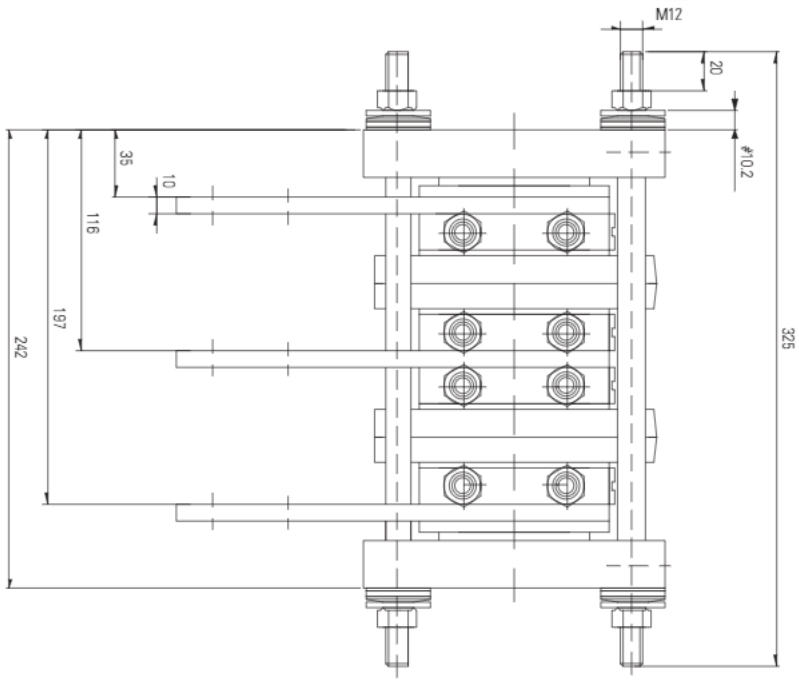

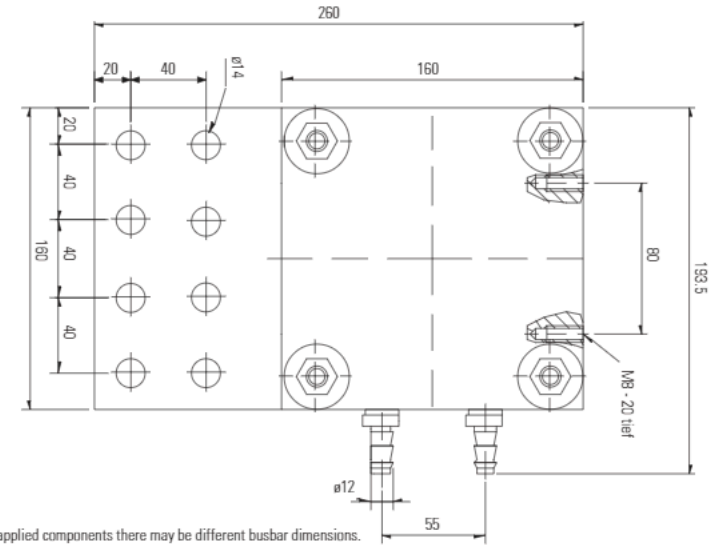


Example: Depending on applied components there may be different busbar dimensions.


KW 50

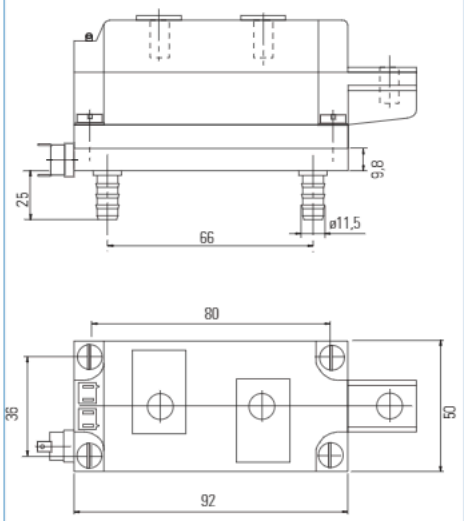


KW 60

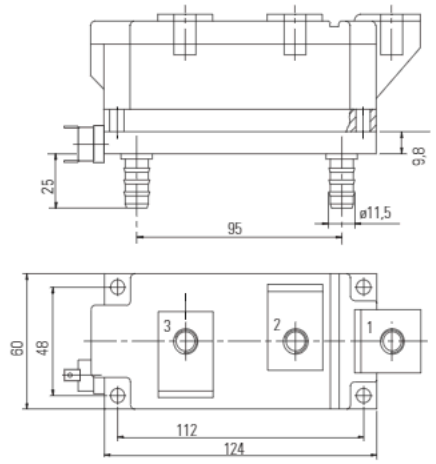


KW 70-T

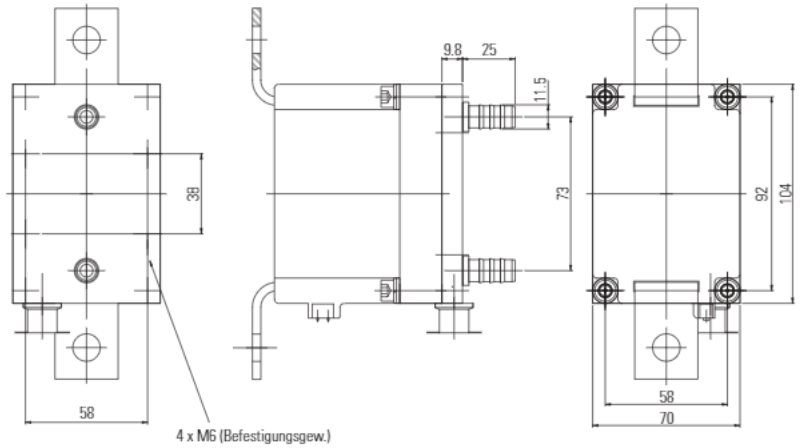


K 0.92S

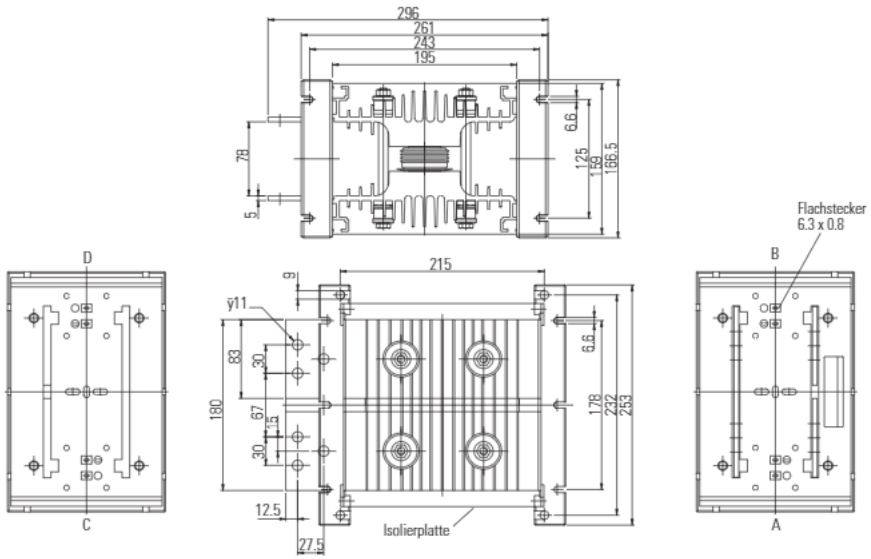


K 0.05 F/K 0.05.7 F — G = 9 kg

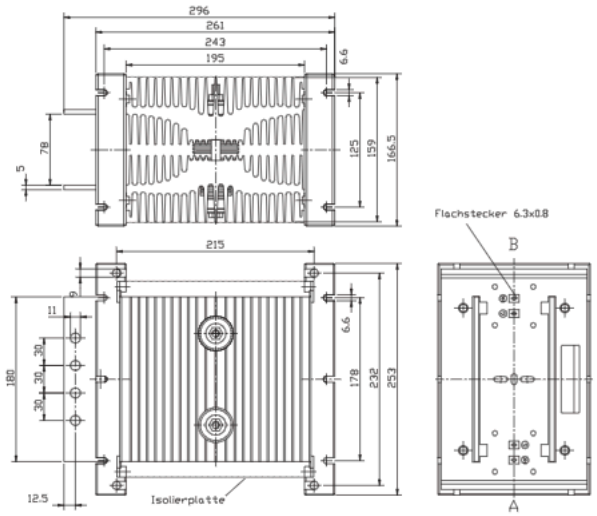


K 0.12 F — G = 2,5 kg

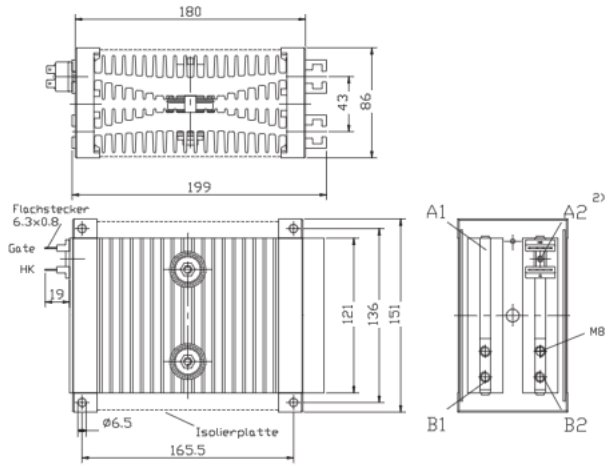


KK 32 — G = 1 kg

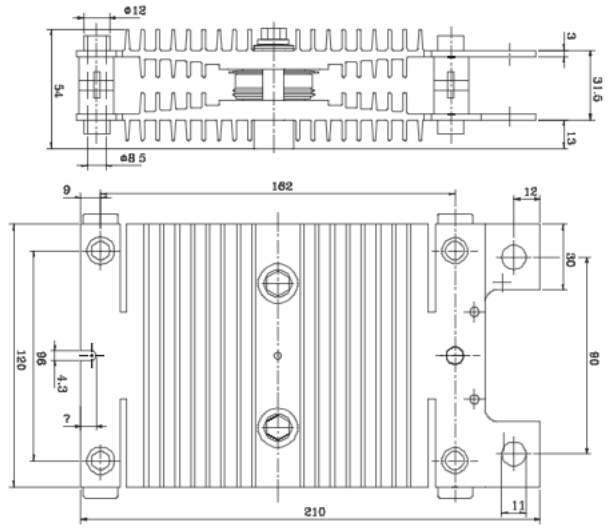


K 0.08 F/K 0.08.7 F/K 0.08.8 F — G = 9 kg

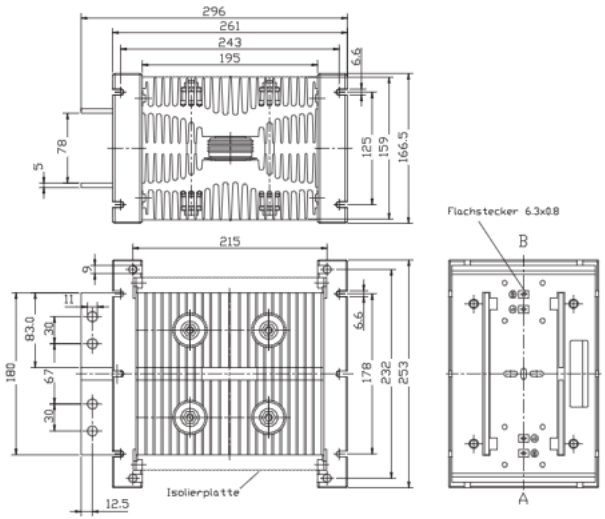


K 0.22 F — G = 3 kg

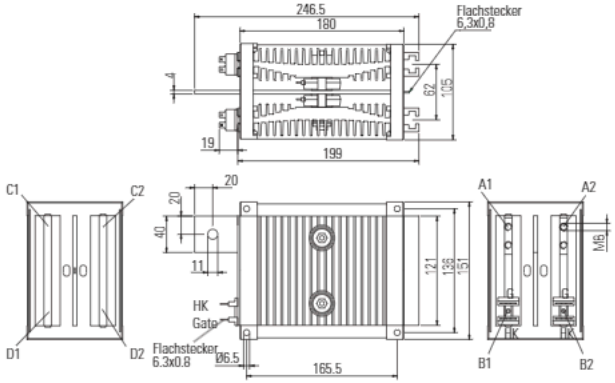


KK 34 — G = 1,3 kg

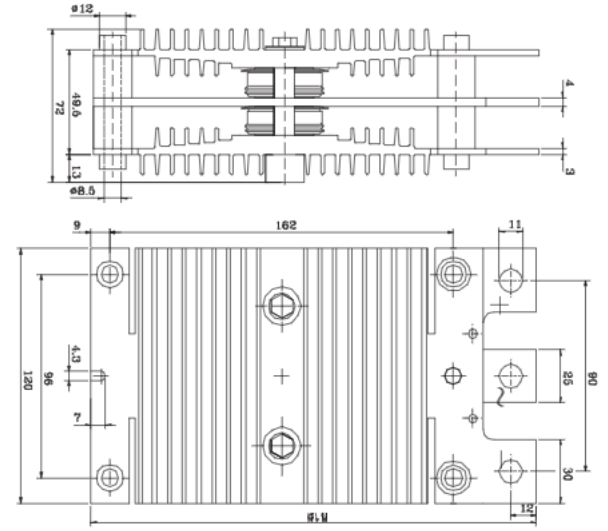


K 0.17 F — G = 2,5 kg

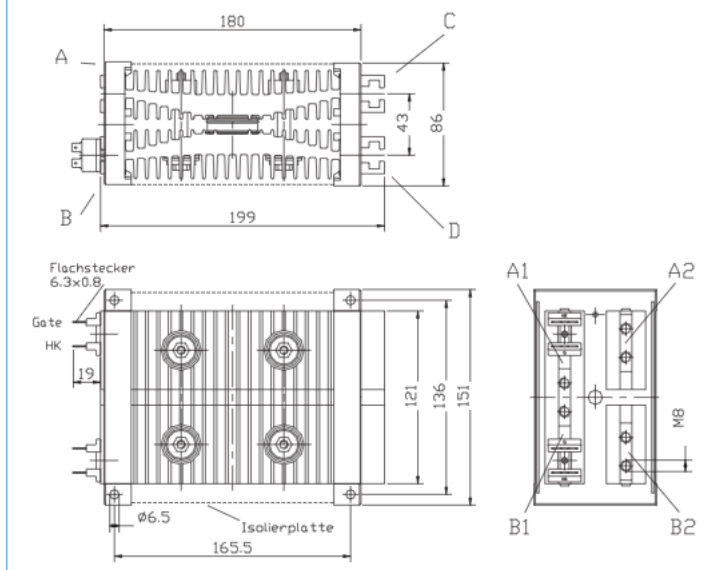


K 0.65 S — G = 3,3 kg

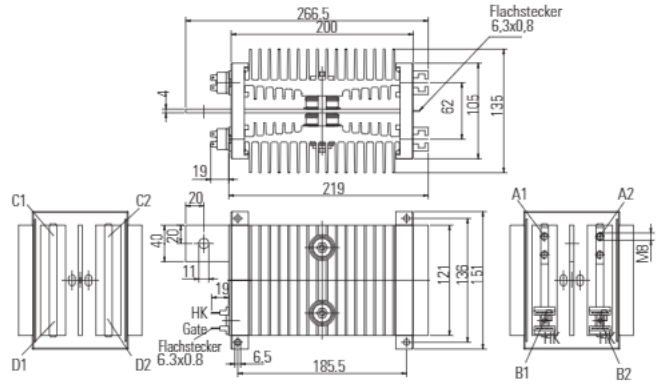

K 0.36 S — G = 2,9 kg

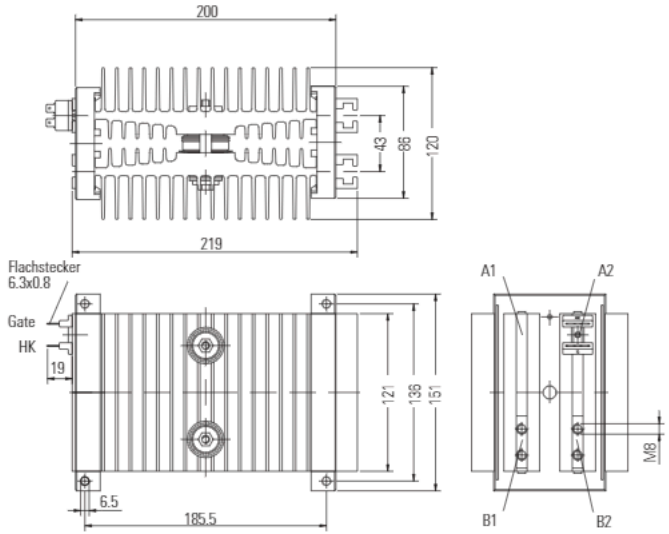


K 0.048 F — G = 9 kg

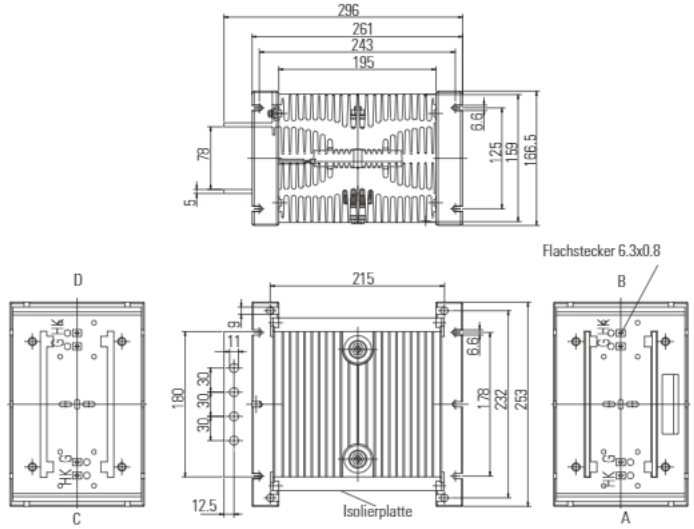


KE 01


G = 18,8 kg

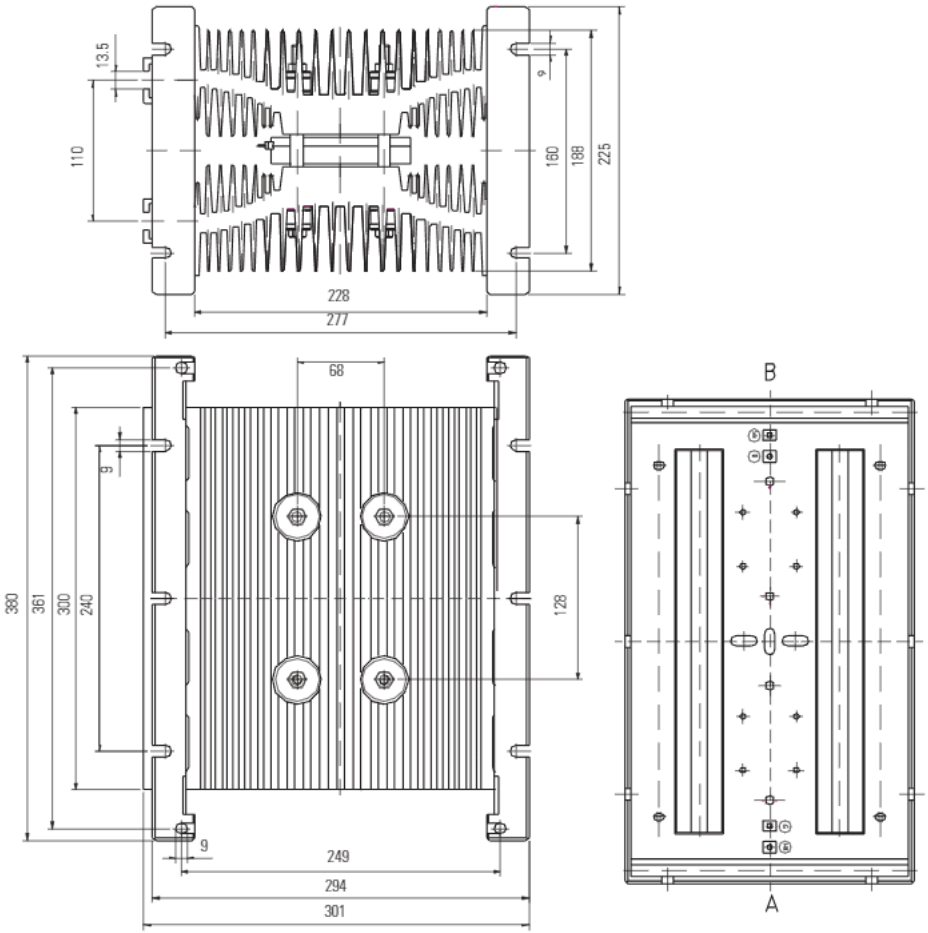


KE 02


G = 18,5 kg

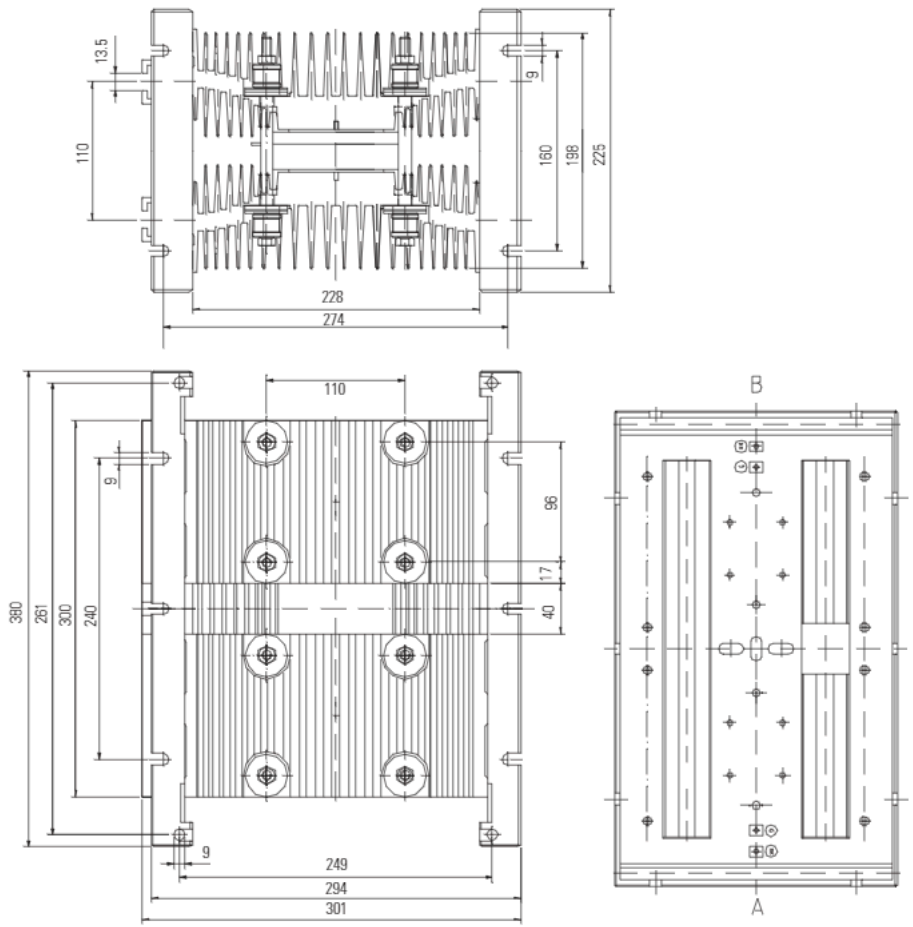

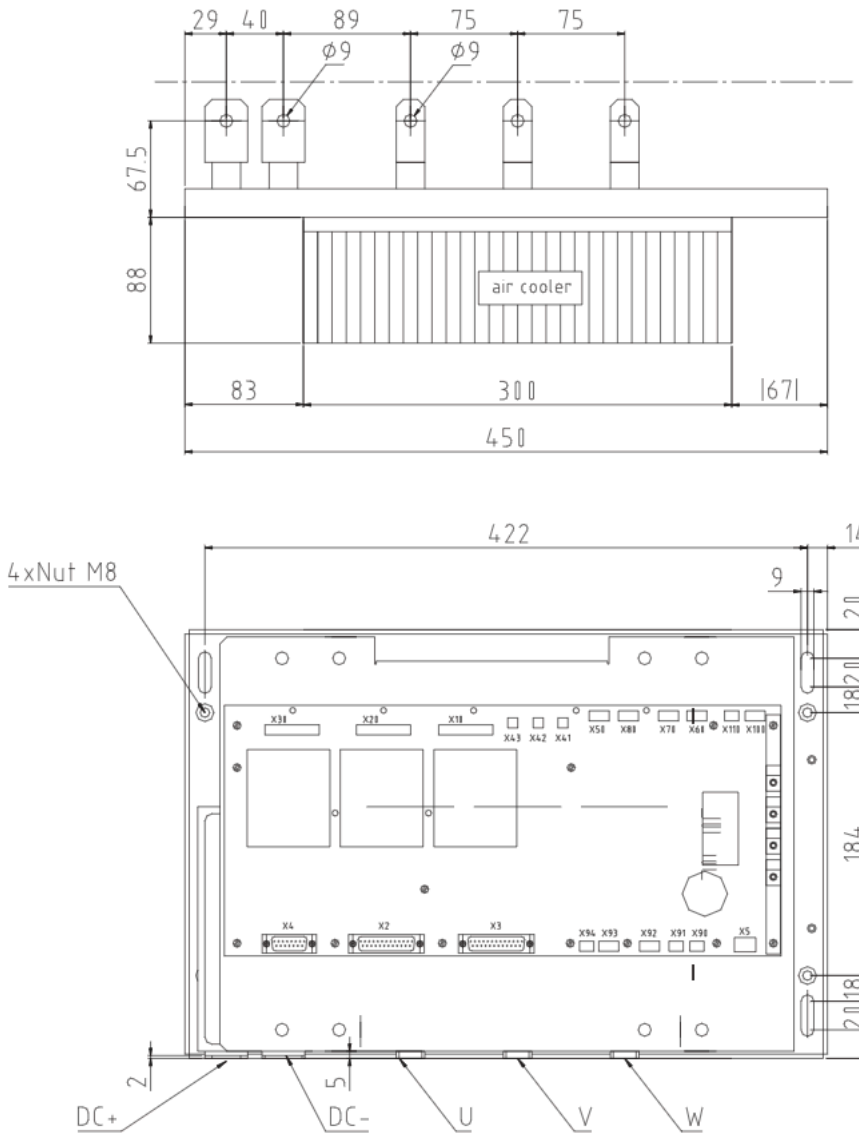

29
40
89
75
75
ø9
ø9
67.5
88
air cooler
83
300
167
450
422
14
9
4xNut M8
20
182
184
300
2
5
DC+
DC-
U
V
W

Size: 1

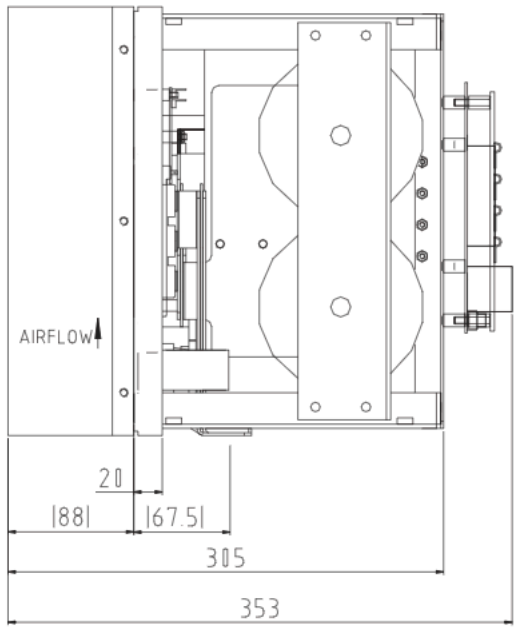

AIRFLOW
20
88
67.5
305
353

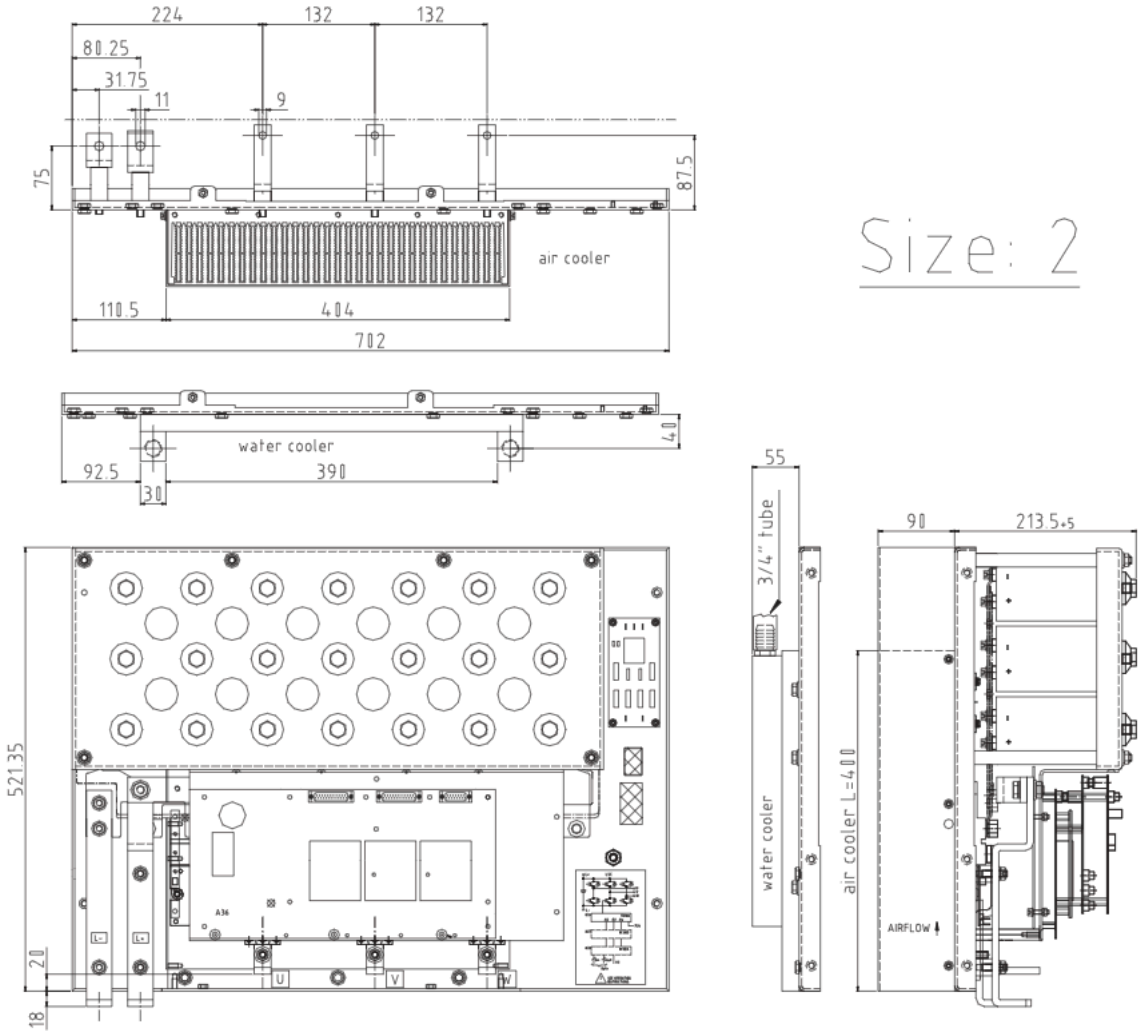

224
132
132
80.25
31.75
11
9
75
87.5
air cooler
110.5
404
702
water cooler
92.5
390
30
40
55
3/4" tube
water cooler
90
213.5+5
air cooler L=400
AIRFLOW
521.35
20
18
A36
U
V
W


Size: 2

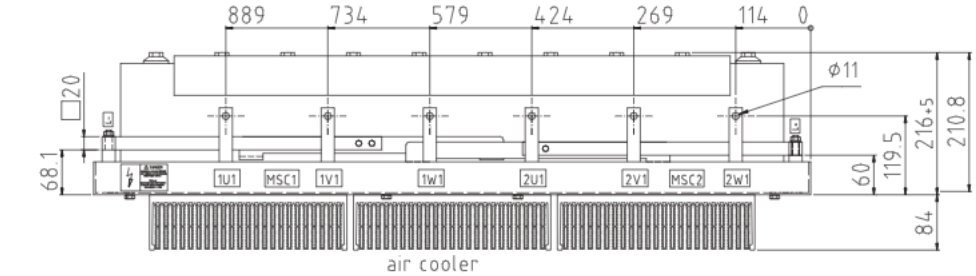

889
734
579
424
269
114
0
□20
ø11
68.1
216+5
210.8
119.5
60
84
1U1
MSC1
1V1
1W1
2U1
2V1
MSC2
2W1
air cooler


Size: 3

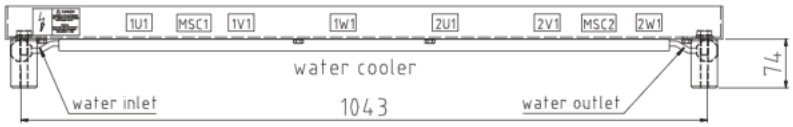
1U1
MSC1
1V1
1W1
2U1
2V1
MSC2
2W1
water cooler
74
water inlet
1043
water outlet

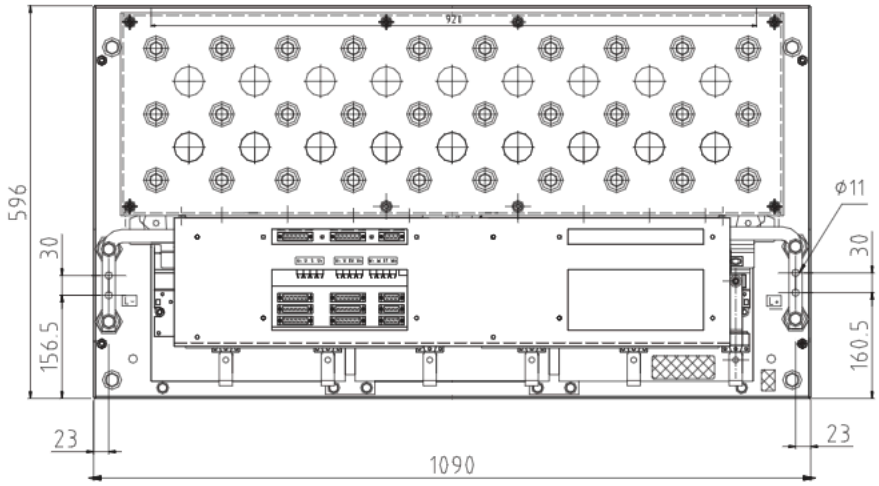

596
30
156.5
ø11
30
160.5
23
1090
23

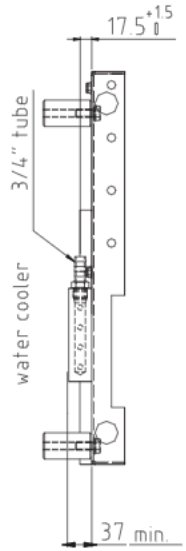

17.5 +1.5 0
3/4" tube
water cooler
37 min.

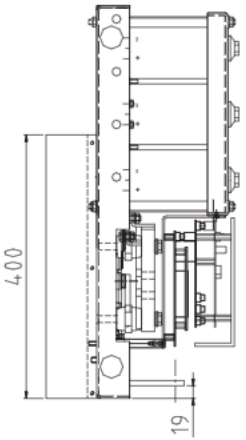
400
19

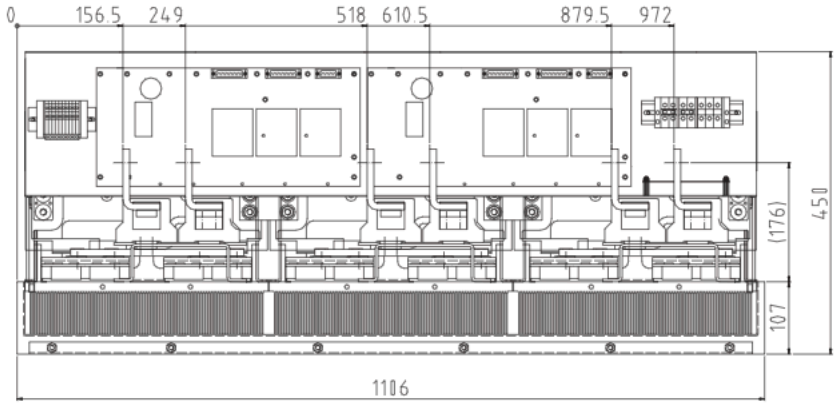

0
156.5
249
518
610.5
879.5
972
(176)
450
107
1106

Size: 4

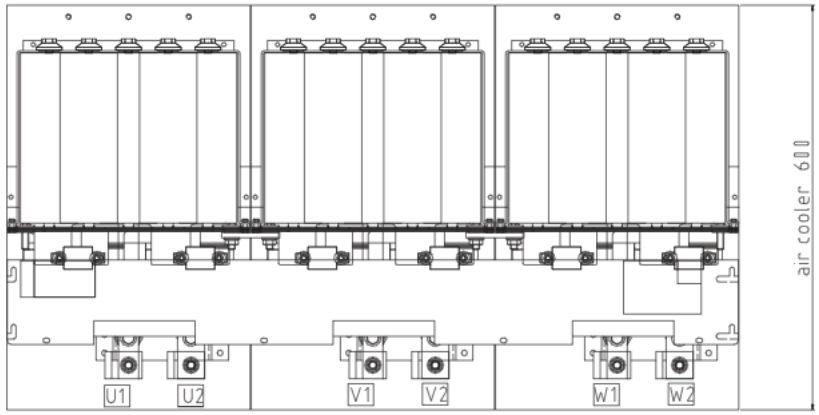
air cooler 600
U1
U2
V1
V2
W1
W2

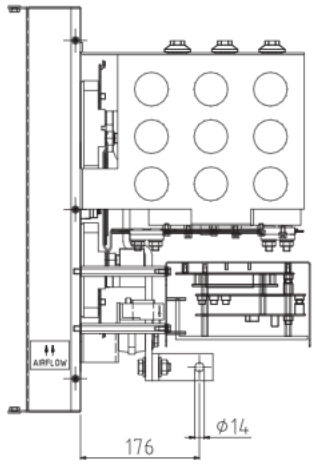

AIRFLOW
176
ø14

EasyPIM™750 L_750a

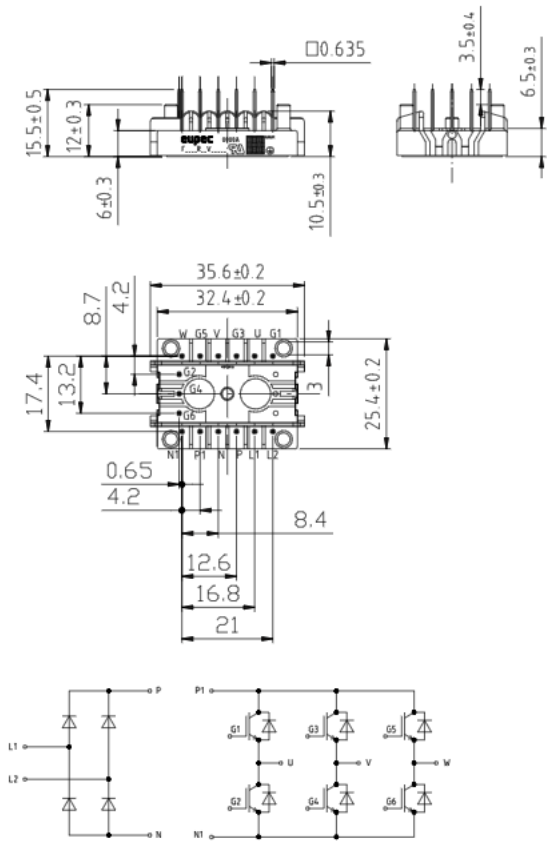


Type: FB6R06VE3
FB10R06VE3
FB15R06VE3

EasyPACK750 L_750b

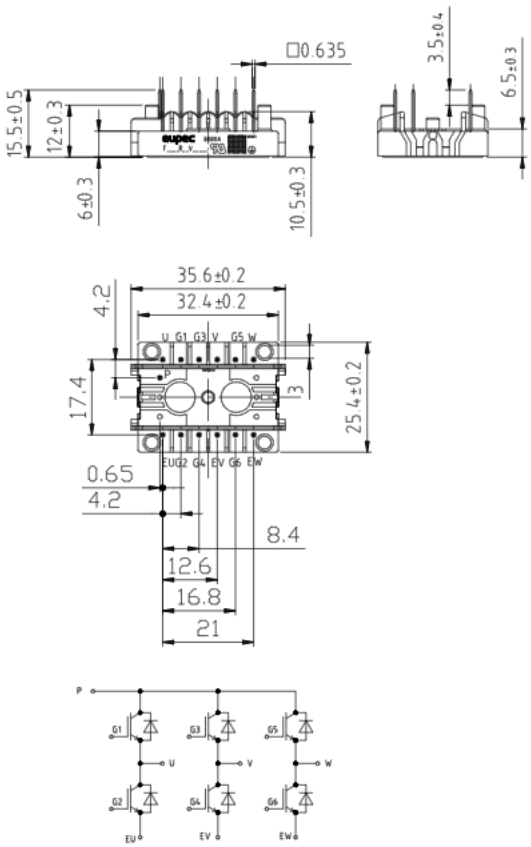


Type: FS6R06VE3
FS10R06VE3
FS15R06VE3
FS20R06VE3
FS30R06VE3

EasyPACK750 L_750c

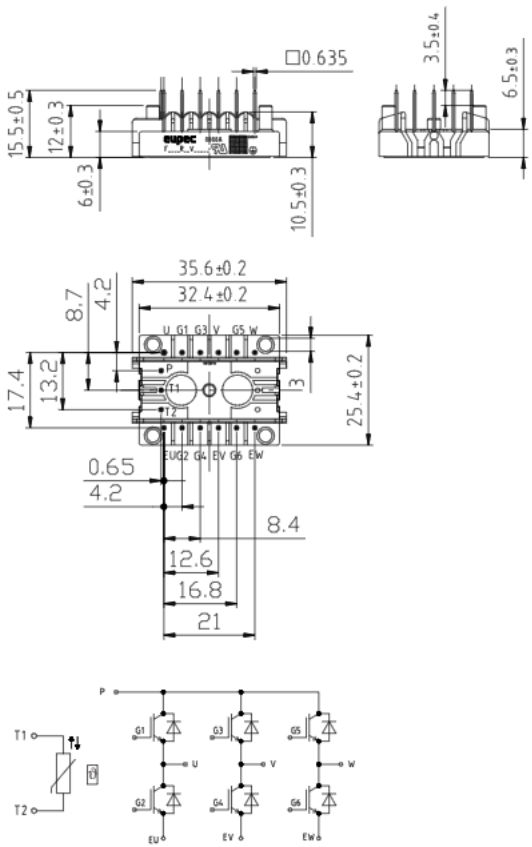


Type: FS10R06VL4_B2
FS15R06VL4_B2
FS6R06VE3_B2
FS10R06VE3_B2
FS15R06VE3_B2
FS20R06VE3_B2

EasyPIM™1 L_1a

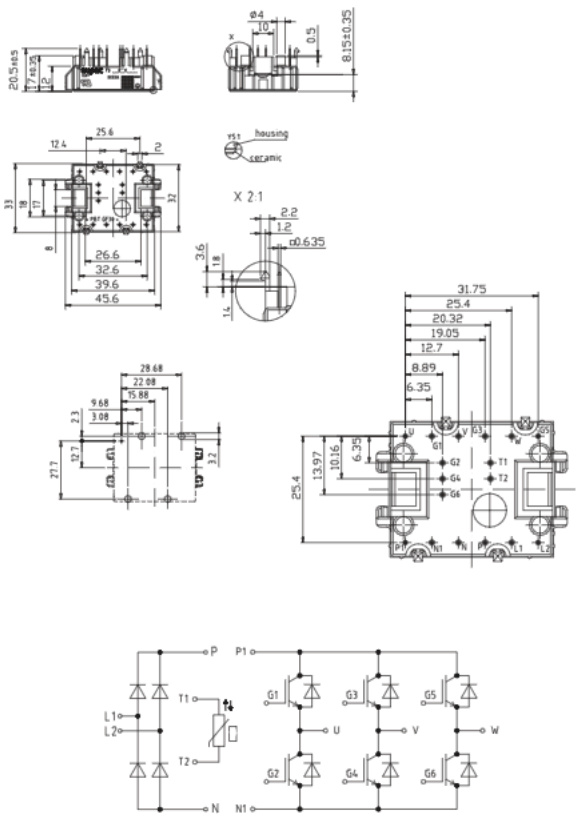


Type: FB10R06KL4
FB10R06XE4
FB15R06XE3
FB20R06XE3

EasyPACK1 L_1b

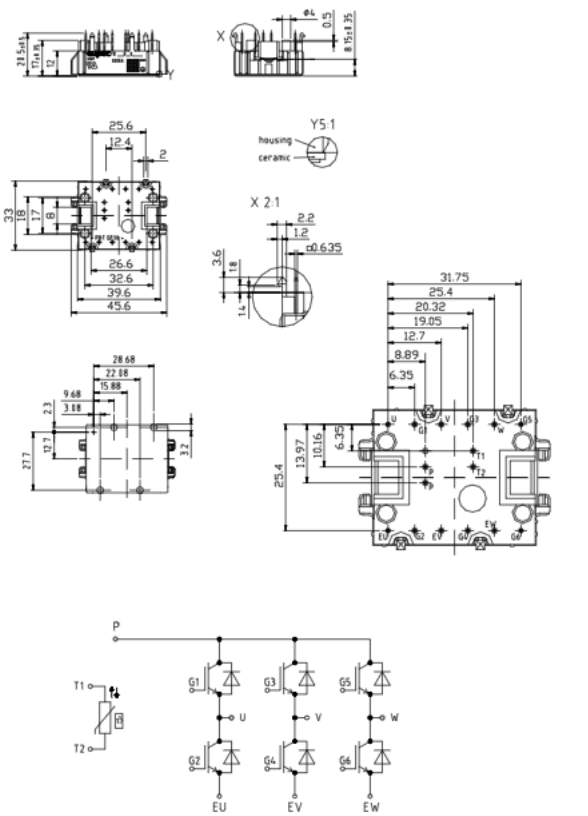


Type: FS10R06KL4
FS10R06XE3
FS15R06XL4
FS15R06XE3
FS20R06XL4
FS20R06XE3
FS30R06XL4
FS30R06XE3

EasyPIM™2 L_2a

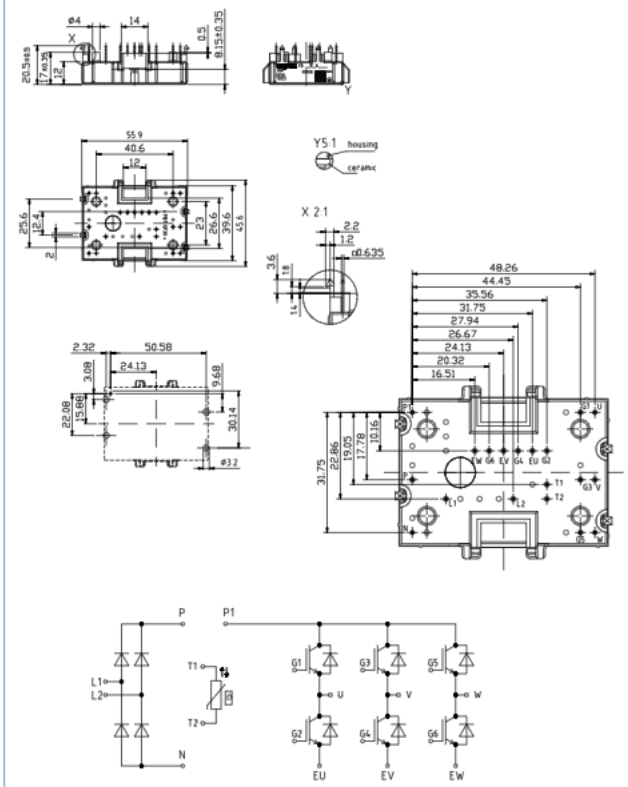


Type: FB10R06KL4G
FB10R06YE3

EasyPIM™2 L_2b

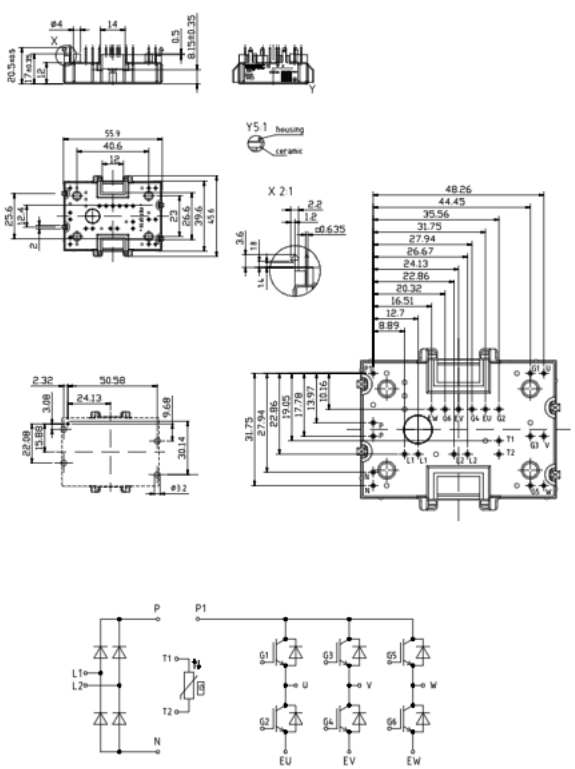


Type: FB15R06KL4
FB20R06KL4
FB15R06YE3
FB20R06YE3

EasyPIM™2 L_2c

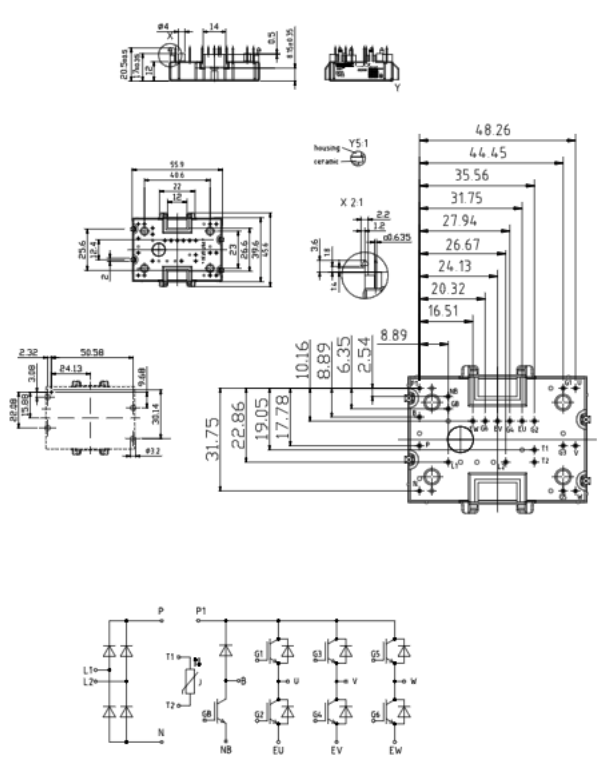


Type: FB10R06KL4G_B1
FB10R06Y3_B1

EasyPIM™2 L_2d

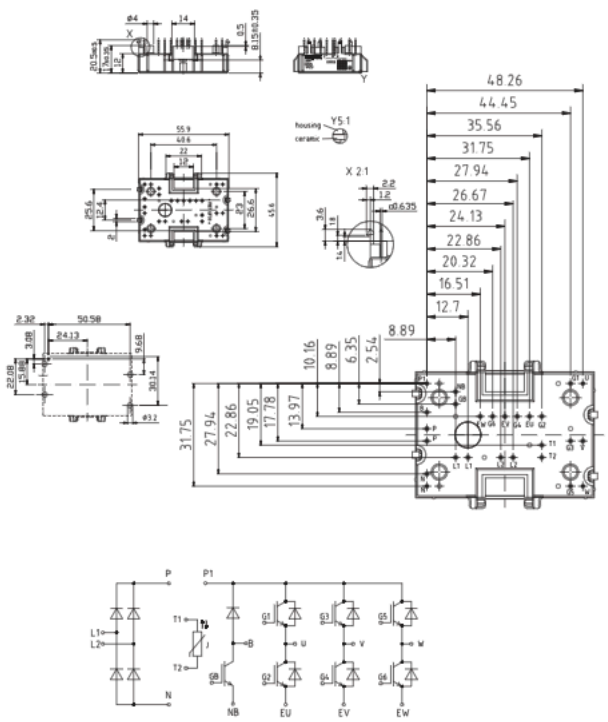


Type: FB15R06KL4_B1
FB20R06KL4_B1
FB15R06YE3_B1
FB20R06YE3_B1

EasyPIM™2 L_2e

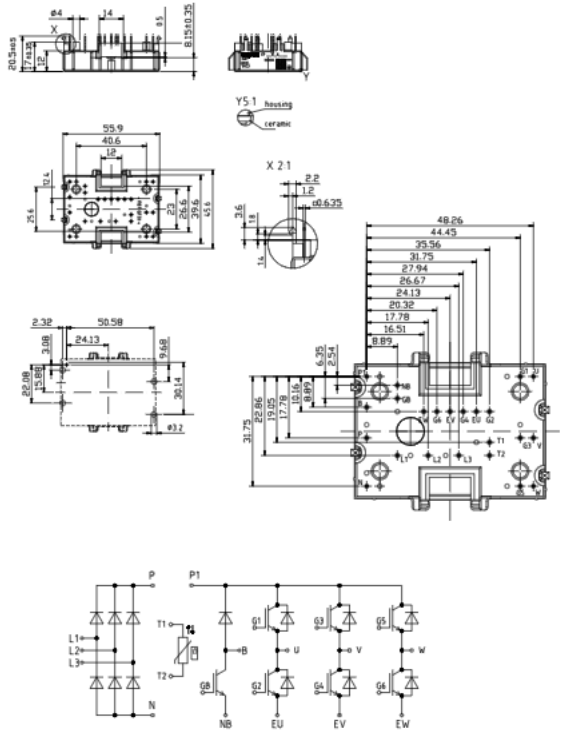


Type: FP10R06KL4
FP15R06KL4
FP20R06KL4
FP10R06YE3
FP15R06YE3
FP20R06YE3
FP30R06YE3
FP10R12KE3
FP15R12KE3
FP10R12YT3
FP15R12YT3

EasyPIM™2 L_2f

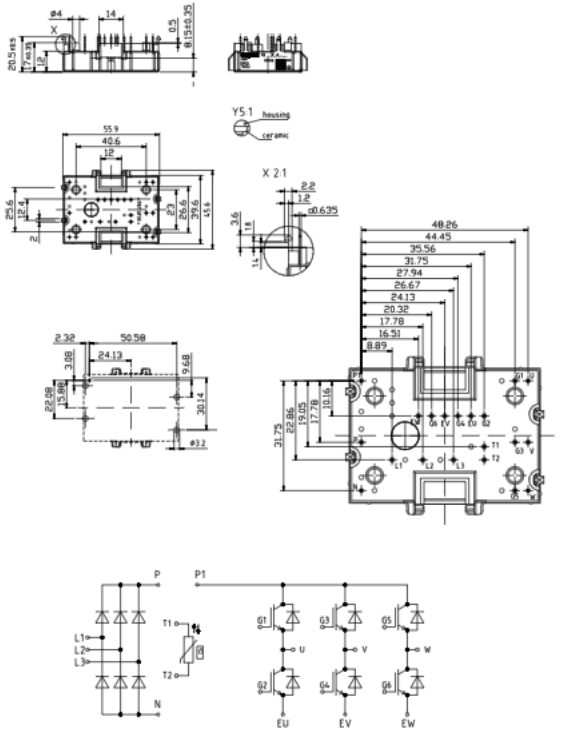


Type: FP10R06KL4_B3
FP10R06YE3_B3

EasyPACK2 L_2g

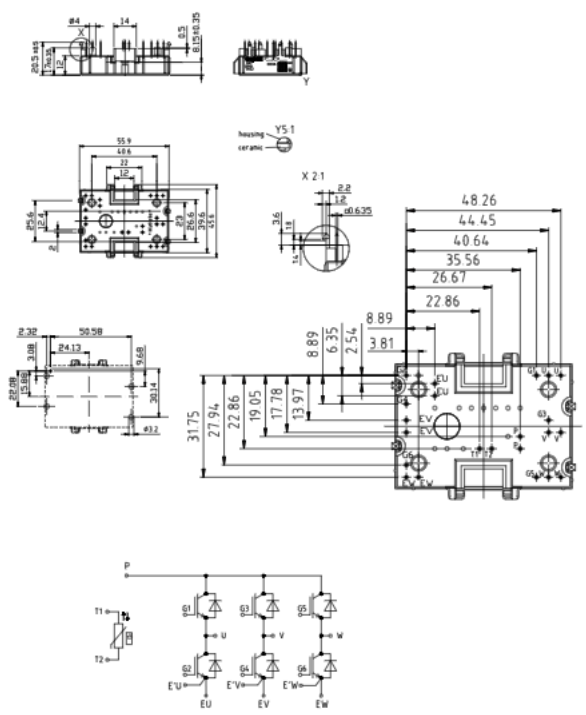


Type: FS10R12YT3
FS15R12YT3
FS25R12YT3
FS35R12YT3

EasyPACK2 L_2h

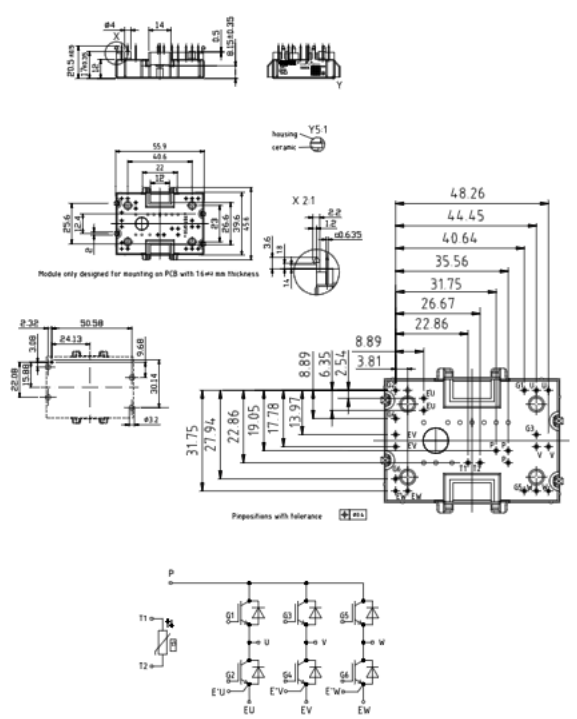


Type: FS50R06YL4
FS50R06YE3


EconoPIM™2 — M_E2a

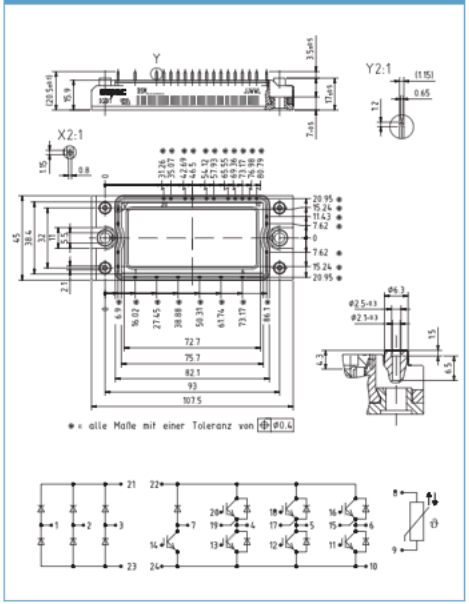


EconoPIM™3 — M_E3a

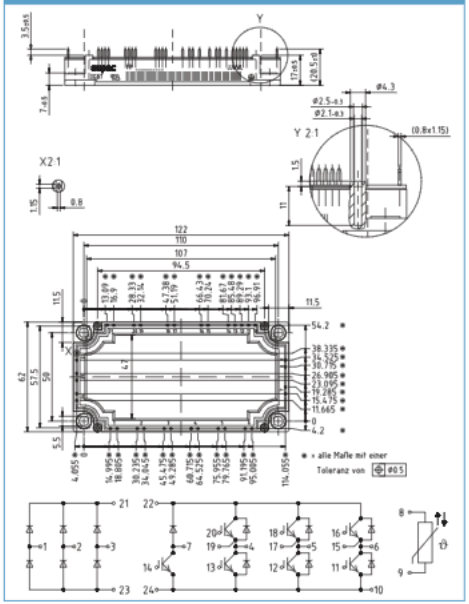


EconoPACK™2 A-Series (shortpin) — M_E2c

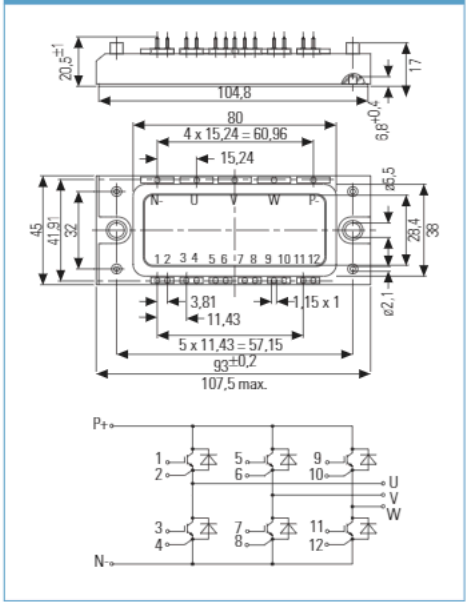


EconoPACK™2 A-Series (longpin) — M_E2d

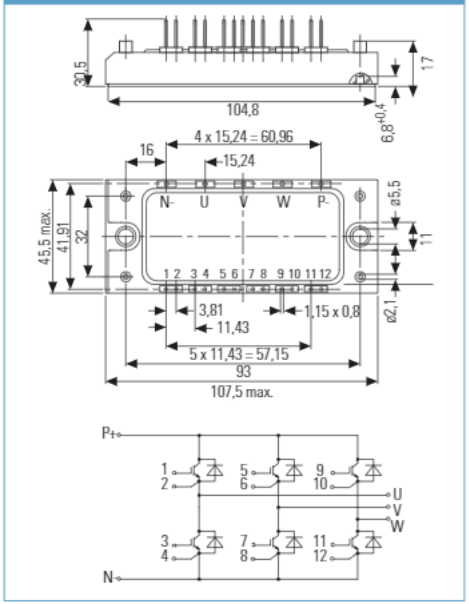


EconoPACK™3 A-Series — M_E3c

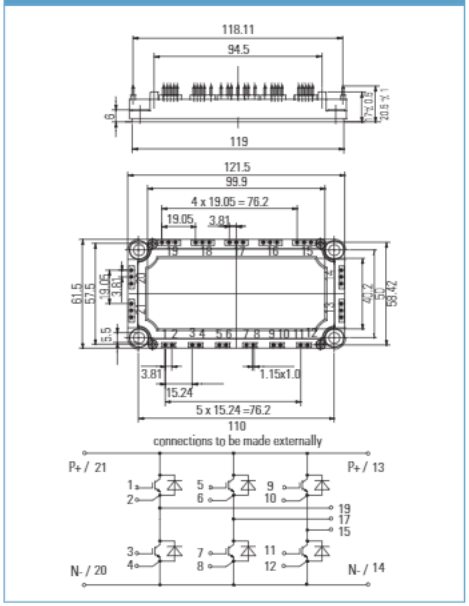


EconoPACK™2 B-Series — M_E2b

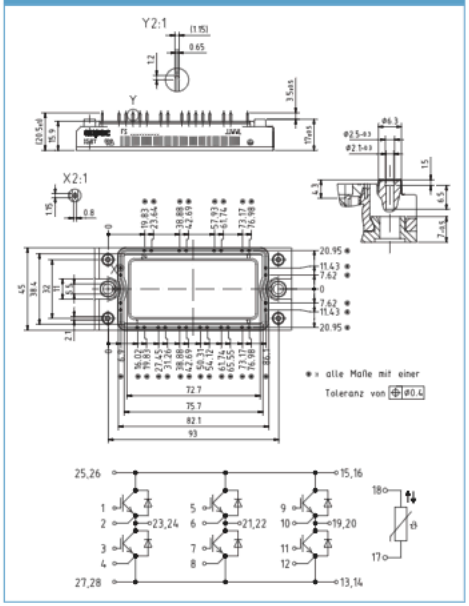


EconoPACK™3 B-Series — M_E3b

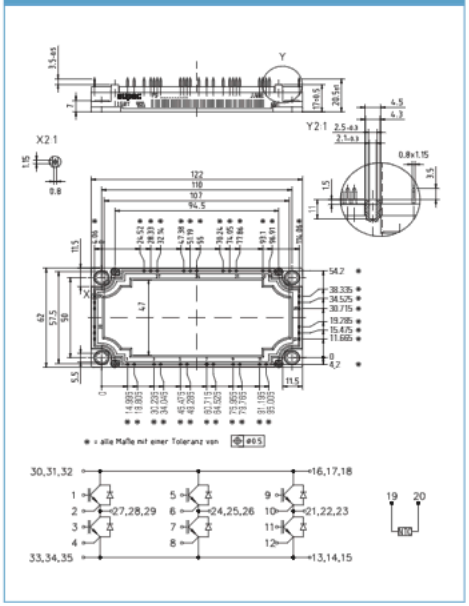


EconoPACK™2 B-Serie FourPACK M_E2e

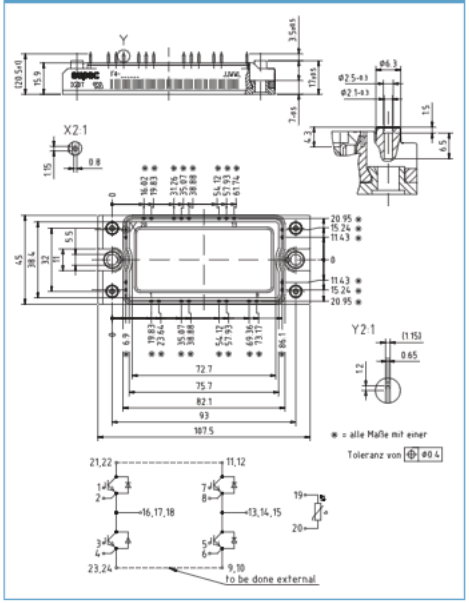


EconoPACK™3 B-Serie FourPACK M_E3d

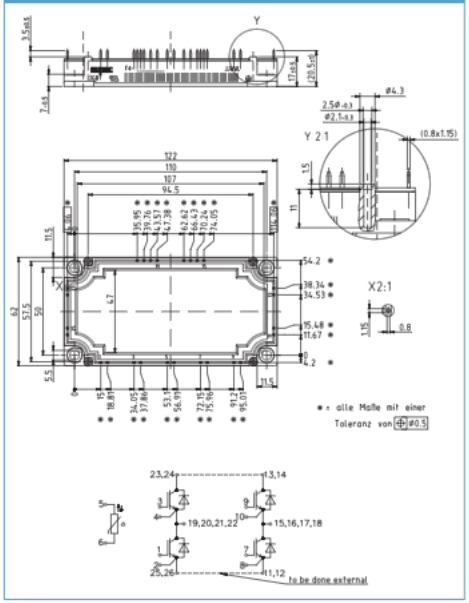


EconoPACK™3 A-Serie SR-Drives Modul M_E3e

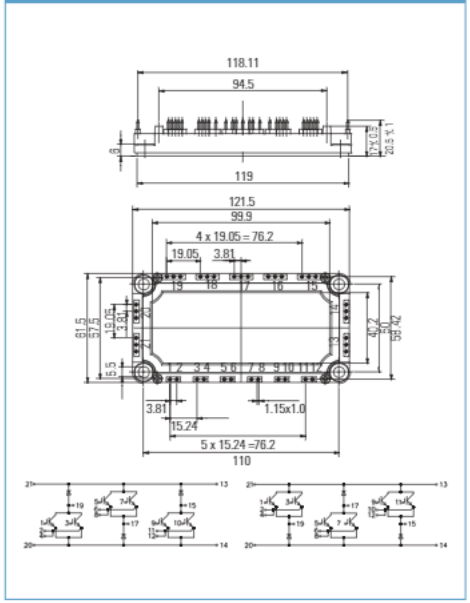


EconoPACK™3 A-Series TriPACK M_E3f

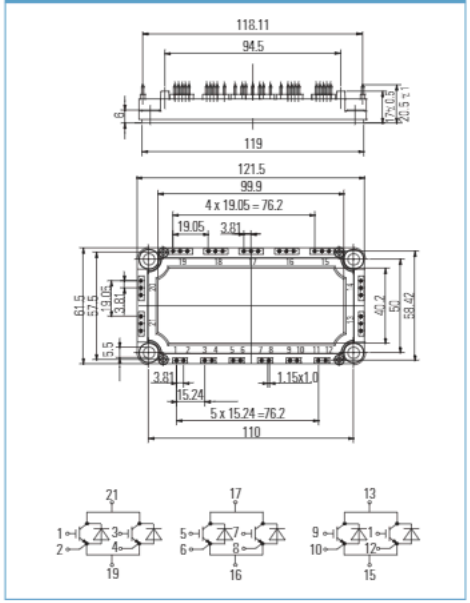


EconoPACK™ Shunt (Full Bridges) M_E3g

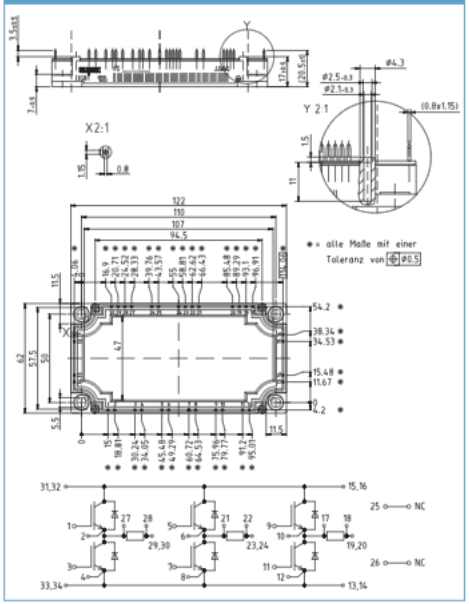


EconoPACK™ Shunt (TriPACK-High) M_E3h

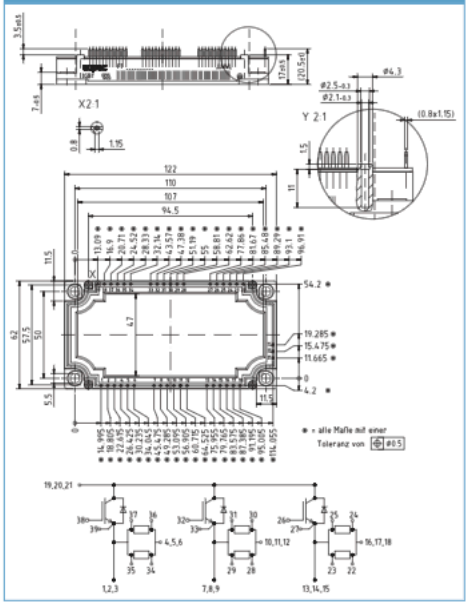


EconoPACK™ Shunt (TriPACK-Low) M_E2f

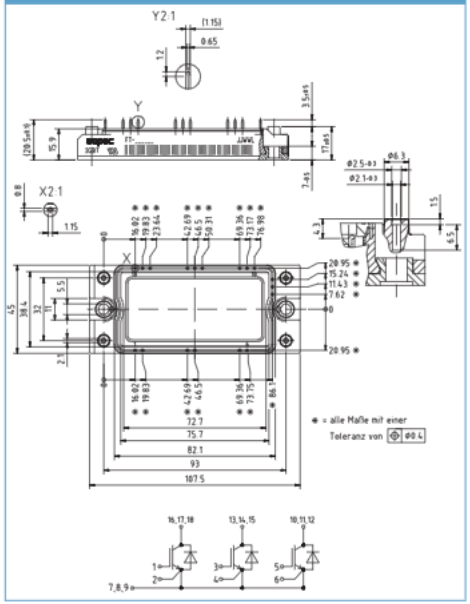


34 mm Module M_34a

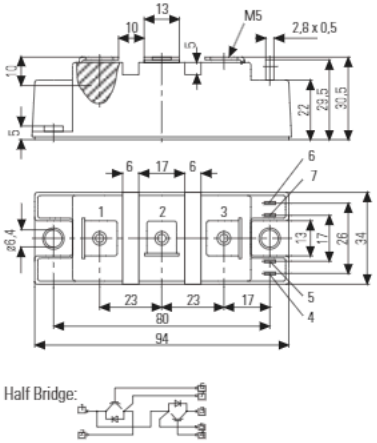


62 mm Module M_62a

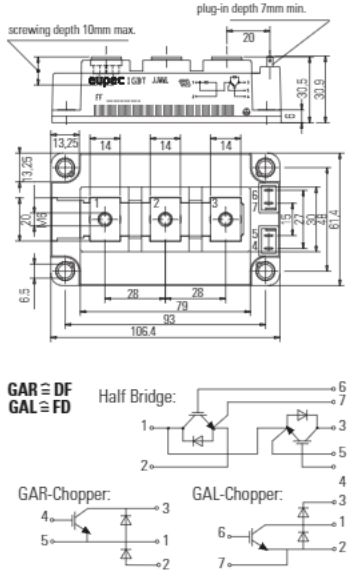


Single Switch 62 M_62b

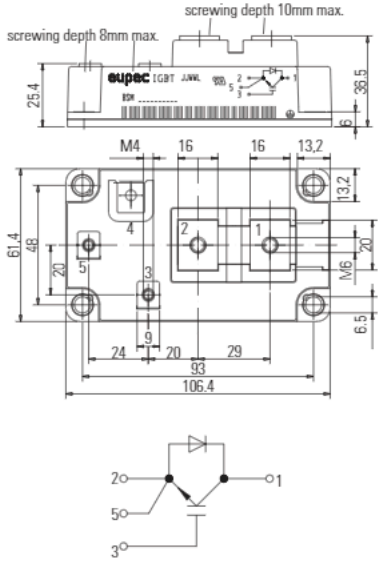


Single Switch 62, collector sense M_62c

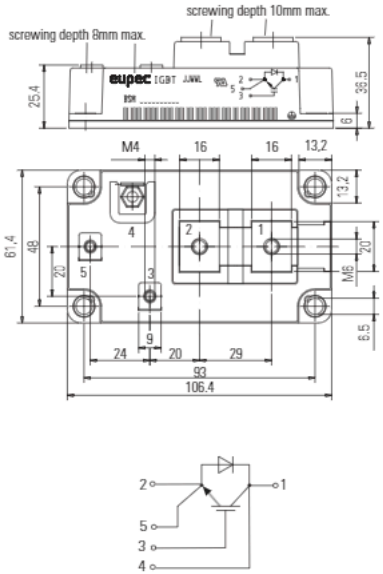


Single Diode 62 M_62d

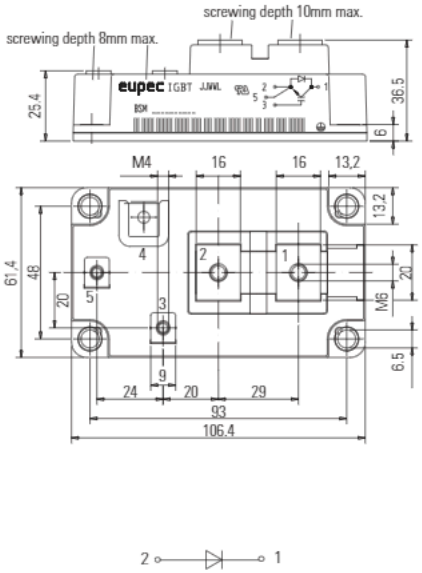


Dual Diode 62 M_62e

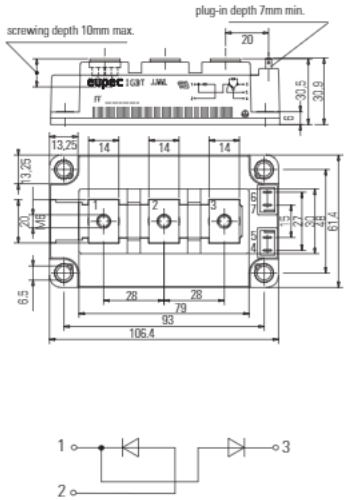


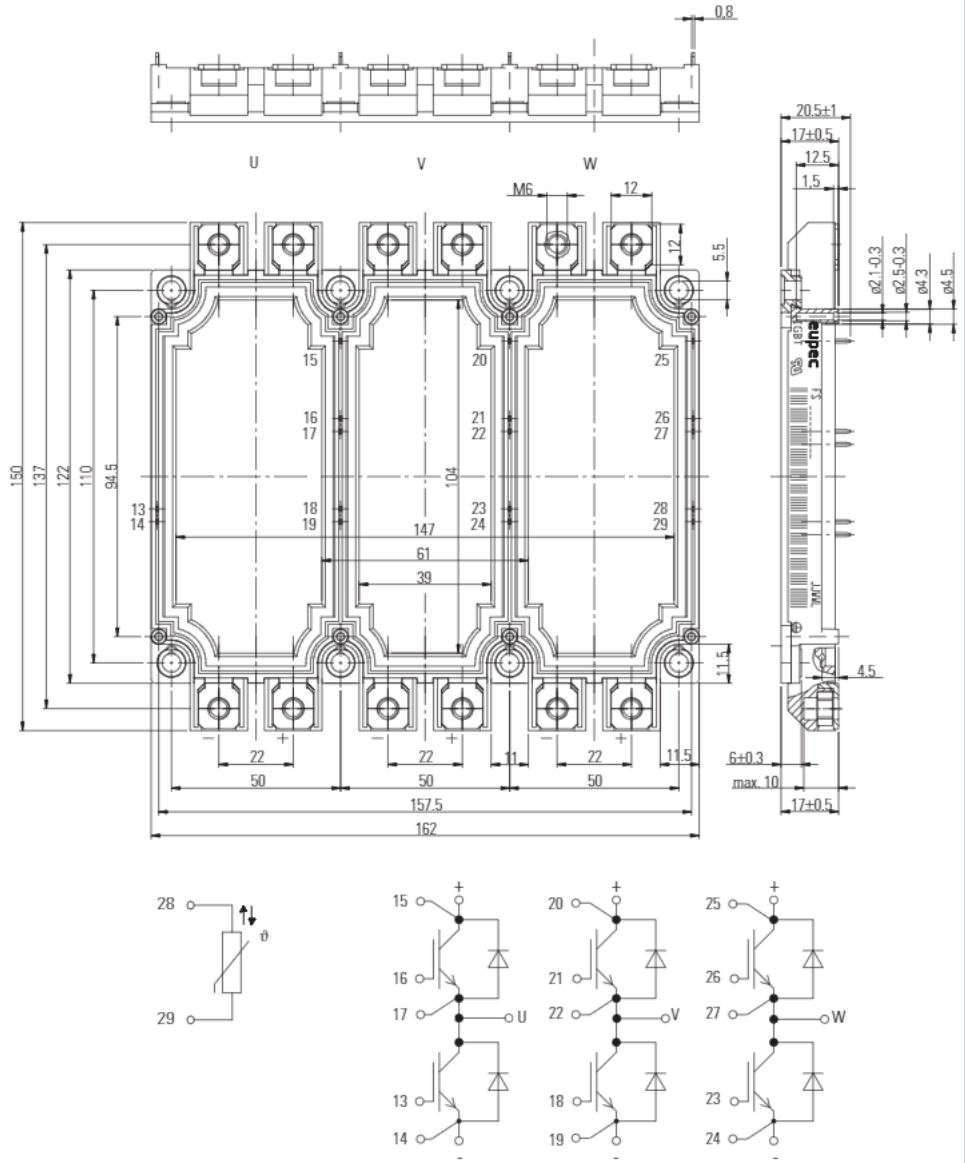
0.8
U
V
W
M6
12
12
5.5
20.5±1
17±0.5
12.5
1.5
ø2.1-0.3
ø2.5-0.3
ø4.3
ø4.5
4.5
6±0.3
max. 10
17±0.5
150
137
122
110
94.5
104
11.5
147
61
39
22
50
11
157.5
162
28
29
15
16
17
U
13
14
20
21
22
V
18
19
25
26
27
W
23
24


IHM — H_IH1

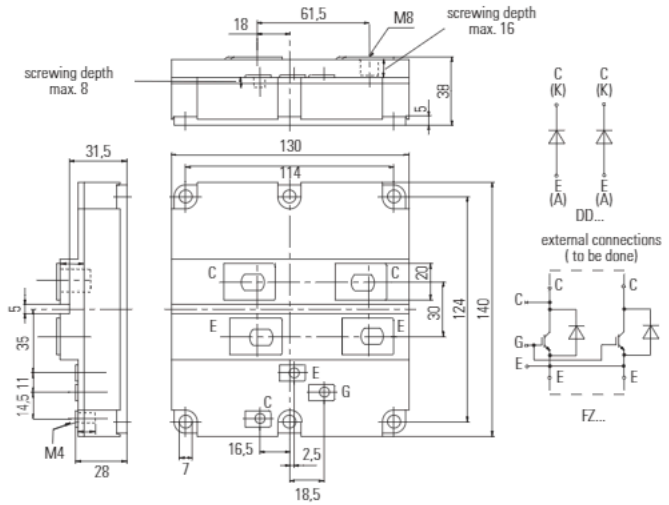


IHM — H_IH2

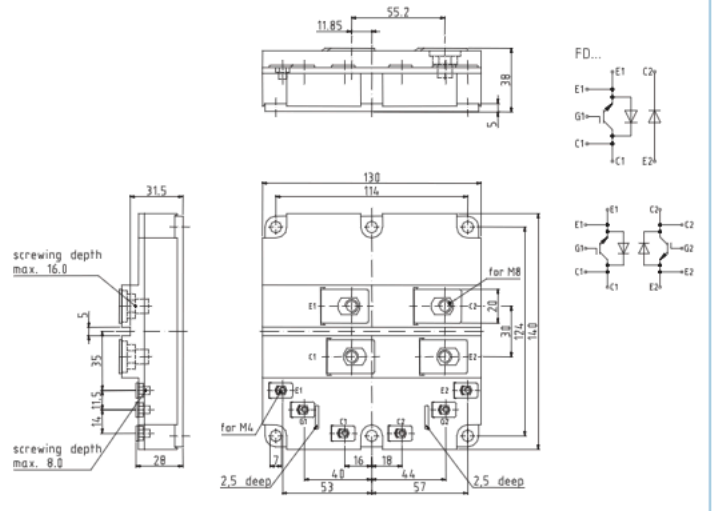


IHM/IHV — H_IH4

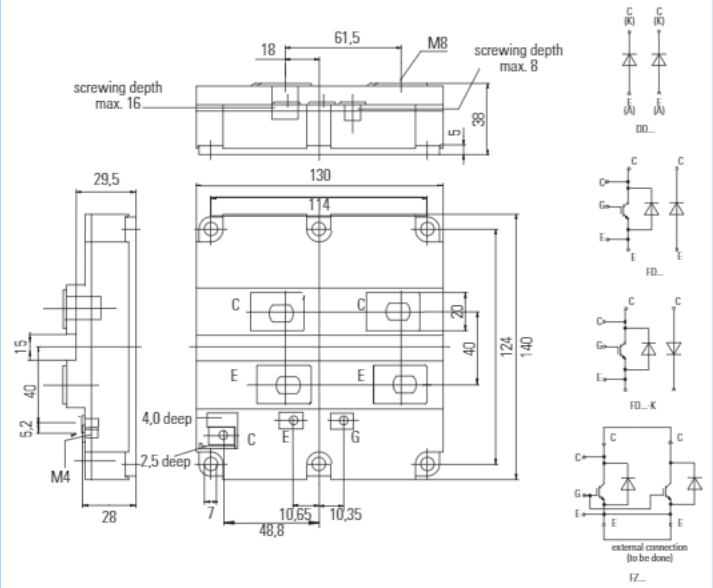


IHM — H_IH5

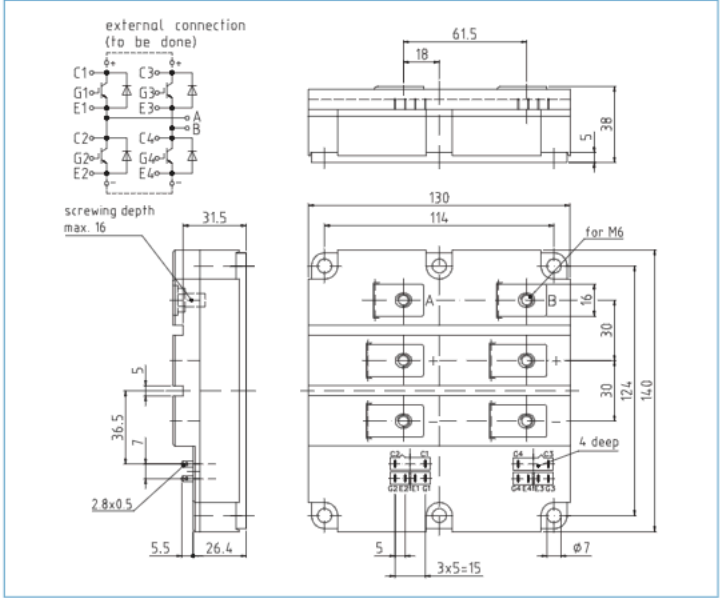


IHV — H_IH6

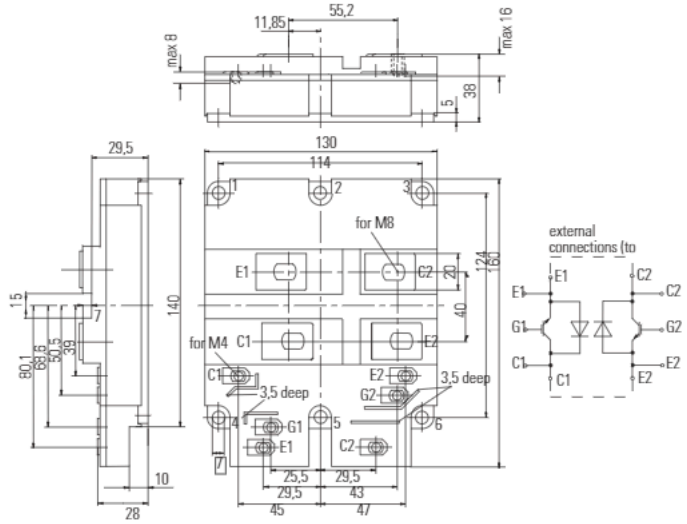


IHM/IHV — H_IH7

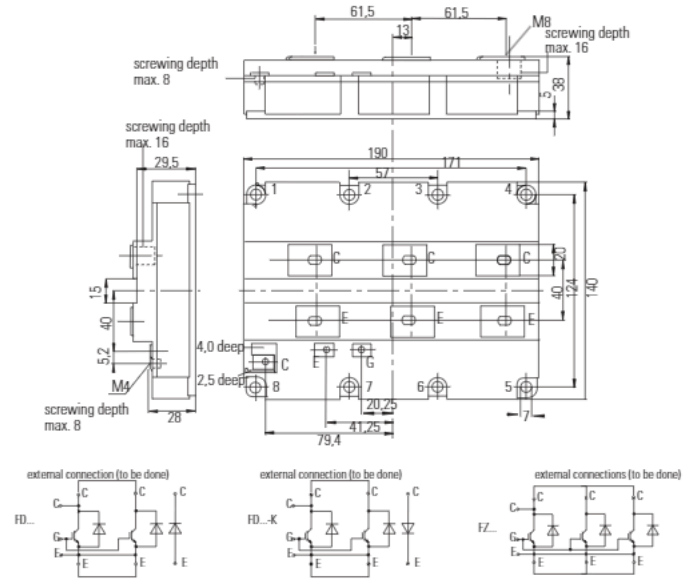


IHM — H_IH8

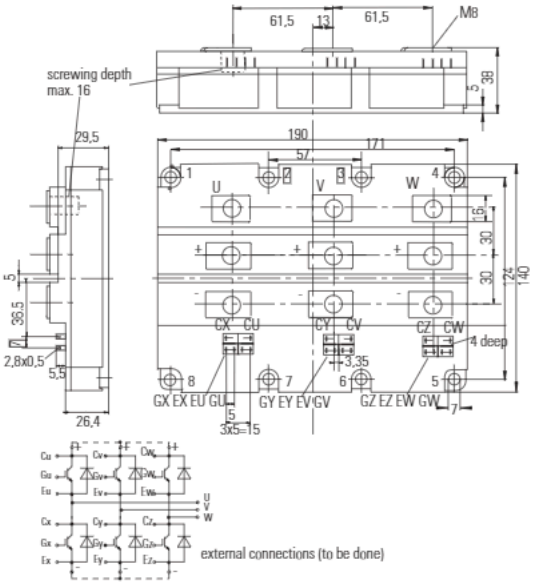


IHM/IHV — H_IH9

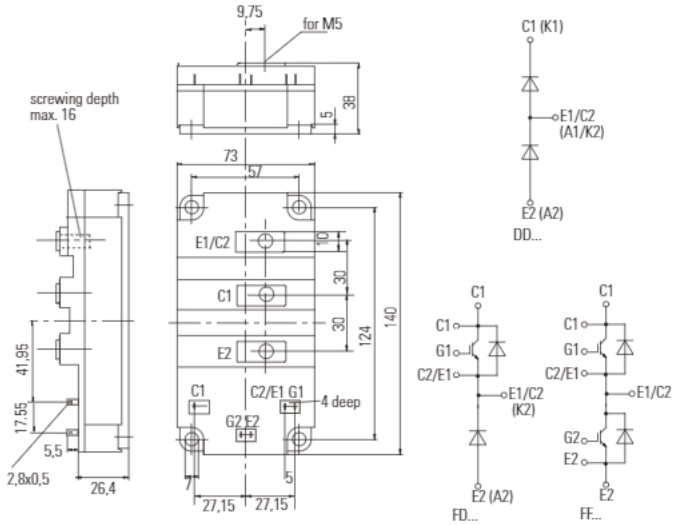


IHV H_IH10

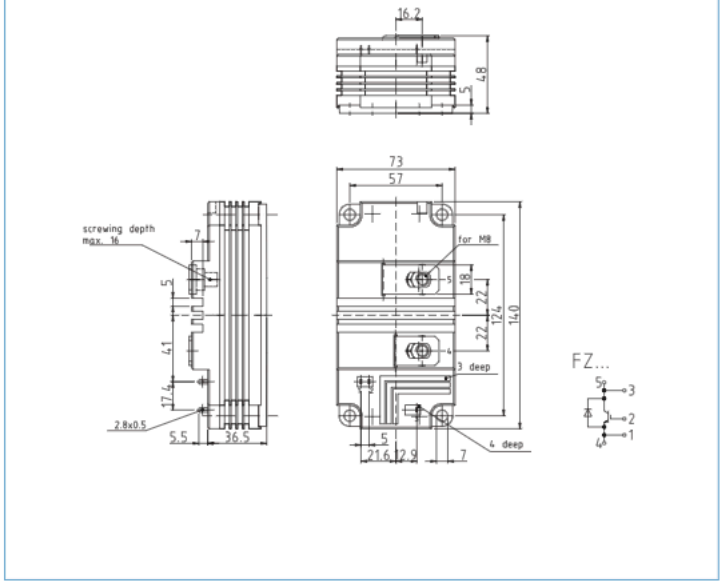


IHV H_IH11

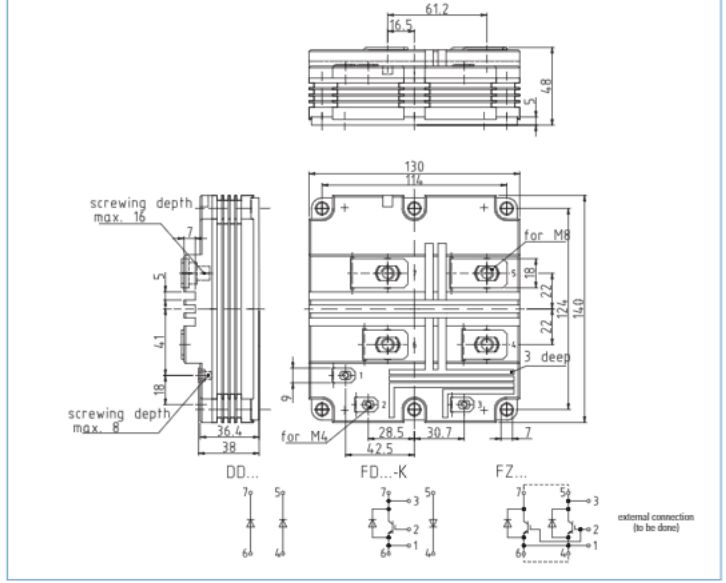


IHV H_IH12

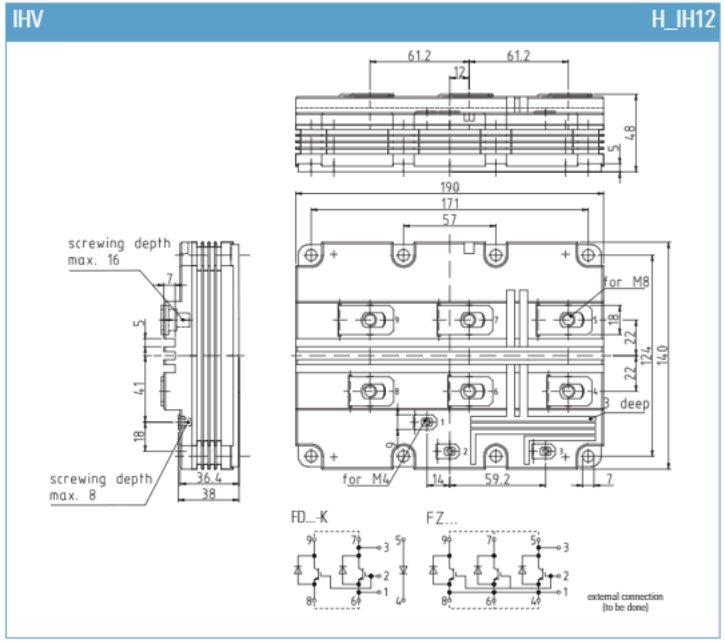


IsoPACK™ 42 M_1Pa

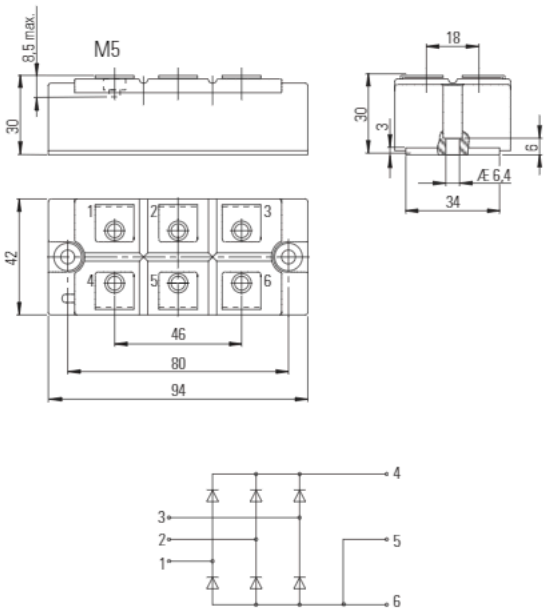


IsoPACK™ 54 M_1Pb

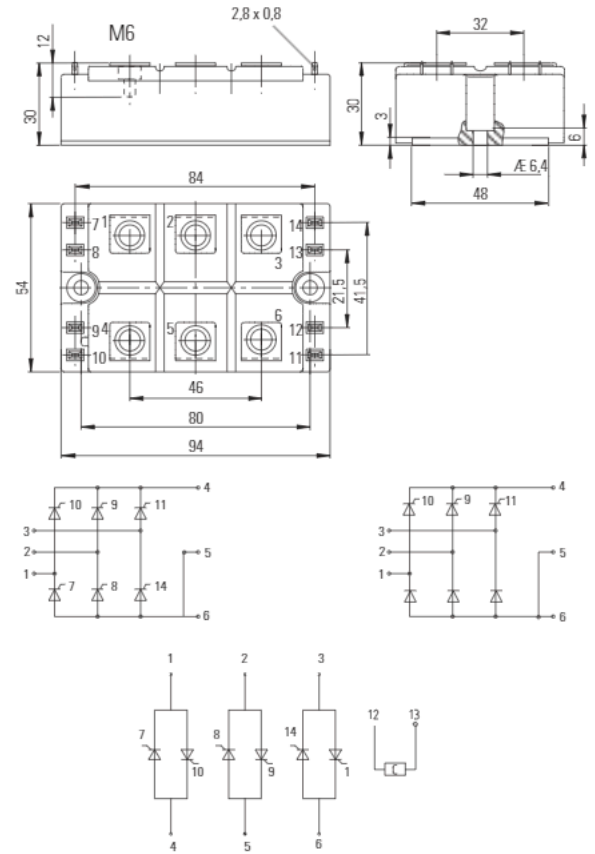


EconoBRIDGE™ Rectifier 2 — M_E2g

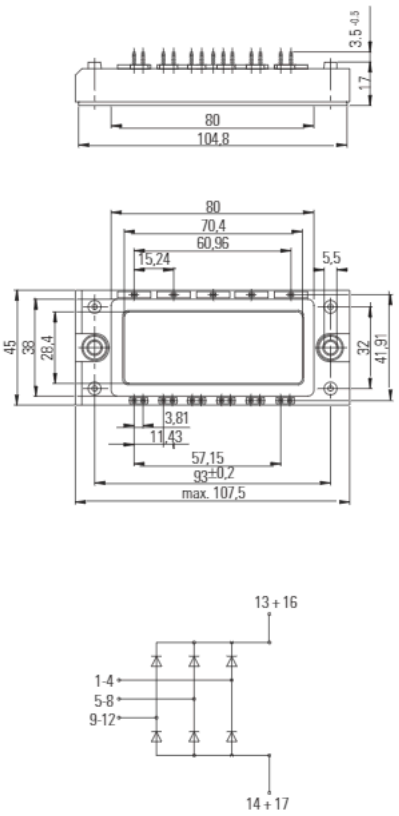


EconoBRIDGE™ Rectifier 2 — M_E2h

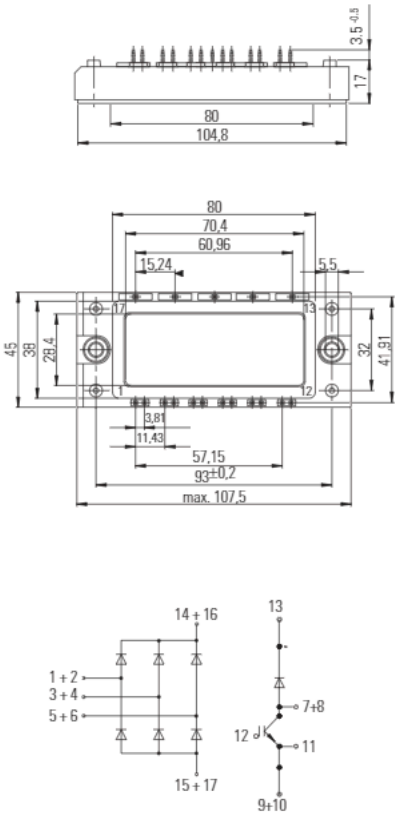


EconoBRIDGE™ Rectifier 2 — M_E2i

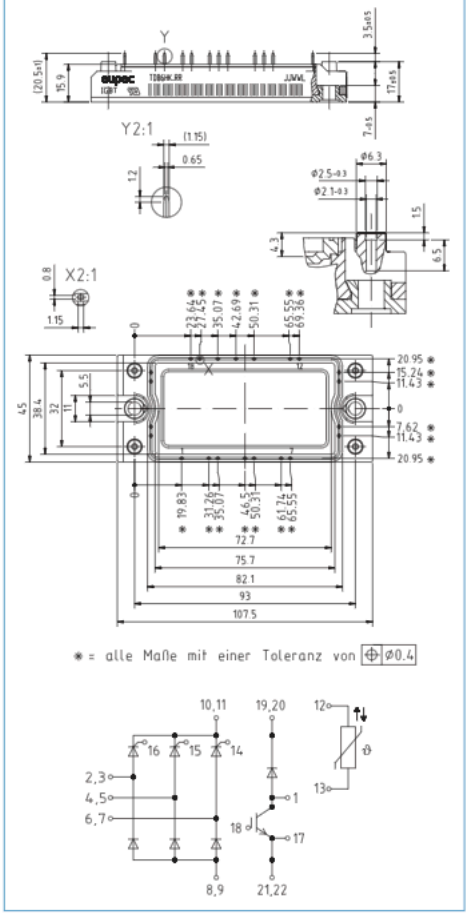


EconoBRIDGE™ Rectifier 2 — M_E2j

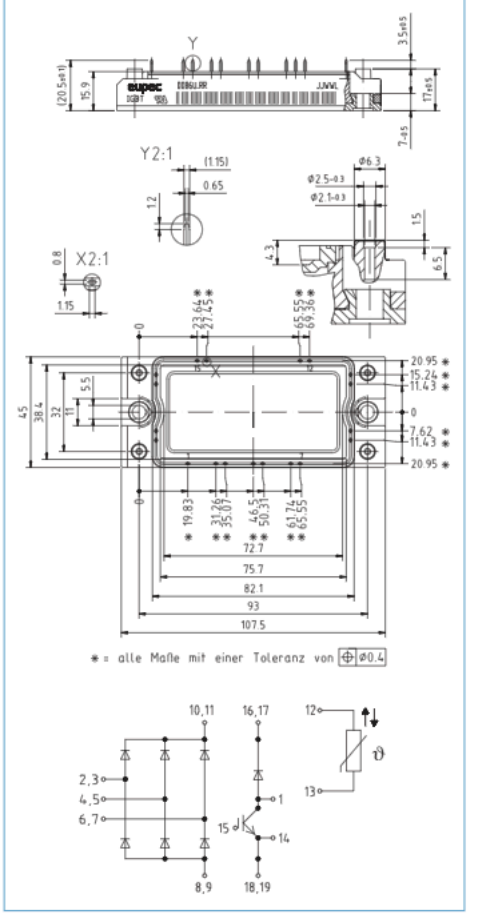


20 mm TP20

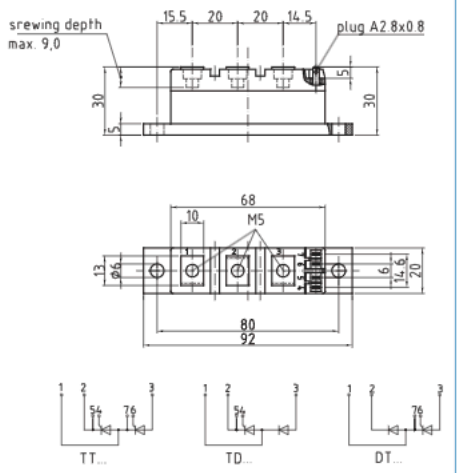


25 mm TP25

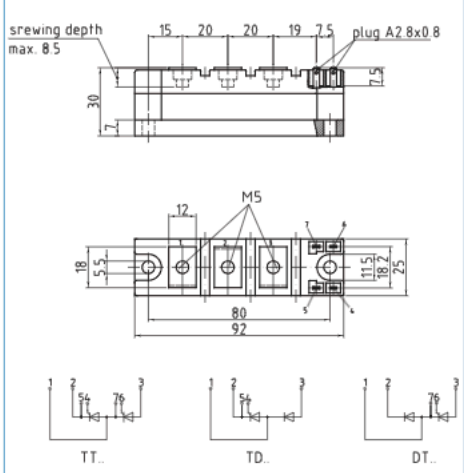


30 mm TP30

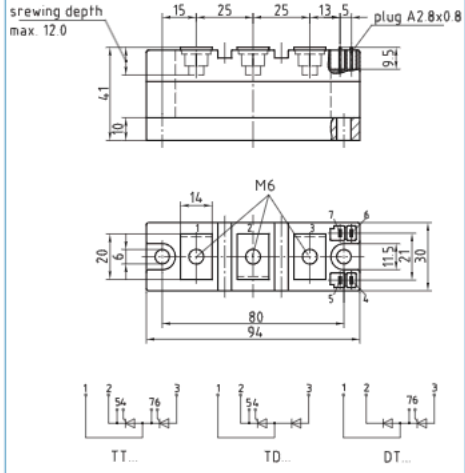


34 mm TP34

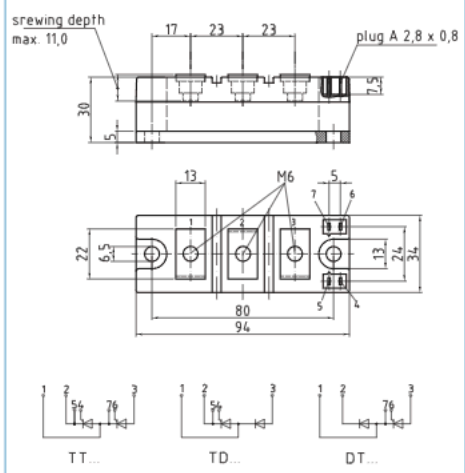


50 mm TP50

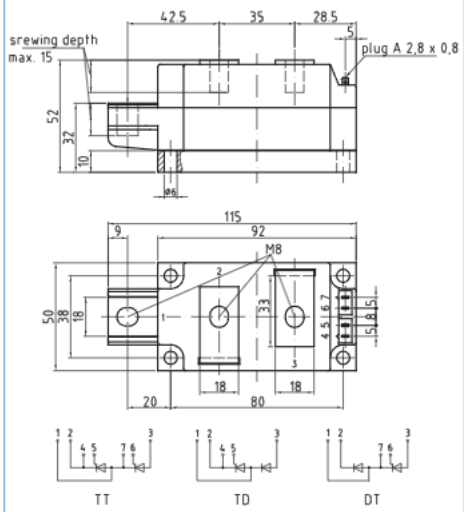


50 mm TP50.1

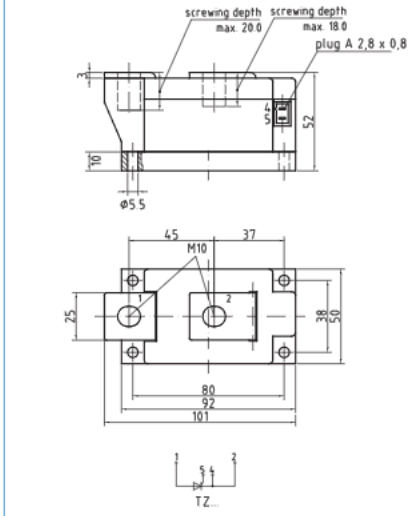


60 mm TP60

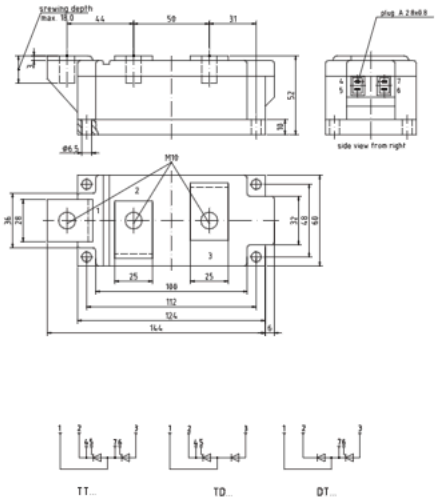


70 mm — TP70

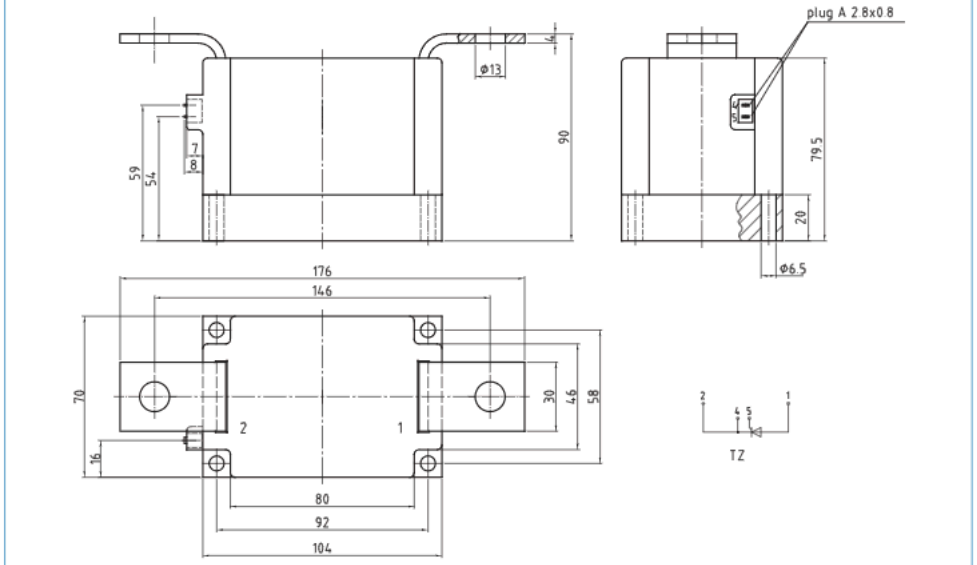


20 mm — DP20

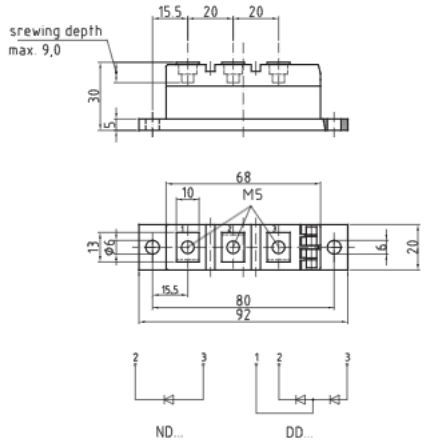


25 mm — DP25

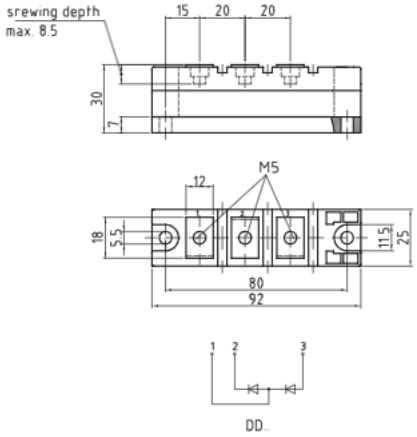


30 mm — DP30

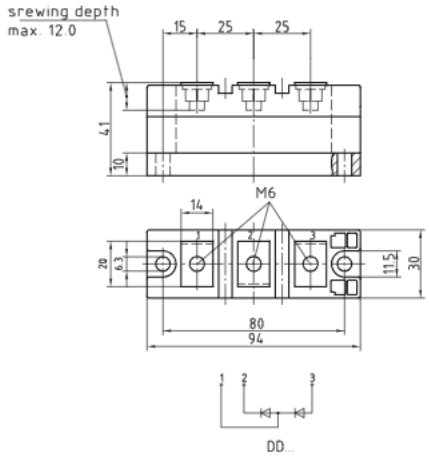


30 mm — DP30.1

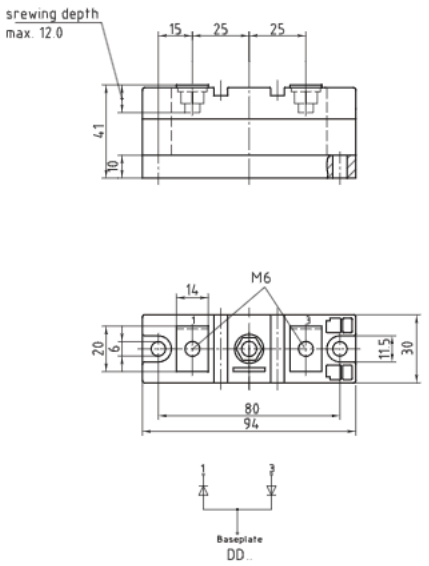


34 mm — DP34

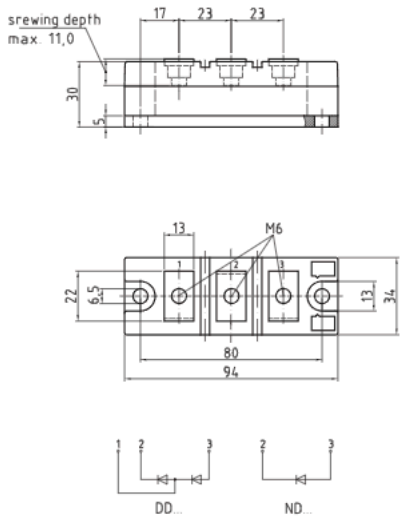


50 mm — DP50

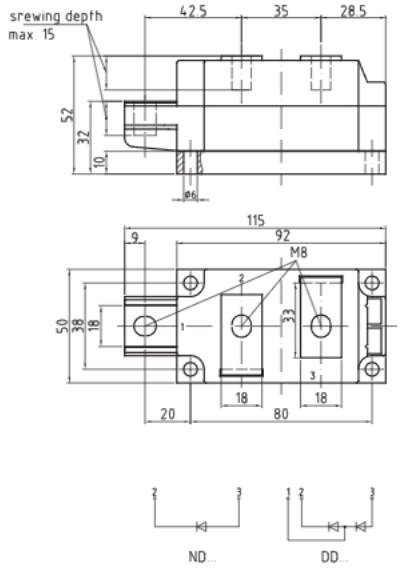


50 mm — DP50.1

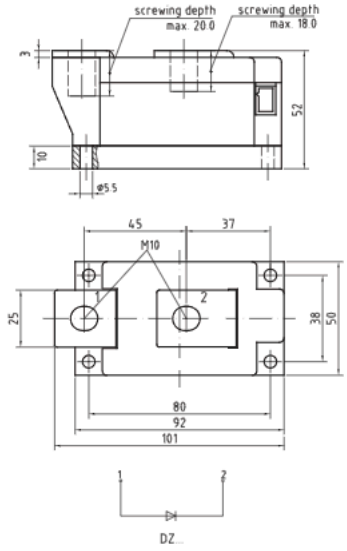


50 mm — DP50ND

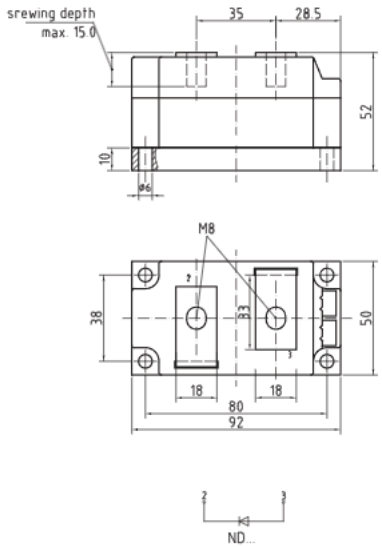


60 mm — DP60

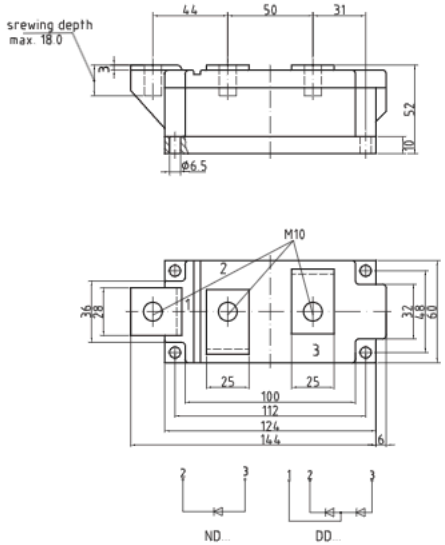


70 mm — DP70

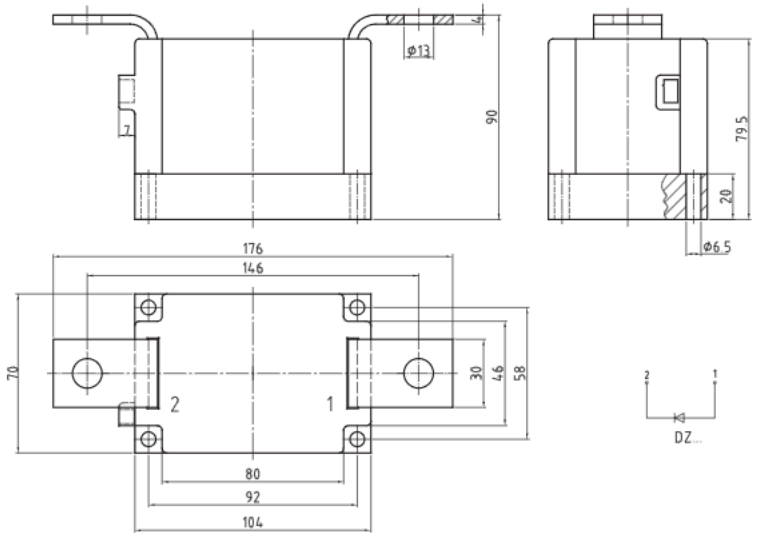


TSW27

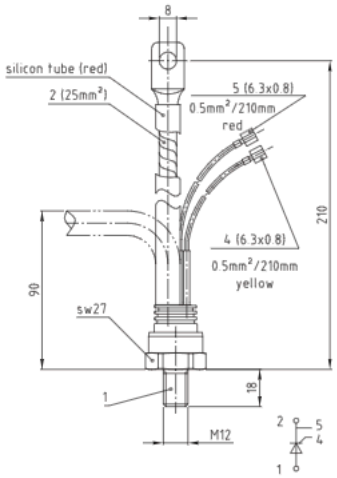


TFL36

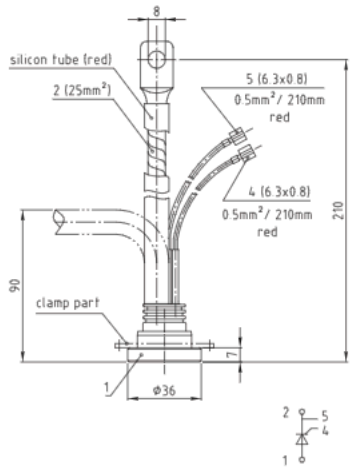


TSW41

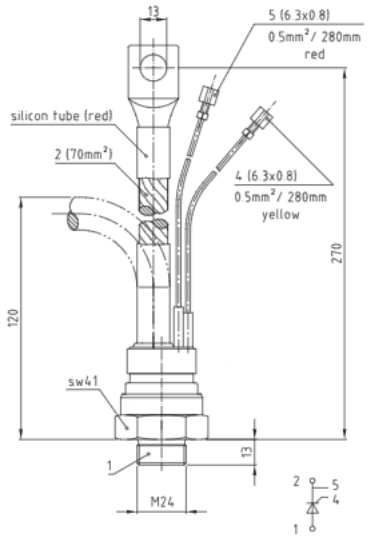


TFL54

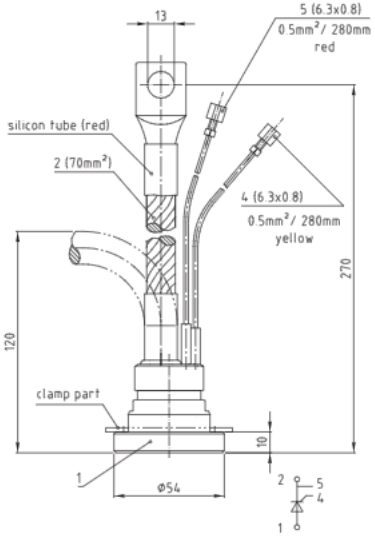


T41.14

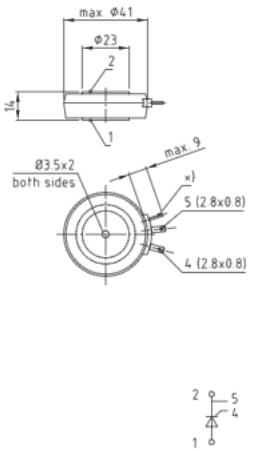


T50.14

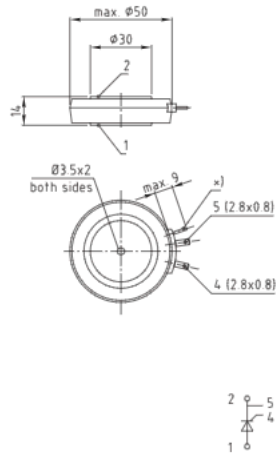


T60.14

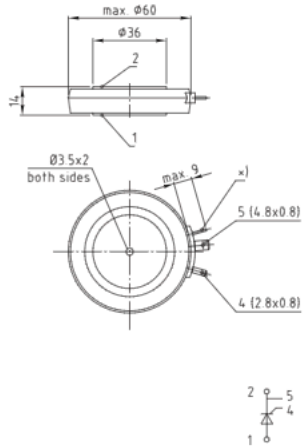


T75.14

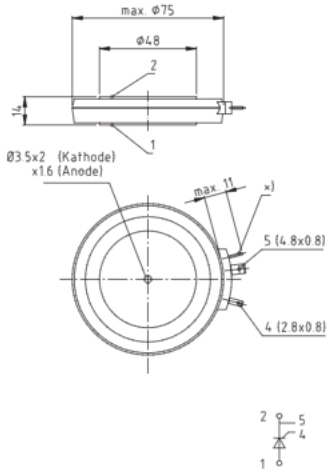


T57.26

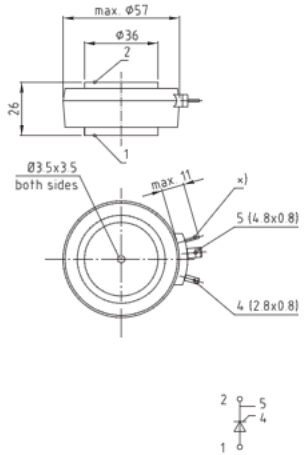


T75.26

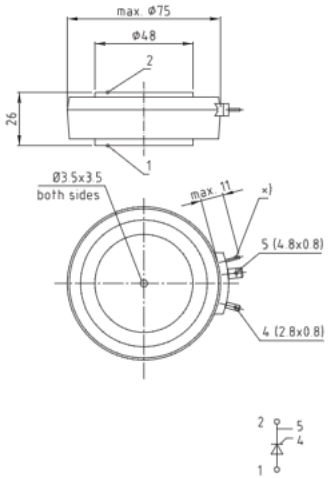


T100.26

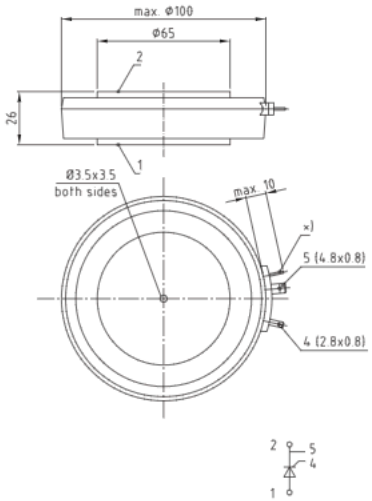


T100.35

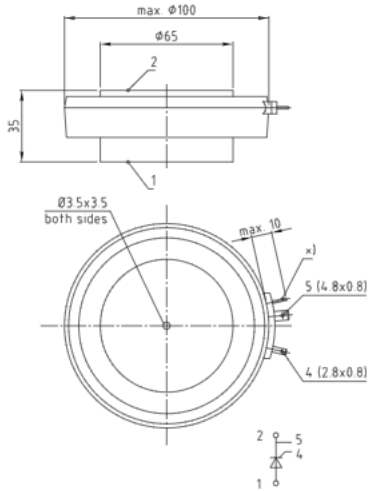


T110.26

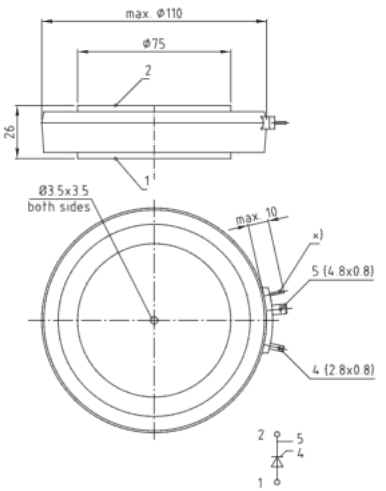


T110.35

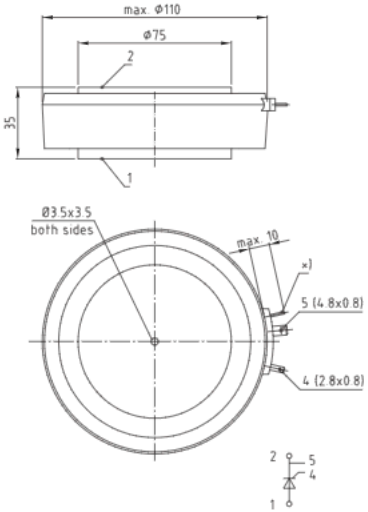


T57.26K

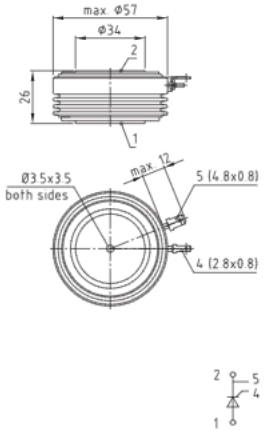


T58.26K

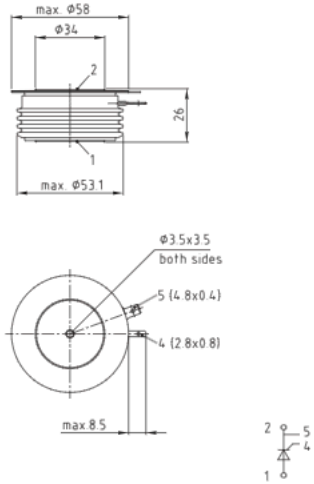


T75.26K

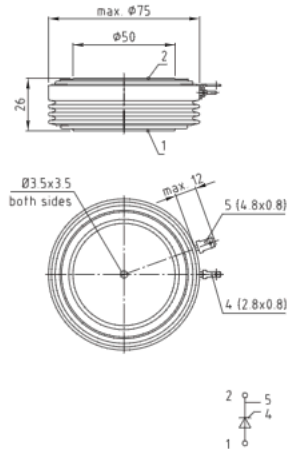


T76.26K

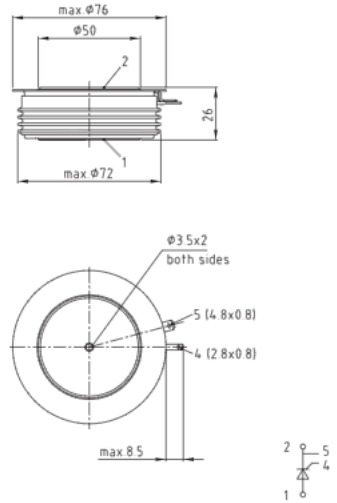


T76.35K

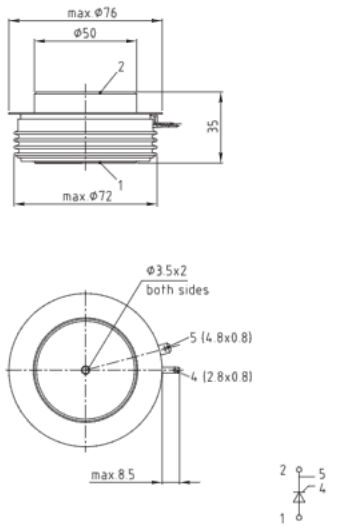


T100.26K

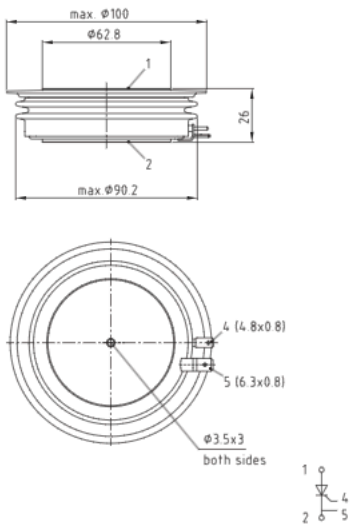


T120.26K

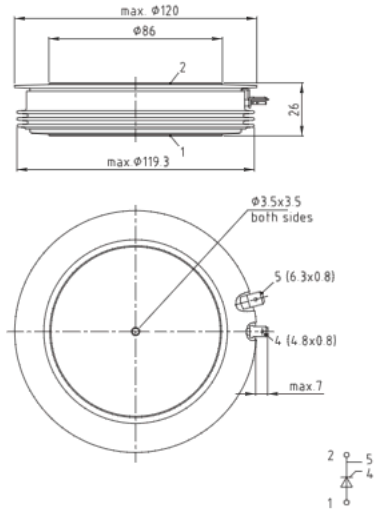


T120.26K.1

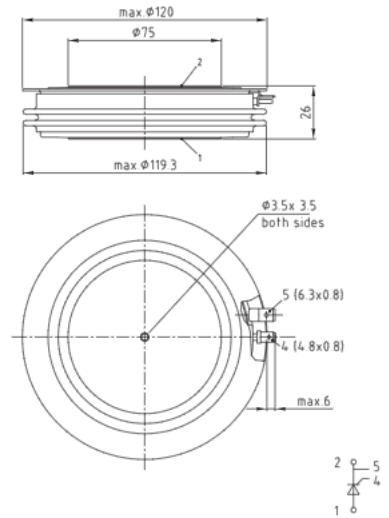


T120.35K

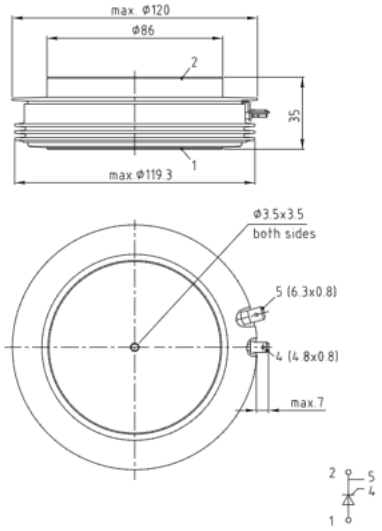


T120.35K.2

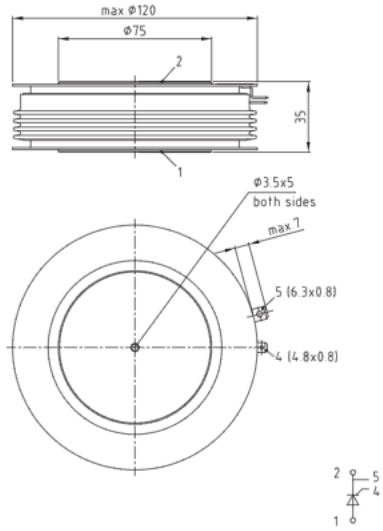


T150.26K

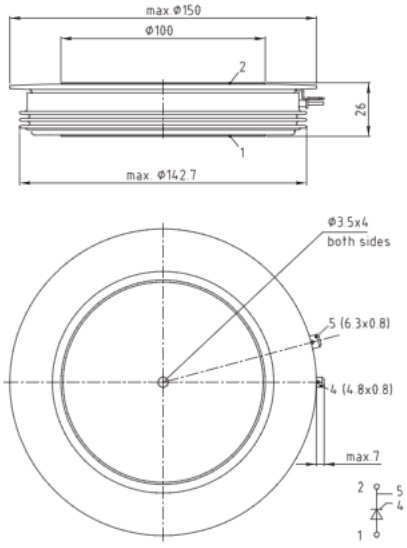


T150.35K

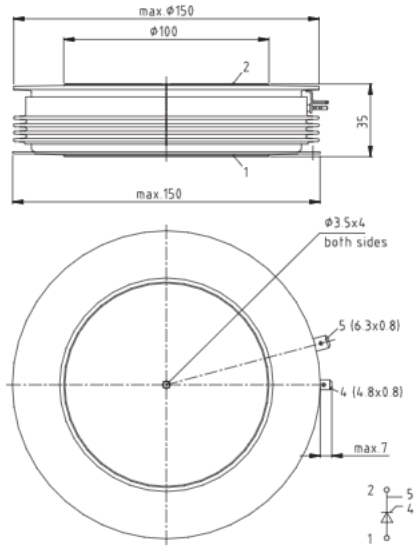


T172.35K

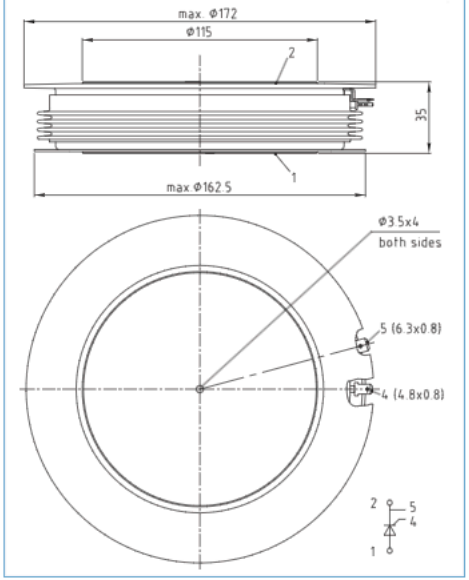


T172.40K

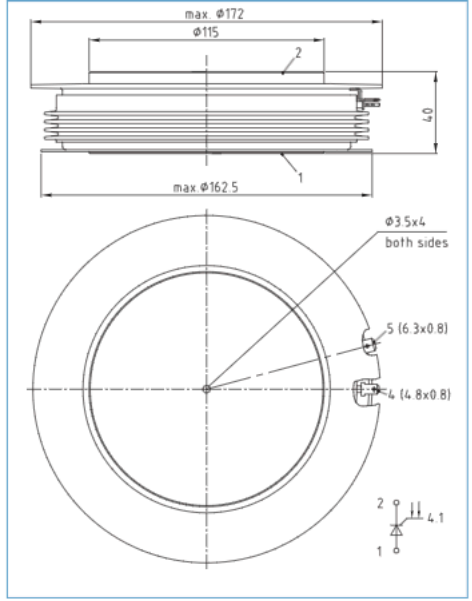


T76.35L

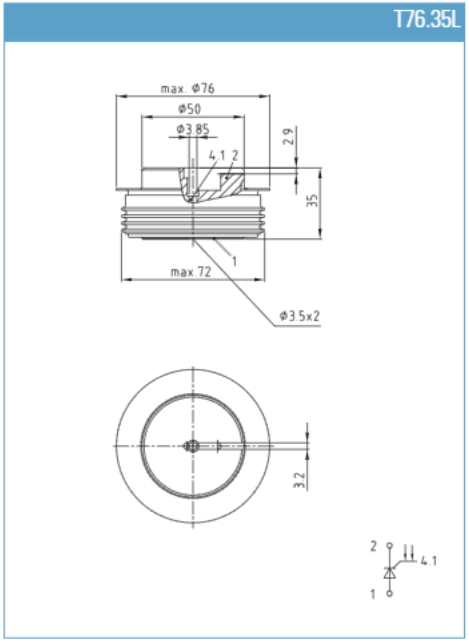


T150.40L

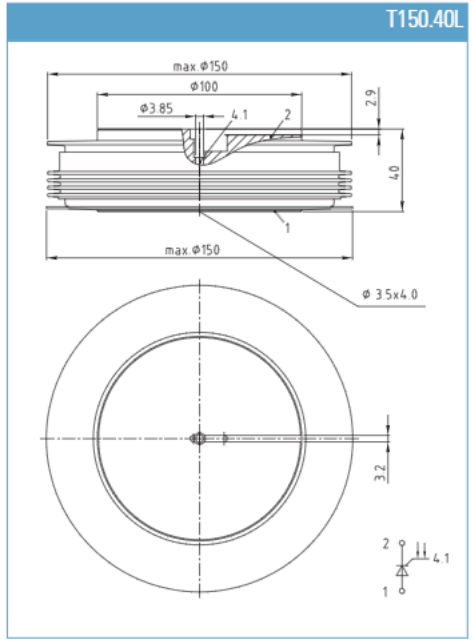

T172.40L

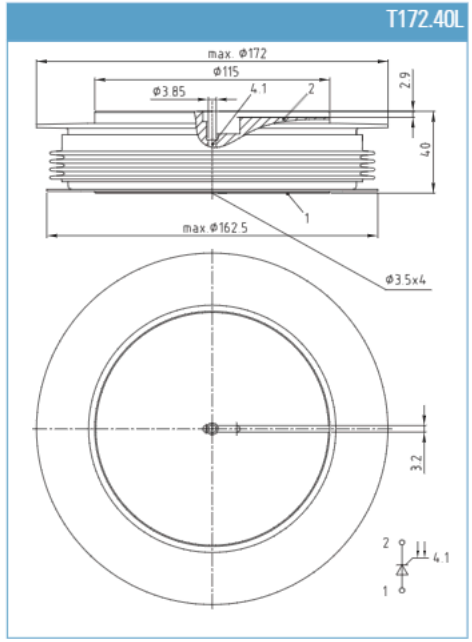


DSW27

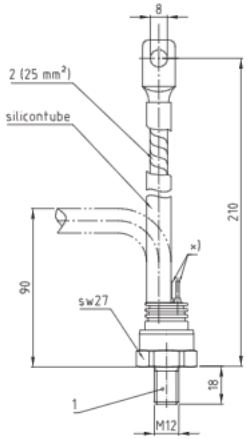


type	symbol	cathode	anode	prot. flex. tubing
N, S		rope (2)	case (1)	red
K, U		case (1)	rope (2)	blue

DSW27.1




type	symbol	cathode	anode
N, S		conection pin (2)	case (1)
K, U		case (1)	conection pin (2)

DSW27.2




type	symbol	cathode	anode
N, S		conection pin (2)	case (1)
K, U		case (1)	conection pin (2)

DFL36

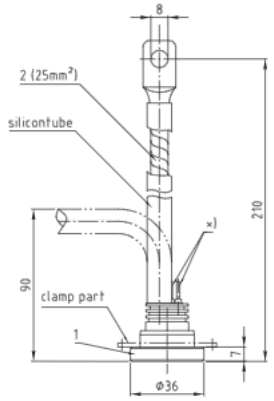


type	symbol	cathode	anode	prot. flex. tubing
N, S		rope (2)	case (1)	red
K, U		case (1)	rope (2)	blue

DSW41

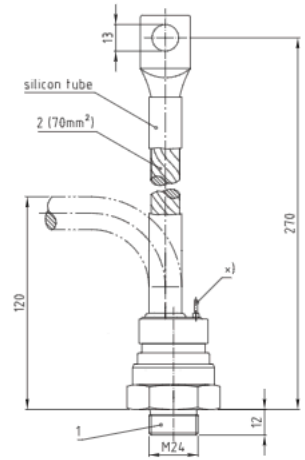


type	symbol	cathode	anode	prot. flex. tubing
N, S		rope (2)	case (1)	red
K, U		case (1)	rope (2)	blue

DSW41.1

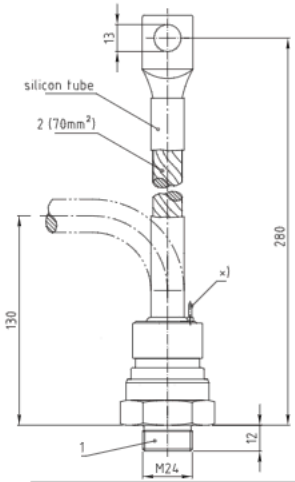


type	symbol	cathode	anode	prot. flex. tubing
N, S		rope (2)	case (1)	red
K, U		case (1)	rope (2)	blue

DFL54

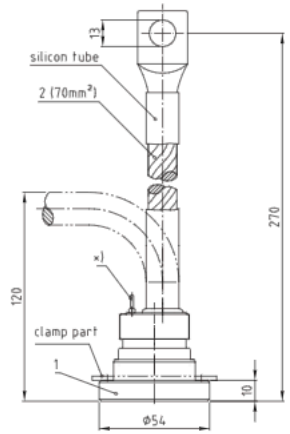


type	symbol	cathode	anode	prot. flex. tubing
N, S		rope (2)	case (1)	red
K, U		case (1)	rope (2)	blue

D41.14






D50.14






D57.26






D60.8






D60.14






D73.8

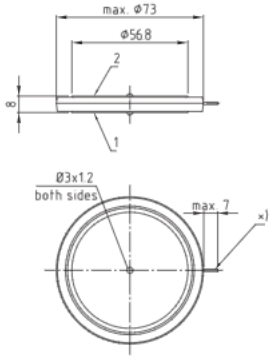




D75.14

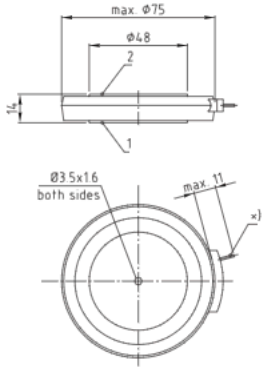




D75.26

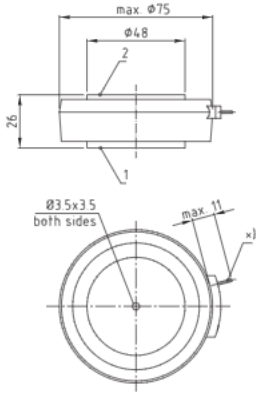





D100.26

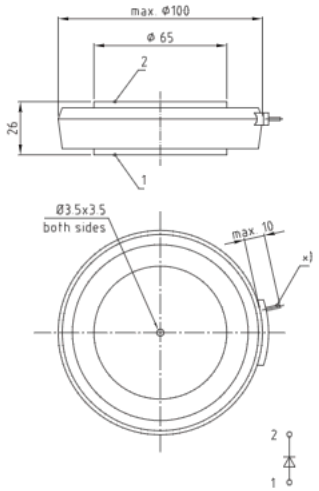


D110.26

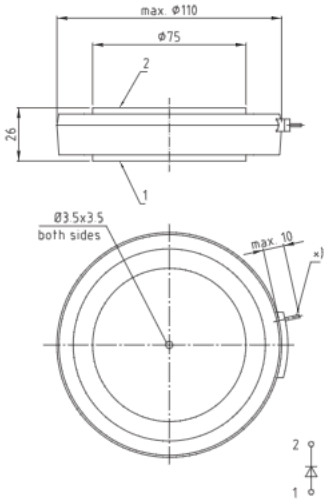


D41.14K

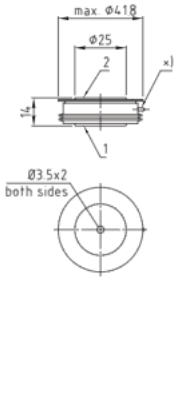


D57.26K

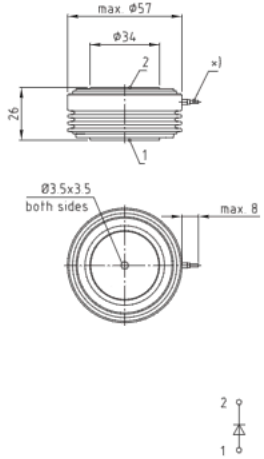


D58.26K

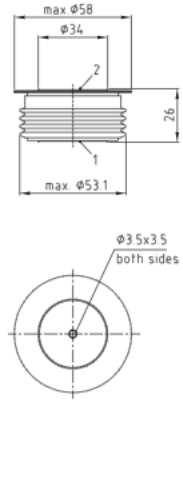


D75.26K

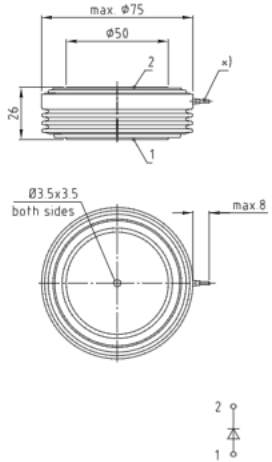


D76.14K

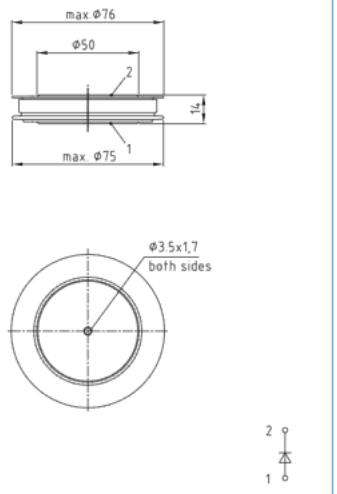


D76.26K

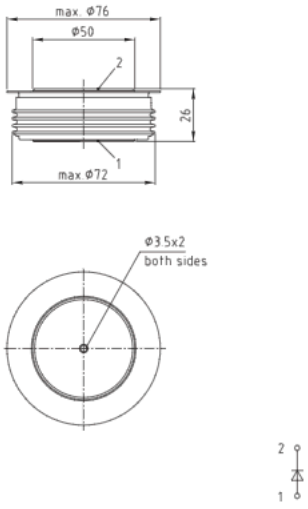


D100.26K

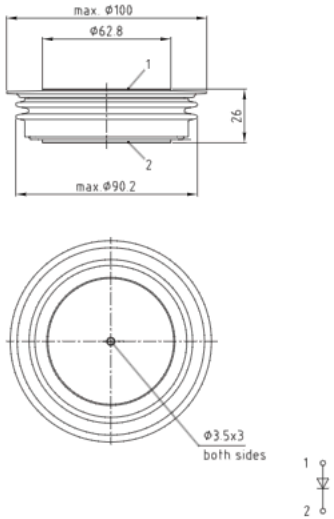


D120.26K

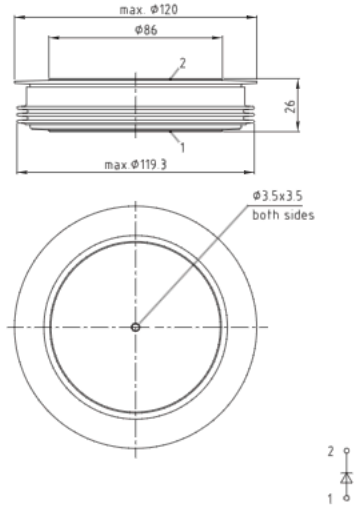


D120.26K.1

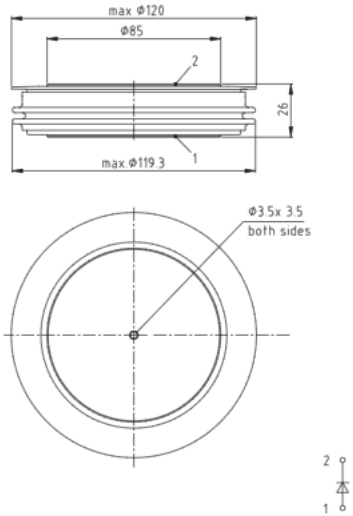


D120.35K

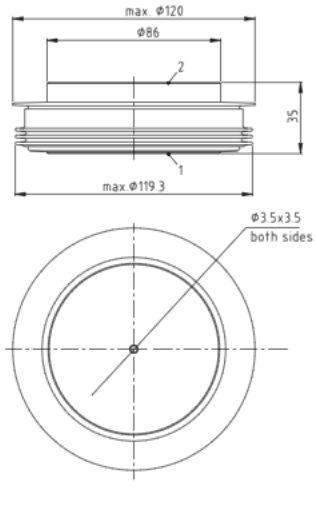


D150.26K

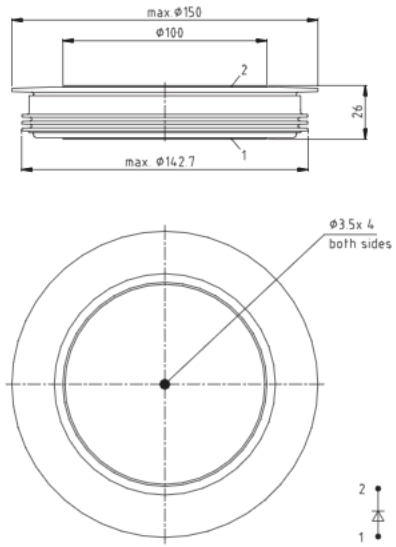


25DN06

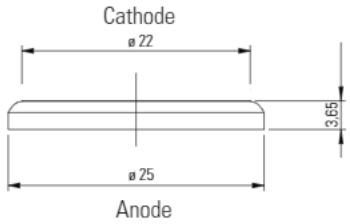


38DN06

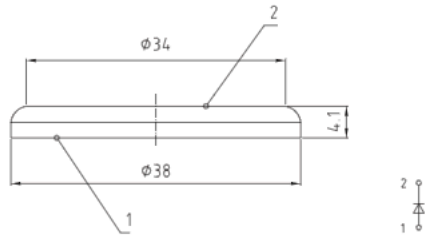


46DN06

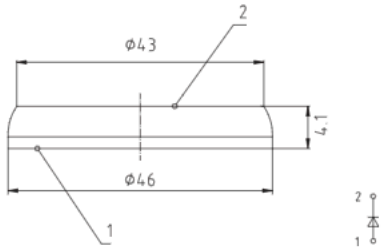


56DN06




65DN06

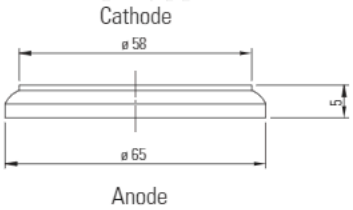


I57.26




I65.35

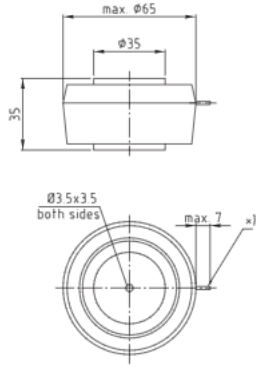


I72.8

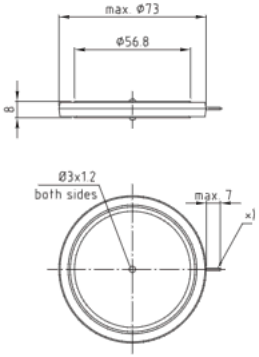


I75.14

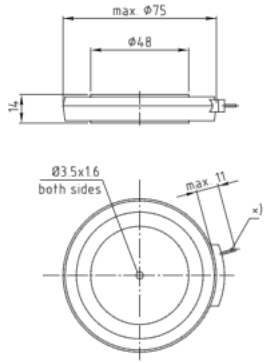


I75.26

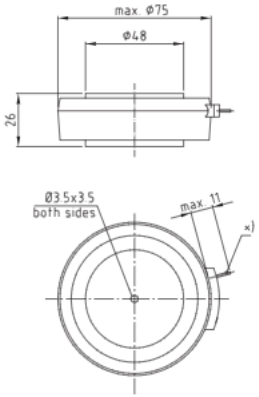

I120.35

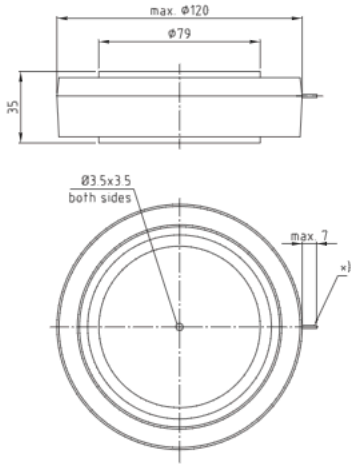


SZ 1

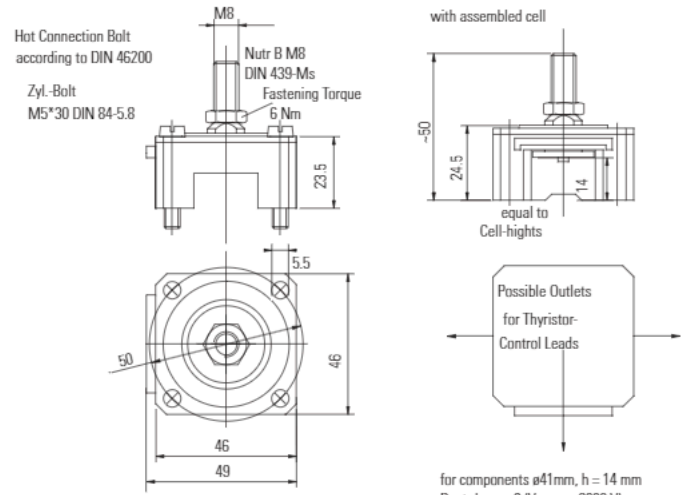

V 50-14.45 M F = 4.5 kN
V 50-14.60 M F = 6.0 kN

for components ø41mm, h = 14 mm
Dust-degree 3 (V_{RRM} = 2900 V)
Supply Voltage 1 kV_{eff}


SZ 2

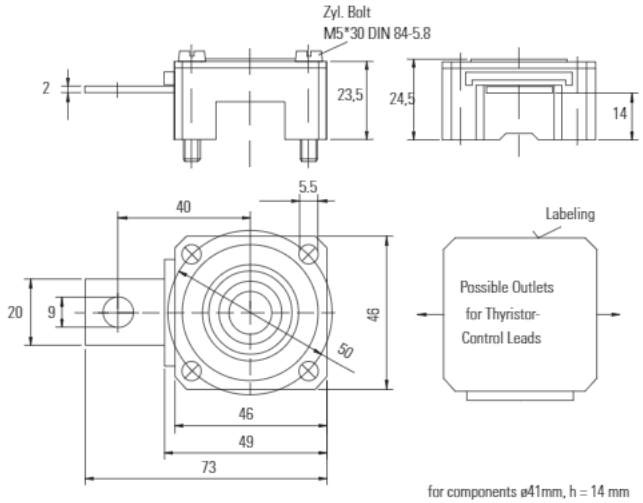

V 50-14.45 N F = 4.5 kN
V 50-14.60 N F = 6.0 kN

for components ø41mm, h = 14 mm
Dust-degree 3 (V_{RRM} = 2900 V)
Supply Voltage 1 kV_{eff}


SZ 3

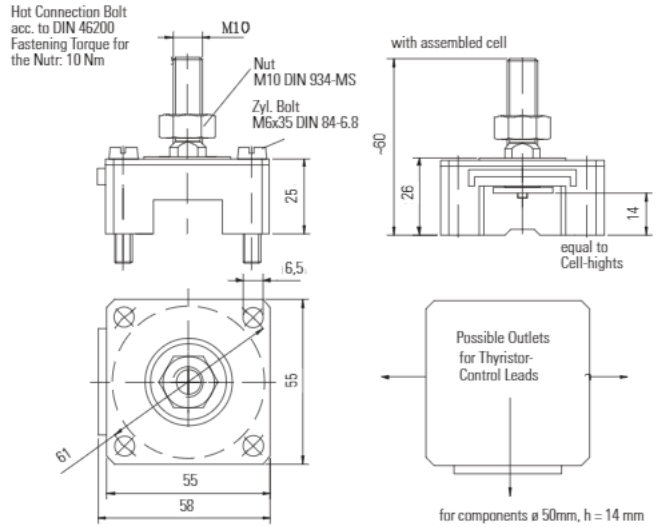

V61-14.80 M F = 8.0 kN

for components ø 50mm, h = 14 mm
Dust-degree 3 (V_{RRM} = 2900 V)
Supply Voltage 1 kV_{eff}


SZ 4

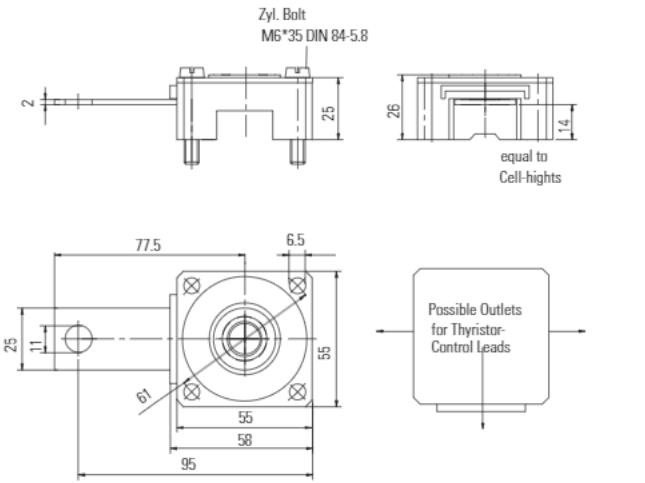

V61-14.80 N F = 8 kN
V61-14.100 N F = 10 kN

for components ø 50mm, h = 14 mm
Dust-degree 3 (V_{RRM} = 2900 V)
Supply Voltage 1 kV_{eff}


SZ 5




for components ø60mm, h = 14/26 mm
Dust-degree 3 (V_{RRM} = 4000/5000 V)
Supply Voltage 1,4/1,8 kV_{eff}

Clamping device	c	l	a	b	d	e	f	F	U eff
V72-14.150M	14	45	68	49	32	36	40,5	15 kN	1400V
V72-26.150M	26	60	80	61	44	48	52,5	15 kN	1800V
V72-26.80 M	26	60	80	61	44	48	52,5	8 kN	1800V
V72-26.120M	26	60	80	61	44	48	52,5	12 kN	1800V
V72-26.120MS	26	60	80	61	44	49	53,5	12 kN	2100V

SZ 7

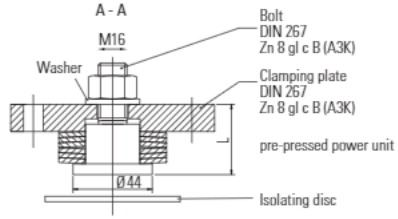




mounting instructions:
- part are to be centered
- the clamping plate must be fixed equally with 4 Bolts M10 - 8.8 (not included) until the washer is untight up to a gap of 0.2 mm.
- glue untightened washer to avoid noises

For max. UEff = max.1KV
For higher voltage on request
For components D = 75 mm

Type	Mat.-No.	clamping force	L
V89-26.400N	6921	40KN	38
V89-26.300N	3586	30KN	39
V89-26.170N	12784	17KN	40


SZ 6

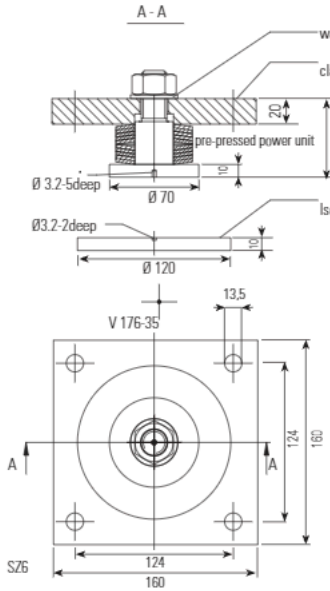



mounting instructions:
- part are to be centered
- the clamping plate must be fixed equally with 4 Bolts M12 - 8.8 (not included) until the washer is untight up to a gap of 0.2 mm.
- glue untightened washer to avoid noises


For max. 2,5 kVeff applications
For components D = 150 mm

Type	Mat.-No.	clamping force	L
V176-35.650N	19610	65KN	57.5
V176-35.500N	19611	50KN	58.5
V176-35.400N	19612	40KN	59.5

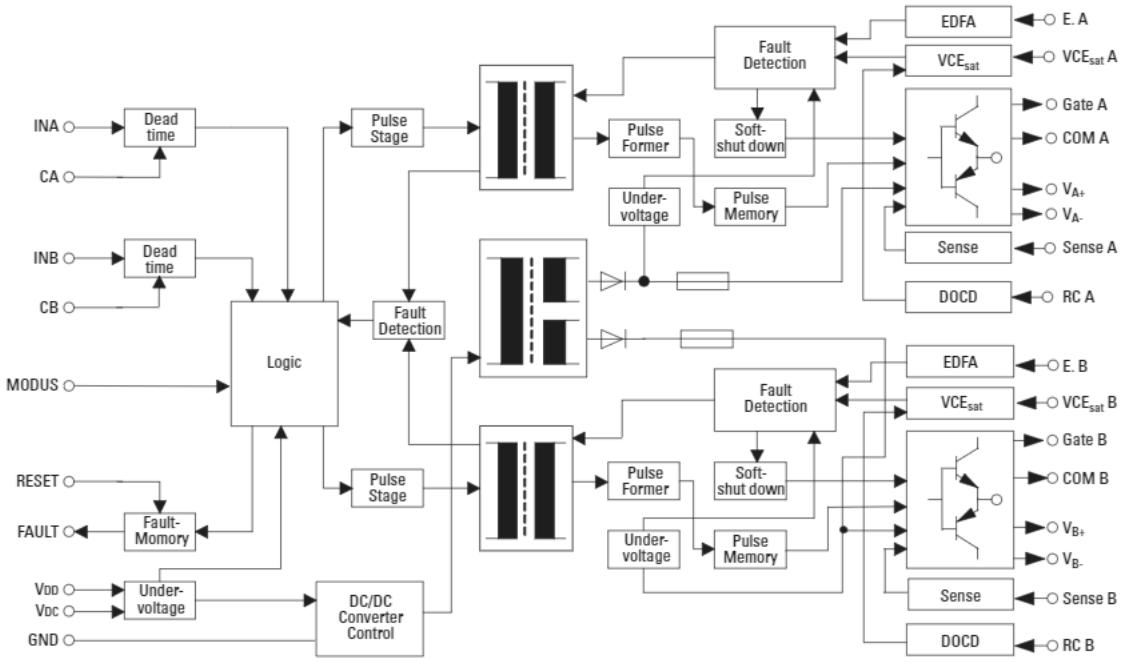





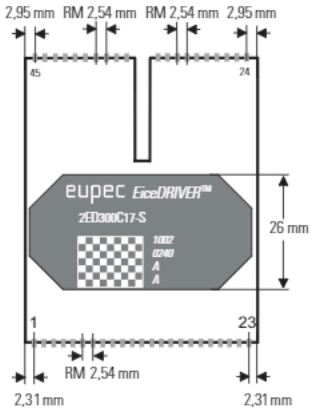

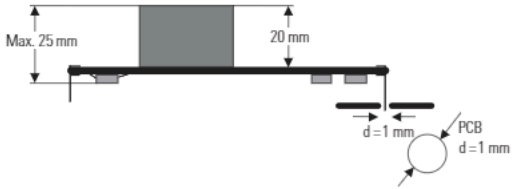


Clearance distance and creep page Primary/Secondary >15 mm
Clearance distance Secondary/Secondary > 6 mm
Creep page Secondary/Secondary > 14 mm

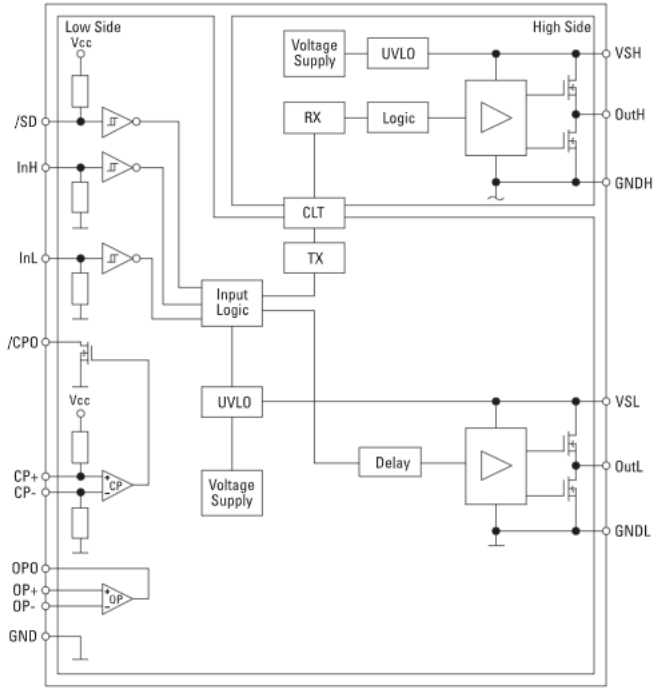

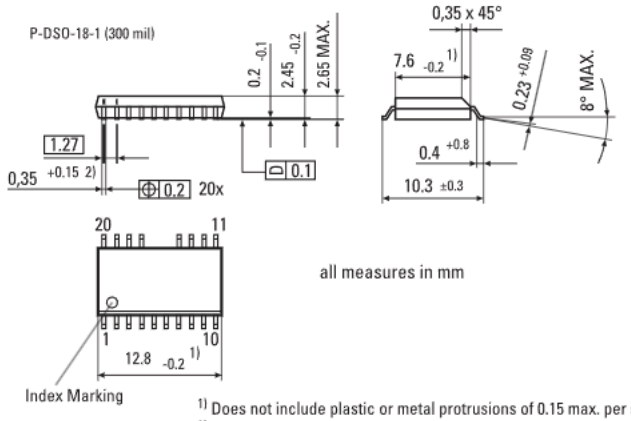


1) Does not include plastic or metal protrusions of 0.15 max. per side
2) Does not include dambar protrusion of 0.05 max. per side

IGBT Driver

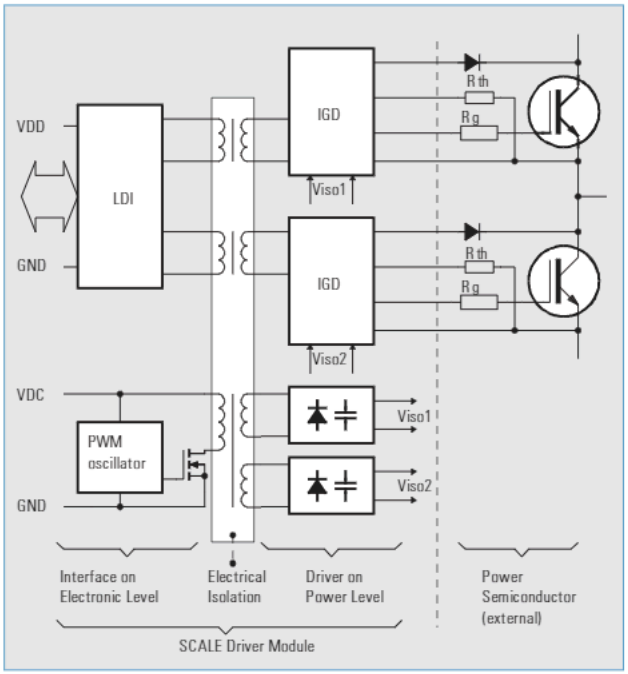


Block diagramm shows 2 channels (i.e. one third of the 6SD 106EI-17)


SCALE DRIVER SD 1

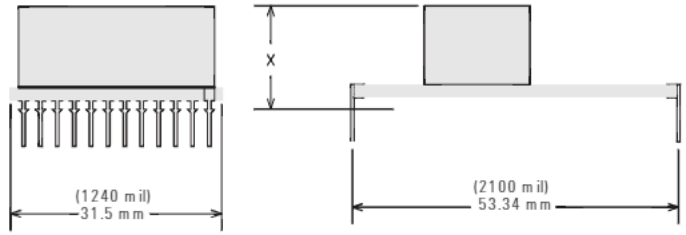

SCALE DRIVER SD 2

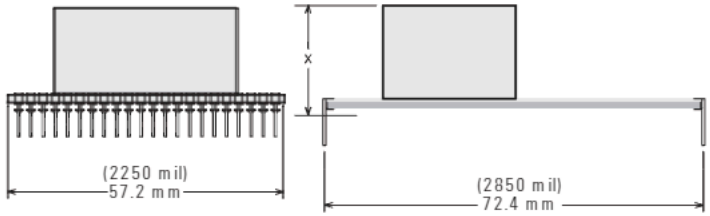


SCALE DRIVER SD 3

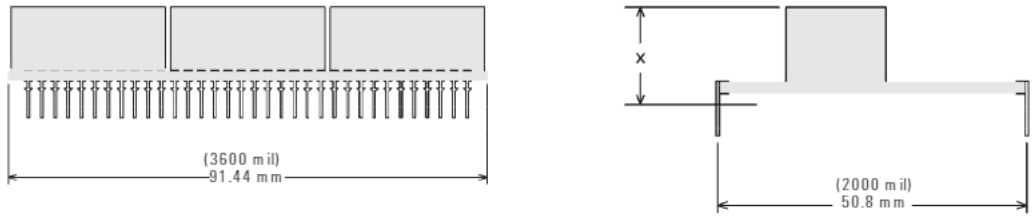


Mounting Hardware for EasyPIM™, EasyPACK, EasyBRIDGE and EasyDUAL Modules

	Suitable for	Type	Outline	Part-No.
 SC750	Easy750 housing	ScrewClamp Easy750	SC750	24126
 SC1	Easy1 housing	ScrewClamp Easy1	SC1	23088
 SC2	Easy2 housing	ScrewClamp Easy2	SC2	23089


SC750

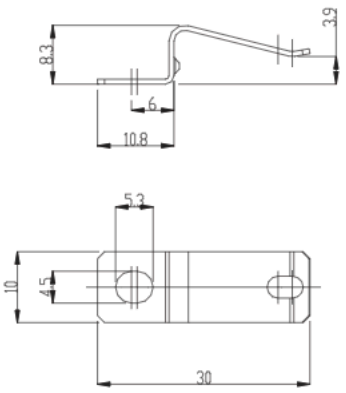

SC1

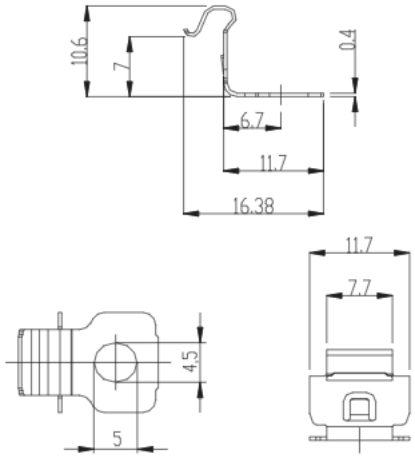

SC2

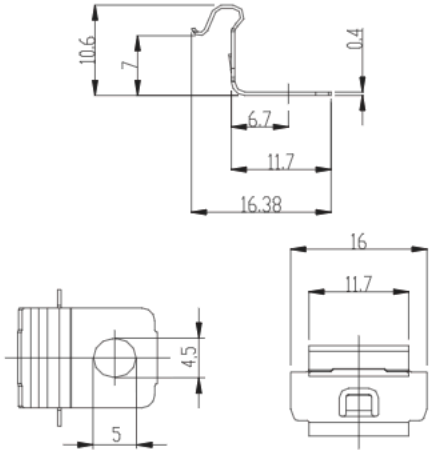


Gate Leads for Thyristor Modules

Leads and gate strands must be ordered separately

Baseplate	connection to	Part no.	Outline
20 mm	4/5	2391	LZ1
	6/7	2392	LZ2
25 mm	4/5	4301	LZ3
	6/7	4303	LZ4
30 mm	4/5	4305	LZ5
	6/7	4307	LZ6
34, 50, 60 mm	5/4	12669	LZ7
	6/7	12711	LZ8
50 mm-Single	5/4	12669	LZ7
70 mm-Single	5/4	12711	LZ8

The strands consist of copper, 0,5 mm² and are insulated with silicon rubber 0,6 mm.
Operating voltage: 380 V_{eff}
Test voltage: 2000 V_{RMS}
Breakdown voltage min 3000 V
Temperature range: - 50 °C/+ 180 °C

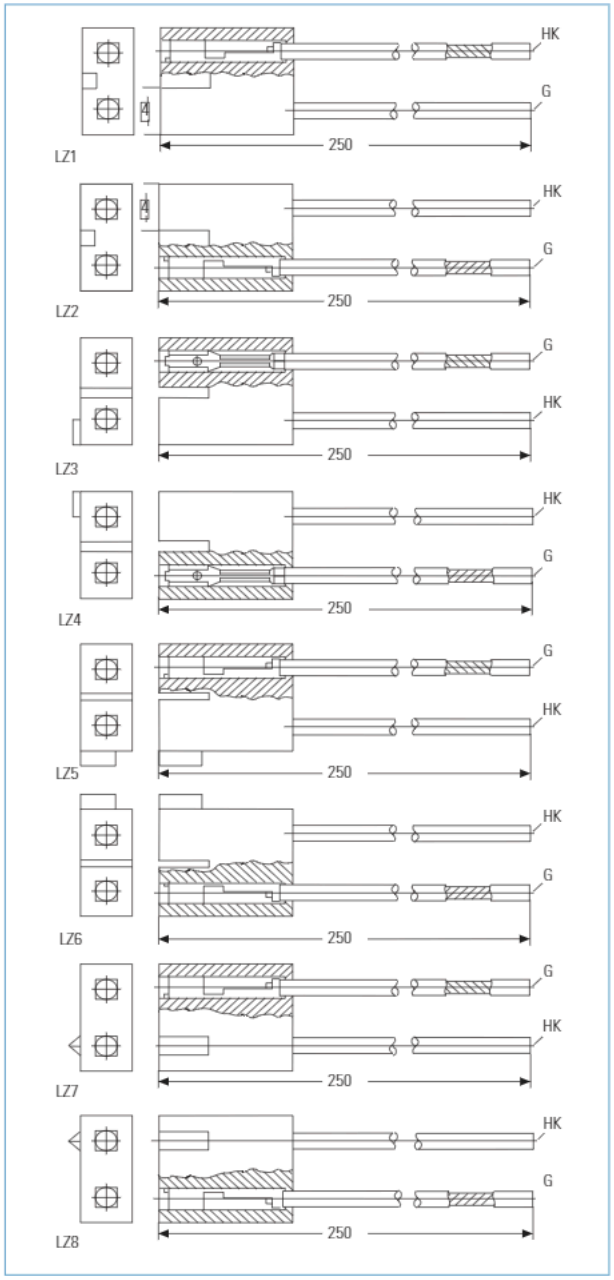

Mounting Hardware for Modules

Type	Content	Quantity	Part-No.
IsoPACK™ 42	M5x11	30	4195
IsoPACK™ 54	M6x15	30	4210

Standard Gate Leads for Disc Type Devices

Leads and gate leads must be ordered separately

Disc outline/page	Material	Mat. no.	Connection	Color	Length mm
T41.14/75	epoxy	2385	HK	red	225
		2386	G	yellow	225
T50.14/75	epoxy	2385	HK	red	225
		2386	G	yellow	225
T60.14/75	epoxy	2387	HK	red	225
		2386	G	yellow	225
T57.14/75	epoxy	2387	HK	red	225
		2386	G	yellow	225
T57.26/75	epoxy	2387	HK	red	225
		2386	G	yellow	225
T75.26/76	epoxy	2387	HK	red	225
		2386	G	yellow	225
T57.26K/76	ceramic	2387	HK	red	225
		2386	G	yellow	225
T120.35K.2/76	ceramic	2390	HK	red	225
		2386	G	yellow	225
T150.35K/76	ceramic	2390	HK	red	225
		2386	G	yellow	225
T75.26K/77	ceramic	2387	HK	red	225
		2386	G	yellow	225
T58.26K/79	ceramic	2387	HK	red	225
		2386	G	yellow	225
T76.26K/79	ceramic	2387	HK	red	225
		2386	G	yellow	225

All gate connection leads with plug 6,3 x 1 mm at the free ends.
Lead material: silicon cord type SiFF 0,5 mm²
Lead material no. 2390 is not standard stock material.

Clamping Force (kN) and Disc Diameter (mm)

Phase control thyristors			Phase control thyristors			Phase control thyristors			Phase control thyristors		
Typ	kN	mm	Typ	kN	mm	Typ	kN	mm	Typ	kN	mm
T 178 N	2,5 - 5	41	T 739 N	15 - 24	75	T 1866 N	30 - 65	100	Fast Thyristors		
T 201 N	7 - 12	58	T 821 N	27 - 40	100	T 1869 N	30 - 65	100			
T 218 N	2,5 - 5	41	T 828 N	5,5 - 8	50	T 1901 N/T 2251 N	63 - 91	150	T 128 F	3 - 6	41
T 268 N	5 - 10	50	T 829 N	12 - 29	75	T 1929 N	42 - 95	110	T 178 F	1,5 - 2,5	41
T 298 N	3 - 6	41	T 860 N	20 - 45	74	T 1971 N	36 - 52	120	T 188 F	3 - 6	41
T 308 N	5 - 10	50	T 869 N	20 - 45	75	T 1986 N	30 - 65	100	308 F	2,5 - 5	41
T 348 N	2,5 - 5	41	T 878 N	10,5 - 21	60	T 1989 N	30 - 65	100	T 318 F	5,5 - 10	50
T 358 N	4 - 8	41	T 879 N	10,5 -21	75	T 2001 N	36 - 52	120	T 358 S	4,5 - 9	50
T 378 N	4 - 8	41	T 901 N	15 - 24	75	T 2006 N	36 - 52	110	T 408 F	5 - 10	50
T 379 N	10,5 - 21	57	T 909 N	15 - 24	75	T 2009 N	36 - 52	110	T 468 S	7 - 15	60
T 380 N	7,5 - 17,5	56	T 929 N	20 - 45	75	T 2101 N	36 - 52	120	T 510 S	7 - 15	56
T 388 N	5 - 10	50	T 1039 N	16 - 32	75	T 2156 N	42 - 95	110	T 599 F	9 - 18	57
T 398 N	3 - 6	41	T 1049 N	12 - 24	75	T 2159 N	42 - 95	110	T 600 F	9 - 18	56
T 399 N	7,5 - 17,5	57	T 1050 N	20 - 45	75	T 2160 N	42 - 95	120	T 698 F	5,5 - 11	50
T 458 N	7,5 - 17,5	60	T 1050 N	20 - 45	75	T 2161 N	45 - 65	120	T 930 S	16 - 32	74
T 459 N	7,5 - 17,5	57	T 1078 N	8 - 16	50	T 2301 N	63 - 91	150	T 1052 S	16 - 32	74
T 501 N	15 - 24	75	T 1081 N	36 - 52	120	T 2351 N	45 - 65	120	T 1078 F	8 - 16	50
T 508 N	5 - 10	50	T1101 N	27 - 40	100	T 2401 N	63 - 91	150	T 1101 S	27 - 39	100
T 509 N	5 - 10	57	T 1189 N	16 - 32	75	T 2451 N	63 - 91	150			
T 551 N	15 - 24	75	T 1200 N	20 - 45	74	T 2476 N	42 - 95	110	Fast Asymmetric Thyristors		
T 553 N	15 - 24	75	T 1201 N	36 - 52	120	T 2479 N	42 - 95	110			
T 568 N	4 - 8	41	T 1209 N	20 - 45	75	T 2509 N	24 - 56	75	A 158 S	2,5 - 4,5	41
T 588 N	6 - 12	50	T 1218 N	20 - 45	75	T 2551 N	36 - 52	120	A 198 S	2,5 - 4,5	41
T 589 N	6 - 12	57	T 1219 N	20 - 45	75	T 2561 N	90 - 130	170	A 358 S	4,5 - 9	50
T 618 N	6 - 12	50	T 1258 N	12 - 24	60	T 2563 N/T 2563 NH	90 - 130	170	A 438 S	4,5 - 9	50
T 619 N	6 - 12	57	T 1321 N	36 - 52	120	T 2601 N	63 - 91	150	T 6A 901 S	13,5 - 24	75
T 648 N	9 - 18	50	T 1329 N	20 - 45	75	T 2871 N	36 - 52	120	A 931 S	13,5 - 24	75
T 649 N	9 - 18	57	T 1401 N	36 - 52	120	T 2709 N	42 - 95	110			
T 658 N	10,5 - 21	60	T 1451 N	36 - 52	120	T 2710 N	42 - 95	120			
T 659 N	10,5 - 21	57	T 1500 N	24 - 56	74	T 2851 N/T3441 N	63 - 91	150			
T 699 N	10,5 - 21	57	T 1501 N	63 - 91	150	T 3101 N	63 - 91	150			
T 708 N	10,5 - 21	60	T 1503 N/T 1503 NH	63 - 91	150	T 3159 N		110			
T 709 N	12 - 29	75	T 1509 N	24 - 56	75	T 3401 N/T 3801 N	63 - 91	150			
T 718 N	9 - 18	60	T 1549 N	42 - 95	110	T 3709 N	30 - 65	100			
T 719 N	9 - 18	57	T 1551 N	36 - 52	120	T 4021 N	90 - 130	170			
T 729 N	18 - 43	75	T 1589 N	30 - 65	100	T 4003 N/T 4003 NH	90 - 130	170			
T 730 N	18 - 43	75	T 1601 N	36 - 52	120	T 4301 N	63 - 91	150			
T 731 N	15 - 24	75	T 1851 N/T 1651 N	45 - 65	120	T 4771 N	63 - 91	150			

Clamping Force (kN) and Disc Diameter (mm)

Rectifier diodes			Rectifier diodes			Fast rectifier diodes			Fast rectifier diodes		
Typ	kN	mm	Typ	kN	mm	Typ	kN	mm	Typ	kN	mm
D 269 N	3,2 - 7,6	57	D 5807 N	40 - 60	72	D 138 S	1,7 - 3,4	41	D 1331 SH	36 - 52	120
D 428 N	3,2 - 7,6	41	D 5809 N	30 - 60	75	D 178 S	1,7 - 3,4	41	D 1251 S	15 - 36	75
D 448 N	2,6 - 4,6	41	D 8019 N	40 - 80	100	D 188 S	1,7 - 3,4	41	D 1181 SX	27 - 45	100
D 471 N	10 - 16	58	D 6001 N	55 - 91	150	D 228 S	3,2 - 7,6	41	D 1381 S	27 - 45	100
D 660 N	6,1 - 14,7	41				D 238 S	3,2 - 7,6	41	D 1408 S	18 - 50	75
D 711 N	10 - 16	58	25 DN 06	4 - 8	25	D 261 S	9 - 13	58	D 1461 S	27 - 45	100
D 748 N	6,1 - 14,7	50	38 DN 06	20 - 30	38	D 271 S	9 - 13	58	D 1641 SX	27 - 45	100
D 749 N	10 - 24	57	46 DN 06	30 - 45	46	D 281 S	10 - 16	58	D 1951 SH	55 - 91	150
D 758 N	3,2 - 7,6	41	56 DN 06	40 - 60	56	D 291 S	9 - 13	58			
D 798 N	6 - 14,7	50	65 DN 06	55 - 80	65	D 348 S	3,2 - 7,6	41			
D 849 N	10 - 24	57				D 358 S	3,2 - 7,6	41			
D 850 N	10 - 24	56				D 368 S	3,2 - 7,6	41			
D 1029 N	10 - 24	57	D 2201 N	27 - 45	100	D 371 S	10 - 16	58			
D 1030 N	10 - 24	56				D 438 S	4,8 - 11,4	41			
D 1049 N	10 - 24	57				D 440 S	4,8 - 11,4	56			
D 1069 N	14 - 34	75				D 509 S	6 - 14,5	57			
D 1481 N	15 - 36	75				D 648 S	6 - 14,5	50			
D 1709 N	12 - 24	75				D 649 S	6 - 14,5	57			
D 1800 N	24 - 60	74				D 658 S	6 - 14,5	50			
D 1809 N	24 - 60	75				D 659 S	6 - 14,5	57			
D 2151 N	27 - 45	100				D 675 S	10 - 24	56			
D 2200 N	24 - 60	74				D 689 S	10 - 24	57			
D 2001 N	27 - 45	100				D 721 S	15 - 36	75			
D 2209 N	24 - 60	75				D 801 S	15 - 36	75			
D 2228 N	12 - 24	60				D 841 S	15 - 36	75			
D 2601 N/D 2601 NH	36 - 52	120				D 901 S	27 - 45	100			
D 2650 N	24 - 60	74				D 911 SH	27 - 45	100			
D 2659 N	24 - 60	75				D 921 S	27 - 45	100			
D 3001 N/D 3041 N	36 - 52	120				D 1031 SH	27 - 45	100			
D 3301 N	45 - 65	120				D 1081 S	15 - 36	75			
D 3401 N	36 - 52	120				D 1101 S	27 - 45	100			
D 3501 N	36 - 52	120				D 1131 SH	36 - 52	120			
D 4201 N	36 - 52	120				D 1169 S	18 - 50	75			
D 4457 N	30 - 45	60				D 1170 S	8 - 50	74			
D 4709 N	42 - 95	110				D 1181 S	27 - 45	100			

Letter Symbols/Kurzzeichen

B	DC current gain	Kollektor-Basis-Gleichstromverhltn.
FBSOA	forward biased safe operating area	Sicherer Vorwärts-Arbeitsbereich
f	frequency	Frequenz
f_o	repetition frequency	Wiederholfrequenz
F	clamping force	Anpresskraft
G	weight	Gewicht
I_C	maximum permissible DC collector current	höchstzulässiger Dauergleichstrom
I_{CAVM}	maximum permiss. average collector current	Kollektor-Dauergrenzstrom
I_{CES}	collector-emitter cut-off current	Kollektor-Emitter-Reststrom
I_{GES}	gate-leakage current	Gate-Emitter Reststrom
I_{EGS}	gate-leakage current	Emitter-Gate Reststrom
i_{CBO}	collector-base cut-off current	Kollektor-Basis-Reststrom
I_{CRM}	permissible repetitive peak collector current	höchstzulässiger periodischer Kollektor-Spitzenstrom
i_{EBO}	emitter-base cut-off current	Emitter-Basis-Reststrom
i_{FB}	forward base current	Vorwärts-Basisstrom
I_{FB}	maximum permissible peak forward current	höchstzul. Vorwärts-Basis-Spitzenstrom
i_{RB}	reverse base current	Rückwärts-Basisstrom
I_{RB}	maximum perm. peak reverse base current	höchstzulässiger Rückwärts-Basis-Spitzenstrom
i_D	forward off-state current	Vorwärts-Sperrstrom
i_G	gate current	Steuerstrom
I_{GD}	gate non trigger current	nicht zündender Steuerstrom
i_{GM}	peak gate current	Spitzensteuerstrom
I_{GT}	gate trigger current	Zündstrom
I_H	holding current	Haltestrom
I_L	latching current	Einraststrom
i_R	reverse current	Rückwärts-Sperrstrom
I_{RMS}	RMS current	Strom-Effektivwert
I_{RM}	peak reverse recovery current	Rückstromspitze
i_T/i_F	on-state current	Durchlassstrom
I_{TAV}/I_{FAV}	on-state current (average value)	Durchlassstrom (Mittelwert)
I_{TAVM}/I_{FAVM}	maximum average on-state current	Dauergrenzstrom
I_{TINT}/I_{FINT}	on-state current at intermittent duty	Durchlassstrom bei Aussetzbetrieb
I_{TM}/I_{FM}	on-state current (peak value)	Durchlassstrom (Spitzenwert)
$I_{T(OV)}/I_{F(OV)}$	on-state current at shorttime duty	Überstrom bei Kurzzeitbetrieb
$I_{T(OV)M}/I_{F(OV)M}$	maximum overload on-state current	Grenzstrom

$I_{T(RC)M}$	repetitive turn-on current (from snubber)	periodischerEinschaltstrom (aus RC)
I_{TRMSM}/I_{FRMSM}	maximum RMS on-state current	Durchlassstrom-Grenzeffektivwert
I_{TSM}/I_{FSM}	surge non repetitive on-state current	Stoßstrom-Grenzwert
$I_{F(max)}$	DC forward current	Dauergleichstrom
I_{FRM}	repetitve peak forward current	Periodischer Spitzenstrom
$\int i^2 dt$	maximum rated value	Grenzlastintegral
di_G/dt	rate of rise of gate current	Steilheit des Steuerstromes
$di_T/dt/di_F/dt$	rate of rise of on-state current	Steilheit des Durchlassstromes
$(di/dt)_{cr}$	critical rate of rise of on-state current	kritische Stromsteilheit
L	inductance	Induktivität
M	tightening torque	Anzugsdrehmoment
P_{ON}	turn-on dissipation	Einschaltverlustleistung
P_{OFF}	turn-off dissipation	Ausschaltverlustleistung
P	power dissipation	Verlustleistung
P_D	forward off-state dissipation	Vorwärts-Sperrverlustleistung
P_G	gate dissipation	Steuerverlustleistung
P_R	reverse power dissipation	Rückwärts-Sperrverlustleistung
P_{RQ}	turn-off dissipation	Ausschaltverlustleistung
$P_{TT} + P_{RQ}$	switching dissipation	Schaltverlustleistung
P_T/P_F	on-state power dissipation	Durchlassverlustleistung
P_{TAV}/P_{FAV}	on-state power dissipation (average value)	Durchlassverlustleistung (arithmetischer Mittelwert)
P_{TT}	turn-on dissipation	Einschaltverlustleistung
P_{tot}	total power dissipation	Gesamtverlustleistung
Q_r	recovered charge	Sperrverzugsladung
Q_s	lag charge	Nachlaufladung
R	resistance	Widerstand
r_T	slope resistance	Ersatzwiderstand
R_{thCA}	thermal resistance, case to coolant	Wärmewiderstand Gehäuse-Kühlmittel
R_{thCK}	thermal resistance, case to heatsink	Übergangs-Wärmewiderstand
R_{thJA}	thermal resistance, junction to coolant	Gesamtwärmewiderstand
R_{thJC}	thermal resistance, junction to case	innerer Wärmewiderstand
RBSOA	reverse biased safe operating area	Sicherer Rückwärts-Arbeitsbereich
t	time	Zeit
T	period	Periodendauer
T_A	coolant temperature	Kühlmitteltemperatur
T_{IC}	case temperature	Gehäusetemperatur

Letter Symbols/Kurzzeichen

T_{cop}	operating temperature	Betriebstemperatur
t_g	trigger pulse duration	Steuerimpulsdauer
t_{gd}	gate controlled delay time	Zündverzug
T_K	heatsink temperature	Kühlkörpertemperatur
t_p	current pulse duration (sinusoidal)	Strompulsdauer (Sinusform)
t_q	circuit commutated turn-off time	Freiwerdezeit
t_{rr}	reverse recovery time	Sperrverzugszeit
T_{vj}	junction temperature	Sperrschichttemperatur
$T_{vj\,max}$	maximum permissible junction temperature	höchstzul. Sperrschichttemperatur
t_w	current pulse duration (trapezoidal)	Stromflusszeit (Trapezform)
t_f	fall time	Fallzeit
$t_{fb\,min}$	minimum duration of forward base current	Mindestdauer des Vorwärtsbasisstroms
t_{off}	turn-off time	Abschaltzeit
t_{on}	turn-on time	Einschaltzeit
t_s	storage time	Speicherzeit
$t_{vj\,op}$	operating temperature	Betriebstemperatur
t_{stg}	storage temperature	Lagertemperatur
v_D	forward off-state voltage	Vorwärts-Sperrspannung
v_{DM}	forward off-state voltage (peak value)	Vorwärts-Sperrspanng (Spitzenwert)
V_{DRM}	repetitive peak forward off-state voltage	periodische Vorwärtsspitzenspannung
V_{DSM}	non-repetitive peak forward off-state voltage	Vorwärts-Stoßspitzenspannung
v_G	gate voltage	Steuerspannung
V_{GD}	gate non trigger voltage	nicht zündende Steuerspannung
$V_{GE\,(th)}$	gate threshold voltage	Gate-Schwellenspannung
V_{GT}	gate trigger voltage	Zündspannung
V_{ISOL}	insulation test voltage	Isolat.-Prüfspannung
v_L	no-load voltage of trigger pulse generator	Leerlaufspannung des Steuergenerators
v_R	reverse voltage	Rückwärts-Sperrspannung

V_R	direct reverse voltage	Rückwärts-Gleichsperrspannung
V_{RG}	reverse gate voltage	Rückwärts-Steuerspannung
V_{RGM}	peak reverse gatevoltage	Rückwärts-Spitzensteuerspannung
v_{RM}	reverse voltage (peak value)	Rückwärts-Sperrspannung (Spitzenw.)
V_{RMS} V_{DC}	RMS or DC voltage value	Bemessungsspannung Effektivwert/Gleichspannung
V_{RRM}	repetitive reverse voltage	periodische Rückwärts-Spitzensperrspannung
$V_{RRM(C)}$	repetitive peak reverse voltage after commutation	periodische Spitzensperrspannung nach der Kommutierung
V_{RSM}	non-repetitive peak reverse voltage	Rückwärts-Stoßspitzenspannung
v_T/v_F	on-state voltage	Durchlassspannung
$V_{(TO}$	threshold voltage	Schleusenspannung
V_M	repetitive peak voltage	periodische Spitzensperrspannung
$V_{CE\,sat}$	collector-emitter saturation emitter voltage	Kollektor-Emitter-Sättigungsspannung
$V_{CES,}$ V_{CE}	maximum permissible collector-voltage	höchstzulässige Kollektor-Emitter-Sperrspannung
dv_D/dt	rate of rise of forward off-state voltage	Steilheit der Vorwärts-Spannung
dv_R/dt	rate of rise of reverse voltage	Steilheit der Rückwärts-Spannung
$(dv/dt)_{cr}$	critical rate of rise of off-state voltage	kritische Spannungssteilheit
V_L	air quantity	Luftmenge
V_W	water quantity	Wassermenge
W	energy	Verlustenergie
W_{tot}	total energy	Gesamtverlustenergie
Z_{thCA}	transient thermal impedance, case to coolant	transienter äußerer Wärmewiderstand
Z_{thJA}	transient thermal impedance, junction to coolant	transienter Gesamtwärmewiderstand
Z_{thJC}	transient thermal impedance, junction to case	transienter innerer Wärmewiderstand
Θ	current conduct. angle	Stromflusswinkel

Type designations

Presspacks

T 930 S 18 T M C

T	thyristor
D	diode
A	asymmetric thyristor
930	average on state current (A)
0	standard ceramic disc
1	high power ceramic disc
4	epoxy disc 19 mm high
6	epoxy disc 35 mm high
7	epoxy disc 8 mm high
8	epoxy disc 14 mm high
9	epoxy disc 26 mm high
3	light triggered thyristor, ceramic disc
N	phase control device
K	phase control diode with cathode on case (only flatbase or metric)
F	fast thyristor with central gate
S	fast thyristor with gate cathode interdigitated, fast diode
U	fast diode with cathode on case (only flatbase or metric)
A	aavalanche diode
B	avalanche diode with cathode on case (only flatbase or metric)
18	repetitive peak off-state and reverse voltage in 10^2 V
B	metric thread with cable
C	metric thread with solder pin
E	flat base
T	disc

turn-off time:

A	8 µs
B	10 µs
C	12 µs
D	15 µs
S	18 µs
E	20 µs
F	25 µs
G	30 µs
K	40 µs
M	50 µs
P	55 µs
N	60 µs
T	80 µs

T 930 S 18 T M C

U	120 µs
0	no guaranteed turn off time
1	see data sheet
2	see data sheet

critical rate of off-state voltage

B	50 V/µs
C	500 V/µs
F	1000 V/µs
G	1500 V/µs
H	2000 V/µs

B 1...n contruction variation
S 1...n electrical selection

PowerBLOCK Modules

TT 162 N 16 K O F -K

TT	with 2 thyristors
DD	with 2 diodes
ND, DZ, TZ	with 1 thyristor or 1 diode
TD, DT	with 1 thyristor and 1 diode
AD	with 1 asymmetric thyristor and 1 diode
162	average on state current (A)
N	phase control device
F	fast thyristor with central gate
S	fast thyristor with gate cathode interdigitated, fast diode
16	repetitive peak off-state and reverse voltage in 10^2 V
K	mechanical construction: module
O	turn off time (see disk devices)
F	critical rate of rise of off-state voltage (see disk devices)
-K	design with common cathode
-A	design with common anode
B1...n	construction variation
S1...n	electrical selection

IGBT Modules

FF 400 R 33 KF x

FF	example for a High-Power-Module
FZ	single switch with one IGBT and FWD
FF	half bridge (two IGBTs an FWDs)
FP	Power Integrated Module
FM	Matrix Module
FD/DF	chopper module
FB	Power Integrated Module with B4 rectifier
DD	dual diode module
F4	4-pack
FS	3 phase full bridge (6-pack)
400	max. DC-collector current (A)
R	reverse conducting
S	fast Diode
33	collector-emitter-voltage in 10^2 V
K/V/X/Y	mechanical construction: module
F	fast switching type
L	type with low v_{CEsat}
S	fast short tail IGBT Chip
E	low sat IGBT Chip
T	thin IGBT[3]
1 ... n	internal reference numbers
C	EmCon Diode
D	higher Diode current
-K	design with common cathode
G	module in big housing
I	integrated cooling
B1 ... n	Construction variation
S1 ... n	Electrical selection

BSM 100 GB 120 DL x

BSM	example for a standard module
BYM	switch with IGBT and FWD
100	diode module
GA	max. DC-collector current (A)
GB	single switch with one IGBT and FWD
GD	half bridge (two IGBTs and FWDs)
GT	3 phase full bridge (6-pack)
	3 single switches an FWDs (Tripack)

BSM 100 GB 120 DL x

GP	Power Intergrated Module
	B6/Break/Inverter
GAL	chopper module (diode on collector side)
GAR	chopper module (diode on emitter side)
A	single diode
120	collector-emitter-voltage in 10^1 V
DL	Typ with low v_{CEsat}
DN2	fast switching type
DLC	low loss type with EmCon Diode
S	with collector sense
G	Design Variation
Exxx	special type

Bridge Rectifiers and AC-Switches

TD B6 H K 135 N 16 L OF

DD	diode module
TT	thyristor module
TD	thyristor/diode
B6	three phase bridge
W3	three phase AC-switch
C	fully controlled
H	half controlled
U	uncontrolled
K	common cathode of thyristors
105	output current (A) (W3C: RMS-current)
N	phase control thyristor/diode
16	repetitive peak off-state voltage in 100 V
L	IsoPACK
R	EconoBRIDGE without integr. brake chopper IGBT
RR	EconoBRIDGE with integr. brake chopper IGBT
O	no guaranteed turn-off time
F	critical rate of rise of off-state voltage

Typenbezeichnungen

Scheibenbauelemente

T 930 S 18 T M C

T	Thyristor
D	Diode
A	asymmetrischer Thyristor
930	Dauergrenzstrom (A)
0	Standardkeramik-Scheibe
1	Hochleistungskeramik-Scheibe
4	Epoxy-Scheibe 19mm hoch
6	Epoxy-Scheibe 35mm hoch
7	Epoxy-Scheibe 8mm hoch
8	Epoxy-Scheibe 14mm hoch
9	Epoxy-Scheibe 26mm hoch
3	lichtgezündeter Thyristor, Keramik-Scheibe
N	Netz-Bauelement
K	Netz-Diode mit Kathode am Gehäuse (nur Flachboden oder Gewindebolzen)
F	schneller Thyristor mit Zentralgate
S	schneller Thyristor mit verzweigtem Gate, schnelle Diode mit Aode am Gehäuse
U	schnelle Diode mit Kathode am Gehäuse (nur Flachboden oder Gewindebolzen)
A	Avalanche Diode mit Kathode am Gehäuse (nur Flachboden oder Gewindebolzen)
B	Avalanche Diode mit Kathode am Gehäuse (nur Flachboden oder Gewindebolzen)
18	periodische Vorwärts- und Rückwärts-Spitzensperrspannung in 10^2V
B	mit metrischem Gewinde u. Seil
C	mit metrischem Gewinde u. Lötöse
E	Flachboden
T	Scheibe

Freiwerdezeit

A	8µs
B	10µs
C	12µs
D	15µs
S	18µs
E	20µs
F	25µs

T 930 S 18 T M C

G	30µs
K	40µs
M	50µs
P	55µs
N	60µs
T	80µs
U	120µs
0	keine garantierte Freiwerdezeit
1	Freiwerdezeit siehe Datenblatt
2	Freiwerdezeit siehe Datenblatt

kritische Spannungssteilheit:

B	50V/µs
C	500V/µs
F	1000V/µs
G	1500/µs
H	2000V/µs
B 1...n	Konstruktionsvariante
S 1...n	elektrische Selektion

PowerBLOCK Module

TT 162 N 16 K O F -K

TT	mit 2 Thyristoren
DD	mit 2 Dioden
ND, DZ, TZ	mit 1 Thyristor oder 1 Diode
TD, DT	mit 1 Thyristor und 1 Diode
AD	mit 1 asymmetrischen Thyristor und 1 Diode
162	Dauergrenzstrom (A)
N	Netz-Element
F	schneller Thyristor mit Zentralgate
S	schneller Thyristor mit verzweigtem Gate, schnelle Diode
16	periodische Vorwärts- und Rückwärts-Spitzensperrspannung in 10^2V
K	mech. Ausführung: Modul
O	Freiwerdezeit (siehe Scheibenbauelemente)
F	kritische Spannungssteilheit (siehe Scheibenbauelemente)
-K	Ausführung mit gem. Kathode
-A	Ausführung mit gem. Anode
B 1...n	Konstruktionsvariante
S 1...n	elektrische Selektion

IGBT Module

FF 400 R 33 KF x

FF	Beispiel für ein Hochleistungsmodul
FZ	Einzelschalter mit IGBT und Freilaufdiode
FF	Halbbrücke (zwei IGBT's und Freilaufdioden)
FP	Integriertes Modul mit IGBT, NTC, B6, Chopper
FM	Matrix Module
FD/DF	Choppermodul
FB	Integriertes Modul mit IGBT, NTC, und B4
DD	Doppeldiodenmodul
F4	Halbbrücke
FS	Vollbrücke
400	max. Kollektor-Dauergleichstrom (A)
R	rückwärts leitend
S	schnelle Diode
33	Kollektor-Emitter-Sperrspannung in 10^2 V
K/V/X/Y	mechanische Ausführung: Modul
F	schnell schaltender Typ
L	Typ mit niedriger v_{CEsat}
S	schneller short Tail IGBT Chip
E	sehr kleine Schwellenspannung IGBT
T	thin IGBT[3]
1 ... n	interne Referenznummer
C	EmCon Diode
D	größerer Dioden Strom
-K	Design mit common Kathode
G	Modul im größeren Gehäuse
I	mit integrierter Kühlung
B1 ... n	konstruktive Variationen
S1 ... n	elektrische Selektion

BSM 100 GB 120 DL x

BSM	Beispiel für ein Standardmodul
BYM	Schalter
100	Diodenmodul
GA	max. Kollektor-Dauergleichstrom (A)
GB	Einzelschalter mit IGBT und Freilaufdiode
GD	Halbbrücke (zwei IGBTs und Freilaufdioden)
GT	Vollbrücke
GP	3 Einzelschalter mit IGBT und Freilaufdiode
GAL	Integriertes Modul B6/ Break/WR
GAR	Choppermodul (Diode kollektorseitig)
A	Choppermodul (Diode emitterseitig)
120	Einzeldiode
DL	Kollektor-Emitter-Sperrspannung in 10^1 V
DN2	Typ mit niedriger v_{CEsat}
DLC	schnell schaltender Typ
S	low lost Typ mit EmCon Diode
G	mit Hilfskollektor
Exxx	Design Variation
	Sondertyp

Brückengleichrichter und Drehstromsteller

TD B6 H K 135 N 16 L OF

DD	Dioden-Modul
TT	Thyristor-Modul
TD	Thyristor/Dioden-Modul
B6	Sechspuls-Brücke
W3	Dreiphasen-Wechselweg
C	vollgesteuert
H	halbgesteuert
U	ungesteuert
K	gemeins. Kathode der Thyristoren
135	Ausgangsstrom (A) (W3C: Effektivstrom)
N	Netzthyristor/Diode
16	periodische Spitzensperrspannung in 100 V
L	IsoPACK
R	EconoBRIDGE ohne integr. Bremschopper IGBT
RR	EconoBRIDGE mit integr. Bremschopper IGBT
O	keine garantierte Freiwerdezeit
F	kritische Spannungssteilheit

Business Excellence due to Quality Management

In quality and reliability of our innovative products and services for power electronics we are a worldwide leading company.

We have developed and introduced a quality management which continuously supervises the stability and the performance of our production and business progresses. The qualification of our innovative products and services with the most progressive quality tools contributes effectively and efficiently to a positive business development.

Our quality management is permanently brought in line with the requests and expectations of our customers, partners and employees. The base are the standards DIN EN ISO 9001:2000 and the ISO/TS 16949, which includes the requirements of the automobile industry. In addition to this standards we use the EFQM-Model for Business Excellence to force the continual improvement of our company.

Our competent and qualified employees are motivated to fulfill the requests and wishes of our customers to their highest satisfaction at all times.

Business Excellence due to Environment Management

The use of our products leads to saving of electrical energy. Consequently we feel committed to protect the environment and the natural resources also at the manufacture of our products. Our measures in designing towards an environmental - protective way includes the production sequences of operations as well as the complete product spectrum.

In a responsible pollution control we find a social responsibility and at the same time an essential base for the continuous success of our enterprise. Success is an entrepreneurial aim at the development of new techniques and products, a criterion for the quality of our deliveries and performances and a suitable remedy for the defense of dangers and for the minimization of ambient environment risks.

We pursue our progress in the range of the work safety and the pollution control regularly, judge the achievements and lay down new main emphases and aims. Our ambient environment management system is certified to DIN EN ISO 14001.


DET NORSKE VERITAS
QUALITY SYSTEM CERTIFICATE

Certificate No. CERT-13022-2003-AQ-ESN-IATF

eupec

Europäische Gesellschaft für Leistungshalbleiter mbH
Max-Planck-Str. 5 in D - 59581 Warstein

with the site
eupec Hungária Kft.
Ipartelepi út 3, Pf 143 in H - 2700 Cegléd

ISO/TS 16949 : 1999

Location D-Warstein: DEVELOPMENT, PRODUCTION AND MARKETING OF POWER SEMICONDUCTOR DEVICES
Location H-Cegléd: ASSEMBLY OF POWER SEMICONDUCTOR DEVICES

DET NORSKE VERITAS
QUALITY SYSTEM CERTIFICATE

Supplement to Certificate No. CERT-13022-2003-AQ-ESN-IATF

for: eupec - Europäische Gesellschaft für Leistungshalbleiter mbH, Max-Planck-Str. 5 in D - 59581 Warstein

Customer Specific Requirements: QS-9000 Semiconductor Supplement 2nd Ed. 1998

Exclusions: none

Site: eupec Hungária Kft., Ipartelepi út 3, Pf 143 in H - 2700 Cegléd
With the scope:
Assembly of power semiconductor devices

Remote Locations: n.a.

Audit conducted by DNV Office: DNV ZERTIFIZIERUNG UND UMWELTGUTACHTER GMBH, Schnieringshof 14, 45329 Essen, Germany


CERTIFICATE

DNV Zertifizierung und Umweltgutachter GmbH

eupec

EUPEC Europäische Gesellschaft für Leistungshalbleiter mbH
Max-Planck-Str. 5
D - 59581 Warstein

EN ISO 14001 : 1996

Development, production and marketing of power devices and assemblies

CERTIFICATE

DNV Zertifizierung und Umweltgutachter GmbH

eupec

Europäische Gesellschaft für Leistungshalbleiter mbH
Max-Planck-Str. 5 in D - 59581 Warstein
with the site
eupec Hungária Kft.
Ipartelepi út 3, Pf 143 in H - 2700 Cegléd

EN ISO 9001 : 2000

Location D-Warstein: DEVELOPMENT, PRODUCTION AND MARKETING OF POWER SEMICONDUCTOR DEVICES
Location H-Cegléd: ASSEMBLY OF POWER SEMICONDUCTOR DEVICES

Qualitätsmanagement

Qualität und Zuverlässigkeit unserer innovativen Produkte und Leistungen für die Leistungselektronik sind weltweit führend.

Wir haben ein Qualitätsmanagement entwickelt und eingeführt, das die Stabilität und die Leistung unserer Fertigungs- und Geschäftsprozesse kontinuierlich überwacht, unsere innovativen Produkte und Leistungen mit den fortschrittlichsten Qualitätswerkzeugen qualifiziert und in seiner effektiven und effizienten Umsetzung seinen Beitrag zu einer positiven Geschäftsentwicklung leistet.

Unser Qualitätsmanagement wird ständig den Anforderungen und Erwartungen unserer Kunden, Partner und Mitarbeiter angepasst und kontinuierlich verbessert. Grundlage dafür bilden die Normen

DIN EN ISO 9001:2000 sowie die ISO/TS 16949, welche die Forderungen der Automobilindustrie beinhalten. Weiterhin nutzen wir das EFQM-Modell für Business Excellence, um die ständige Verbesserung unseres Unternehmens zu unterstützen.

Unsere kompetenten Mitarbeiter sind qualifiziert und motiviert die Anforderungen und Wünsche unserer Kunden immer zur höchsten Zufriedenheit aller zu erfüllen.

Umweltmanagement

Der Einsatz unserer Produkte ermöglicht die Einsparung von elektrischer Energie. Konsequenterweise fühlen wir uns auch bei der Herstellung unserer Produkte zur Schonung der Umwelt und der natürlichen Ressourcen verpflichtet. Unsere Maßnahmen zur umweltgerechten Gestaltung umfassen die Produktionsabläufe sowie die gesamte Produktpalette.

In einem verantwortungsvollen Umweltschutz sehen wir eine gesellschaftliche Verantwortung und zugleich eine wesentliche Basis für den kontinuierlichen Erfolg unseres Unternehmens. Er ist ein unternehmerisches Ziel bei der Entwicklung neuer Techniken und Produkte, ein Kriterium für die Qualität unserer Lieferungen und Leistungen und ein geeignetes Mittel zur Abwehr von Gefahren und zur Minimierung von Umweltrisiken.

Wir verfolgen regelmäßig unsere Fortschritte im Bereich der Arbeitssicherheit und des Umweltschutzes, bewerten das Erreichte und setzen uns neue Schwerpunkte und Ziele. Unser Umwelt - Managementsystem ist zertifiziert nach DIN EN ISO 14001.

Europe

eupec Headquarters
eupec GmbH
Max-Planck-Straße 5
D-59581 Warstein
Phone 02902 764-0
Fax 02902 764-1256
info@eupec.com

Germany

eupec Headquarters
eupec GmbH
Max-Planck-Straße 5
D-59581 Warstein
Phone 02902 764-0
Fax 02902 764-1256
info@eupec.com

eupec Distribution
Ernst Heukelbach
Max-Planck-Straße 5
D-59581 Warstein
Phone 02902 764-1142
Fax 02902 764-1510
ernst.heukelbach@eupec.com

eupec Sales Partner
D. Schuricht GmbH & Co.KG
Lise-Meitner-Str. 4
D-28359 Bremen
Phone 0180 5223435
Fax 0180 5223436

Regional Offices

Vertriebsbüro Nord
Jörg Moneke
Burgfeld 12
D-37130 Gleichen-Klein Lengden
Phone 05508 974445
Fax 05508 974447
Mobile 0170 2267265
joerg.moneke@eupec.com

Vertriebsbüro West
Harald Zely
Spiekerstraße 28
D-45966 Gladbeck
Phone 02043 67693
Fax 02043 67159
Mobile 0171 2136244
harald.zely@eupec.com

Vertriebsbüro Mitte
Gerhard Mewißen
Am Schützenrain 63
D-64354 Reinheim-Ueberau
Phone 06162 4132
Fax 06162 4133
Mobile 0171 2136243
gerhard.mewissen@eupec.com

Vertriebsbüro Ost
Jost Wendt
Kaltenhöfer Straße 1
D-23611 Sereetz
Phone 0451 5929792
Fax 0451 5929793
Mobile 0175 2981581
jost.wendt@eupec.com

Vertriebsbüro Südwest
Siegfried Löw
Brunnweiher 9
D-71116 Gärtringen
Phone 07034 26665
Fax 07034 26907
Mobile 0171 2136388
siegfried.loew@eupec.com

Handelsvertretung Nord
Handelsvertretung Nord
Hans-Jürgen Schupp
Reichenstraße 6a
D-25485 Hemdingen
Phone 04123 6856-60
Fax 04123 6856-61
Mobile 0171 2683812
schupp.handel@t-online.de

Austria

Infineon Technologies / eupec
Mr. Roman Bulant
Operngasse 20 B Top 31
A 1040 Wien
Phone +43 15877070-333
Fax +43 15877070-500
Mobile +43 676 5792003
Roman.Bulant@Infineon.com

Belgium

eurodis Texim Electronics N.V.
Koningin Astridlaan 49
1780 Wemmel
Belgium
Phone +32 24620-100
Fax +32 24620-199

Czeck Republic / Slavak Republic

Vladimir Zizek
31219 Plzen
Spolkova 19
Phone +420 377473715
Fax +420 377471876
Mobile +420 736538133
Vladimir.Zizek@volny.cz

Denmark

eupec
c/o Geveke AS in c/o Hans Buch AS
Alex Vittrup
Roskildevej 8-10
D -2620 Albertslud
Phone +45 436850-21
Fax +45 436850-52
av@hansbuch.dk

France

eupec SARL
Semiconducteurs de puissance
41 à 45, avenue du Général Leclerc
F-92350 Le Plessis Robinson
Phone +33 146307-675
Fax +33 146307-587

Sorelec SA
BP 89
9 avenue des Peupliers
35512 Cesson-Sévigné Cedex
Phone +33 299834567
Fax +33 299833969

Great Britain

Power Semiconductors Ltd.
Caxton Centre
Porters Wood
Valley Road
GB-St. Albans Herts AL3 6XT
Phone +44 17278111-10
Fax +44 17278111-12
info@powersemiconductors.co.uk

Greece

see eupec Headquarters

Hungaria

eupec Hungária Kft.
Mrs. Edit Eberhard
Gizella u. 51-57
H-1143 Budapest
Phone +36 14712824
Fax +36 14712826

Italy

Infineon Technologies Italia S.r.l.
Settore eupec
Mr. Renzo Verzaro
Via Vipiteno 4
I-20128 Milano
Phone +39 0 2252044448
Fax +39 0 2252044033
Renzo.Verzaro@infineon.com

Netherlands

eurodis Texim Electronics B.V.
Nijverheidsstraat 16
7482-GZ Haaksbergen
Phone +31 535733-333
Fax +31 535733-888

Poland

Siemens Sp.z.o.o.Components
Mr. Salak
03-821 Warszawa
ul.Zupnicza 11
Phone +48 228708645
Fax +48 228709159
Jaroslaw.Salak@siemens.com

Russia/Ukraine/GUS

RTK Component Ltd
Moscow Russia 129075
31 Kalibrovskaya St.
Phone +7 095215-97-06 or
+7 095215-73-13
Fax +7 095216-2308
rtk@rtkcomponent.com

RTK Component Ltd
Minsk, Belarus 220035
65A Timiryazeva St. Office 433
Phone +375 2506017 or
Phone +375 2506018
Fax +375 172548953
sales@rtkcomponent.com

INTECH electronics GmbH
Mr. Zverev
125445 Moskau
Smolnaya ul. 24/1203
Phone +7 0954519737
Fax +7 0954518608
intech@aha.ru

INTECH Ukraine
02002 Kiev, Ukraine
Mariny Raskovoi ul. 13, office 910
PO Box 294
Phone +38 0445165444
Fax +38 0445165444
info@intech.com.ua

ITC Electronics
Moscow
24, Domodedovskaya Street, building 3
Phone +7 0953639575
Fax +7 0953912038
moscow@itc-electronics.com

ITC Electronics
Saint Petersburg
14, Nab.Obvodnogo Canala
Phone +7 8125677382
Fax +7 8125677377
spb@itc-electronics.com

ITC Electronics
Novosibirsk
7, Prospect Dimitrova, office 600
Phone +7 3832100787
Fax +7 3832103837
nsk@itc-electronics.com

ITC Electronics
Ekaterinburg
Malyscheva St. 122, office 330
Phone +7 3432179032
Fax +7 3432179031
ural@itc-electronics.com

ITC Electronics
Kiev
7a, Prospect Vossoedineniya,
office 721
Phone +380 445596890
Fax +380 445510400
kiev@itc-electronics.com

Spain / Portugal

eupec Semiconductors
Isabel Toledano
c/ Lugano, 35
E-28420 La Navata (Madrid))
Phone +34 91-8426640
Fax +34 91-8426641
Isabel.Toledano@eupec.com

Sweden / Finland / Norway

Infineon technologies Nordic AB
c/o eupec, Tommy Andersson
Österögatan 1
S-16493 Kista
Phone +46 87035992
Fax +46 87035901
Tommy.Andersson@infineon.com

Switzerland

see eupec Headquarters

Turkey

see eupec Headquarters

America

USA

eupec Inc.
1050 Route 22
Lebanon, NJ, 08833
Phone +1 90823656-00
Fax +1 90823656-20

Latin America

Please contact eupec Inc. USA

Africa

South African Republic

The Components Group PTY Ltd.
Mr. Mike King
91, Silverstone Crescent,
Kyalami Business Park, Kyalami
1685 Midrand, Southafrica
Phone +27 11 466-1828
Fax +27 11 466-1878

Australia / New Zealand

Siemens Ltd. - Components Division
Mark Playsted
885 Mountain Highway
Bayswater Victoria 3153
Melbourne,0 Australia
Fax +61 397217275
mark.playsted@siemens.com.au

Melbourne

Siemens Ltd.
Mr. Mark Playsted
885 Mountain Highway
Bayswater Victoria 3153
Melbourne, Australia
Phone +61 3972-77933
Fax +61 3972-17275

Victoria

Fastron Technologies PTY. Ltd.
Mr. Mike Trubridge
25 Kingsley Close
3178 Rowville, VIC
Victoria 3178, Australia
Phone +61 39763-5155
Fax +61 39763-5166

Asia

Asean

Sales
Infineon Technologies AP Pte. Ltd.
Derrick Lee
25 New Industrial Road
Singapore 536211
Fax +65 68400078
derrick.lee@infineon.com

Achieva Components Pte. Ltd.
Gary Oh
240 Macpherson Road
#02-13, Pines Industrial Bldg
Singapore 348574
Fax +65 67476880
garyoh@achieva.com.sg

Korea

Seoul

Infineon Technologies Korea Co. Ltd.
Hong Sung Il
9th Floor, Daelim Acrotel
467-6 Dokock-dong, Kangnam-gu
Seoul Korea 135-971
Fax +82 234600901
Sung-Il.Hong@Infineon.com

DABO Industrial Systems Co. Ltd.
Kim Chang-Soo
Rm 909, DaeRung TechnoTown-3rd
448, KaSan-Dong, KumChon-Gu
Seoul, Korea
Fax +82221073328
daboel@unitel.co.kr

China

Hong Kong

Infineon Technologies HK Ltd.
Kong Chun Kuen, Kevin
Suite 302 Level 3
Festival Walk, 80 Tat Chee Avenue
Kowloon Tong, HongKong
Fax +852 28279762
kevin.kong@infineon.com

Eurotone Electric Ltd.
Bernard Yuen
7F, HaoGong Building
No.5 Yan Nan Road
Shenzhen, China
Fax +86 75583206540
bernard@etpec.com

Shanghai

Infineon Technologies International
Trade (Shanghai) Co. Ltd.
Simon Chen
No. 8, Lane 647, SongTao Road,
ZhangJiang Hi-Tech Park, Pudong,
Shanghai 201203, P.R.China.
Fax +8621 50806204
Simon.Chen@Infineon.com

Beijing

Infineon Technologies International
Trade (Shanghai) Co. Ltd. Beijing Office
Lori He
12/F, Quantum Plaza, No. 27
ZhiChunLu, Hai Dian, Beijing 100083
P.R.China
Fax +8610 82355475
lori.he@infineon.com

Beijing Jingchuan Electronic
Technology Development Co. Ltd.
Zhou Wen Ding
Rm1703 A/3Bld,
1 Area Fangchengyuan Fangzhuang
Beijing, China P.C. 100078
Fax +86 1067656750
jingchuan@a-1.net.cn

India

Bangalore

Infineon Technologies India Pvt. Ltd.
Padmanabha Gowda
10th Floor, Discover Building
International Tech Park
Whitefield Road
Bangalore 560066, India
Fax +91 808410016
Padmanabha.Gowda@infineon.com

Arihant Electricals
Amit Jain
24/4866, Ansari Road, Darya Ganj,
New Delhi - 110002
Fax +91 3256918 / 3273554
ajain@arihantelectricals.com

Hagemeyer India Ltd.
GA Manohara
No. 12, SG Center, Wilson Garden
New Hosur Road
Bangalore 560027, India
Fax +91 806563451
manohara@techpacindia.com

Taiwan

Infineon Technologies Taiwan Ltd.
Feng Li Wei
12F-1, No.3-2 Yuan Qu St., Nan Kang
Software Park, Taipei
Taiwan 115, R.O.C.
Fax +886 226557505
Liwei.Feng@Infineon.com

Elecbiz Enterprises Co. Ltd.
Roger Sheng
Room C, 7F, No. 20,
Min Chuan W. Rd.
Taipei, Taiwan, R.O.C.
Fax +886 225313192
rogersheng@elecbiz.com.tw

Yuban & Co.
James Su
9F, No. 19-2, San Chong Road
Nan-King, 115
Taipei, Taiwan
Fax +886 226550666
james_su@yuban.com.tw

Japan

Infineon Technologies Japan K.K
Eiji Yanokura
Takanawa Park Tower 17F
3-20-14 Higashi Gotanda
Shinagawa-ku, Tokyo
141-0022, Japan
Fax +81 354496611
info-japan@eupec.com

Fuji Denki Sangyo Co. Ltd. (Tokyo)
Tetsuya Matsuoka
Atou Bldg. 201, Shibadaimon 1-2-7
Minato-ku, Tokyo 105-0012, Japan
Fax +81 357771610
tmatsuoka@fujidensan.co.jp

Kern Company Ltd.
Satoshi Ito
5-50-8 Higashi-Nippori
Arakawa-Ku
Tokyo, Japan
Fax +81 338011857
ito@kern.co.jp

power electronics in motion

eupec

eupec GmbH
Max-Planck-Straße 5
D-59581 Warstein
Tel. +49 (0) 29 02 7 64-0
Fax +49 (0) 29 02 7 64-12 56
info@eupec.com
www.eupec.com

2-2004-6000

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP