ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Instek GOS-6112* at our website: *Click HERE*

Cursor Readout Analog Oscilloscope




FEATURES

* 100MHz Bandwidth, Dual Channel, Delayed Sweep
* Built-In 6 Digit Universal Counter (GOS-6103C)
* 10 Sets Memory for Front Panel Setting Save & Recall (GOS-6103/GOS-6103C)
* Time Base Auto-range (GOS-6103/GOS-6103C)
* Cursor Readout with 7 Measurements
* Panel Setup Lock of Digital-Control Functions
* Buzzer Alarm
* LED Indicators
* TV Synchronization
* Trigger Signal Output
* Z-Axis Modulation Input
* SMD Technology, High Stability and Reliability

GOS-6112/6103/6103C (100 MHz)

SPECIFICATIONS

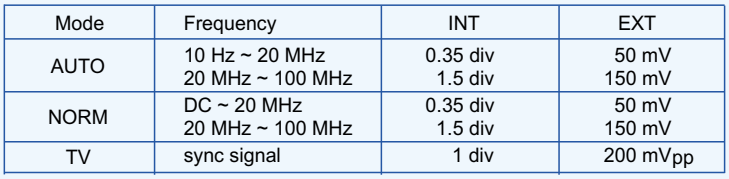CRT	**Type**	6-inch rectangular type with internal graticule; 0%, 10%, 90% and 100% markers. 8 x 10 div (1 div = 1 cm)
	Accelerating Potential	16 kV approx. (GOS-6103/GOS-6103C), 12kV approx. (GOS-6112)
	Illumination	Continuously adjustable (GOS-6103/GOS-6103C)
	Z-axis input	Coupling : DC Sensitivity: 5V or more Maximum input voltage : 30V (DC + AC peak) at 1kHz or less Bandwidth : DC ~ 5 MHz
VERTICAL SYSTEM	**Sensitivity**	2mV~5V/div, 11 step in 1-2-5 sequence
	Sensitivity Accuracy	≤3% (5div at the center of display)
	Vernier Vertical Sensitivity	Continuously variable to 1/2.5 or less of panel-indicate value
	Bandwidth(-3dB)	DC~100MHz(2mV/div:DC~20MHz)
	Rise Time	3.5ns (2mV/div:17.5ns)
	Signal Delay	Leading edge can be monitored
	Max. Input Voltage	400V(DC+AC peak) at 1kHz or less
	Input Coupling	AC, DC, GND
	Input Impedance	1MΩ±2% // approx. 25pF
	Vertical Mode	CH1,CH2,DUAL(CHOP/ALT), ADD, CH2 INV.
	Bandwidth Limited	20MHz
	Common-Mode Rejection Ratio	50:1 or better at 50kHz
	Dynamic Range	8 div at 60MHz; 5div at 100MHz (GOS-6112) 8 div at 100MHz (GOS-6103/GOS-6103C)
HORIZONTAL SYSTEM	**Horizontal Modes**	MAIN(A), ALT, DELAY(B)
	A(main) Sweep Time	50ns~0.5s/div, continuously variable (UNCAL)
	B(delay) Sweep Time	50ns~50ms/div
	Accuracy	±3% (±5% at x 10 MAG)
	Sweep Magnification	x 10 (maximum sweep time 5nS/div)
	Hold Off Time	Variable
	Delay Time	1μs~5s
	Delay Jitter	Better than 1:20000
	Alternate Separation	Variable
TRIGGER	**Trigger Modes**	AUTO, NORM,TV
	Trigger Source	CH1,CH2,LINE,EXT
	Trigger Coupling	AC,DC,HFR,LFR
	Trigger Slope	"+" or "-" polarity or TVsync polarity
	Trigger Sensitivity	
	TV sync	TV-V, TV-H
	Max. External Input Voltage	400V(DC+AC peak) at 1kHz
	External Input Impedance	1MΩ±5% // approx.25pF
X-Y OPERATION	**Mode**	X-axis: selectable CH1, CH2, EXT ; Y-axis: selectable CH1, CH2, CH1 and CH2
	Sensitivity Accuracy	2mV~5V/div±3% ; EXT : 0.1V/div ± 5%
	X-axis Bandwidth	DC~500kHz(-3dB)
	Phase Error	3° or less from DC~50kHz
OUTPUT SIGNAL	**Trigger Signal Output**	Voltage: approx. 25mV/div into 50Ω ; Frequency response : DC ~ 10MHz
	Calibrator Output	1kHz Square wave, 2Vpp ± 2%

Mode	Frequency	INT	EXT
AUTO	10 Hz ~ 20 MHz 20 MHz ~ 100 MHz	0.35 div 1.5 div	50 mV 150 mV
NORM	DC ~ 20 MHz 20 MHz ~ 100 MHz	0.35 div 1.5 div	50 mV 150 mV
TV	sync signal	1 div	200 mVpp

Cursor Readout Analog Oscilloscope



GOS-6112




GOS-6103/6103C


SPECIFICATIONS

CURSOR READOUT FUNCTION	**Cursor Measurement Function**	△V, △V%, △VdB, △T, 1/△T, △T%, △ θ
	Cursor Resolution	1/100 DIV
	Effective Cursor Range	Vertical: ±3div ; Horizontal: ±4 div
	Panel Setting Display	Vertical: V/div(CH1,CH2),UNCAL,ALT/CHOP/ADD,INV, probe factor,AC/DC/GND Horizontal: s/div(MTB, DTB), UNCAL, x 10MAG, delay time , HO Trigger: source, coupling, slope, level, TV-V, TV-H Others: X-Y, lock, save/recall MEM 0-9 (GOS-6103/GOS-6103C)
AUTO MEASUREMENT FUNCTION (GOS-6103C)	**Parameter Function**	FREQ, PERIOD, ±WIDTH, ±DUTY (+ or - polarity selected by trigger slope)
	Display Digits	Max. 6-digits, decimal
	Frequency Range	50Hz ~ 100MHz
	Accuracy	1kHz ~ 100MHz : ±0.01% ; 50Hz ~ 1kHz : ±0.05%
	Measuring Sensitivity	> 2 div (Measuring source selected from CH1 and CH2 as synchronous signal sources)
SPECIAL FUNCTION	**TIME/DIV Auto Range**	Provided (GOS-6103/GOS-6103C)
	Panel Setting Save & Recall	10 sets (GOS-6103/GOS-6103C)
	Panel Setups Lock	Provided
POWER SOURCE		AC 100V/120V/230V±10% , 50/60Hz
ACCESSORIES		Instruction manual x 1; Power cord x 1; LF-210E Probe (10:1/1:1) x 2
DIMENSIONS & WEIGHT		310(W) x 150(H) x 455(D) mm ; Approx. 9kg


CURSOR MEASUREMENT FUNCTIONS




The unique easy-to-use cursor and numerical readouts make waveform observation and measurement easier, faster and more accurate. The on screen cursors provide seven measurement functions (△V, △V%,△VdB,△T, 1/△ T,T%,△θ)




Voltage Measurement




Voltage percentage Measurement



Time Measurement



Frequency Measurement



Time percentage Measurement



Phase Measurement

ORDERING INFORMATION

GOS-6112 100MHz, 2-channel, Analog Oscilloscope
GOS-6103 100MHz, 2-channel, Analog Oscilloscope
GOS-6103C 100MHz, 2-channel, Analog Oscilloscope with 100MHz Frequency Counter

Option
Opt. 01 : GTC-001 Instrument Cart, 450(W) x 430(D) mm
Opt. 02 : GTC-002 Instrument Cart, 330(W) x 430(D) mm

NOTE : GOS-6103C Without CE Approved

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP