



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

1MHz PRECISION LCR METER



NEW

LCR-8101(1MHz)




The LCR-8101 1MHz precision LCR meter provides accuracy and versatility for a wide range of component measurements, even including DC resistance measurement and Voltage/Current monitoring. High resolution and accuracy provide precise measurement results which helps reconstructing component characteristics. Multi-Step function allows customized measurement with Pass/Fail indication, in accordance with to the users' requirements. Parameters and limitations are defined separately for each program step. GPIB and RS-232C interface are installed as standard features for controlling the instrument and reading the measurement results. Optional Graph Mode function can display component characterization over a wide frequency range in graph charts. The rich features of LCR-8101 relieve your measurement tasks at a very competitive price.

FEATURES

- * Test Frequency 20Hz ~ 1 MHz
- * 6 Digit Measurement Resolution
- * DC Resistance Measurement
- * Monitoring of DUT Voltage and Current
- * 0.1% Basic Measurement Accuracy
- * Comprehensive Measurement Functions
- * Standard Interface : RS-232 & GPIB
- * Large LCD Display
- * Intuitive User Interface
- * Multi Step Mode
- * PASS/FAIL Comparator
- * Graph Mode (Option)

SPECIFICATIONS	
TEST FREQUENCY	
20Hz ~ 1MHz, 5 Digits, ±0.005%	
INPUT IMPEDANCE	
100Ω	
BASIC ACCURACY	
±0.1% (R, Z, X, G, Y, B, L, C)	
TEST SPEED	
AC	DC
MAX: 75mS	MAX: 30mS
FAST: 150mS	FAST: 60mS
MEDIUM: 450mS	MEDIUM: 120mS
SLOW: 600mS	SLOW: 500mS
TEST SIGNAL LEVELS	
10mV~2Vrms, 1mV/Step, ±2.5%	
SHORT CIRCUIT CURRENT	
Max. 20mA	
DISPLAY RANGES	
R, Z, X	0.01mΩ ~ 1GΩ
G, Y, B	0.001nS ~ 1kS
L	0.1nH ~ 100kH
C	0.001pF ~ 1F
D	0.00001 ~ 1000
Q	0.1 ~ 9999.9
Rdc	0.1mΩ ~ 100MΩ
MEASUREMENT PARAMETERS	
Impedance (Z), Phase Angle (θ), Inductance (L), Capacitance (C), AC Resistance (Rac), Quality Factor (Q), Dissipation Factor (D), Admittance (Y), Conductance (G), Reactance (X), Susceptance (B), DC Resistance (Rdc)	
SERIES OR PARALLEL EQUIVALENT CIRCUIT	
C + R, C + D, C + Q, L + R, L + Q	
SERIES EQUIVALENT CIRCUIT ONLY	
X + R, X + D, X + Q	
PARALLEL EQUIVALENT CIRCUIT ONLY	
C + G, B + G, B + D, B + Q	
POLAR FORM	
Z + Phase Angle, Y + Phase Angle	
LCD DISPLAY	
320 x 240 DOT-MATRIX	
INTERFACE	
RS-232, GPIB	
POWER SOURCE	
AC 115V/230V (Selectable), 50/60Hz	
DIMENSIONS & WEIGHT	
330(W) x 170(H) x 340(D)mm, Approx. 5kg	

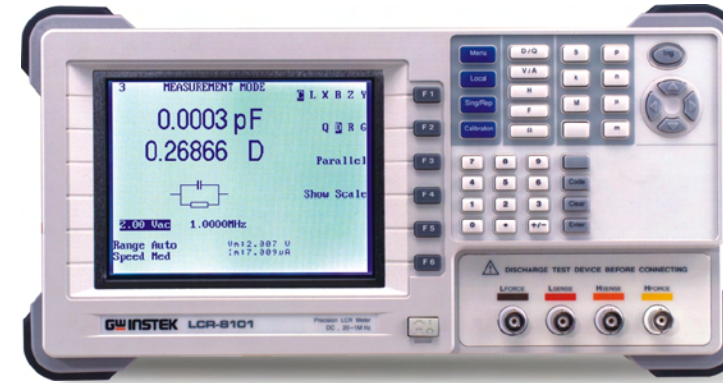

LCR-8101

Rear Panel



ORDERING INFORMATION

LCR-8101 1MHz Precision LCR Meter

ACCESSORIES :
User manual x1, Power cord x 1, Test lead LCR-06A

Option


Opt.01 Graph Mode (factory installed)

Optional Accessories

- LCR-05** Test Fixture for Axial & Radial Leaded Components
- LCR-06A** Kelvin Clip Test Leads
- LCR-07** Test Fixture, Two-Wire with Alligator Clips
- LCR-08** Test Fixture(Tweezers) for SMD/Chip Components
- LCR-09** Test Fixture for SMD/Chip Components
- LCR-13** Test Fixture for SMD/Chip Components
- GRA-404** Rack Adapter Panel, Rack Mounting (19", 4U)
- GTL-232** RS232C Cable, 9-pin Female to 9-pin, null Modem for Computer
- GTC-001** Instrument Cart
- GTC-002** Instrument Cart

OPTION - Graph Mode

Display of component characterization over a wide frequency range in graph charts.

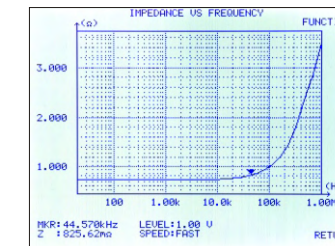

LCR-06A



Description:
Kelvin clip test leads.
Frequency: DC to 1MHz
Max. Voltage: +/- 35V

LCR-05



Description:
Test fixture for measurement of both axial and vertical lead components
Frequency: DC to 1MHz
Max. Voltage: +/- 35V

LCR-07




Description:
Test leads for conventional component measurement. It is especially useful for high impedance measurement. (With alligator clips)
Two-wire measurement; apply to low C or high R.
Frequency: DC to 1MHz
Max. Voltage: +/- 35V

LCR-08



Description:
SMD / clip tweezers
Frequency: DC to 1MHz
Max. Voltage: +/- 35V

LCR-09



Description:
SMD / chip test fixture
Frequency: DC to 1MHz
Max. Voltage: +/- 35V
Size range from 0603 to 1812

LCR-13



Description:
SMD / chip test fixture
Frequency: DC to 1MHz
Max. Voltage: +/- 35V
Size range from 0201 to 0805

1MHz PRECISION LCR METER



NEW

LCR-8101(1MHz)




The LCR-8101 1MHz precision LCR meter provides accuracy and versatility for a wide range of component measurements, even including DC resistance measurement and Voltage/Current monitoring. High resolution and accuracy provide precise measurement results which helps reconstructing component characteristics. Multi-Step function allows customized measurement with Pass/Fail indication, in accordance with to the users' requirements. Parameters and limitations are defined separately for each program step. GPIB and RS-232C interface are installed as standard features for controlling the instrument and reading the measurement results. Optional Graph Mode function can display component characterization over a wide frequency range in graph charts. The rich features of LCR-8101 relieve your measurement tasks at a very competitive price.

FEATURES

- * Test Frequency 20Hz ~ 1 MHz
- * 6 Digit Measurement Resolution
- * DC Resistance Measurement
- * Monitoring of DUT Voltage and Current
- * 0.1% Basic Measurement Accuracy
- * Comprehensive Measurement Functions
- * Standard Interface : RS-232 & GPIB
- * Large LCD Display
- * Intuitive User Interface
- * Multi Step Mode
- * PASS/FAIL Comparator
- * Graph Mode (Option)

SPECIFICATIONS	
TEST FREQUENCY	
20Hz ~ 1MHz, 5 Digits, $\pm 0.005\%$	
INPUT IMPEDANCE	
100 Ω	
BASIC ACCURACY	
$\pm 0.1\%$ (R, Z, X, G, Y, B, L, C)	
TEST SPEED	
AC	DC
MAX: 75mS	MAX: 30mS
FAST: 150mS	FAST: 60mS
MEDIUM: 450mS	MEDIUM: 120mS
SLOW: 600mS	SLOW: 500mS
TEST SIGNAL LEVELS	
10mV~2Vrms, 1mV/Step, $\pm 2.5\%$	
SHORT CIRCUIT CURRENT	
Max. 20mA	
DISPLAY RANGES	
R, Z, X	0.01m Ω ~ 1G Ω
G, Y, B	0.001nS ~ 1kS
L	0.1nH ~ 100kH
C	0.001pF ~ 1F
D	0.00001 ~ 1000
Q	0.1 ~ 9999.9
Rdc	0.1m Ω ~ 100M Ω
MEASUREMENT PARAMETERS	
Impedance (Z), Phase Angle (θ), Inductance (L), Capacitance (C), AC Resistance (Rac), Quality Factor (Q), Dissipation Factor (D), Admittance (Y), Conductance (G), Reactance (X), Susceptance (B), DC Resistance (Rdc)	
SERIES OR PARALLEL EQUIVALENT CIRCUIT	
C + R, C + D, C + Q, L + R, L + Q	
SERIES EQUIVALENT CIRCUIT ONLY	
X + R, X + D, X + Q	
PARALLEL EQUIVALENT CIRCUIT ONLY	
C + G, B + G, B + D, B + Q	
POLAR FORM	
Z + Phase Angle, Y + Phase Angle	
LCD DISPLAY	
320 x 240 DOT-MATRIX	
INTERFACE	
RS-232, GPIB	
POWER SOURCE	
AC 115V/230V (Selectable), 50/60Hz	
DIMENSIONS & WEIGHT	
330(W) x 170(H) x 340(D)mm, Approx. 5kg	

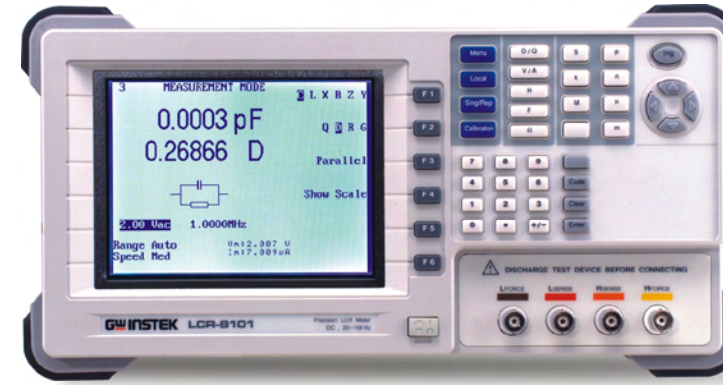

LCR-8101

Rear Panel



ORDERING INFORMATION

LCR-8101 1MHz Precision LCR Meter

ACCESSORIES :
User manual x1, Power cord x 1, Test lead LCR-06A

Option


Opt.01 Graph Mode (factory installed)

Optional Accessories

- LCR-05** Test Fixture for Axial & Radial Leaded Components
- LCR-06A** Kelvin Clip Test Leads
- LCR-07** Test Fixture, Two-Wire with Alligator Clips
- LCR-08** Test Fixture(Tweezers) for SMD/Chip Components
- LCR-09** Test Fixture for SMD/Chip Components
- LCR-13** Test Fixture for SMD/Chip Components
- GRA-404** Rack Adapter Panel, Rack Mounting (19", 4U)
- GTL-232** RS232C Cable, 9-pin Female to 9-pin, null Modem for Computer
- GTC-001** Instrument Cart
- GTC-002** Instrument Cart

OPTION - Graph Mode

Display of component characterization over a wide frequency range in graph charts.



LCR-06A



Description:
Kelvin clip test leads.
Frequency: DC to 1MHz
Max. Voltage: +/- 35V

LCR-05



Description:
Test fixture for measurement of both axial and vertical lead components
Frequency: DC to 1MHz
Max. Voltage: +/- 35V

LCR-07




Description:
Test leads for conventional component measurement. It is especially useful for high impedance measurement. (With alligator clips)
Two-wire measurement; apply to low C or high R.
Frequency: DC to 1MHz
Max. Voltage: +/- 35V

LCR-08



Description:
SMD / clip tweezers
Frequency: DC to 1MHz
Max. Voltage: +/- 35V

LCR-09



Description:
SMD / chip test fixture
Frequency: DC to 1MHz
Max. Voltage: +/- 35V
Size range from 0603 to 1812

LCR-13



Description:
SMD / chip test fixture
Frequency: DC to 1MHz
Max. Voltage: +/- 35V
Size range from 0201 to 0805



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com