

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Visit our website - *Click HERE*

140 SERIES

OPERATING UP TO 50 GHz

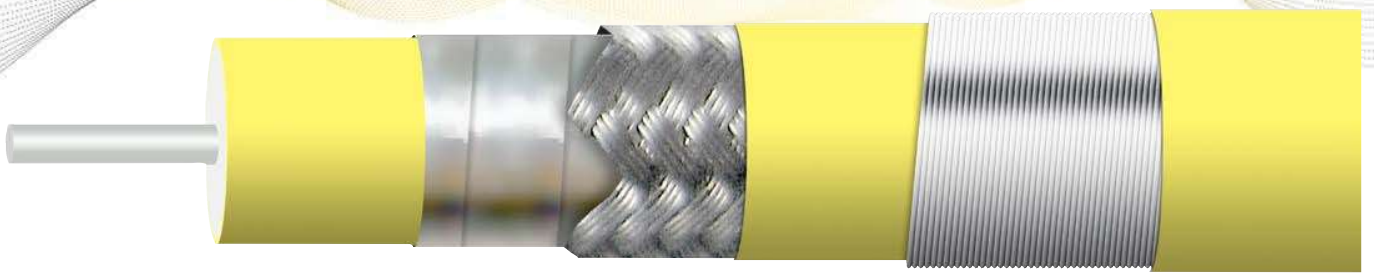

Center Conductor	Dielectric	Foil	Braid	Inner Jacket	Serving	Outer Jacket
Silver Plated Copper 1401/1403 Solid 1406/1408 Stranded	EPTFE	Silver Plated Copper	Silver Plated Copper	FEP (0.130", 3.30mm)	SCCS Armor	FEP (0.186", 4.72mm)

CABLE SPECIFICATIONS

	1401	1406	1403	1408
ELECTRICAL CHARACTERISTICS				
Impedance	50 +/– 2Ω	50 +/– 2Ω	50 +/– 2Ω	50 +/– 2Ω
Cut Off Frequency (cable only, max)	50 GHz	50 GHz	50 GHz	50 GHz
Capacitance	24.5 pF/ft.	25.4 pF/ft.	24.5 pF/ft.	25.4 pF/ft.
Velocity of Propagation	80%	80%	80%	80%
Time Delay	1.27 ns/ft.	1.27 ns/ft.	1.27 ns/ft.	1.27 ns/ft.
Shielding Effectiveness up to 18GHz	>100 dB	>100 dB	>100 dB	>100 dB
Cable Attenuation Factors (K1, K2) *	12.9, 0.195	14.5, 0.190	12.9, 0.195	14.5, 0.190
Power Handling	See Chart	See Chart	See Chart	See Chart
MECHANICAL CHARACTERISTICS				
Weight	.30 oz/ft (28g/m)	.29 oz/ft (27 g/m)	.83 oz/ft (77 g/m)	.82 oz/ft (76 g/m)
Static Bend Radius	0.5" (12.7mm)	0.5" (12.7mm)	0.75" (19.1mm)	0.75" (19.1mm)
Dynamic Bend Radius	1.0" (25.4mm)	1.0" (25.4mm)	1.375" (34.9mm)	1.375" (34.9mm)
ENVIRONMENTAL CHARACTERISTICS				
Operating Temperature Range [1]	-65°C to +200°C	-65°C to +200°C	-65°C to +200°C	-65°C to +200°C
RoHS 3 (EU 2015/863)	Yes	Yes	Yes	Yes
VSWR for assemblies with two straight 2.4 mm connectors	1.40 : 1 to 50 GHz	1.40 : 1 to 50 GHz	1.40 : 1 to 50 GHz	1.40 : 1 to 50 GHz

[1] Standard cable assembly temperature range is -55°C to +165°C, -65°C to +200°C available for select configurations

*Attenuation = $K1\sqrt{f} + K2f$ (cable only)


140 SERIES


OPERATING UP TO 50 GHz


CABLE ATTENUATION

ATTENUATION (MAX)


	1401/1403			1406/1408		
GHz	dB/ft.	dB/m	Power(W) @ 20°C @ Sea Level	dB/ft.	dB/m	Power(W) @ 20°C @ Sea Level
0.5	0.09	0.30	688	0.10	0.34	608
1	0.13	0.43	450	0.15	0.48	402
2	0.19	0.61	300	0.21	0.69	268
4	0.27	0.87	225	0.30	0.98	201
6	0.33	1.08	185	0.37	1.20	156
8	0.38	1.25	150	0.43	1.40	134
10	0.43	1.40	140	0.48	1.57	125
12	0.47	1.54	120	0.53	1.72	107
14	0.51	1.67	110	0.57	1.87	98
16	0.55	1.80	105	0.61	2.00	94
18	0.58	1.91	100	0.65	2.13	89
20	0.62	2.02	95	0.69	2.25	85
22	0.65	2.13	90	0.72	2.37	80
24	0.68	2.23	85	0.76	2.48	76
26	0.69	2.28	80	0.77	2.53	71
28	0.71	2.32	75	0.79	2.59	67
30	0.77	2.51	73	0.85	2.79	65
32	0.79	2.60	71	0.88	2.89	63
34	0.82	2.69	70	0.91	2.99	63
36	0.84	2.77	68	0.94	3.08	61
38	0.87	2.85	65	0.97	3.17	58
40	0.89	2.93	60	0.99	3.26	54
42	0.92	3.01	58	1.02	3.35	52
44	0.94	3.09	56	1.05	3.43	50
46	0.96	3.16	54	1.07	3.51	48
48	0.99	3.24	52	1.10	3.60	46
50	1.01	3.31	50	1.12	3.68	44

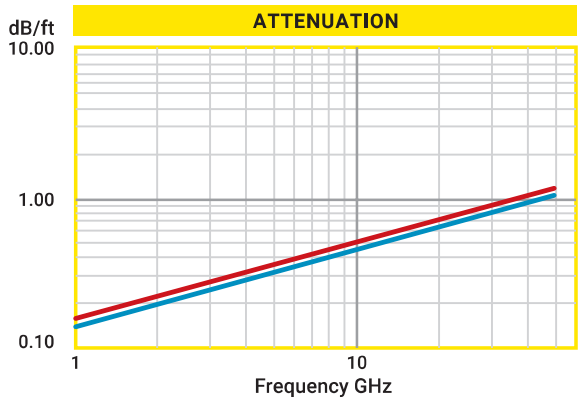

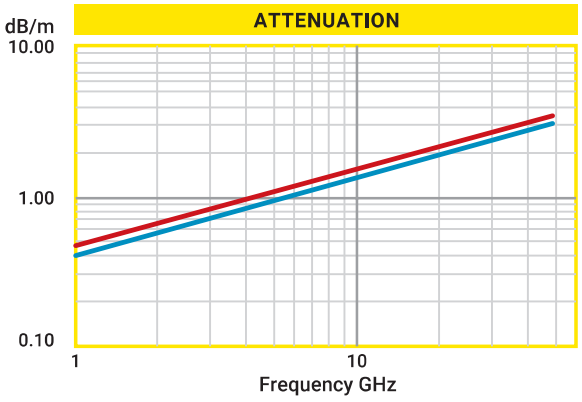


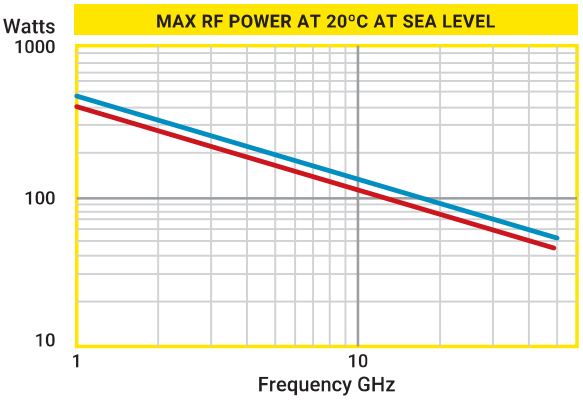


CONNECTORS FOR 140 SERIES

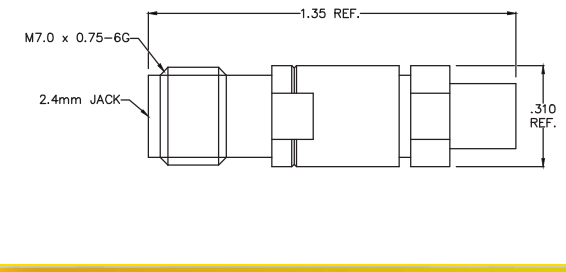


2.4MM FEMALE (2JS-1401)

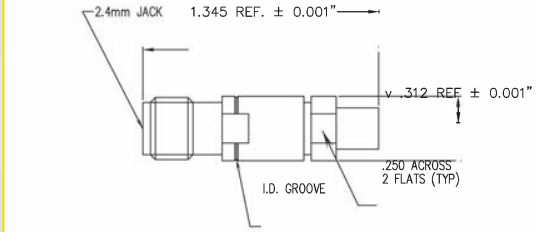


2.4MM FEMALE W/ARMOR (2JS-1401A)

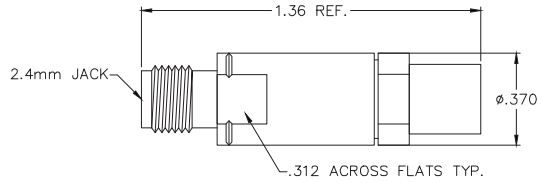

2.4MM FEMALE (2JS-1403)

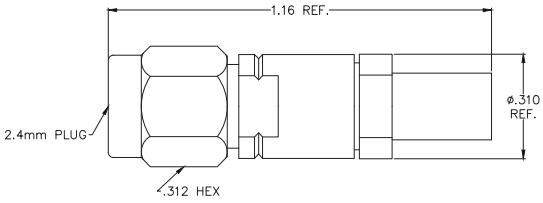


2.4MM MALE (2PS-1401)

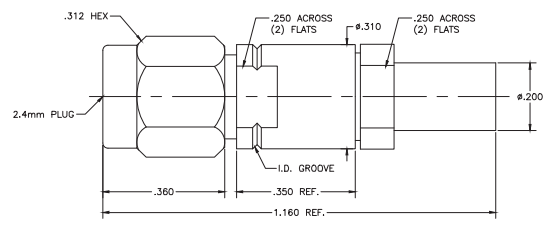


2.4MM MALE W/ARMOR (2PS-1401A)


CONNECTORS FOR 140 SERIES

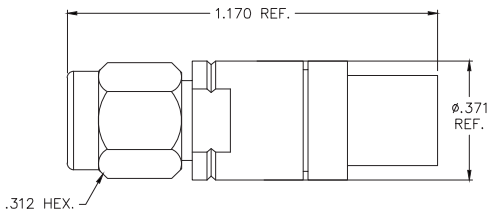


2.4MM MALE (2PS-1403)

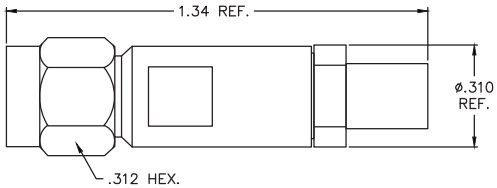


3.5MM MALE (3PS-1401)

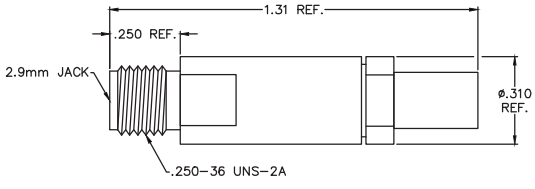

2.92MM FEMALE (KJS-1401)

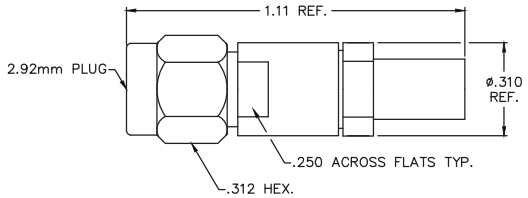

2.92MM MALE (KPS-1401)

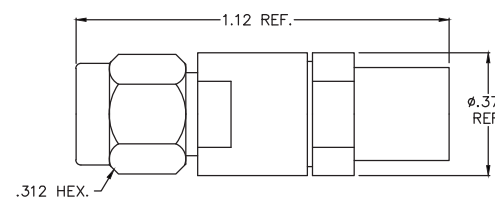

2.92MM MALE (KPS-1403)

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP